INCH-POUND

MS51825J
24 May 2018
SUPERSEDING
MS51825H
w/AMENDMENT 1
5 June 2008


DETAIL SPECIFICATION SHEET

SLEEVES, CLINCHES, TUBE FITTING, FLARELESS TYPE, HYDRAULIC

Reactivated after 24 May 2018 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

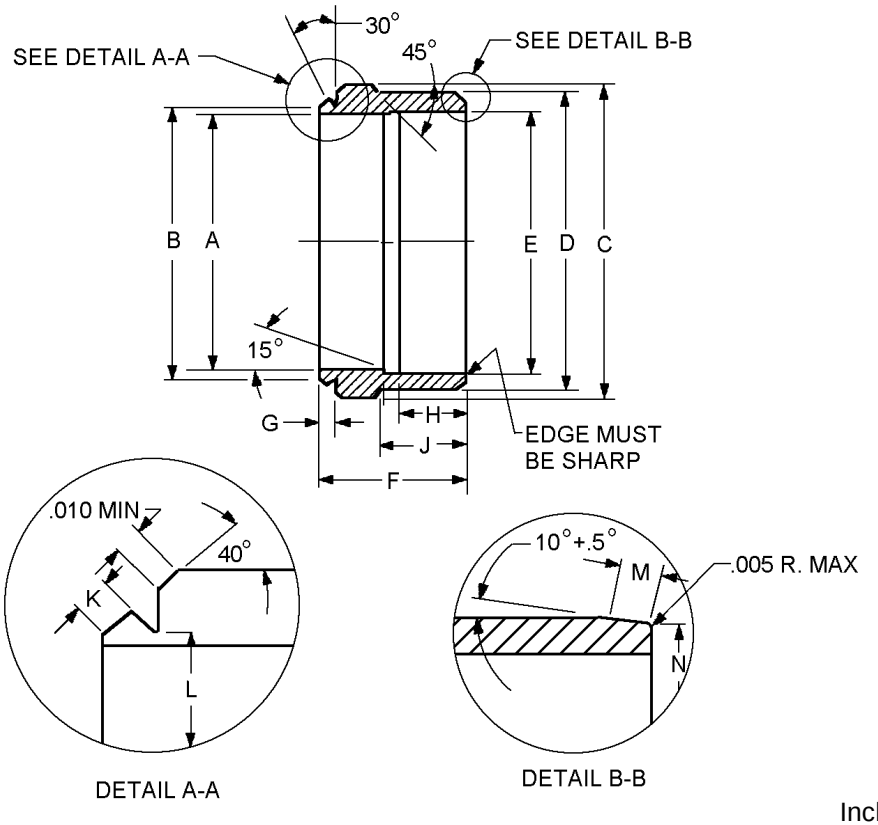

STYLE - A

Inches	mm
.005	0.13
.010	0.25

See notes at end of figure.

FIGURE 1. Sleeves, style A, clinch, tube fitting.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

Dash number style A	Tube O.D. NOM	A dia. Inches (mm) +.003 (0.08) -.000	C dia. Inches (mm) +.005 (0.13) -.000	D dia. Inches (mm) +.000 -.003 (0.08)	E dia. Inches (mm) +.003 (0.08) -.000	F Inches (mm) ±.003 (0.08)
-1	1/8	.130 (3.30)	.237 (6.02)	.178 (4.52)	.140 (3.56)	.288 (7.32)
-2	3/16	.193 (4.90)	.307 (7.80)	.249 (6.32)	.205 (5.21)	.329 (8.36)
-3	1/4	.255 (6.48)	.367 (9.32)	.312 (7.92)	.268 (6.81)	.363 (9.22)
-4	5/16	.318 (8.08)	.430 (10.92)	.375 (9.53)	.330 (8.38)	.367 (9.32)
-5	3/8	.380 (9.65)	.492 (12.50)	.440 (11.18)	.393 (9.98)	.393 (9.98)
-6	1/2	.505 (12.83)	.663 (16.84)	.587 (14.91)	.521 (13.23)	.429 (10.90)
-7	5/8	.631 (16.03)	.780 (19.81)	.713 (18.11)	.647 (16.43)	.442 (11.23)
-8	3/4	.756 (19.20)	.925 (23.50)	.838 (21.29)	.772 (19.61)	.475 (12.07)
-9	7/8	.881 (22.38)	1.040 (26.42)	.963 (24.46)	.897 (22.78)	.475 (12.07)
-10	1	1.006 (25.55)	1.187 (30.15)	1.088 (27.64)	1.022 (25.96)	.475 (12.07)
-11	1-1/4	1.260 (32.00)	1.446 (36.73)	1.341 (34.06)	1.275 (32.39)	.475 (12.07)
-12	1-1/2	1.510 (38.35)	1.694 (43.03)	1.590 (40.39)	1.524 (38.71)	.475 (12.07)
-13	2	2.014 (51.16)	2.210 (56.13)	2.094 (53.19)	2.026 (51.46)	.509 (12.93)


Dash number style A	G Inches (mm) +.000 -.006 (0.15)	H Inches (mm) +.016 (0.41) -.000	J Max Inches (mm)	K ref Inches (mm)	L Inches (mm) .000 -.005 (0.13)	M Inches (mm) +.003 (0.08) -.002 (0.05)
-1	.046 (1.17)	.078 (1.98)	.130 (3.30)	.027 (0.69)	.152 (3.86)	.020 (0.51)
-2	.047 (1.19)	.078 (1.98)	.130 (3.30)	.027 (0.69)	.218 (5.54)	.020 (0.51)
-3	.049 (1.24)	.109 (2.77)	.161 (4.09)	.027 (0.69)	.285 (7.24)	.025 (0.64)
-4	.049 (1.24)	.125 (3.18)	.171 (4.34)	.027 (0.69)	.352 (8.94)	.025 (0.64)
-5	.049 (1.24)	.125 (3.18)	.156 (3.96)	.029 (0.74)	.418 (10.62)	.025 (0.64)
-6	.068 (1.73)	.162 (4.11)	.260 (6.60)	.044 (1.12)	.555 (14.10)	.030 (0.76)
-7	.064 (1.63)	.181 (4.60)	.247 (6.27)	.042 (1.07)	.681 (17.30)	.030 (0.76)
-8	.076 (1.93)	.181 (4.60)	.270 (6.86)	.050 (1.27)	.807 (20.50)	.030 (0.76)
-9	.083 (2.11)	.181 (4.60)	.275 (6.99)	.052 (1.32)	.931 (23.65)	.030 (0.76)
-10	.083 (2.11)	.187 (4.75)	.265 (6.73)	.054 (1.37)	1.056 (26.82)	.030 (0.76)
-11	.083 (2.11)	.187 (4.75)	.245 (6.22)	.062 (1.57)	1.309 (33.25)	.030 (0.76)
-12	.086 (2.18)	.187 (4.75)	.245 (6.22)	.062 (1.57)	1.559 (39.60)	.030 (0.76)
-13	.092 (2.34)	.187 (4.75)	.258 (6.55)	.070 (1.78)	2.059 (52.30)	.030 (0.76)

Dash number style A	N Inches (mm)
-1	.171 (4.34)
-2	.242 (6.15)
-3	.303 (7.70)
-4	.366 (9.30)
-5	.431 (10.95)
-6	.577 (14.66)
-7	.703 (17.86)
-8	.828 (21.03)
-9	.953 (24.21)
-10	1.078 (27.38)
-11	1.331 (33.81)
-12	1.580 (40.13)
-13	2.084 (52.93)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. This illustration is for identification and is not intended to restrict designs or shapes not dimensioned.

FIGURE 1. Sleeves, style A, clinch, tube fitting - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

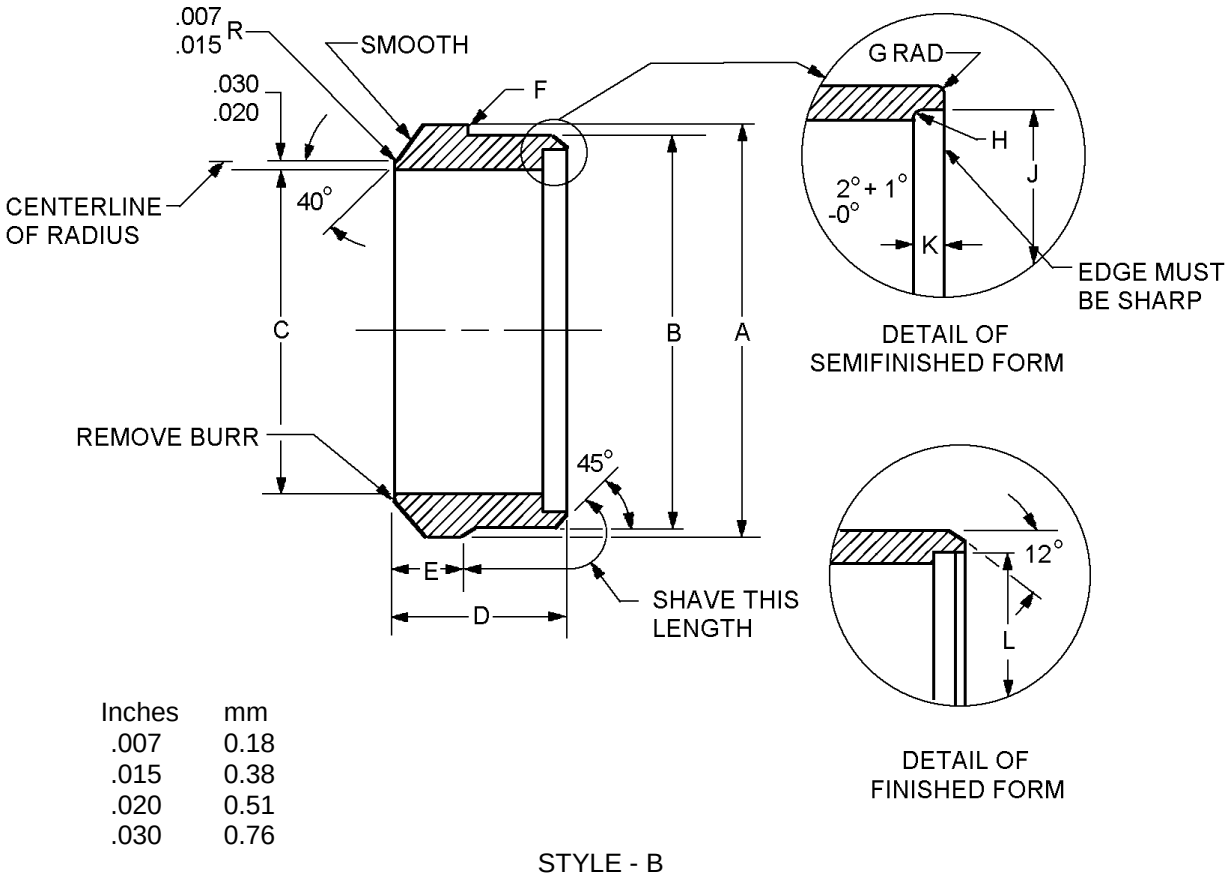

Inches	mm
.007	0.18
.015	0.38
.020	0.51
.030	0.76

STYLE - B

Dash number style B	Tube O.D. NOM	A dia. ±.005 (0.13) Inches (mm)	B dia.		C dia. +.003 (0.08) -.000 Inches (mm)
			Min Inches (mm)	Max Inches (mm)	
-1	1/8	.203 (5.16)	.175 (4.45)	.178 (4.52)	.129 (3.28)
-2	3/16	.312 (7.92)	.252 (6.40)	.256 (6.50)	.193 (4.90)
-3	1/4	.359 (9.12)	.309 (7.85)	.313 (7.95)	.255 (6.48)
-4	5/16	.422 (10.72)	.373 (9.47)	.377 (9.58)	.318 (8.08)
-5	3/8	.484 (12.29)	.431 (10.95)	.435 (11.05)	.380 (9.65)
-6	1/2	.625 (15.88)	.585 (14.86)	.589 (14.96)	.506 (12.85)
-7	5/8	.750 (19.05)	.698 (17.73)	.702 (17.83)	.633 (16.08)
-8	3/4	.875 (22.23)	.836 (21.23)	.840 (21.34)	.758 (19.25)
-9	7/8	1.000 (25.40)	.961 (24.41)	.965 (24.51)	.883 (22.43)
-10	1	1.125 (28.58)	1.086 (27.58)	1.090 (27.69)	1.008 (25.60)
-11	1-1/4	1.406 (35.71)	1.339 (34.01)	1.343 (34.11)	1.260 (32.00)
-12	1-1/2	1.656 (42.06)	1.589 (40.36)	1.593 (40.46)	1.511 (38.38)
-13	2	2.188 (55.58)	2.092 (53.14)	2.096 (53.24)	2.014 (51.16)

See notes at end of figure.

FIGURE 2. Sleeves, style B, clinch, tube fitting - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

Dash number style B	D ±.003 (0.08) Inches (mm)	E Max Inches (mm)	F radius Inches (mm)	G radius Inches (mm)	H radius max Inches (mm)
-1	.278 (7.06)	.281 (7.14)	.010 (0.25)	.007 (0.18)	.006 (0.15)
-2	.278 (7.06)	.281 (7.14)	.020 (0.51)	.007 (0.18)	.006 (0.15)
-3	.336 (8.53)	.339 (8.61)	.020 (0.51)	.007 (0.18)	.006 (0.15)
-4	.336 (8.53)	.378 (9.60)	.020 (0.51)	.007 (0.18)	.006 (0.15)
-5	.375 (9.53)	.418 (10.62)	.020 (0.51)	.007 (0.18)	.006 (0.15)
-6	.375 (9.53)	.418 (10.62)	.020 (0.51)	.010 (0.25)	.010 (0.25)
-7	.415 (10.54)	.418 (10.62)	.020 (0.51)	.010 (0.25)	.010 (0.25)
-8	.415 (10.54)	.418 (10.62)	.020 (0.51)	.010 (0.25)	.010 (0.25)
-9	.415 (10.54)	.418 (10.62)	.020 (0.51)	.010 (0.25)	.010 (0.25)
-10	.415 (10.54)	.418 (10.62)	.020 (0.51)	.010 (0.25)	.010 (0.25)
-11	.415 (10.54)	.418 (10.62)	.020 (0.51)	.010 (0.25)	.010 (0.25)
-12	.415 (10.54)	.418 (10.62)	.020 (0.51)	.010 (0.25)	.010 (0.25)
-13	.450 (11.43)	.456 (11.58)	.020 (0.51)	.010 (0.25)	.010 (0.25)

Dash number style B	J dia. Min Inches (mm)	K Inches (mm)		L Diameter Inches (mm)	
		Min	Max	Min	Max
-1	.154 (3.91)	.015 (0.38)	.023 (0.58)	.148 (3.76)	.156 (3.96)
-2	.227 (5.77)	.020 (0.51)	.028 (0.71)	.221 (5.61)	.229 (5.82)
-3	.286 (7.26)	.024 (0.61)	.032 (0.81)	.280 (7.11)	.288 (7.32)
-4	.350 (8.89)	.024 (0.61)	.032 (0.81)	.344 (8.74)	.352 (8.94)
-5	.408 (10.36)	.024 (0.61)	.032 (0.81)	.402 (10.21)	.410 (10.41)
-6	.556 (14.12)	.024 (0.61)	.032 (0.81)	.550 (13.97)	.558 (14.17)
-7	.669 (16.99)	.024 (0.61)	.032 (0.81)	.663 (16.84)	.671 (17.04)
-8	.807 (20.50)	.024 (0.61)	.032 (0.81)	.801 (20.35)	.809 (20.55)
-9	.932 (23.67)	.024 (0.61)	.032 (0.81)	.926 (23.52)	.934 (23.72)
-10	1.057 (26.85)	.024 (0.61)	.032 (0.81)	1.051 (26.70)	1.059 (26.90)
-11	1.310 (33.27)	.024 (0.61)	.032 (0.81)	1.304 (33.12)	1.312 (33.32)
-12	1.560 (39.62)	.024 (0.61)	.032 (0.81)	1.554 (39.47)	1.562 (39.67)
-13	2.063 (52.40)	.024 (0.61)	.032 (0.81)	2.057 (52.25)	2.065 (52.45)

NOTES:
1. Dimensions are in inches, unless otherwise specified.
2. Metric equivalents are given for information only.
3. This illustration is for identification and is not intended to restrict designs or shapes not dimensioned.

FIGURE 2. Sleeves, style B, clinch, tube fitting - Continued.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Material: Materials shall be in accordance with MIL-DTL-18866.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

Finish. Finishes shall be as specified in table I. All plating's shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The sleeves shall show no evidence of red corrosion after 96 hours of salt spray.


TABLE I. Material and finish identification codes.

PIN code material/plating finish	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2. 1/
H	Steel	Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC. 2/
J	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 2/ 3/
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1. 4/
R	Steel	Zinc plating in accordance with ASTM B633; type III or V, Fe/Zn 8. 4/ 5/
SS	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7, free machining alloy UNS S30300 method 1, type 2 or 4.
T	Titanium	Anodize in accordance with SAE-AMS2488 type 2. 6/
TF	Titanium	Fluoride phosphate in accordance with SAE-AMS2486. 6/
Z	Steel	Zinc plating in accordance with ASTM B695, type II, class 8. 4/ 5/
ZC	Steel	Zinc may be any zinc plating from PIN codes J, R, and Z with a colored chromate coating. 4/ 5/

1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems. Cadmium is prohibited from use in NAVSEA owned shipboard systems.
2/ Hexavalent chromium free. Finish shall be RoHS compliant.
3/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum.
4/ Not for use in aircraft. Requires approval from the Program Office for all applications. Zinc-plated materials should be avoided in hydraulic systems with water-glycol fluids. Reference ASTM MNL37 - Fuels and Lubricants Handbook, "water glycol fluids are highly alkaline due to the presence of amine based corrosion inhibitors. As a result, these fluids can attack zinc, cadmium, magnesium, and non-anodized aluminum, forming sticky or gummy residues. Consequently, these metals should be avoided when selecting system components.
5/ These finishes have a chromate conversion coating which includes hexavalent chromium and are not recommended.
6/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to SAE-AMS-STD-595 colors 36076 through 36293. Titanium shall not be used in oxygen or potable water systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

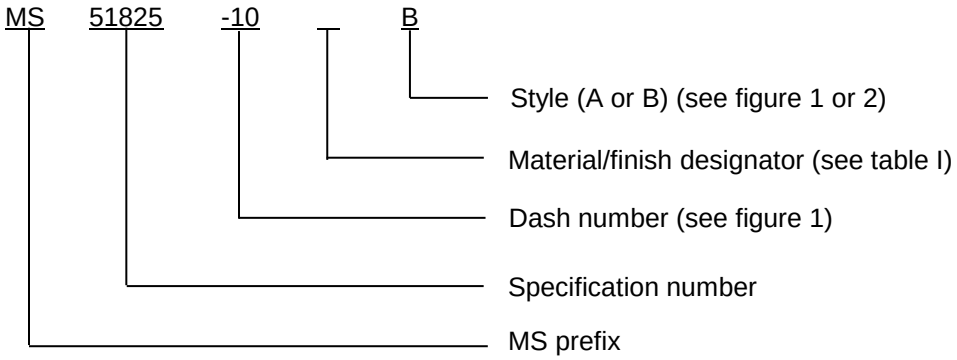

PIN example: MS51825-10B indicates a sleeve, style B, 1.008 (25.60) ID, steel, cadmium plated.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Cadmium is prohibited from use in NAVSEA owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2.

Class I and II ozone depleting substances (ODS) shall not be used in MS51825 or any referenced procedures.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

MIL-DTL-16232	SAE-AMS-STD-595/36099	SAE-AMS-STD-595/36270
ASTM B117	SAE-AMS-STD-595/36118	SAE-AMS-STD-595/36280
ASTM B633	SAE-AMS-STD-595/36134	SAE-AMS-STD-595/36293
ASTM B695	SAE-AMS-STD-595/36152	SAE-AMS-QQ-P-416
ASTM MNL37	SAE-AMS-STD-595/36170	SAE-AMS2417
ASTM F1136/F1136M	SAE-AMS-STD-595/36173	SAE-AMS2486
SAE-AMS-C-81562	SAE-AMS-STD-595/36176	SAE-AMS2488
SAE-AMS-STD-595/36076	SAE-AMS-STD-595/36231	SAE-AMS2700
SAE-AMS-STD-595/36081	SAE-AMS-STD-595/36251	T9070-AL-DPC-020/077-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2018-061)

Review activities:
Army - AT, AV, GL, MI
Navy - AS, SA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.