
FED. SUP CLASS
2330

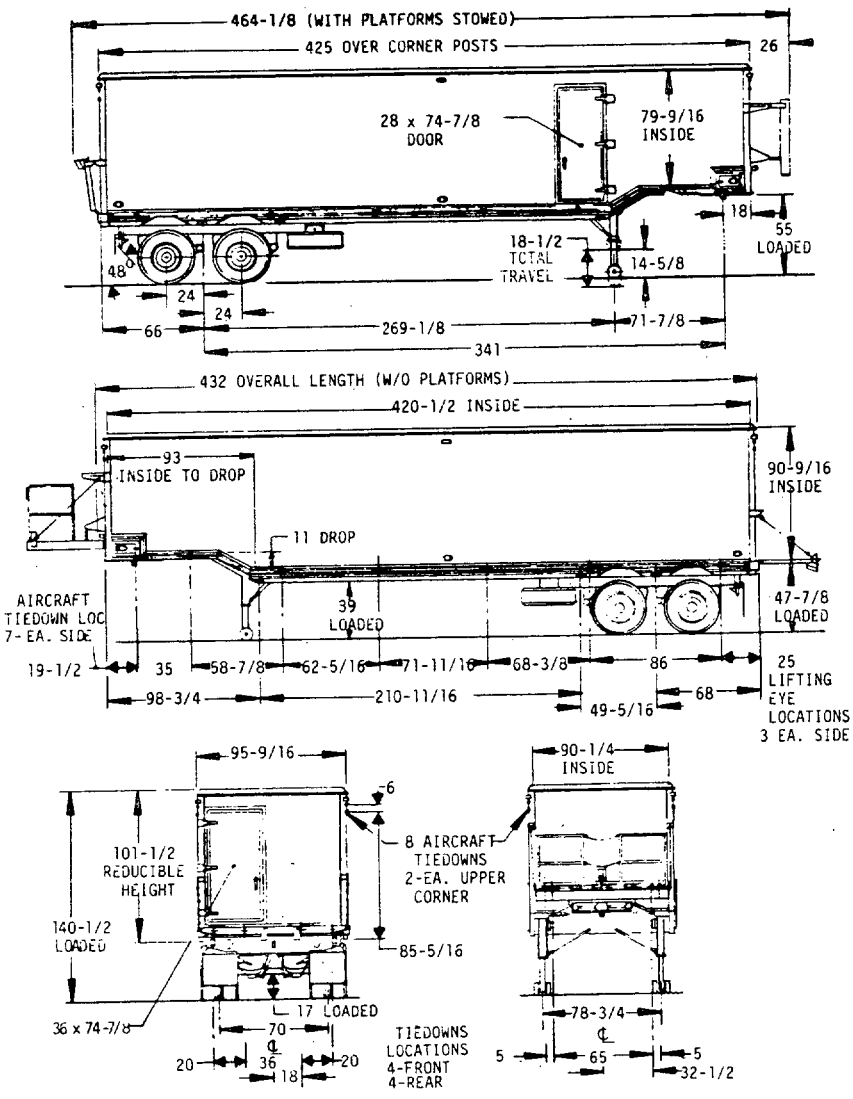

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRUBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS52157-1	8736998

P A: ARMY - AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, VAN: 10 TON, 4 WHEEL, DATA CENTER, M971.	MILITARY STANDARD MS52157(AT)
PROCUREMENT SPECIFICATION MIL-S-46756	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 2330

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK TRACTOR M52 OR M818 OR COMMERCIAL TRUCK TRACTOR

WEIGHTS: TOTAL LANDING KINGPIN SUSPENSION GEAR

EMPTY	13,110	4,500	8,610
EMPTY	13,110 5,700		7,410
PAYLOAD	20,000*		
LOADED	33,110	11,360	21,750
LOADED	33,110 14,395		18,715
DOLLY			4,500

* RATED PAYLOAD, EVENLY DISTRIBUTED

SHIPPING VOLUME: 3384 CU. FT.

FORDING DEPTH: 60 INCHES

AIR TRANSPORTABILITY:
IN C5-A AS IS
IN C141 WITH DOLLY REMOVED AND LANDING GEAR IN HORIZONTAL POSITION

BODY: ALUMINUM STRUCTURE; ONE SINGLE DOOR IN CURB SIDE WALL; ONE SINGLE DOOR IN REAR WALL, FLOOR STRUCTURE, BUT NO FLOORING IS PROVIDED

INSULATION: WALLS, DOORS AND CEILING: FOAM-IN-PLACE URETHANE, 2 INCH.

INTERIOR LINING: NONE

FRAME-UNDERCARRIAGE WITH 11 INCH DROP: P/N 11684443

A SECOND DROP ACCOMODATES AN AIR MOUNTED KINGPIN ASSEMBLY

DOLLY FRAME: P/N 12307777

DOLLY ASSEMBLY: P/N 12307758

PINTLE ASSEMBLY (TOWING): P/N 8380198

SUSPENSION:
TWO AIR TANDEM, AXLE TRAVEL 8-1/2 IN, P/N 11684434

AIR RIDE SUSPENSION INST'N DWG 11681239

AXLES:
TWO, 10,000 LBS. CAPACITY EA. (20,000 LBS. IN TANDEM)
DWG 11684319

KINGPIN: AIR MOUNTED
ASSEMBLY: P/N 11684331

BRAKES: AIR-OVER-HYDRAULIC INST'N
UNDERCARRIAGE: DWG 11684421
DOLLY: DWG 11684461

SWING-UP LANDING GEAR: TWO SPEED WITH WHEELS AND PADS
INSTALLATION: DWG 11684300

LEVELING JACKS,
ASSEMBLY: P/N 11684674
INSTALLATION: DWG 11684678

LIFTING EYES;
THREE EACH SIDE, P/N 11607444

TIEDOWNS:
5 EACH SIDE, 4 REAR P/N 11637863
2 EACH SIDE, 4 FRONT, P/N 11589937
2 EACH UPPER CORNER, POST, P/N 12307792

WHEELS: 4 DUAL, 1 SPARE
P/N 7389621

TIRES: 9.00 X 20, 8-PLY, NDCC-MIL-T-12459

TUBES: ZZ-I-550

ELECTRICAL INSTALLATION:
24 V DC FOR SERVICE LIGHTS, DWG 12307774

"U" FACTOR APPROXIMATELY 0.23 BTU/HR, SQ FT, F.

OTHER FEATURES:
FRONT PLATFORM INSTALLATION, DWG 11684616
REAR PLATFORM, INSTALLATION, DWG 11684615
TWO BOARDING LADDERS, P/N 11684408
ONE 12 FT. FOLDING LADDER, P/N 11684609

NO VENT PORTS IN DOORS
TAMPER PROOF DOOR HINGES
EMERGENCY ESCAPE LOCKS:
ONE HYDRAULIC JACK, MS16283-4
EIGHT SPIRIT LEVELS, P/N 11638167
TWO CHOCK BLOCKS, MS52127-2
ONE TIRE CARRIER, P/N 8747239

AIRCRAFT LOADING EQUIPMENT CONSISTING OF:
SKIDS WELDED TO UNDERCARRIAGE
TWO LOADING JACKS, P/N 11646252
TWO JACK STANDS, P/N 11646249
TWO ADAPTERS, P/N 11681435
30 TIE DOWN RINGS, MS21237-18

SPEEDS:
HIGHWAY 50 MPH MAX.
IMPROVED ROADS 25 MPH MAX.
LOADED 15 MPH MAX.

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 3 MAY 85 REVISED

MS PART NO.	ENGINEERING DWG NO
MS52157-1	8736998

P.A. ARMY-AT
Other Cust

TITLE
SEMITRAILER, VAN: 10 TON, 4 WHEEL, DATA CENTER, M971.

MILITARY STANDARD
MS52157(AT)

PROCUREMENT SPECIFICATION
MIL-S-46756

SUPERSEDES:

SHEET 2 OF 2

DD FORM (SEP 87) 672-1 LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.