

FED. SUP CLASS
2320

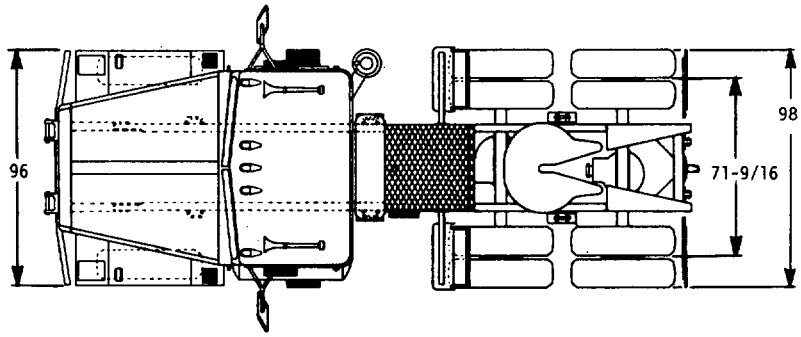

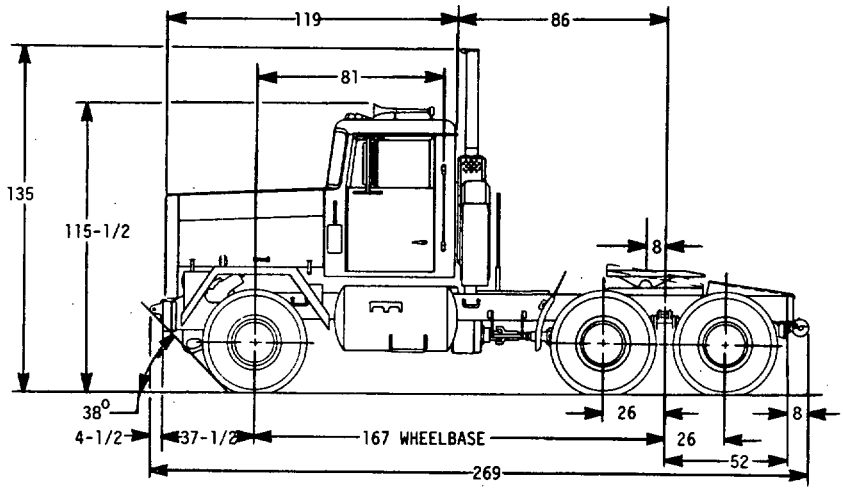

APPROVED 3 JUL 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRACTOR, TRUCK: LINE HAUL, 25 TON, 6×4, M915.	MILITARY STANDARD MS52202(AT)
PROCUREMENT SPECIFICATION MIL-T-PD-9156	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD AND CREW: 18,621 LBS

AXLE LOADS: (W/30,000 LBS ON FIFTH WHEEL)
FRONT AXLE 11,313 LBS
REAR TANDEM 37,658 LBS

GROSS VEHICLE WEIGHT: 48,971 LBS

TOWED LOAD: (M872 TRAILER-30,000 LBS K P) 54,000 LBS

SHIPPING DIMENSIONS: (MINIMUM) 1,674 CU FT
TREAD WIDTH FRONT 78-7/16
DUAL TIRE SPACING 13-3/4
OVERALL LENGTH (W/M872 TRAILER) 55 FT
MINIMUM TURNING DIA CURB TO CURB 53-1/2 FT
MINIMUM GROUND CLEARANCE EMPTY (UNDER REAR WALKING BEAM BRACKET) 10
MAXIMUM FORDING DEPTH 24

ENGINE: TYPE; 6 CYLINDER, 4 CYCLE, TURBO, DIESEL, DISPLACEMENT 855 CU IN
COMPRESSION RATIO 13.5:1
HORSEPOWER GROSS 400 @ 2,100 RPM
NET 373 @ 2,100 RPM
TORQUE GROSS 1,150 @ 1,500 RPM
NET 1,110 @ 1,500 RPM
PTO PROVISIONS FRONT OF CRANKSHAFT FLYWHEEL, ACCESSORY DRIVE PULLEY FOR BELTS, REAR OF LUBE PUMP SAE A MOUNTING FLANGE @ 1-1/2 X ENGINE SPEED, LUBE CAPACITY 46 QTS, FUEL CAPACITY 118 GAL IN TANK 110 GAL USABLE, GOVERNED SPEED LOADED 2,100 RPM, COOLANT CAPACITY 69 QTS

TRANSMISSION: TYPE; 16-SPEED SEMI-AUTOMATIC, FORWARD GEARS 16, REVERSE GEARS 2, RATIOS TO:1 1ST 14.77, 2ND 12.21 3RD 10.07, 4TH 8.33, 5TH 6.89, 6TH 5.70, 7TH 4.70, 8TH 3.89, 9TH 3.14, 10TH 2.60, 11TH 2.14, 12TH 1.77, 13TH 1.47, 14TH 1.21, 15TH 1.00, 16TH .83, 1ST REV 14.77, 2ND REV 8.33, SHIFT REMOTE AIR CONTROL POWER SHIFT, LUBE CAPACITY 22 QTS, PTO OPENINGS 2

AXLES: FRONT TYPE; I BEAM, CAPACITY 12,000 LBS, STEERING ANGLE 40°
REAR TYPE; TANDEM, RATIO 4.44:1, CAPACITY 38,000 LBS AIR CONTROLLED INTERAXLE DIFFERENTIAL LOCKUP, LUBRICATION-PRESSURE, LUBE CAPACITY FORWARD 40 PTS REAR 36 PTS

PROPELLER SHAFTS: TRANS TO AXLE, CAPACITY 10,833 LB FT INTERAXLE CAPACITY 7,083 LB-FT

WHEELS: QTY 11, SIZE 20 DIA X 8.0 WIDE, OFFSET 6-7/8, DUAL SPACING 13-3/4 NUMBER OF STUDS/BOLT CIRCLE 10/11-1/4 STUD SIZE 1-1/8 IN

TIRES: TYPE; BIAS PLY, SIZE 10.00 X 20.00, 41-1/2 DIA X 11 WIDE, LOAD RANGE G, PLY RATING 14

STEERING: TYPE; INTEGRAL POWER, RATIO 23.4-1.0 GEAR DRIVEN PUMP, CAPACITY 4.3-5.0 GPM WHEEL DIAMETER (STEERING) 20 IN

BRAKES SERVICE: TYPE; AIR ACTUATED DRUM TYPE 9 SQ IN ACTUATOR-WEDGE CAM FRONT AXLE SIZE 15 DIA X 5 WIDE REAR TANDEM 30 SQ IN ACTUATOR-"S" CAM SIZE 16-1/2 DIA X 7 WIDE

BRAKES PARKING: TYPE; SPRING CHAMBER LOCATION REAR TANDEMS-FORWARD AXLE, AIR ACTUATED

ELECTRICAL SYSTEM: TYPE; BASIC 12V, FOUR 12V BATTERIES CONNECTED IN SERIES; ALTERNATOR 12/24V 85/15 AMPS; STARTER 24V, REGULATOR BUILT IN ALTERNATOR

FRAME: TYPE; STEEL HEAT TREATED-BOLTED 110,000 PSI-SINGLE RAIL, CHANNEL SECTION 10-5/8 X 3-1/4 X 3/8, SECTION MODULUS 17.7 IN^3, OVERALL WIDTH 34, SIX CROSSMEMBERS

CAB: TYPE; ALL-STEEL, TWO PASSENGER W/BUTTERFLY HOOD

PERFORMANCE:
MAX SPEED 15TH GEAR, 2100 RPM 55 MPH
MAX SPEED 16TH GEAR, 2100 RPM 66 MPH
MAX GRADEABILITY @ 2.31 MPH 41.1%
MIN SUSTAINED SPEED 2.3 MPH
MAX DRAWBAR PULL 25,028 LBS
FUEL ECONOMY 3.6 MI/GAL @ 47.4 MPH
CRUISING RANGE 396 MI

FIFTH WHEEL: TYPE; SINGLE OSCILLATING, DIA 36, CAP 40,000 LBS VERTICAL 150,000 LB DRAWBAR, KING PIN SIZE 2.0, PITCH FORWARD 15°, FROM BEHIND 10°

PINTLE: CAPACITY 30 TONS, 12 TIEDOWNS

OPTIONAL EQUIPMENT: ARCTIC KIT, JUMPER CABLE KIT, TIRE CHAINS, FIFTH WHEEL SPACER

SUSPENSION: FRONT TYPE; ASYMMETRICAL LEAF SPRING PIN AND SHACKLE, RATE 1,861 LB-IN STATIC DEFLECTION 2.73 LEAF SIZE 4 X 52 X 9 LEAVES @ .401 THICKNESS; REAR BOGIE TYPE; WALKING BEAM STEEL LEAF, RATE 7600 LB-IN, STATIC DEFLECTION 0.97

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 3 JUL 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defease.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRACTOR, TRUCK: LINE HAUL, 25 TON, 6x4, M915.	MILITARY STANDARD MS52202(AT)
PROCUREMENT SPECIFICATION MIL-T-PD-9156	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.