

FED. SUP CLASS
2320

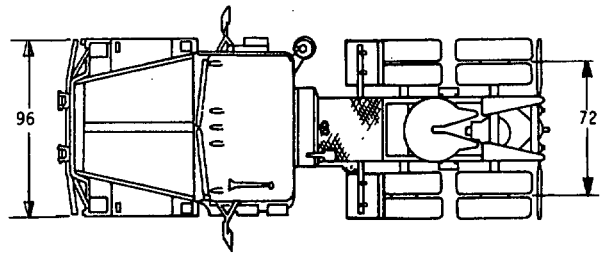

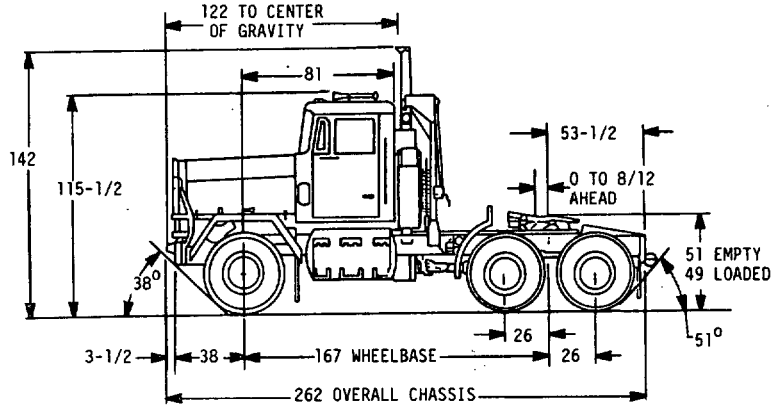

APPROVED 3 JUL 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRACTOR, TRUCK: LINE HAUL, 25 TON, 6×4, M915A1.	MILITARY STANDARD MS52203(AT)
PROCUREMENT SPECIFICATION MIL-T-PD-9156	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

CURB WEIGHT FULLY EQUIPPED LESS PAYLOAD AND CREW: 19,720 LBS

AXLE LOADS:(W/28,400 LBS 5TH WHEEL LOAD)
FRONT AXLE 11,580 LBS
REAR BOGIE 36,540 LBS

GROSS VEHICLE WEIGHT: 48,120 LBS

TOWED LOAD MAX:(M872 TRAILER 28,400 LBS
K.P.) 54,000 LBS

SHIPPING DIMENSIONS:

CAB TO AXLE	86
BUMPER TO REAR OF CAB	119
CUBIC FEET	1,681
TREAD WIDTH FRONT	78-3/8
WIDTH AT REAR TIRES	95-1/2
DUAL TIRE SPACING	13-1/4
FIFTH WHEEL TO REAR BOGIE	4

MINIMUM TURNING RADIUS:(CURB TO CURB) 321

MINIMUM GROUND CLEARANCE:(AT REAR AXLE) 10-3/8

SWING CLEARANCE: TRACTOR 64
TRAILER 77

ENGINE:
IN-LINE 6 CYL 4 CYCLE, TURBO-CHARGED DIESEL, DISPLACEMENT 855 CU IN
COMPRESSION RATIO 14.0:1
HORSEPOWER, GROSS 400 @ 2100 RPM
NET 363 @ 2100 RPM
TORQUE, GROSS 1250 LB FT @ 1300 RPM
NET 1045 LB FT @ 1500 RPM
CRANKCASE CAPACITY W/FILTERS 44 QTS
GOVERNED SPEED 2100 RPM
COOLING SYSTEM CAPACITY 69 QTS
FUEL CAPACITY 118 GAL IN TANK
112 GAL USABLE

TRANSMISSION: TYPE AUTOMATIC NO OF SPEEDS-5 FWD, 1 REV, RATIOS :1 1ST 3.69, 2ND 2.80, 3RD 1.58, 4TH 1.25, 5TH 1.00, REV 9.65, PTO OPENINGS ONE, CONVERTER DRIVEN-6 BOLT-TOP LEFT-10'O CLOCK LUBE CAPACITY 32 QTS, RATED INPUT TORQUE CAPACITY 1300 LB FT @ TORQUE CONVERTER

SUSPENSION: FRONT, TYPE ASYMMETRICAL LEAF & SHACKLE, RATE 1,861 LBS/IN, STATIC DEFLECTION 2.73 REAR BOGIE TYPE, WALKING BEAM-STEEL LEAF STATIC DEFLECTION 0.97

AXLES: FRONT, TYPE I BEAM, RATED CAPACITY 13,000 LBS. STEER ANGLE 40° REAR BOGIE, RATIO 4.33:1 RATED CAPACITY (TANDEM) 40,000 LBS, INTER-AXLE DIFFERENTIAL LOCK-UP AIR CONTROL, AXLE DIFFERENTIAL SPIRAL GEAR NO-SPIN LUBRICATION-PRESSURE, LUBE CAPACITY-FWD/REV 40/36 PTS

WHEELS: QTY 11, SIZE 22-1/2 DIA X 8-1/4 WIDE QTY OF STUDS 10, BOLT CIRCLE 11-1/4, OFFSET 6-5/8 DUAL SPACING 13-1/4, RATED CAPACITY 7,000 LBS

TIRES: TYPE RADIAL-ON HIGHWAY-TUBELESS SIZE 11.00 X 22.5, LOAD RANGE G, PLY RATING 14, STATIC LOADED RADIUS 19-5/8, RATED CAPACITY SINGLE 6,040 LBS, DUAL 5,300 LBS

STEERING: TYPE INTEGRAL POWER, GEAR RATIO 20.4:1 GEAR DRIVEN PUMP, CAPACITY 2 QTS

BRAKES: SERVICE AIR ACTUATED, FRONT "S" CAM SIZE 15-1/2 DIA X 5 WIDE, REAR BOGIE 30" ACTUATOR-"S" CAM SIZE 16-1/2 DIA X 7 WIDE

BRAKES: PARKING, TYPE ANCHORLOCK-SPRING CHAMBER, LOCATION FORWARD REAR AXLE, ACTUATION AIR EXHAUST

AIR SYSTEM: COMPRESSOR PISTON-GEAR DRIVEN, CAPACITY 13-3/16 CFM @ 1250 RPM, PRESSURE 100-120 PSI, RESERVOIRS QTY 3, CAPACITY 2008 CU IN 6024 CU IN TOTAL, DRAIN VALVES MANUAL ON SERVICE, AUTO ON SUPPLY

ELECTRICAL SYSTEM:TYPE 12 V/24 STARTING BATTERIES QTY 4, TYPE 12V, CAPACITY 950 COLD CRANK AMPS @ 0°F @ 24V; ALTERNATOR RATING 85/15 AMPS 12/24 V; STARTER 24V; VOLTAGE REGULATOR INTEGRAL W/ALTERNATOR

FRAME: TYPE STEEL-HEAT TREATED-BOLTED 110,000 PSI CHANNEL SECTION 10-5/8 X 3-1/4 X 3/8; SECTION MODULUS 17.7 IN^3. OVERALL WIDTH 34; CROSSMEMBERS QTY 5; TOW & LIFT EYES QTY 12

CAB: TYPE 2 PASSENGER-ALL STEEL W/BUTTERFLY HOOD

PERFORMANCE: MAXIMUM SPEED 58 MPH AT ENGINE GOVERNED SPEED 2,100 RPM; APPROX 3 MILES PER GAL; CRUISING RANGE HIGHWAY 315 MI; GRADEABILITY AT GCWR OF 105,000 LBS 19.9%; MAXIMUM DRAWBAR PULL 20,541 LBS; FORDING DEPTH, 20 IN MAX

FIFTH WHEEL: TYPE SLIDING-SINGLE OSCILLATING SIZE 36" DIA; TRAVEL 8/12"; RATED CAPACITY 40,000 LBS VERT 150,000 LBS DRAWBAR KING PIN SIZE 2"; PITCH FWD 15° FROM BEHIND 10°

PINTLE: 25 TON RATED CAPACITY

PROPELLER SHAFTS: TRANS-TO-AXLE RATED CAPACITY 10,833 LB FT, INTERAXLE RATED CAPACITY 7,083 LB FT

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH 48397-5000.

APPROVED 3 JUL 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRACTOR, TRUCK: LINE HAUL, 25 TON, 6x4, M915A1.	MILITARY STANDARD MS52203(AT)
PROCUREMENT SPECIFICATION MIL-T-PD-9156	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.