

FED. SUP CLASS
2350

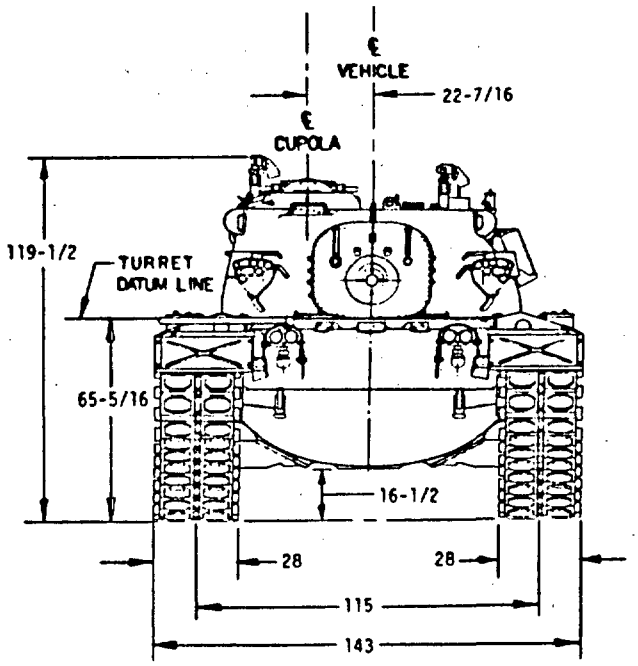

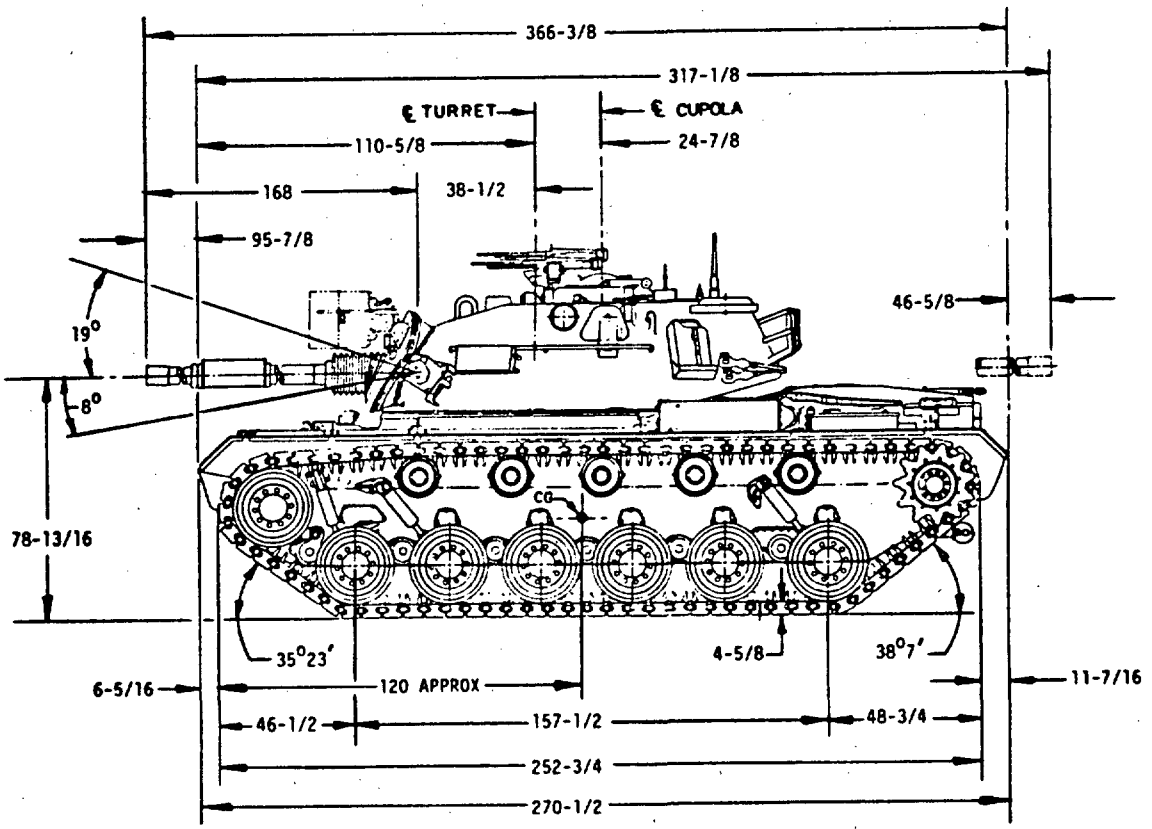

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 26 AUG 85 REVISED (A) 14 APR 86

(A) DENOTES CHANGE

MS PART NO.	ENGINEERING DRAWING NO.
MS 52215-1	8736758

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TANK, COMBAT, FULL TRACKED 105 MM GUN, M48A5 (A)	MILITARY STANDARD MS52215(AT)
PROCUREMENT SPECIFICATION MIL-T-62222	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 LIMITED COORDINATION

2350-A361

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

LIST OF EQUIPMENT:

BASIC ISSUE ITEMS	12290561
INTEGRAL COMPONENTS OF END ITEMS	12290564
ADDITIONAL AUTHORIZED LIST	12290563
EXPENDABLE SUPPLIES AND MATERIALS LIST	12290562

VEHICLE INSTALLATION DRAWINGS:

CHASSIS ASSEMLBY	12270888
TURRET ASSEMBLY	9337886

REFERENCE DOCUMENTS

CHART, PRODUCTION LUBRICATION	11674485
DIAGRAM, STRAP LOCATION	11674484
CHART, TORQUE	10940607

WEIGHT:
FULLY EQUIPPED APPROX 108,000 LBS

ENGINE: AVDS-1790-2D
V-12, COMPRESSION IGNITION, AIR COOLED
GROSS HP 750 BHP @ 2400 RPM

TRANSMISSION: CD-850-6A
CROSS DRIVE
2 SPEEDS FORWARD, 1 REVERSE

VEHICLE ACCESSORY KITS:

KIT, SEARCHLIGHT (AN/VSS-1)	13211E2500

PERFORMANCE:

MAX VEHICLE SPEED	30 MPH
CRUISING RANGE APPROX	310 MI
MAX GRADE ABILITY ASCENDING	60%
MAX GRADE ABILITY DESENDING	60%
MAX FORDING ABILITY W/O KIT	48 IN
VERTICAL OBSTACLE ABILITY	36 IN
MAX TRENCH WIDTH CROSSING	102 IN

ARMAMENT:

1	GUN, MACH, M240 TANK	7.62 MM
2	GUN, SUB MACH, M3A1	45 CAL
2	GUN, MACH, M60D	7.62 MM
1	GUN,	105 MM

AMMUNITION:

7.62 MM (MG)	10,000 ROUNDS
CAL .45	360 ROUNDS
105 MM	54 ROUNDS
GRENADES	8
SMOKE GRENADES	24

CREW:
COMMANDER, DRIVER,
GUNNER, LOADER

RADIO:
AN/VRC-12 OR AN/VRC-46 OR
AN/VRC-47 OR AN/VRC-64

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 26 AUG 85 REVISED (A) 14 APR 86

(A) DENOTES CHANGE

MS PART NO.	ENGINEERING DRAWING NO.
MS 52215-1	8736758

P. A. ARMY-AT
Other Cust

INTERNATIONAL INTEREST

TITLE
TANK, COMBAT, FULL TRACKED
105 MM GUN, M48A5 (A)

MILITARY STANDARD
MS52215(AT)

PROCUREMENT SPECIFICATION
MIL-T-62222

SUPERSEDES:

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
REVIEWER ACTIVITIES
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.