
Form Approved
OMB No. 0704-0188

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: NONE

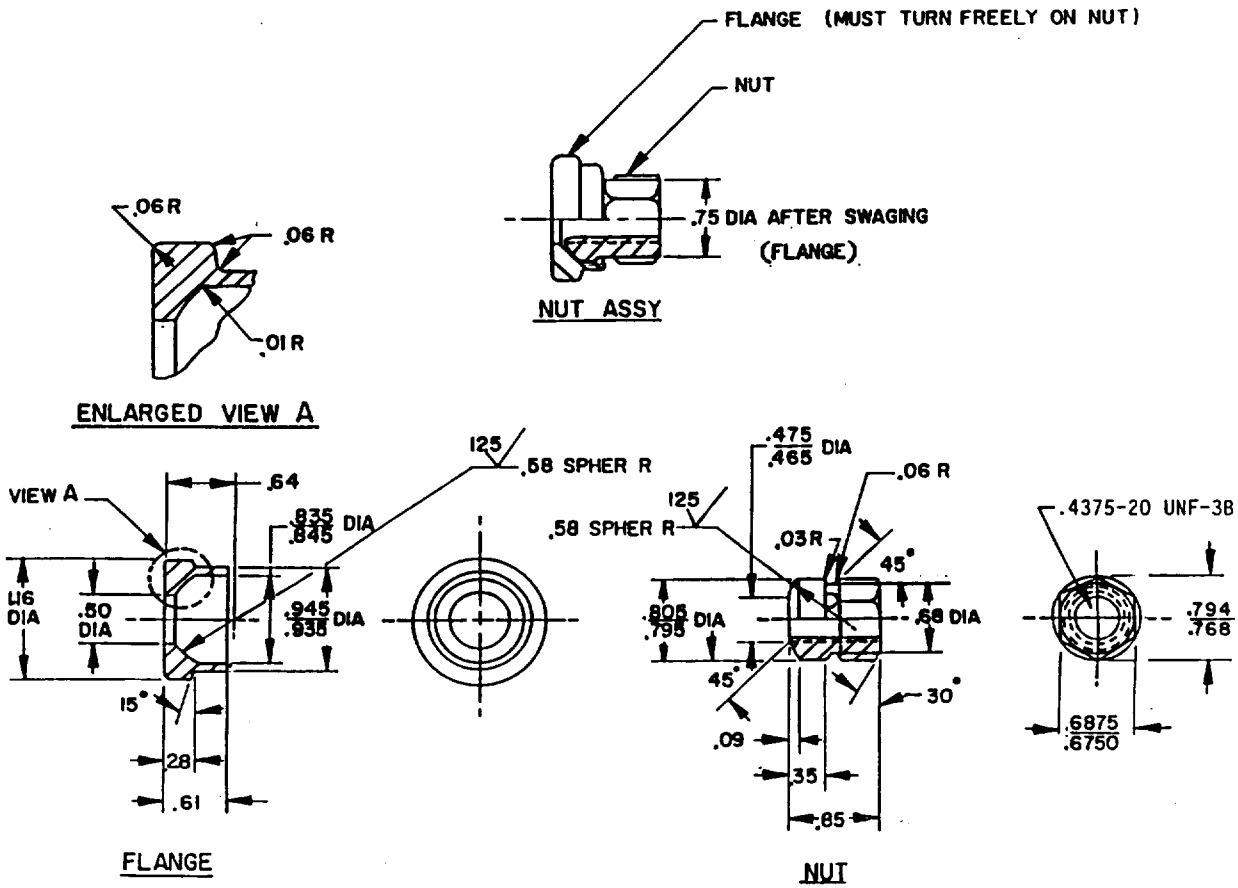

Ⓔ DENOTES CHANGES

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY-AT NAVY- AIR FORCE- DLA- REVIEW: DLA-IS USER: ARMY-ER, AR PROJECT NUMBER: 5310-1784	MILITARY SPECIFICATION SHEET TITLE: NUT, PLAIN, ASSEMBLED WASHER: 7/16 INCH (FLOATING TYPE)	SPECIFICATION SHEET NUMBER: MS53069E(AT) 1 MARCH 1991 SUPERSEDING: MS53069D(AT) 20CTOBER 1978 AMSC-NA FSC- 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

REQUIREMENTS:

(E) 1. MATERIAL: NUT: STEEL, CARBON, 1015 (UNS G10150) TO 1020 (UNS G10200), PER ASTM A576 OR ASTM A108, OR 1212 (UNS 12120), 1117 (UNS 11170) PER ASTM-A108.

2. HEAT-TREAT: NUT CASE HARDEN .003 - .008 DEEP, ROCKWELL 15-N, 89-92 OR EQUIVALENT.

3. MATERIAL: FLANGE: STEEL, CARBON, 1541 (UNS G15410), PER ASTM A576 OR ASTM A108, OR STEEL ALLOY, 1335 (UNS G13350) - 1340 (UNS G13400), PER AMSTA A322.

4. HEAT-TREAT: FLANGE: QUENCH AND TEMPER TO ROCKWELL C-32-38, PARTIAL DECARBURIZATION .005 MAX. COMPLETE DECARBURIZATION NOT PERMITTED. HEAT TREATMENT SHALL NOT BE ACCOMPLISHED IN PRESENCE OF NITROGEN COMPOUNDS.

(E) 5. PROTECTIVE FINISH: ZINC PLATE PER ASTM B633, TYPE II, CLASS Fe/Zn8 (SC2), EXCEPT THREADS WHICH ARE NOT FULLY PLATED, OR CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2. HYDROGEN EMBRITTLEMENT RELIEF REQUIRED WITHIN ONE HOUR AFTER PLATING.

(E) 6. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, FED-STD-H28. SCREW THREAD ACCEPTABILITY SHALL BE IN ACCORDANCE WITH FED-STD-H28/20 SYSTEM 21.

7. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .010 ON DECIMALS, ± 1° ON ANGULAR DIMENSIONS.

8. MARKING, SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES

1. DIMENSIONS ARE IN INCHES.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF ISSUE ADOPTED.

3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER.

5. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

(E) 6. CAUTION SHOULD BE TAKEN DURING ANY PLATING, CLEANING, DESCALING, PASIVATION OR SIMILAR PROCESS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE SAFE REUTILIZATION AND DISPOSAL OF ALL MATERIAL GENERATED BY THESE PROCESSES IN ACCORDANCE WITH ASTM A380, SECTION 8.2 AND 8.7.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: NONE

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY- AT NAVY- AIR FORCE- DLA- REVIEW: DLA-IS USER: ARMY-ER, AR PROJECT NUMBER: 5310-1784	MILITARY SPECIFICATION SHEET TITLE: NUT, PLAIN, ASSEMBLED WASHER: 7/16 INCH (FLOATING TYPE)	SPECIFICATION SHEET NUMBER: MS53069E(AT) 1 MARCH 1991 SUPERSEDING: MS53069D(AT) 2 OCTOBER 1978 AMSC-NA FSC- 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.