
PROJECT No. 5136-0031

FED. SUP CLASS 5136


USER SYMBOLS: NAVY - SH, MC

REVIEWER SYMBOLS: NAVY - OS, EC; ARMY - GL


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

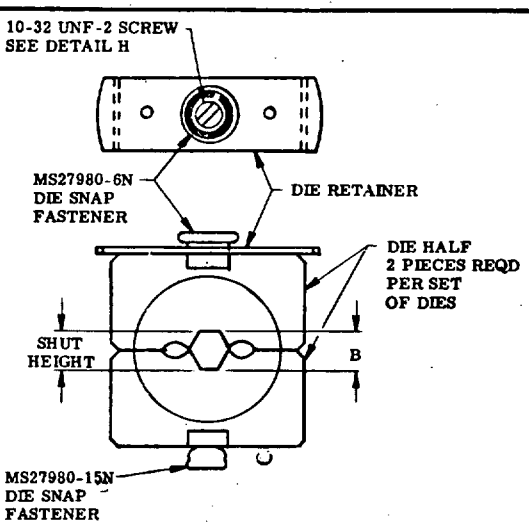


ASSEMBLY

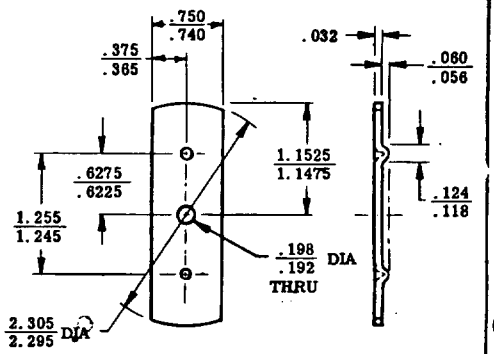


DIE RETAINER

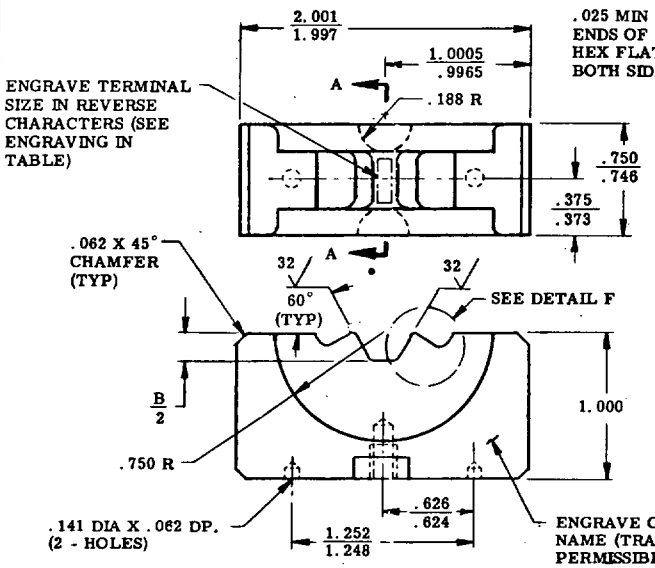


DIE

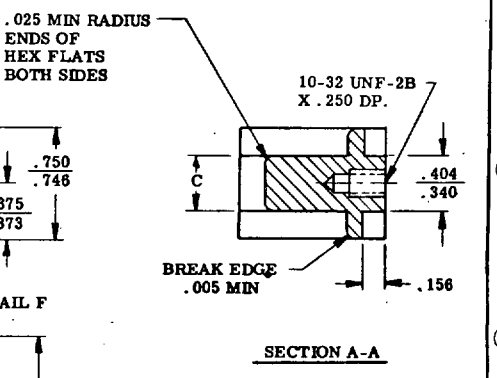

SECTION A-A

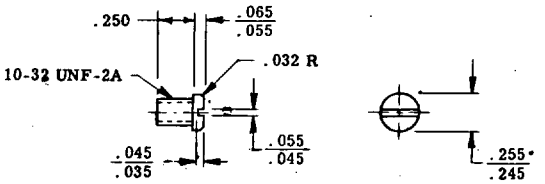

DETAIL H
STEEL SCREW

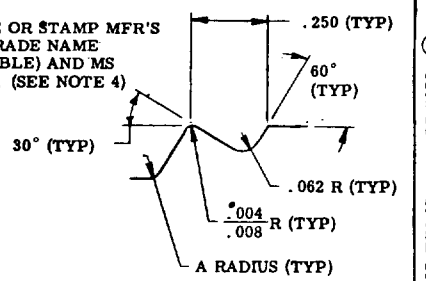

DETAIL F
FLASH CUTTER

(E) FOR CHANGES SEE SHEETS 1 & 2

P.A. NAVY - AS Other Cust ARMY - EL USAF - 84	TITLE: DIES, CRIMPING TOOL, FOR USE WITH MS20659 UNINSULATED WIRE TERMINALS AND EXTERNAL POWER PLUG SOCKET CONTACTS (FOR WIRE SIZES 8 THROUGH 4/0)	MILITARY STANDARD MS90485
PROCUREMENT SPECIFICATION MIL-T-22909	SUPERSEDES: AN3427 FOR NAVAIR USE, MS90485(AS)	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23065

APPROVED 27 JUN 67 (A) REVISED 16 DEC 1968 (B) 5 JUN 1970 (C) 21 FEB 1972 (D) 15 FEB 1973 (E) 30 AUG 74

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.

REVIEWER SYMBOLS:
NAVY - OS, EC
ARMY - GL

USER SYMBOLS:
NAVY - SH, MC

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DASH NO.	WIRE SIZE	A ±.005	B ±.002	C ±.003	ENGRAVING	GAGE NO.
-8	8	.031	.210	.310	8 CU	MS90486-8
-6	6	.062	.240		6 CU	MS90486-6
-4	4		.299	.372	4 CU	MS90486-4
-2	2		.377	.435	2 CU	MS90486-2
-1	1		.417		1 CU	MS90486-1
-01	0		.456		1/0 CU	MS90486-01
-02	00		.500	.502	2/0 CU	MS90486-02
-03	000	.094	.562	.627	3/0 CU	MS90486-03
-04	0000		.618	.740	4/0 CU	MS90486-04

ADDITIONAL REQUIREMENTS:

1. MATERIAL: DIE, SAE 4340 OR FEDERAL SPECIFICATION QQ-T-570-CLASS 01; DIE RETAINER, SAE 1060 OR 1080 SPRING STEEL.
2. FINISH: CHROMIUM OR NICKEL PLATED IN ACCORDANCE WITH QQ-C-320 OR QQ-N-290 RESPECTIVELY, 63 MICROINCHES ALL OVER EXCEPT THE HEX CRIMPING SURFACES WHICH SHALL BE 32 MICROINCHES OR FINER. CADMIUM PLATING SHALL NOT BE USED.
3. UNLESS OTHERWISE SPECIFIED. ALL HEX ENGRAVINGS SHALL BE LOCATED CENTRALLY IN HEX, CUT TO A DEPTH .015 - .020.
4. ENGRAVING OR STAMPING TO BE AS LARGE AS PRACTICABLE.
5. HEAT TREAT: DIE TO ROCKWELL C42-46, DIE RETAINER SPRING-TEMPER.
6. (E) THESE DIES ARE DESIGNED TO CRIMP MIL-T-7928 UNINSULATED COPPER TERMINALS AND EXTERNAL POWER PLUG SOCKET CONTACTS FOR WIRE SIZES 8 THRU 4/0 INCLUSIVE, USING MS25441 CRIMPING TOOL.
7. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
8. THREAD DIMENSIONS AND DESIGNATIONS SHALL BE INTERPRETED IN ACCORDANCE WITH HANDBOOK H28.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015, ANGLES ±1°.
10. FOR SERVICE USE, CHECK SHUT HEIGHT WITH MS90486 GAGES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 27 JUN 67 REVISED (E) FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY - AS Other Cust ARMY - EL USAF - 84	TITLE: DIES, CRIMPING TOOL, FOR USE WITH MS20659 UNINSULATED WIRE TERMINALS AND EXTERNAL POWER PLUG SOCKET CONTACTS (FOR WIRE SIZES 8 THROUGH 4/0)	MILITARY STANDARD MS90485
PROCUREMENT SPECIFICATION MIL-T-22909	SUPERSEDES: AN3427 FOR NAVAIR USE, MS90485(AS)	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.