MIL-R-22097/5C
01 SEPTEMBER 1977
SUPERSEDING
MIL-R-22097/5B
4 November 1970

MILITARY SPECIFICATION

RESISTORS, VARIABLE, NONWIRE-WOUND

(ADJUSTMENT TYPE, LEAD-SCREW ACTUATED),

STYLE RJ26

* This specification is approved for use by all Departments and Agencies of the Department of Defense.

* THIS SPECIFICATION INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION (SEE 6.3). USE MIL-R-39035/3.

1. SCOPE

1.1 This specification covers the detail requirements for style RJ26, adjustment type, lead-screw actuated, nonwire-wound, variable resistors. This style is available in characteristics C and F.

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following document of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-22097 - Resistors, Variable, Nonwire-Wound (Adjustment Type), General Specification for.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-22097, and as specified herein.

3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Power rating. The power rating shall be 1/4 watt for characteristics C and F.

3.4 Nominal resistance value and maximum rated ac or dc working voltage. Nominal resistance values and maximum rated ac or dc working voltages are as specified in table I.


3.5 Actual effective electrical travel. Actual effective electrical travel shall be 10 turns minimum and 25 turns maximum.

3.6 Operating torque. Operating torque shall be 3 ounce-inches maximum.


3.7 Terminals. Characteristics C and F are available in P, W, and X-type terminals.

FSC 5905

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:09Z
Check the source to verify that this is the current version before use.

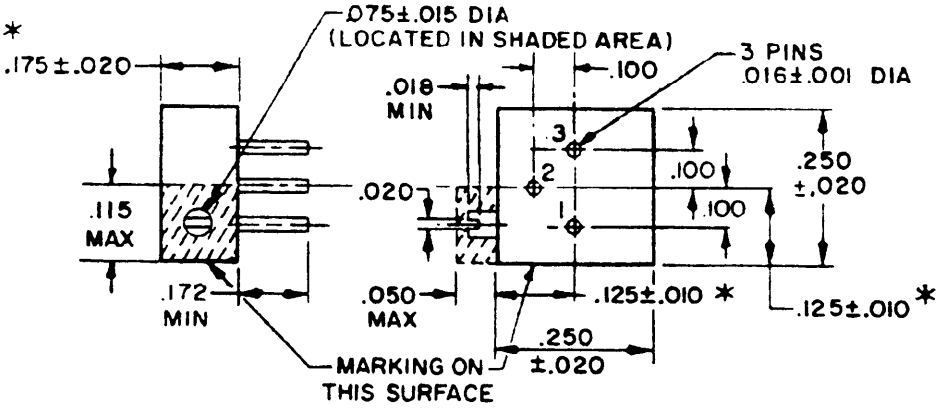


TERMINAL TYPE P

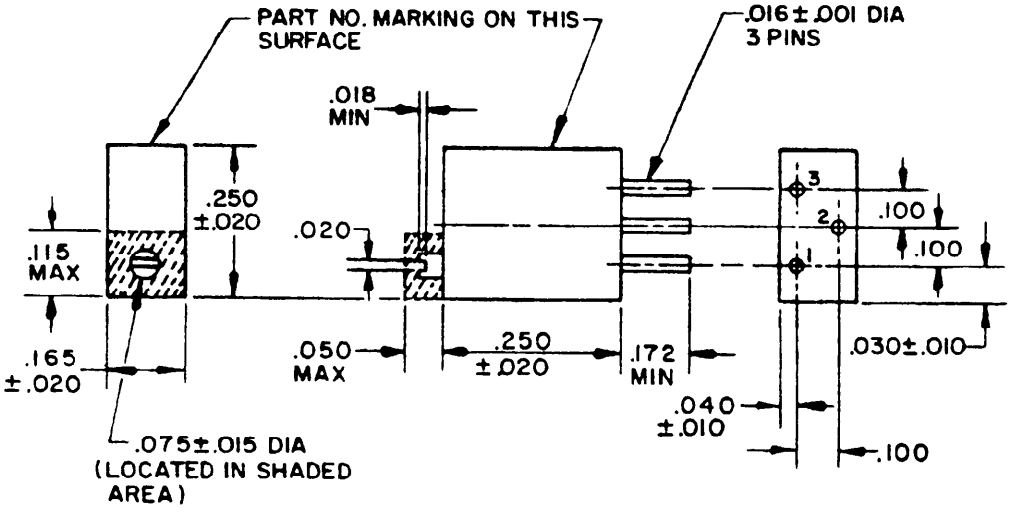

TERMINAL TYPE W

FIGURE 1. Style RJ26 resistors.

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:09Z
Check the source to verify that this is the current version before use.

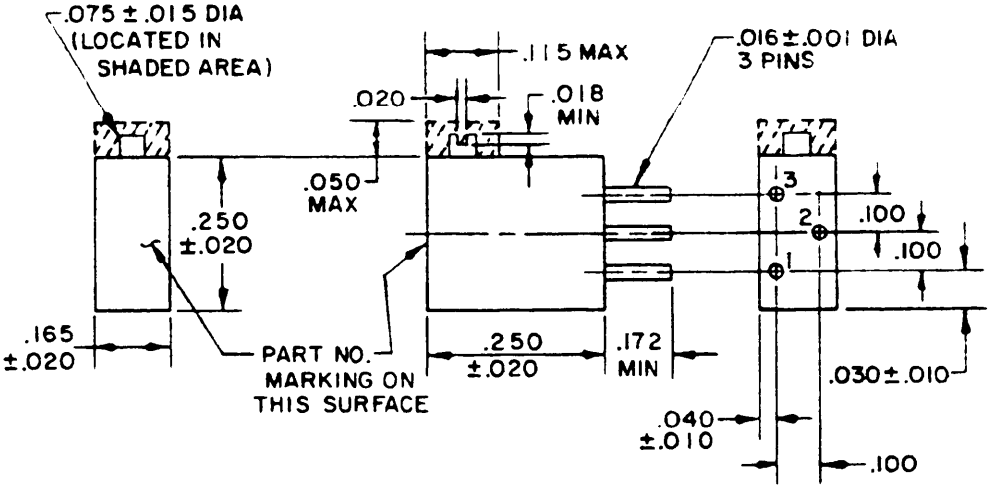

TERMINAL TYPE X

INCHES	MM
.001	.03
.010	.25
.015	.38
.016	.41
.018	.46
.020	.51
.030	.76
.040	1.02
.050	1.27
.075	1.91
.100	2.54
.115	2.92
.125	3.18
.165	4.19
.172	4.37
.175	4.45
.250	6.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. The entire slot of the actuating screw must be above the surface of the unit.

FIGURE 1. Style RJ26 resistors - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:09Z
Check the source to verify that this is the current version before use.

TABLE I. Nominal resistance value and maximum rated ac or dc working voltage.

Nominal resistance value	Maximum rated ac or dc working voltage
Ohms	Volts
10	1.58
20	2.23
50	3.54
100	5.0
200	7.07
500	11.1
1,000	15.8
2,000	22.3
5,000	35.4
10,000	50.0
20,000	70.7
25,000	79.0
50,000	111
Megohms	
.10	158
.25	200
.50	200
1.00	200

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-22097.

4.2 Dielectric withstanding voltage. In the dielectric withstanding voltage test, the applied potential shall be 600 volts rms at atmospheric pressure, and 250 volts rms at reduced barometric pressure.

* 5. PACKAGING

* 5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-22097.

6. NOTES

6.1 Notes. The notes specified in MIL-R-22097 are applicable to this specification.

* 6.2 This specification supersedes MIL-R-22097/5B, 04 November 1970.

6.2.1 Characteristic B has been deleted. Resistors having characteristic B shall be replaced by resistors having characteristic C.

* 6.3 Substitution data. The resistors specified herein are not for use in design after the date of this specification. They are authorized for use in design contracts effective prior to or on the date of this specification and to support existing military equipment. Resistors specified in MIL-R-39035/3 are preferred for design and regardless of the failure rate designation can be used as substitutes for the inactivated resistors of the same resistance value, tolerance, and characteristic performance of this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:09Z
Check the source to verify that this is the currenversion before use.

6.4 Weight. The maximum weight is 0.6 gram.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI, MU
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5905-0920)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T11:09Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFALD/PTR
WRIGHT-PATTERSON AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:09Z
Check the source to verify that this is the current version before use.