MILITARY SPECIFICATION

PAD, MATTRESS, Hospital Bed

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1 SCOPE

1.1 Scope This specification covers a vinyl foam mattress pad suitable for use with an adjustable, field-hospital folding bed

2 APPLICABLE DOCUMENTS

2.1 Issues of documents The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein

SPECIFICATIONS

FEDERAL

PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-676	- Boxes, Setup

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, DPSC-ATT, 2800 South 20th Street, Philadelphia PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 7210

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

2 2 Other publications. The following documents form a part of this specification to the extent specified herein Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposals shall apply

CONSUMER PRODUCT SAFETY COMMISSION (CPSC)

Standard FF 4-72 - Flammability of Mattresses and Mattress Pads

(Application for copies should be addressed to Office of the Secretary, Consumer Product Safety Commission, 1111 18th Street NW, Washington, DC 20207)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D-412 Tension Testing of Rubber

D-1667 Sponge Made From Closed Cellular Poly (Vinyl chloride), or Copolymers Thereof

C-177 Steady-State Thermal Transmission Properties by means of the Guarded Hot Plate

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia PA 19103)

3 REQUIREMENTS

3 1 First article When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4 1 2 , and 6 2)

3 2 Material

3 2 1 Vinyl Foam Closed-cell vinyl foam used in the construction of the pad shall have the physical properties listed in table I when tested as specified in 4 5 1

TABLE I Physical properties of vinyl foam

Characteristic	Value
Density (pounds per cubic foot)	1.5 to 5.0
Compression (25 percent) (pounds per square inch)	1.5 to 3.0
Flammability, char length (inches from nearest point of ignition source)	2 maximum
Thermal conductivity (maximum) (BTU/in./hr./sq ft./oF)	0.25
Tensile strength (pounds per square inch)	30 minimum
Elongation (percent)	150 minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

3.3 Design and construction. The pad shall be constructed of vinyl foam and shall be in accordance with figure 1 and as specified herein.

3.4 Color. Color shall be white, off-white, buff, sand, beige, light grey, or yellow.

3.5 Identification marking. Each pad shall have the following information marked upon it, in dark indelible ink, in letters at least 1/8 inch high.

Contract or purchase order number
Name or registered trademark of manufacturer
National Stock Number

3.6 Workmanship. Workmanship shall be first class throughout. Pad shall be free from defects which detract from its appearance or which impair its serviceability, including, but not limited to, objectionable odor, cracks, tears, ruptures, uneven surfaces, uneven edges, or deterioration of material.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, auditory, and olfactory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties of the item).

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

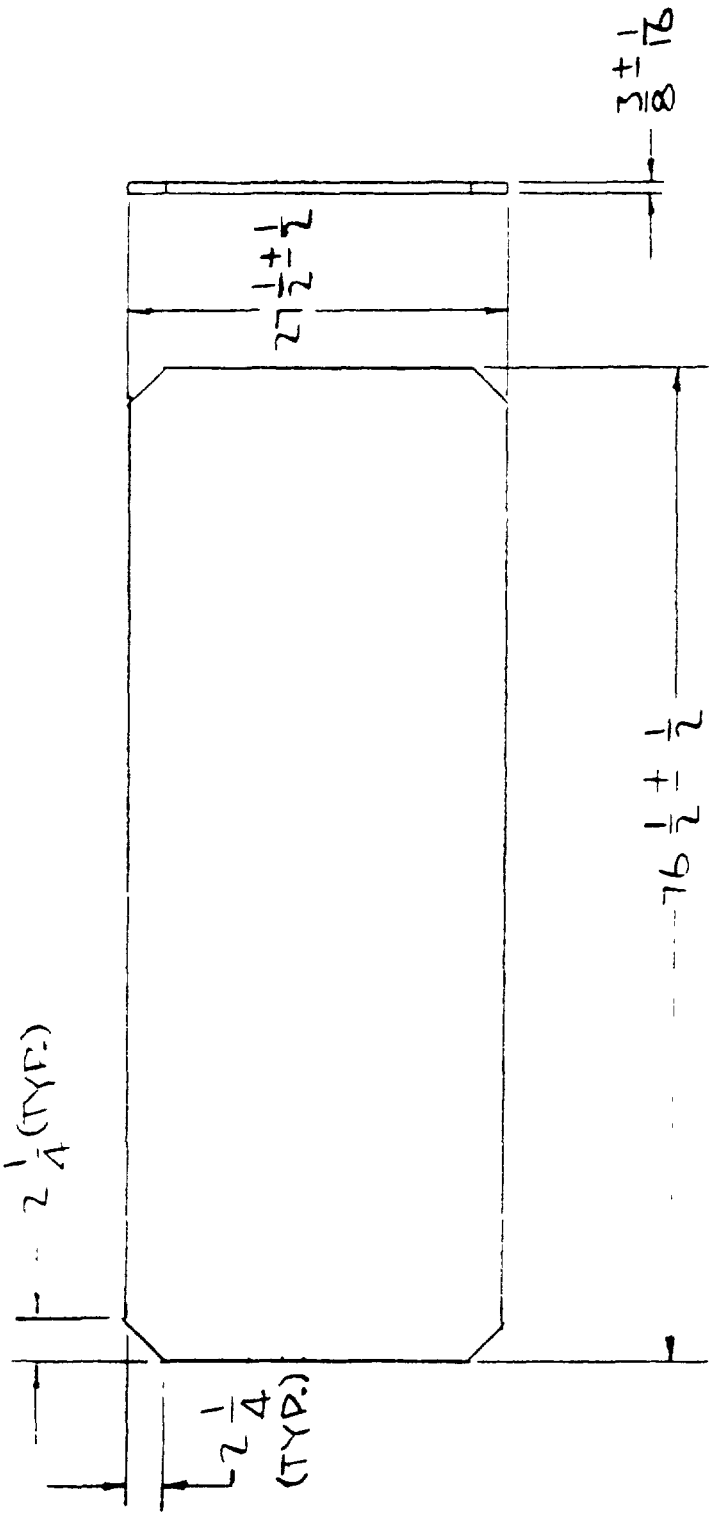


FIGURE 1 Pad, mattress

NOTE:
All dimensions are in inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

4.1.2.1.1 First article inspection. First article inspection shall be performed on the pad when a first article sample is required (see 3.1). This inspection shall include examination of 4.4 and tests of 4.5.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.4 and tests of 4.5.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Inspection lot.

4.2.1 Raw materials. An inspection lot for raw material inspection shall be all material produced under the same conditions and controlled to the degree that uniformity of product within the designated lot can be assured. Lot identification of the raw material by the manufacturer is one method of control, as cited above, which is considered acceptable.

4.2.2 End product. An inspection lot for inspection of end product shall consist of all pads of the same type produced under essentially the same conditions and offered for inspection at one time.

4.3 Sampling.

4.3.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table II. The unit of product for sampling purposes shall be one pad.

TABLE II. Sampling for examination.

	Inspection level	AQL (defects per hundred units)
For visual examination		
Major defects	S-4	1.0
Total defects (Major and Minor combined)	S-4	4.0
For dimensional examination	S-1	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

4.3.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table III, for an Inspection level of S-2 and an acceptance level of zero. The unit of product for testing shall be as specified in the applicable test specification (see 4.5.1)

TABLE III. Sampling for tests.

Component (Unit of product)	Characteristic	Requirement	Test procedure
Vinyl foam	Physical properties	3.2.1	4.5.1

4.4 Examination. The pad shall be examined to determine compliance with all requirements contained in this specification.

4.4.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table IV. Examination shall not be restricted to the classified possible defects listed below.

TABLE IV. Classification of defects.

Categories	Defects
Major	
101	Pad cut, cracked, torn, or ruptured
102	Pad has uneven edge or surface
103	Pad has objectionable odor.
104	Deterioration of vinyl material
Minor	
201	Color not as specified.
202	Color not uniform
203	Identification marking not as specified, not complete, accurate, legible, or permanent

4.4.2 Dimensional examination. The pad shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4.3 Packaging inspection. The inspection of the unit packaging, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

4 5 Tests. Tests shall be conducted to determine compliance with specification requirements.

4 5 1 Physical properties of vinyl foam Vinyl foam used in the construction of the pad shall be tested for physical properties in accordance with table V, for compliance with requirements listed in 3 2 1.

TABLE V Testing of vinyl foam

Characteristic	Test Method
Density	ASTM D-1667
Compression	ASTM D-1667
Flammability	CPSC FF 4-72
Thermal conductivity	ASTM C-177
Tensile strength	ASTM D-412
Elongation	ASTM D-412

5 PACKAGING

5 1 Packaging Packaging shall be level A or C, as specified (see 6 2)

5 1 1 Level A.

5 1 1 1 Unit package Each pad shall be clean, dry and neatly folded to an approximate dimension of 25-1/2 inches in length by 27-1/2 inches in width and wrapped in kraft paper The wrapped pad shall be further packaged in a box conforming to PPP-B-566, type G, PPP-B-676, type I or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification

5 1 2 Level C Each pad shall be clean, dry and packaged in a manner that will afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity

5 2 Packing Packing shall be level A, B or C, as specified (see 6.2)

5 2 1 Level A Four unit packages shall be packed in an exterior container designed for a type I load and conforming to PPP-B-636 class weather-resistant Closure, strapping and waterproofing shall be as specified in the appendix of the box specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Four unit packages shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-636, class domestic. Closure shall be as specified in the appendix of the box specification.

5.2.3 Level C. The packaged pads shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. These packs shall conform to the applicable carrier's rules and regulations.

5.3 Marking. Each unit and exterior container shall be marked as specified in MIL-STD-129.

6 NOTES

6.1 Intended use. The pad is intended for use with adjustable, folding, field hospital bed NSN 6530-00-935-4184.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

a. Title, number and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
c. When a first article is required (see 3.1, 4.1.2.1 and 6.3).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of Armed Services Procurement Regulations. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 This specification covers the following item appearing in the Federal Supply Catalog.

National Stock Number	Item Identification
7210-00-118-0009	PAD, MATTRESS, Hospital Bed, Vinyl Foam, 27-1/2 by 76-1/2 by 3/8 inches

Custodians
Army - MD
Navy - MS
Air Force - 03

Preparing activity
DLA-DM

Project No. 7210-0226

Review activity.
DoD - MB

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-P-37735 PAD, MATTRESS, Hospital Bed

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.