MIL-C-0028754/48A(EC)
15 June 1981
USED IN LIEU OF
MIL-C-28754/48
30 April 1979

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SINGLE SPAN

This limited coordination military specification has been prepared by the Naval Electronic Systems Command based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-C-28754/48. It is subject ot modification. However, pending its promulgation as a coordinated military specification, it may be used in procurement.

The complete requirements for procuring the module frame assembly described herein shall consist of this document and the latest issue of Specification MIL-C-28754.


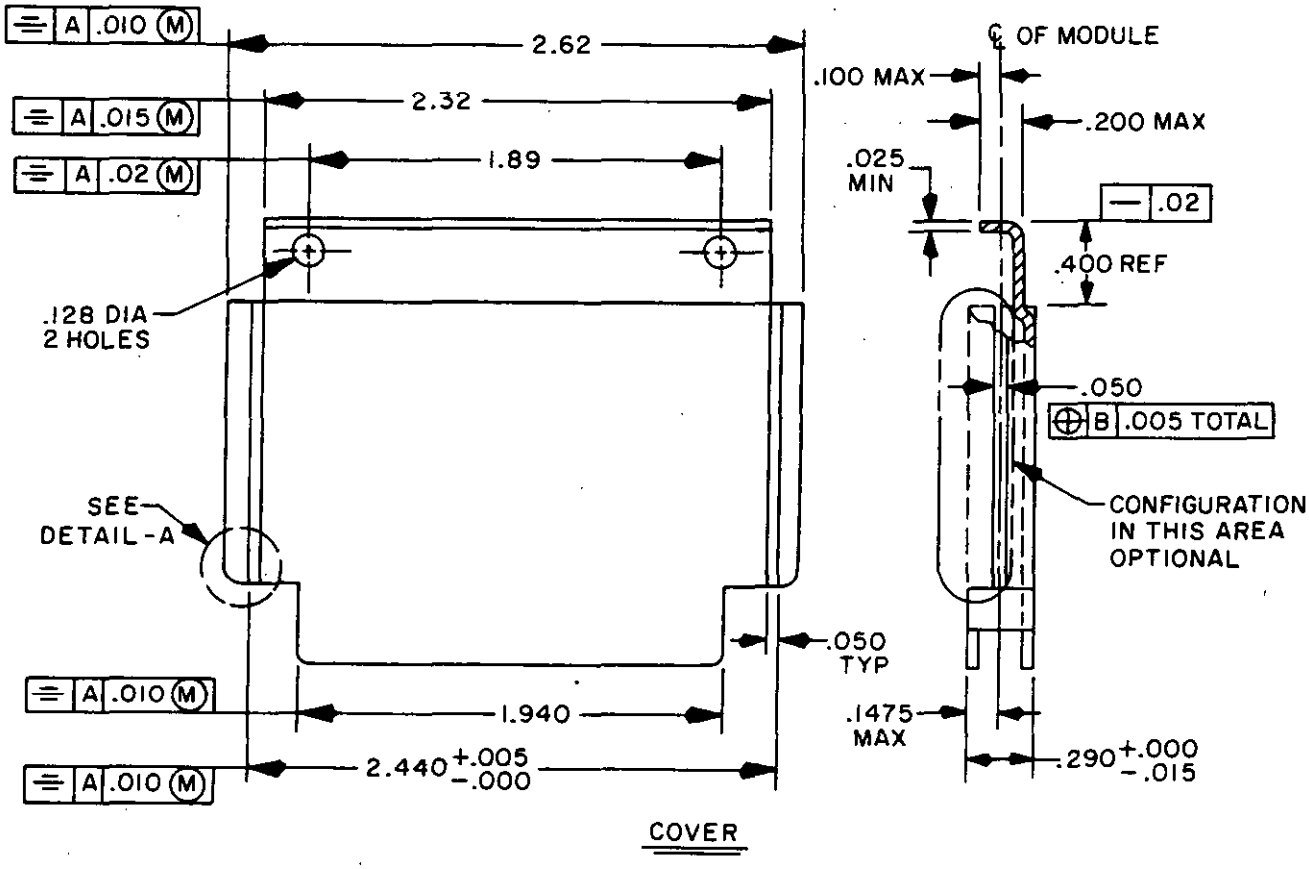



FIGURE 1. Module frame assembly.

Ⓐ Denotes changes.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

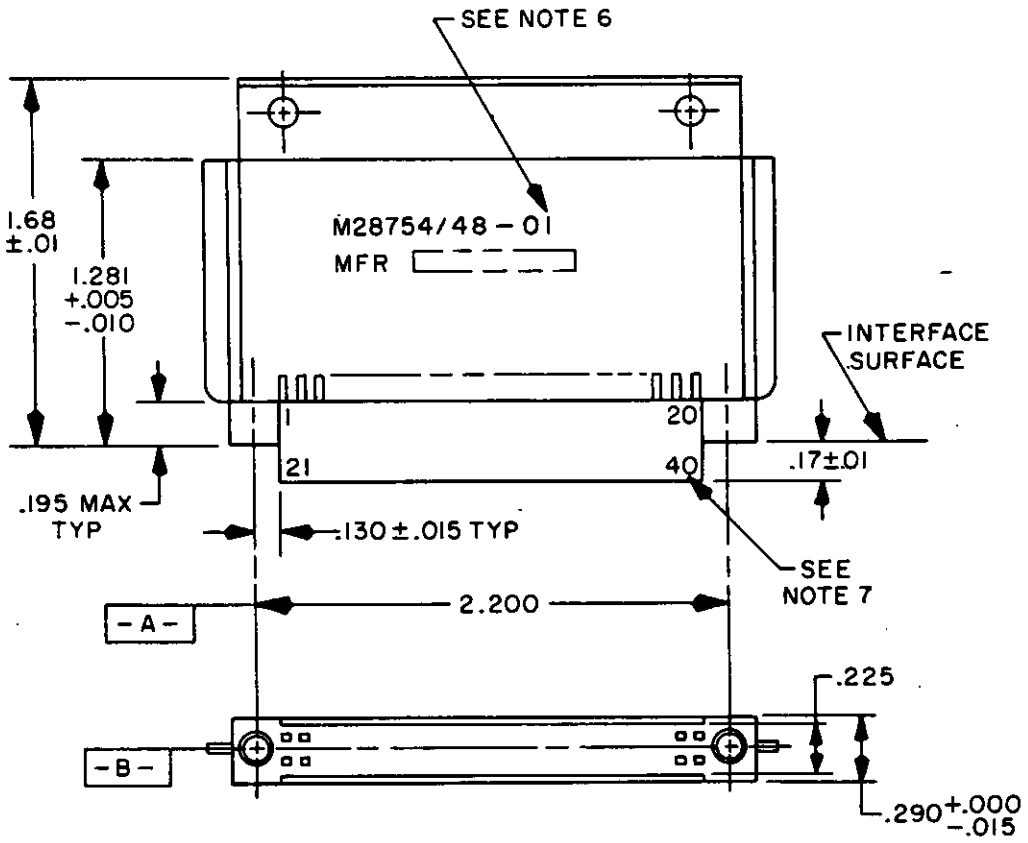

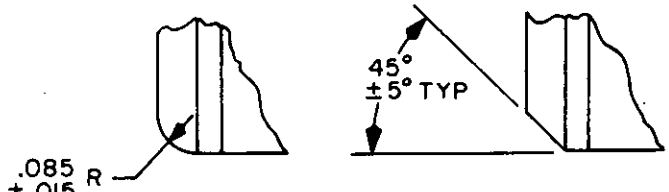

OPTIONAL
CONFIGURATIONS
DETAIL−A

FIGURE 1. Module frame assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.085	2.16	.195	4.95	1.68	42.7
.010	.25	.100	2.54	.200	5.08	1.89	48.0
.015	.38	.128	3.25	.225	5.72	1.940	49.28
.02	.5	.130	3.30	.290	7.37	2.200	55.88
.025	.64	.1475	3.746	.400	10.16	2.440	61.98
.050	1.27	.17	4.3	1.281	32.54	2.62	66.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The $1.281^{+.005}_{-.010}$ ($32.54^{+.13}_{-.25}$ mm) dimension applies from the interface surface to the top of the guide rib only.
4. The portion of the module other than the top surface of the guide rib (that is, within the 2.440 (61.98 mm) dimension) shall be 1.286 (32.66 mm) maximum.
5. The .1475 (3.746 mm) maximum indicates the maximum eccentricity allowed on either side of centerline, but not both. The .290 (7.37 mm) maximum governs.
6. Mark the following in .12 ±.02 inch (3.0 ±.5 mm) high Gothic characters located on side shown using item 3. Manufacturer's code identification shall be marked in place of area outlined by phantom lines.

Mfr: M28754/48-01

(A) 7. Marking this area in color contrasting characters, .06 inch (1.5mm) high.
8. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 1. Module frame assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Applicable connector: See table I.

Finish (frame only): Anodic coating per MIL-A-8625, type III, class 2, color number 7038.

Frame (pin shield retention): Frame shall be attached to connector and meet the pin shield requirements of MIL-C-28754.

Heat sink with guide ribs: Aluminum alloy, 3/4 hard in accordance with QQ-A-250. Surface finish anodized in accordance with MIL-A-8625, type II, class 2, black.

Marking: In accordance with MIL-C-28754 and the figure 1.

Military part number: M28754/48- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 0102-670, code identification number 28687.

(A) TABLE I. Dash number and applicable connector.

Dash number	Applicable connector	Description
01	M28754/10-02	Uninsulated pin shield
02	M28754/10-04	Insulated pin shield

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI,
Navy - YD, AS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-N185-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.