MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SINGLE SPAN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the module frame assemblies described herein shall consist of this specification and the latest issue of MIL-C-28754.


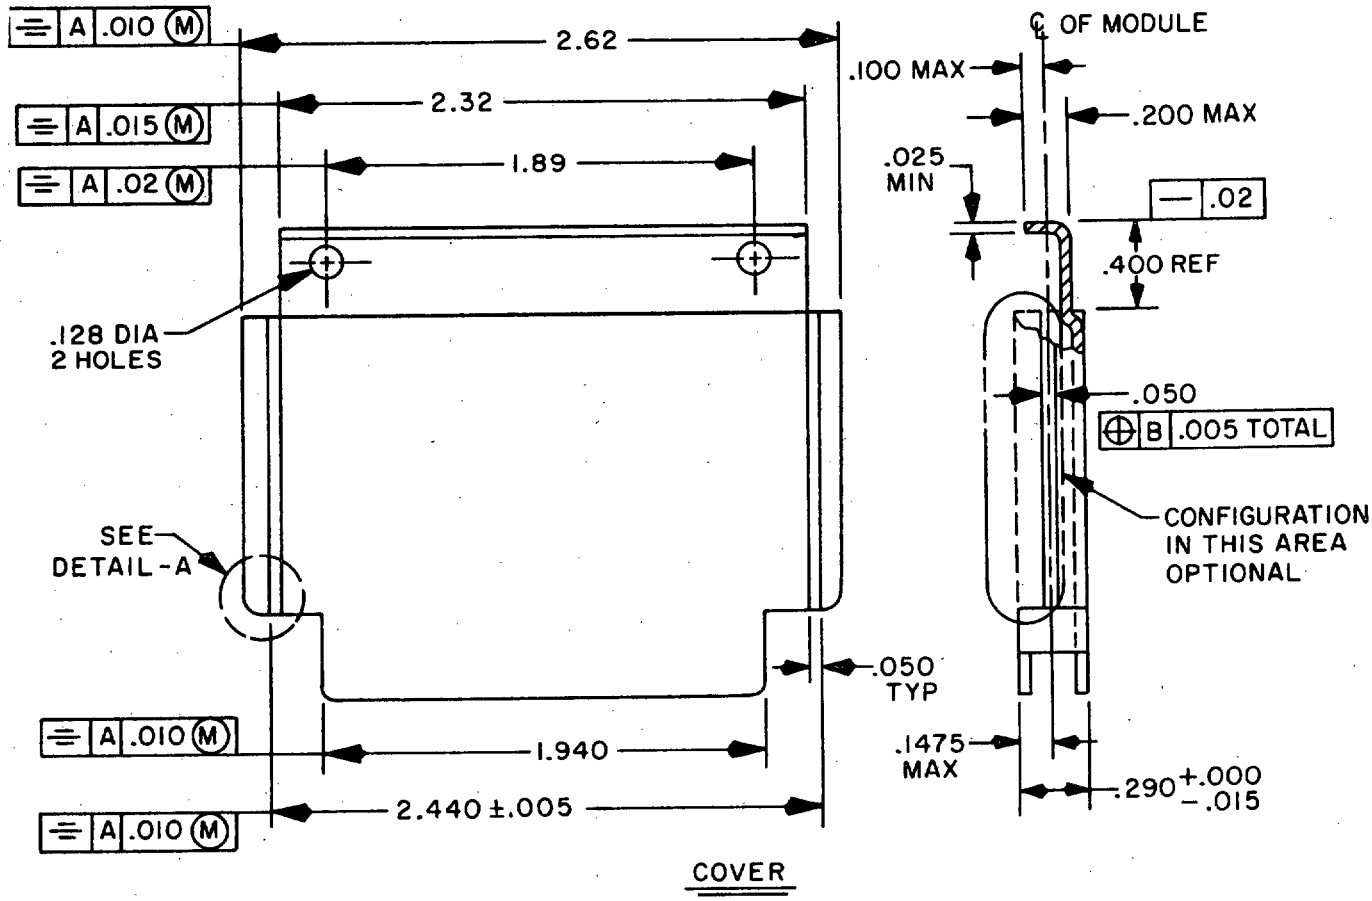



FIGURE 1. Module frame assembly.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

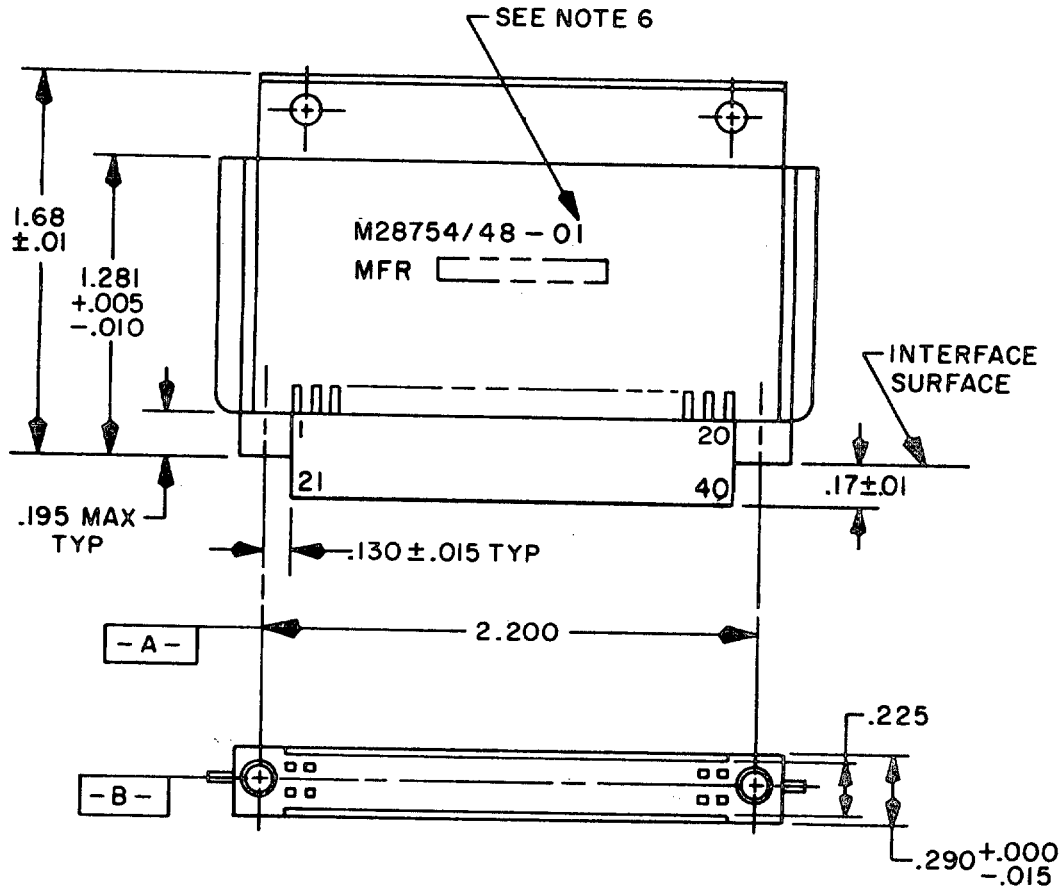

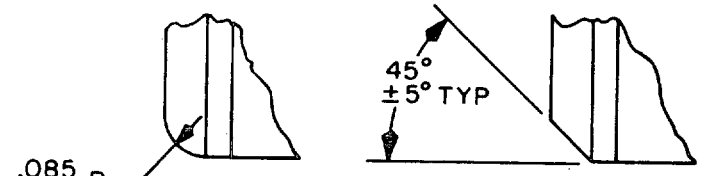

OPTIONAL
CONFIGURATIONS
DETAIL−A

FIGURE 1. Module frame assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.085	2.16	.195	4.95	1.68	42.7
.010	.25	.100	2.54	.200	5.08	1.89	48.0
.015	.38	.128	3.25	.225	5.72	1.940	49.28
.02	.5	.130	3.30	.290	7.37	2.200	55.88
.025	.64	.1475	3.746	.400	10.16	2.440	61.98
.050	1.27	.17	4.3	1.281	32.54	2.62	66.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The 1.281 $^{+.005}_{-.010}$ (32.54 $^{+.13}_{-.25}$ mm) dimension applies from the interface surface to the top of the guide rib only.
4. The portion of the module other than the top surface of the guide rib (that is, within the 2.440 (61.98 mm) dimension) shall be 1.286 (32.66 mm) maximum.
5. The .1475 (3.746 mm) maximum indicates the maximum eccentricity allowed on either side of centerline, but not both. The .290 (7.37 mm) maximum governs.
6. Mark the following in .12 ±.02 inch (3.0 ±.5 mm) high Gothic characters located on side shown using item 3. Manufacturer's code identification shall be marked in place of area outlined by phantom lines.
7. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 1. Module frame assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Applicable connector: See table I.

Finish (frame only): Anodic coating per MIL-A-8625, type III, class 2, color number 7038.

Frame (pin shield retention): Frame shall be attached to connector and meet the pin shield requirements of MIL-C-28754.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/48- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 0102-670, code identification number 28687.

TABLE I. Dash numbers and applicable connector.

Dash no.	Applicable connector	Description
01	M28754/10-02	Uninsulated pin shield
02	M28754/10-04	Insulated pin shield

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-42)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-28754/48B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.