MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, HOUSING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the housings described herein shall consist of this document and the latest issue of Specification MIL-C-28754.

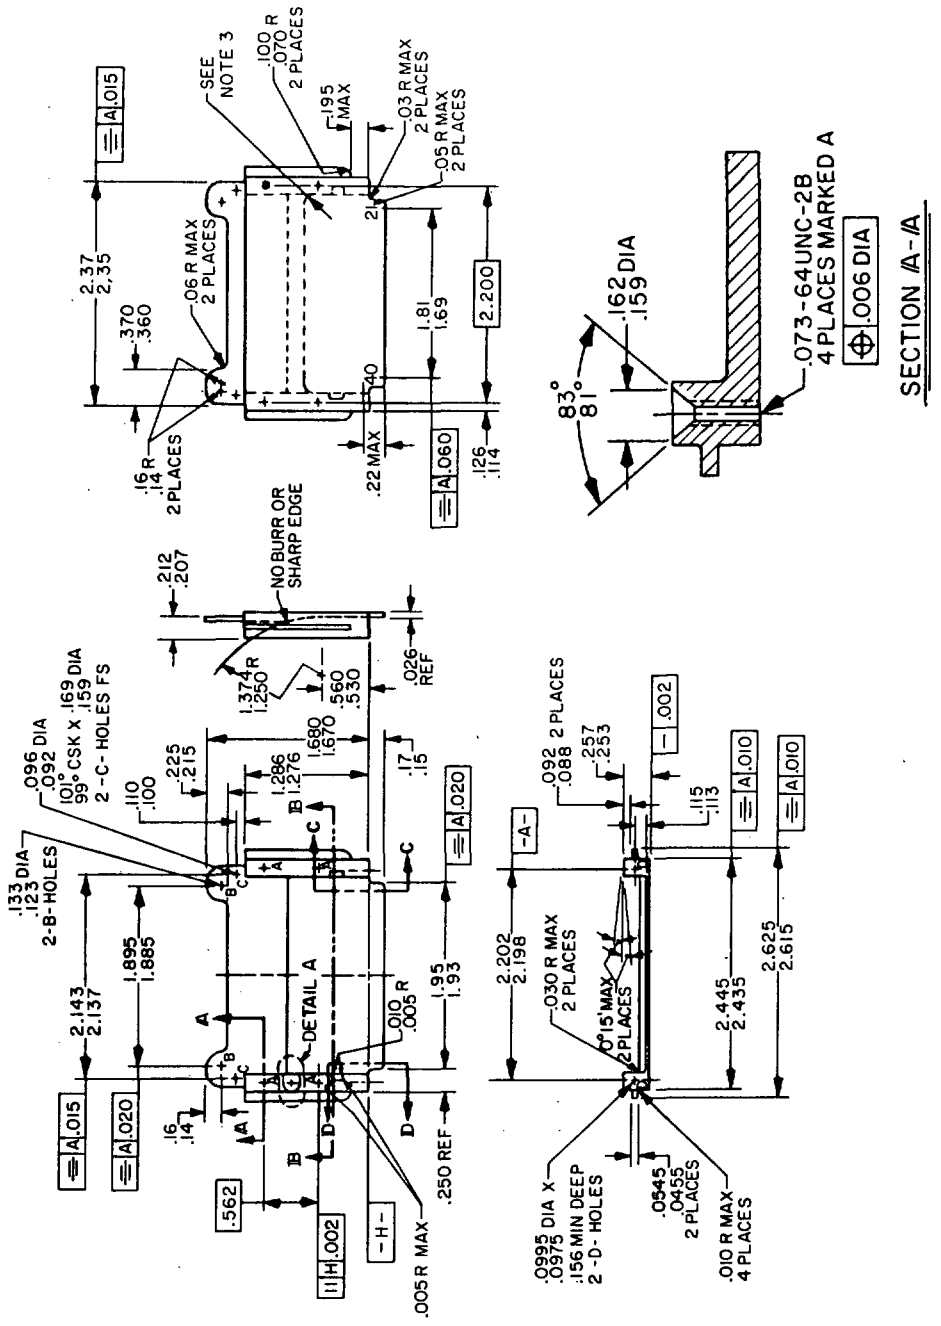


FIGURE 1. Dimensions and configurations.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.


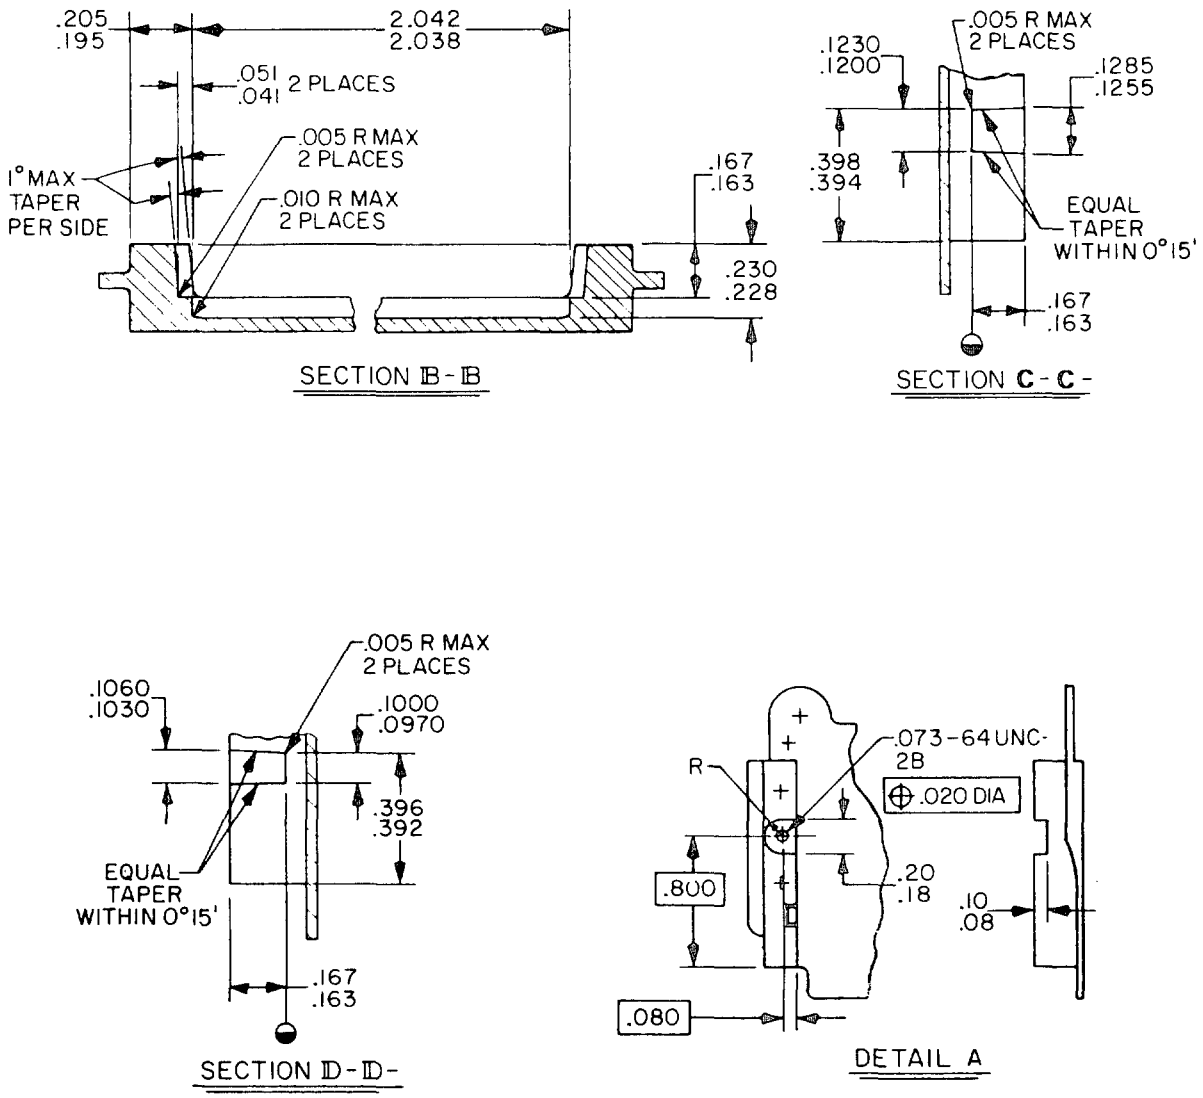


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

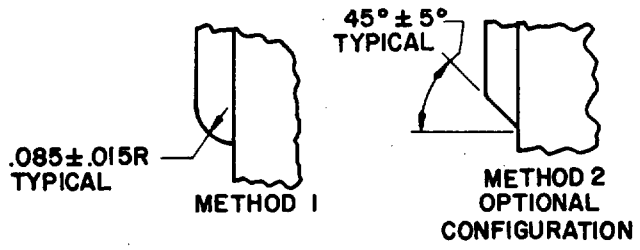

DETAIL B

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.085	2.16	.1255	3.188	.205	5.21	.398	10.11	1.95	49.5
.005	.13	.088	2.24	.126	3.200	.207	5.26	.530	13.46	2.038	51.77
.010	.25	.092	2.34	.1285	3.264	.212	5.38	.560	14.22	2.042	51.87
.015	.38	.096	2.44	.133	3.38	.215	5.46	.562	14.27	2.137	54.28
.020	.51	.0970	2.464	.14	3.6	.22	5.6	.800	20.32	2.143	54.43
.026	.66	.0975	2.476	.15	3.8	.225	5.72	1.250	31.75	2.198	55.83
.030	.76	.0995	2.527	.156	3.96	.228	5.79	1.276	32.41	2.200	55.88
.041	1.04	.1000	2.540	.159	4.04	.230	5.84	1.286	32.66	2.202	55.93
.0455	1.156	.1030	2.616	.16	4.1	.250	6.35	1.374	34.90	2.35	59.7
.05	1.3	.1060	2.692	.162	4.11	.253	6.43	1.670	42.42	2.37	60.2
.051	1.30	.110	2.79	.163	4.14	.257	6.53	1.680	42.67	2.435	61.85
.0545	1.384	.113	2.87	.167	4.24	.360	9.14	1.69	42.9	2.445	62.10
.060	1.52	.114	2.90	.169	4.29	.370	9.40	1.81	46.0	2.615	66.42
.070	1.78	.115	2.92	.17	4.3	.392	9.96	1.885	47.88	2.625	66.68
.073	1.85	.1200	3.048	.18	4.6	.394	10.01	1.895	48.13		
.080	2.03	.1230	3.124	.195	4.95	.396	10.06	1.93	49.0		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.
3. Unless otherwise specified Corner Radii .020 R maximum and corner fillets .020 R maximum.
4. ⌀ Two surfaces to be in line within .002 inch (.05 mm).
5. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: ASTM B85, alloy SC84A, or QQ-A-591, alloy 380, cast finish 125.

Finish: See table I.

Marking: In accordance with table I, MIL-C-28754 and figure 1.

Military part number: M28754/49- (dash number from table I).

Supersession data: This specification sheet supersedes the requirements of MS14062.

TABLE I. Dash number

Dash number	Type	Finish	Marking	With detail A
01	A	Anodize per MIL-A-8625, type 2, dyed black	Mark characters .06 inch high with white epoxy ink	No
02	B	Anodize per MIL-A-8625, type 2, dyed red. Coat detail A per MIL-C-5541, class 3, type and grade optional.	Mark characters .06 inch high with black epoxy ink	Yes
03	C	Anodize per MIL-A-8625, type 2, dyed black. Coat detail A per MIL-C-5541 class 3, type and grade optional.	Mark characters .06 inch high with white epoxy ink	Yes

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, AS
Navy - YD, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3036-52)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-C-28754 / 49

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:44Z
Check the source to verify that this is the current version before use.