MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, INSERT, BOTTOM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the inserts described herein shall consist of this specification and the latest issue of MIL-C-28754.


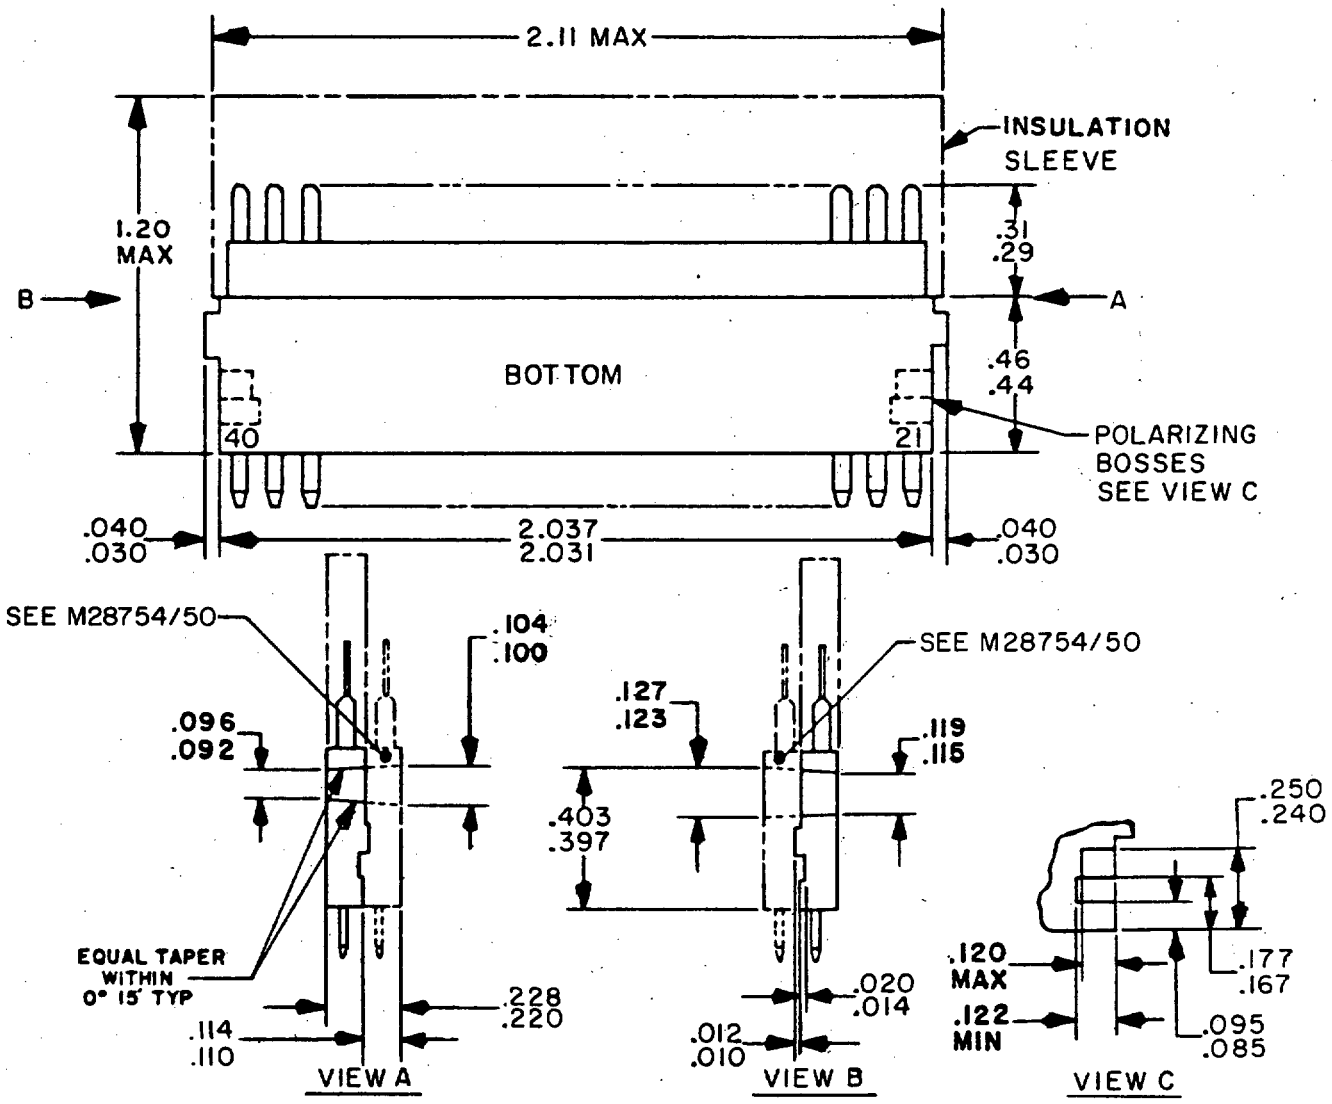


FIGURE 1. Dimensions and configurations.


Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.

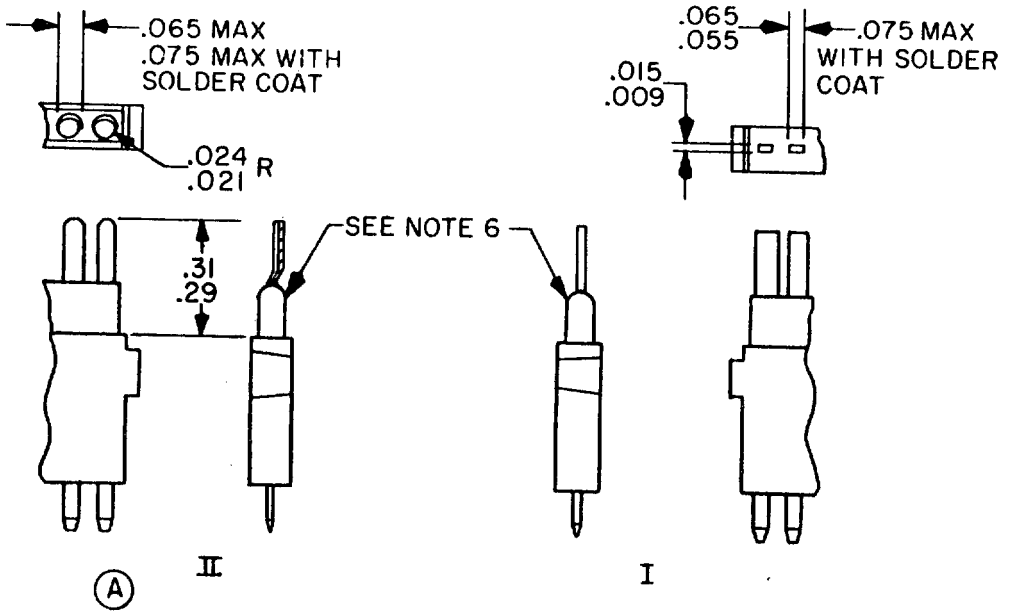

CONTACT STYLE

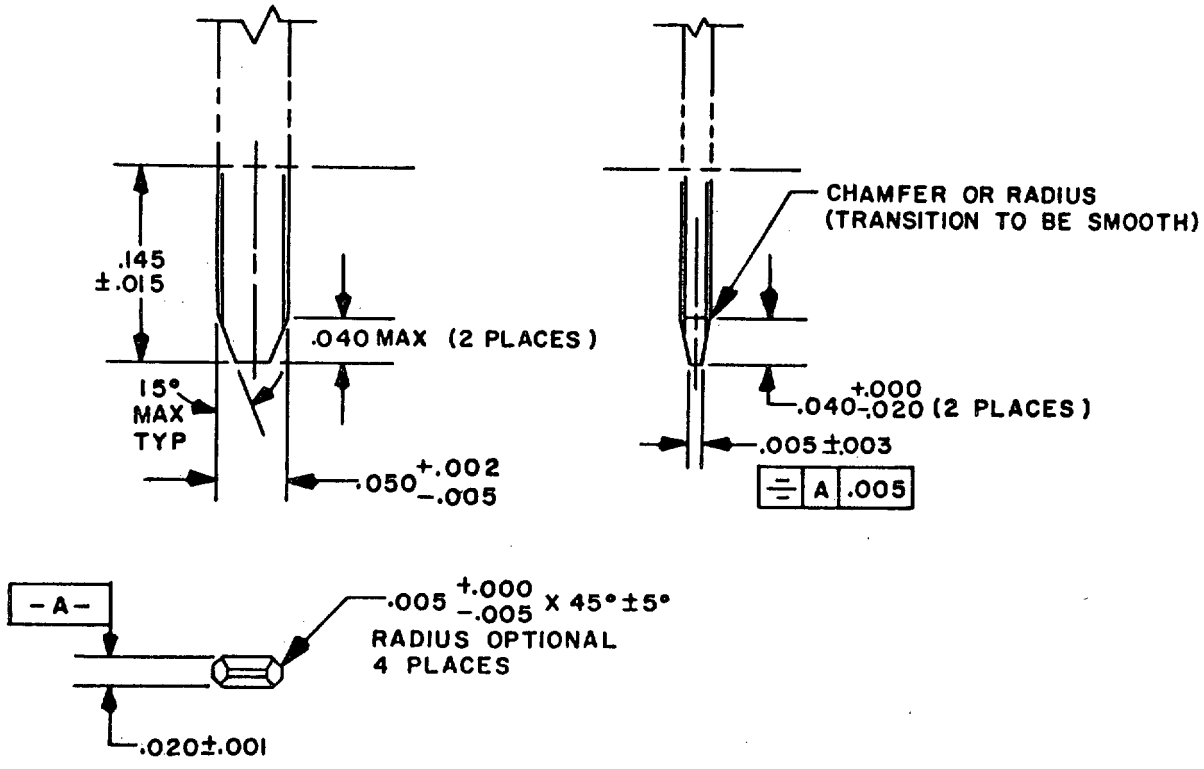

CONTACT CONFIGURATION

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.015	.38	.065	1.65	.110	2.79	.145	3.68	.31	7.9
.002	.05	.020	.51	.075	1.90	.114	2.90	.167	4.24	.397	10.08
.003	.08	.021	.53	.085	2.16	.115	2.92	.177	4.50	.403	10.24
.005	.13	.024	.61	.092	2.34	.119	3.02	.220	5.59	.44	11.2
.009	.23	.030	.76	.095	2.41	.120	3.05	.228	5.79	.46	11.7
.010	.25	.040	1.02	.096	2.44	.122	3.10	.240	6.10	1.20	30.5
.012	.30	.050	1.27	.100	2.54	.123	3.12	.250	6.35	2.031	51.59
.014	.36	.055	1.40	.104	2.64	.127	3.23	.29	7.4	2.037	51.74
										2.11	53.6

NOTES:
1. Dimensions are in inches..
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 for two place decimals and ±2° for angles.
4. Break sharp edges .005 (.13 mm) maximum.
5. Contact numbers 21 and 40, and "bottom" shall be marked in white characters, .300 inch high maximum.
6. Gold plating on termination area shall be 20 millionths mimimum.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Polyphenylene sulfide per MIL-P-46174, class 40, grade E, or diallyl phthalate.

Insulation sleeve material: Optional.

Military part number: M28754/51- (dash number from table I).

This insert to be used with MIL-C-28754/31.

Supersession data: See table II.

Ⓐ TABLE I. Dash numbers.

Dash no.	Wire accommodation	Contact style	Wire size	Termination tool 1/	Plating
01	Flat conductor cable	I	22-24	MTMT-B-1000	SnPb
02	Single round wires	II	24-30	MTMT-B-1000	Au
03	Multiple round wire cable	II	20-30	AA-400	Au
04	Single round wires	II	24-30	MTMT-B-1000	SnPb

1/ Raychem part numbers or equivalent.

Ⓐ TABLE II. Supersession data.

Termination tool 1/	
Old part no.	New part no.
MTMT-B-1000	FC6900
AA-400	AS4000

1/ Raychem part number or equivalent.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-44)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-28754/51A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 75 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.