INCH-POUND

MIL-DTL-28754/53B
22 April 2021
SUPERSEDING
MIL-C-28754/53A
w/AMENDMENT 1
11 May 1984

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, HOUSING, CONNECTOR ASSEMBLY, STYLE II

Reinstated after 15 March 2021 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the housing described herein shall consist of this specification and the latest issue of MIL-DTL-28754.

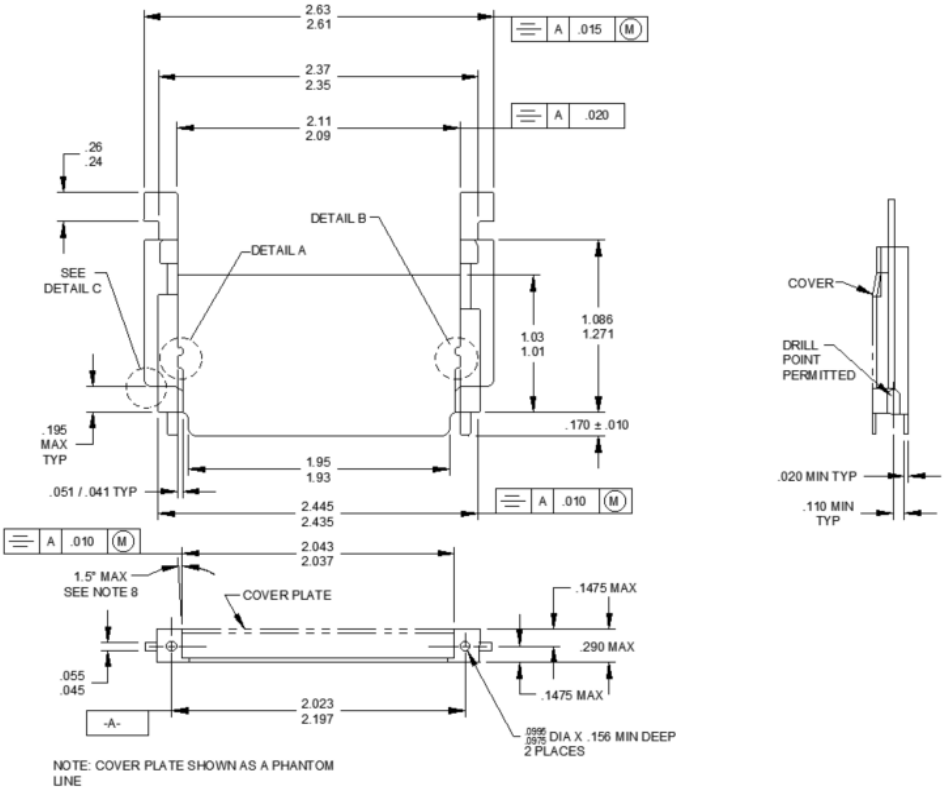


FIGURE 1. Dimensions and configurations

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.


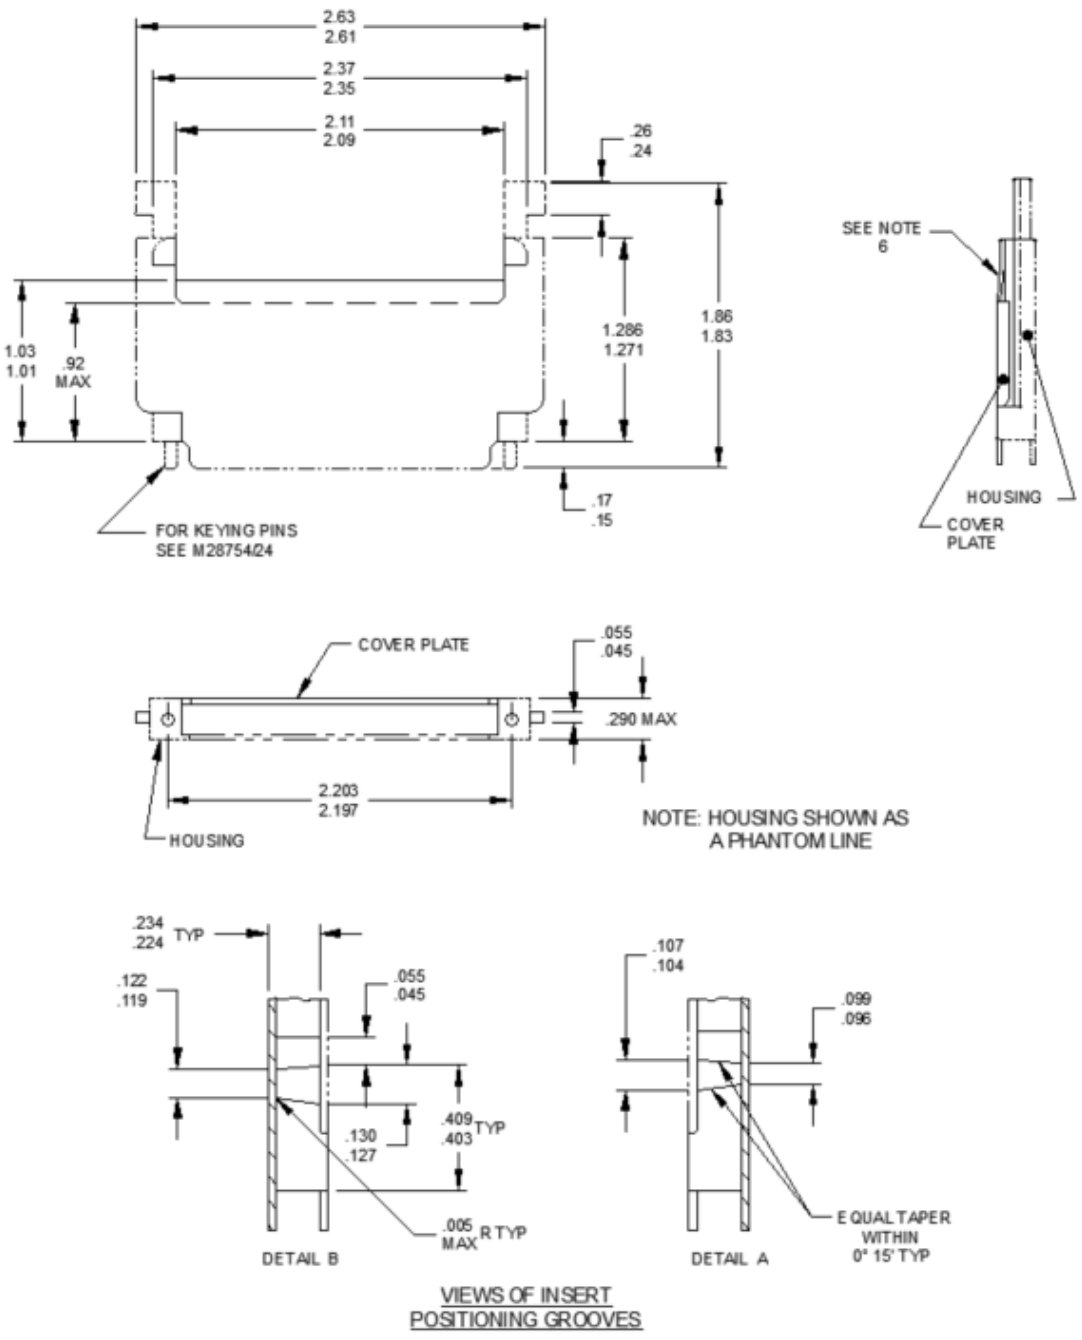


FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.

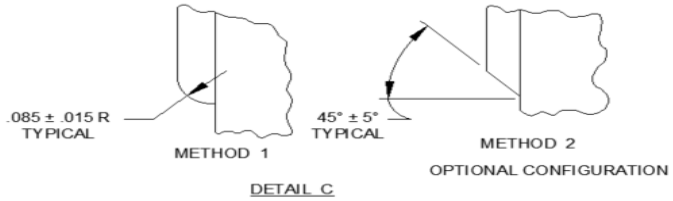

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	.13	.096	2.44	.127	3.23	.24	6.1	1.281	32.54	2.11	53.6
.010	.25	.0975	2.476	.130	3.30	.26	6.6	1.286	32.66	2.197	55.80
.015	.38	.099	2.51	.1475	3.746	.290	7.37	1.83	46.5	2.203	55.96
.020	.51	.0995	2.527	.15	3.8	.403	10.24	1.86	47.2	2.35	59.7
.041	1.04	.104	2.64	.156	3.96	.409	10.39	1.93	49.0	2.37	60.2
.045	1.14	.107	2.72	.170	4.32	.92	23.4	1.95	49.5	2.435	61.85
.051	1.30	.110	2.79	.195	4.95	1.01	25.7	2.037	51.74	2.445	62.10
.055	1.40	.119	3.02	.224	5.69	1.03	26.2	2.043	51.89	2.61	66.3
.085	2.16	.122	3.10	.234	5.94	1.276	32.41	2.09	53.1	2.63	66.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Inside and outside corners .02 R (.5 mm) maximum, unless otherwise specified.
4. Break sharp edges .005 R (.13 mm) maximum.
5. Cover plate included with housing.
6. Cover plate retained by snap down tangs.
7. Unless otherwise specified, tolerances are ± .005 (.13 mm) for three place decimals, ± .01 (.3 mm) for two place decimals and ± 2° for angles.
8. Taper per side.

FIGURE 1. Dimensions and configurations – Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Military part number: M28754/53-01.

This housing designed for use with MIL-DTL-28754/33.

First article testing: Perform the applicable tests as specified in MIL-DTL-28754 and the appendix thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-28754, this document references the following:

MIL-DTL-28754/33

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Review activities:
Army – AR, MI
Navy – MC, YD

Preparing activity:
DLA – CC

(Project 5935-2021-044)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:45Z
Check the source to verify that this is the current version before use.