INCH-POUND

MIL-C-28754/54B
23 March 1994
SUPERSEDING
MIL-C-28754/54A
25 October 1988

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, EXTRACTOR, MODULE, SINGLE AND DOUBLE SPAN, STYLES I AND II

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

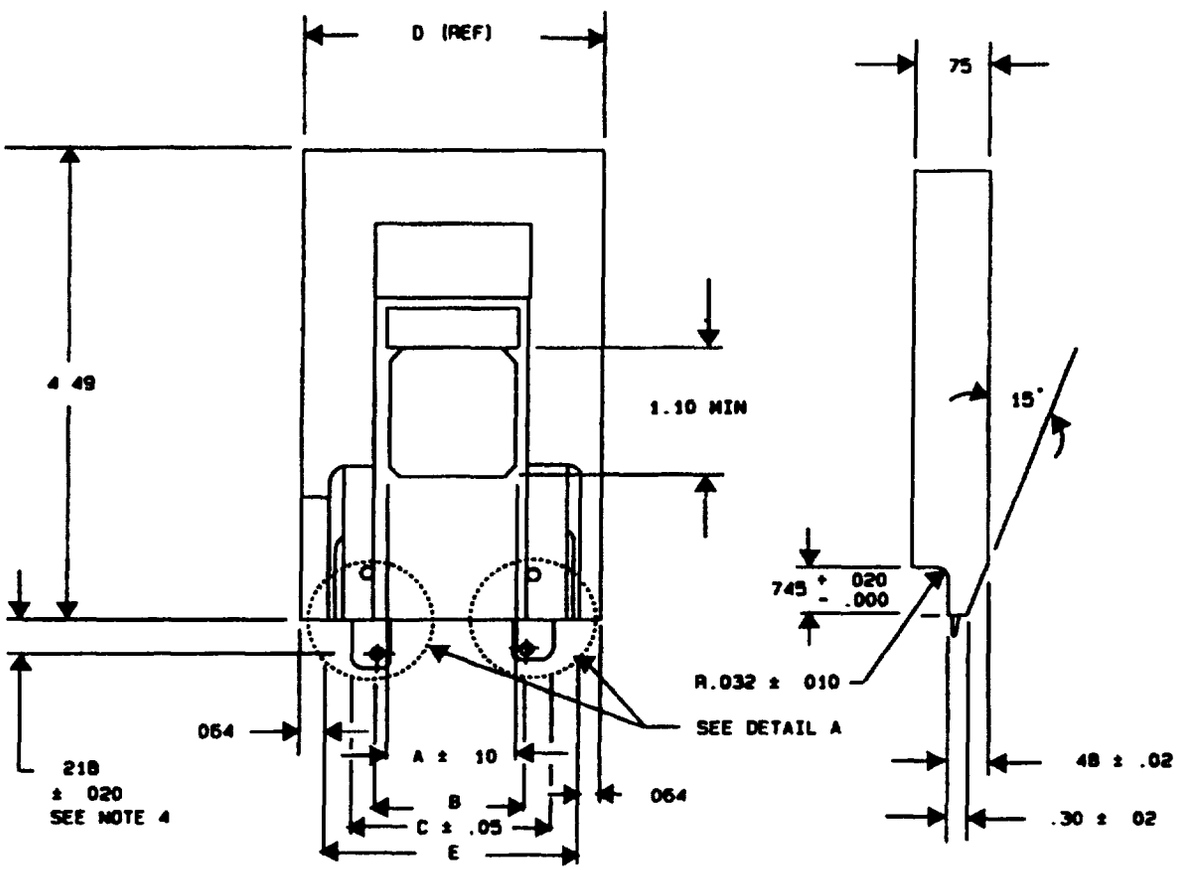


Dimensions	Single span -01	Double span -02
A	1.75	4.75
B	1.890	4.890
C	2.27	5.27
D (REF)	3.12	6.12
E	2.96	5.96

* FIGURE 1. Module extractor (type 1A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

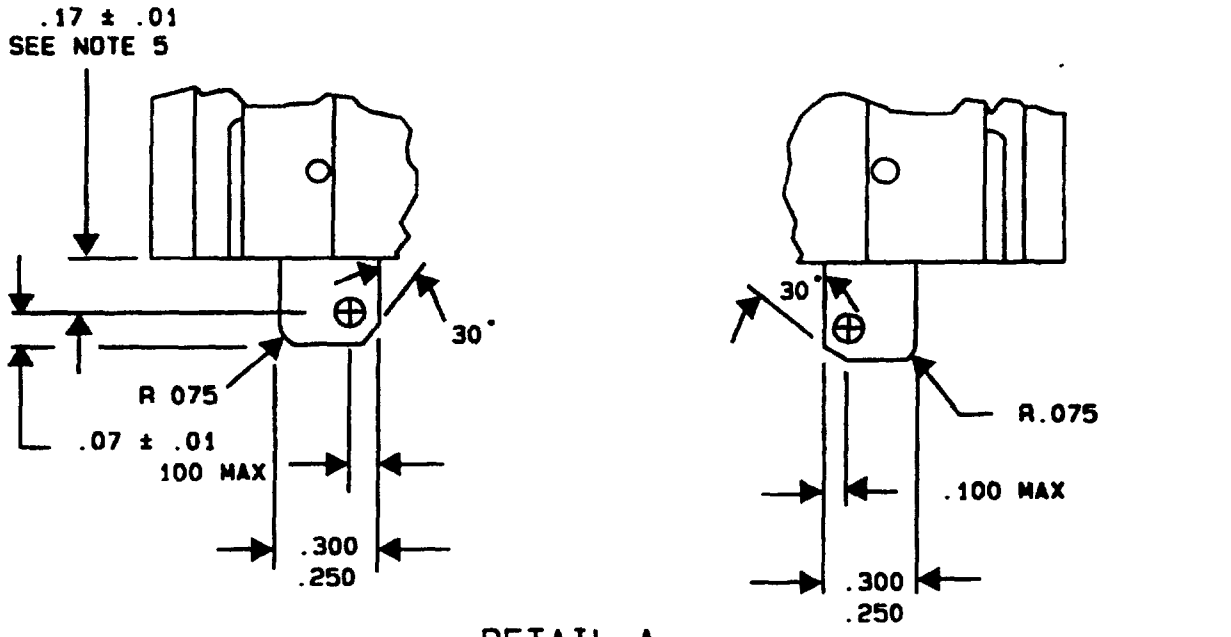

DETAIL A

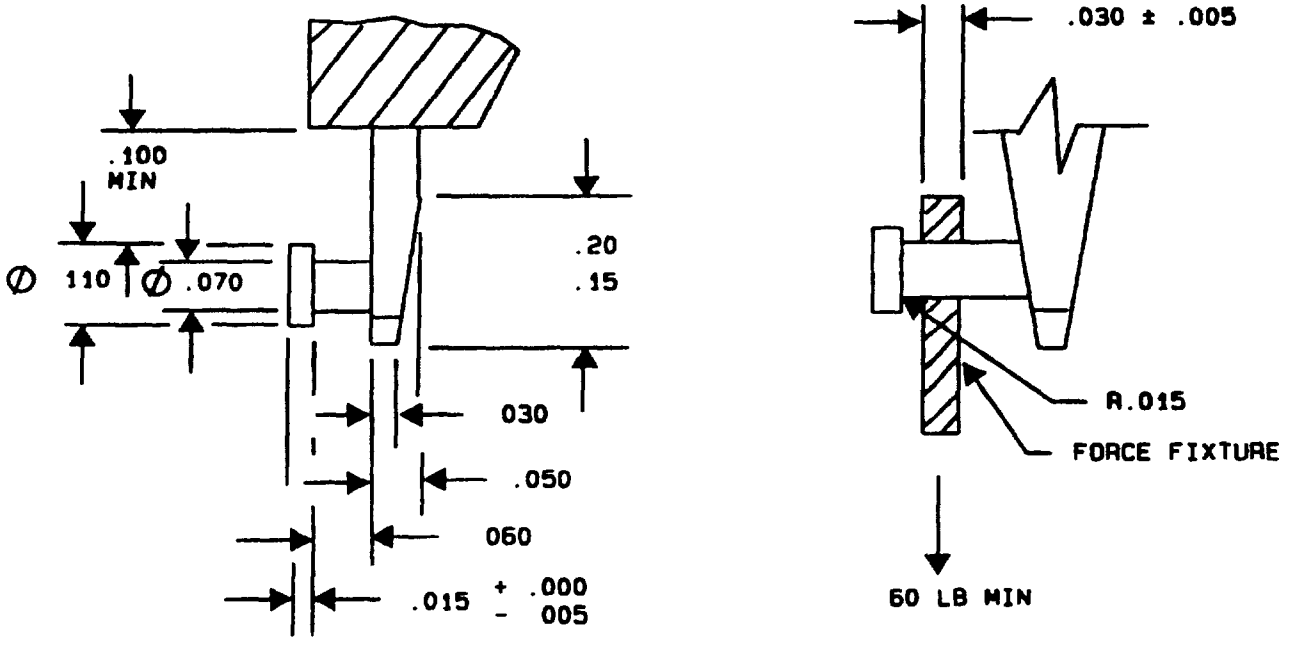

VIEW B-B

* FIGURE 1. Module extractor (type 1A) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.005	.13	.070	1.78	.75	19.1	4.75	120.7
.010	.25	.100	2.54	1.10	27.9	4.89	124.2
.015	.38	.150	3.81	1.75	44.5	5.27	133.9
.025	.64	.17	4.3	1.890	48.01	5.96	151.4
.030	.76	.20	5.1	2.27	57.7	6.12	155.5
.05	1.3	.250	6.35	3.12	79.3		
.060	1.52	.300	7.62	4.49	114.1		

NOTES:


1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are plus or minus .010 inch (.3 mm) on three place decimals, and plus or minus .03 inch (.8 mm) on two place decimals.

*4. Measured from extractor housing foot to center of extractor pins.

*5. Measured from lower end of extractor handle assembly to center of extractor pins.

* FIGURE 1. Module extractor (type 1A) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

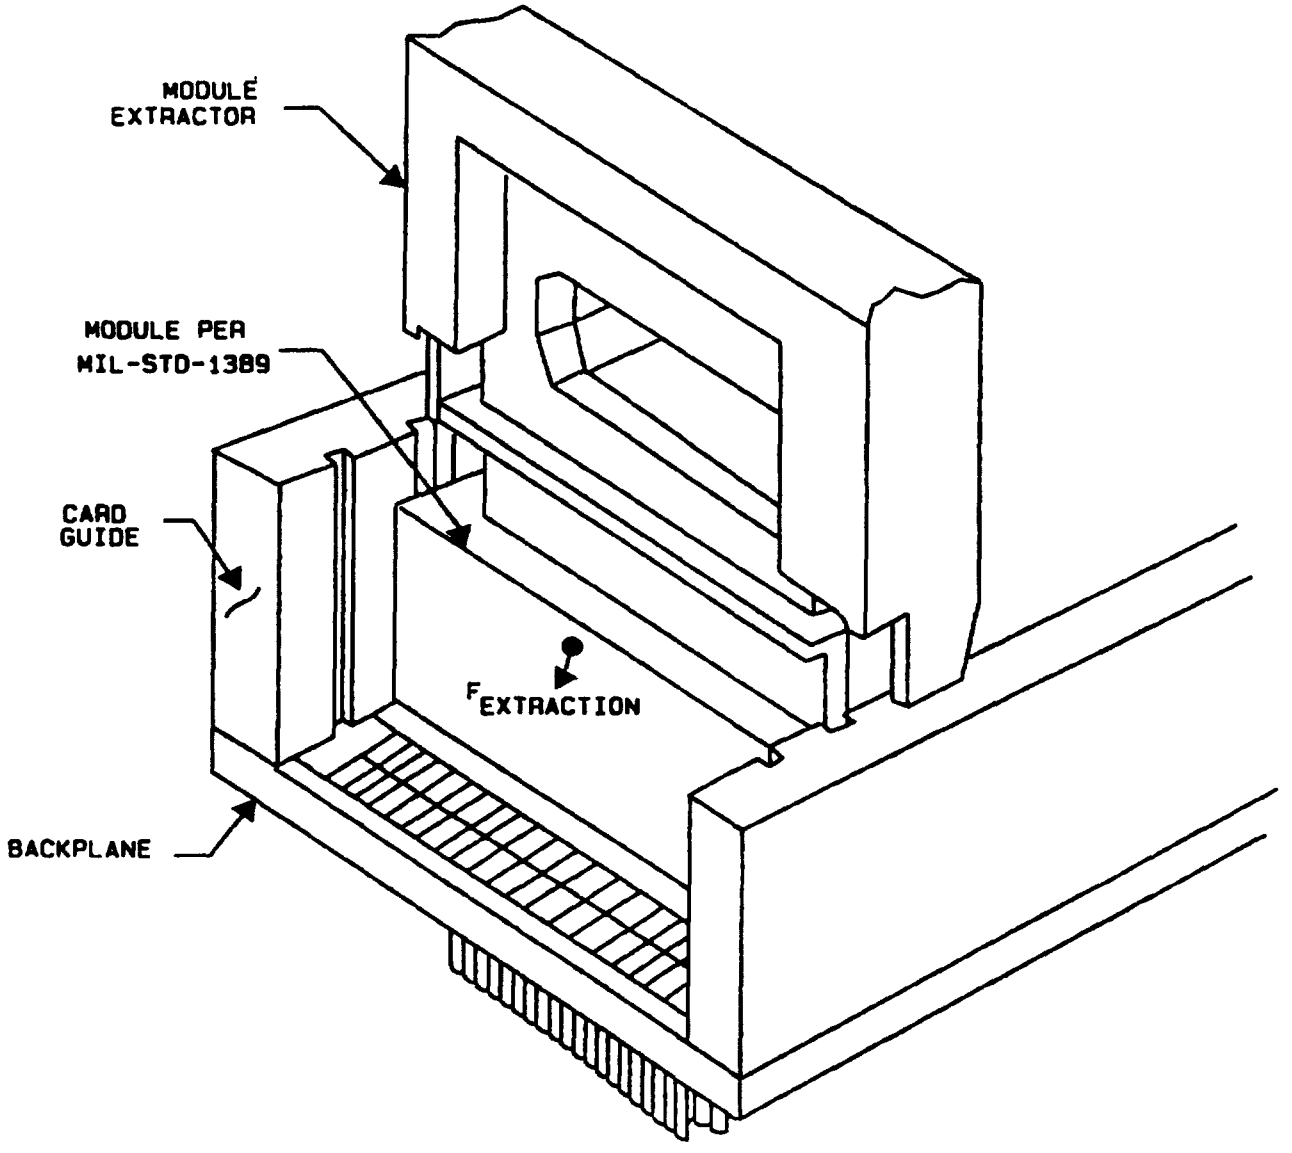

* FIGURE 2. Typical durability fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Material:

Body: Polycarbonate, gray.

*Springs: Stainless steel.

*Extractor pins: 303 stainless steel in accordance with ASTM A581.

Plate: 304 stainless steel in accordance with ASTM A240.

*Marking: Part number to be molded in or supplied as raised marking in .12 inch (approximate) high characters. The date code in accordance with MIL-STD-1285 shall be applied using ink in accordance with MIL-I-43553 using gothic characters .06 inch high.

*Extraction travel: .75 inches minimum. Extractor shall return to the extended position by means of one or more springs.

Structural integrity: Individual module extractor pins and plate shall withstand a 60 pound load applied in accordance with figure 1. There shall be no evidence of damage or deterioration that will affect its normal operation.

Durability: The extractor shall meet the following durability requirements:

(a) The extractor shall meet all dimensional requirements and there shall be no evidence of damage or deterioration that will affect its normal operation after 500 extraction cycles in an appropriate fixture similar to figure 2 that provides a 30 plus or minus 2 pound force per module extractor pin.

(b) The module configuration shall be in accordance with MIL-STD-1389.

Corrosion: The extractor shall show no evidence of corrosion, blistering, or deterioration, indicative of poor plating when exposed to test method 101 of MIL-STD-202, test condition B. The corrosion test shall be done on a sample not submitted to the durability test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

Military part number: M28754/54- (dash number from table I).

TABLE I. Dash numbers.

Dash no	Span	Supersedes 1/
01	Single	MIL-C-28754/26-01
02	Double	MIL-C-28754/27-01

*1/ MIL-C-28754/26 and /27 were canceled on 7 September 1990.

Operation: Operating instructions shall be packed with each extractor.

Qualification testing: Two samples of M28754/54-01 and M28754/54-02 shall be subjected to visual and mechanical examination (including marking and extraction travel), structural integrity, durability, and corrosion tests. To retain qualification, the test shall be repeated every 12 months.

*Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

*Custodians:
Army - CR
Navy - NW
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Preparing activity:
Navy - NW

(Project 5935-3913)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7
3. The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-28754/54B	1994 March 23

3. DOCUMENT TITLE
Connectors, Electrical, Modular, Extractor, Module, Single and Double Span, Styles I and II

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Technical Point of Contact (TPOC): Mr. Joseph P. Toy (Code 603A) PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS	(1) Commercial TPOC: 812-854-5993	(2) AUTOVON 88-482-5993
c. ADDRESS (Include Zip Code) Commander ATTN: Joseph P. Toy, Code 603A, Bldg. 2917 NAVSURFWARCENDIV, 300 Highway 361 Crane, IN 47522-5001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.