MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR,
CONNECTOR ASSEMBLY, TYPE V, CABLE CONNECTOR,
100 PIN, CONTACTS ON .100 CENTERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector assembly described herein shall consist of this specification and the latest issue of MIL-C-28754

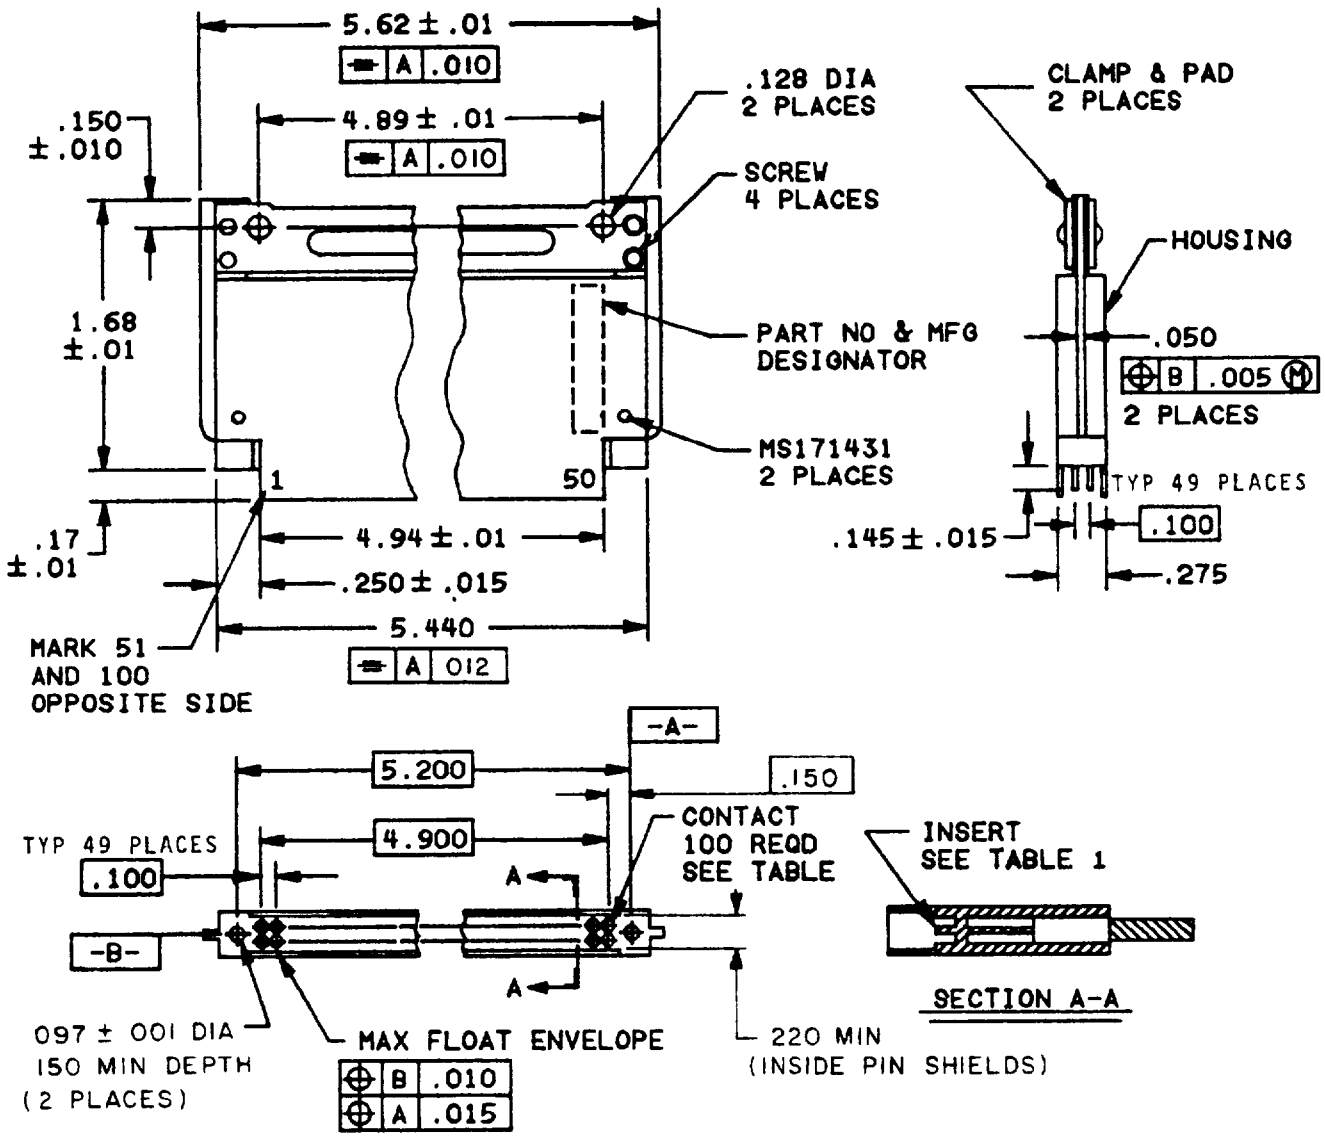


FIGURE 1. 100 pin cable connector assembly.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.001	0.05	.150	3.81
.005	0.13	.158	4.01
.010	0.25	.17	4.3
.012	0.31	.220	5.59
.015	0.38	.250	6.35
.050	1.27	.275	6.99
.090	2.29	1.68	42.7
.097	2.46	4.89	124.2
.100	2.54	4.900	124.46
.128	3.25	4.94	125.5
.145	3.68	5.200	132.08
		5.62	142.7

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) on three place decimals, ±.01 (0.3 mm) on two place decimals and ±2° on angles.
4. Mark 1, 50, 51, 100 and part number using color contrasting ink in the area shown.
5. Datum A and B are established by planes passing through the two keying pin holes.

FIGURE 1. 100 pin cable connector assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

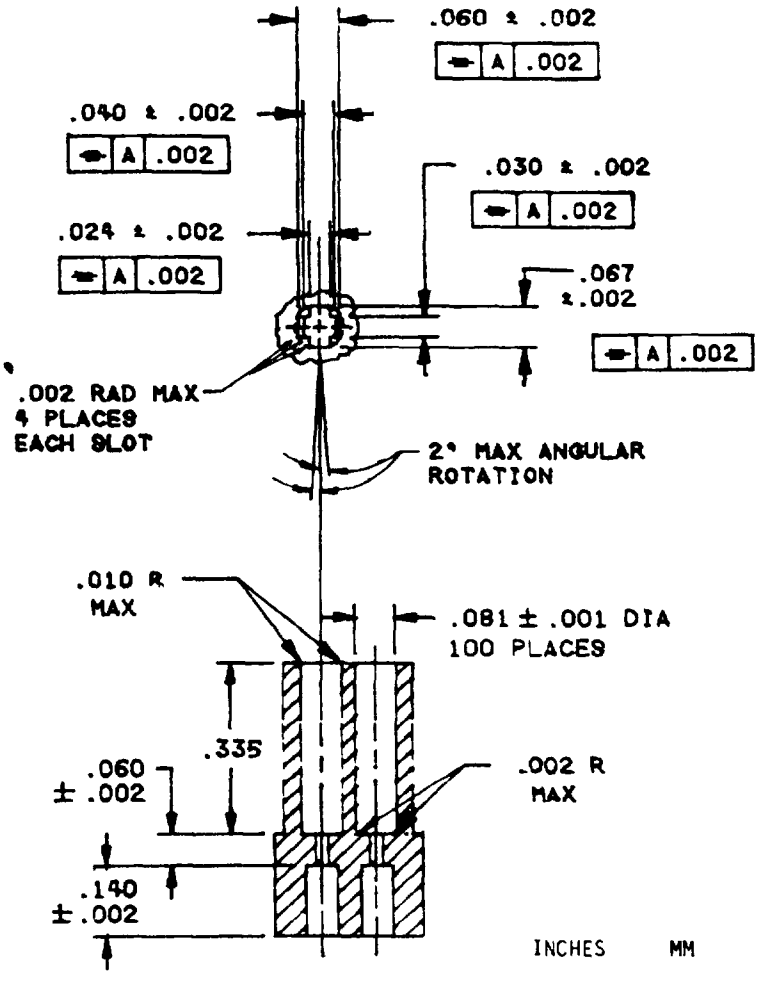

INCHES	MM	INCHES	MM
.001	0.03	.040	1.02
.002	0.05	.060	1.52
.005	0.13	.067	1.70
.010	0.25	.081	2.06
.024	0.61	.140	3.56
.030	0.76	.335	8.51

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerance is ±.005 (0.13 mm) for three place decimals, ±.01 (0.3 mm) for two place decimals.

FIGURE 2. Insert cross-section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See figures 1, 2.
Two clamps and pads, 4 screws, and 2 grove pins are supplied with each assembly.

Material: Housing, Polyphnylene sulfide per MIL-P-46174, insert GPT-30F or GET-30F per MIL-M-24519.

Temperature rating: -55°C to +100°C.

Voltage rating: 300 V ac (rms) at sea level.

Marking: In accordance with MIL-C-28754 and figure 1.

Part number: M28754/55 - (dash number from table I).

TABLE I. Dash number and characteristics.

Dash number	Conductor AWG size	Conductor type	Contact supplied	Insert supplied
01	26-30	Round	M28754/15-01	FIG. 2
02	20-24	Round	M28754/15-02	FIG. 2

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3412)

☆U.S. GOVERNMENT PRINTING OFFICE: 1995 — 906-036/20204

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-C-28754/35	

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.