INCH-POUND

MIL-DTL-28754/55A
4 November 2015
SUPERSEDING
MIL-C-28754/55
7 December 1984

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, CABLE CONNECTOR, 100 PIN, CONTACTS ON .100 CENTERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-28754.

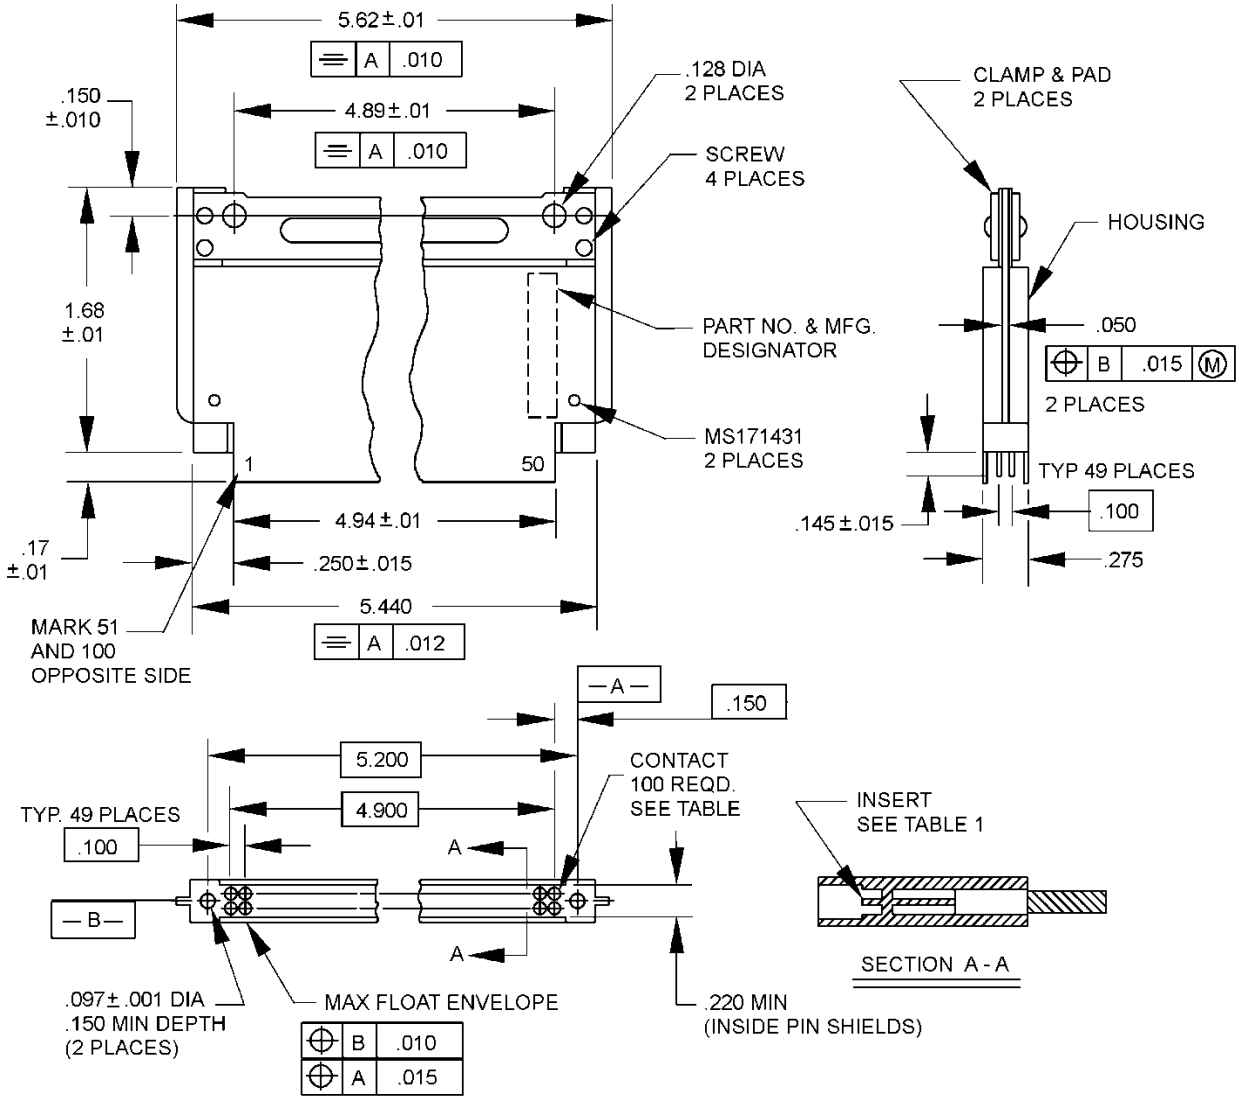


FIGURE 1. 100 pin cable connector assembly.

AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.001	0.05	.150	3.81
.005	0.13	.158	4.01
.010	0.25	.17	4.3
.012	0.31	.220	5.59
.015	0.38	.250	6.35
.050	1.27	.275	6.99
.090	2.29	1.68	42.7
.097	2.46	4.89	124.2
.100	2.54	4.900	124.46
.128	3.25	4.94	125.5
.145	3.68	5.200	132.08
		5.62	142.7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm) on three place decimals, ± .01 (0.3 mm) on two place decimals and ± 2° on angles.
4. Mark 1, 50, 51, 100 and Part or Identifying Number (PIN) using color contrasting ink in the area shown.
5. Datum A and B are established by planes passing through the two keying pin holes.

FIGURE 1. 100 pin cable connector assembly – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

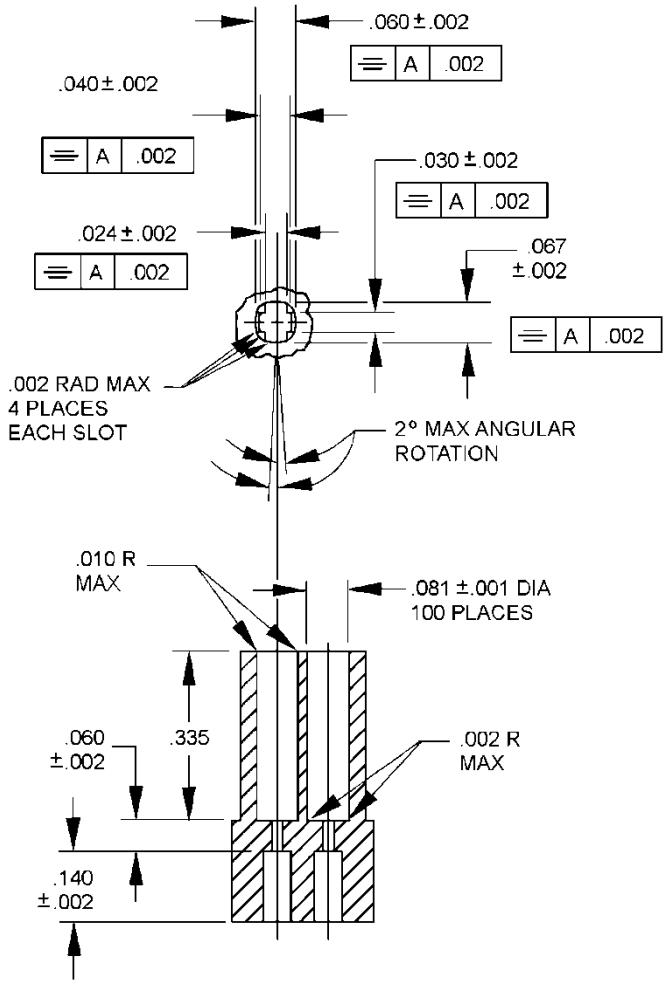

Inches	mm	Inches	mm
.001	0.03	.040	1.02
.002	0.05	.060	1.52
.005	0.13	.067	1.70
.010	0.25	.081	2.06
.024	0.61	.140	3.56
.030	0.76	.335	8.51

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm) for three place decimals, ± .01 (0.3 mm) for two place decimals.

FIGURE 2. Insert cross-section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Two clamps and pads, 4 screws, and 2 grove pins are supplied with each assembly.

Material: Housing, Polyphenylene sulfide in accordance with ASTM D4067, PPS000G40A43042E11. Insert, GPT-30F or GET-30F in accordance with MIL-M-24519 or TPES013G30 or TPES023G30 in accordance with ASTM D5927.

Temperature rating: -55°C to +100°C.

Voltage rating: 300 V ac (rms) at sea level.

Marking: In accordance with MIL-C-28754 and figure 1.

Part number: M28754/55- (dash number from table I).

TABLE I. Dash number and characteristics.

Dash number	Conductor AWG size	Conductor type	Contact supplied	Insert supplied
01	26-30	Round	M28754/15-01	See figure 2
02	20-24	Round	M28754/15-02	See figure 2

First article testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-C-28754, this document references the following:

MIL-M-24519
ASTM D4067
ASTM D5927

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA - CC

Review activities:
Army – AR, MI
Navy – MC
Air Force – 99

Preparing activity:
DLA - CC

(Project 5935-2015-204)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.