[METRIC]

A-A-2653
October 2, 1992

COMMERCIAL ITEM DESCRIPTION

BINDER, NOTE PAD, SPRING-BACK

The General Services Administration has authorized the use of this Commercial Item Description in preference to Interim Federal Specification RR-B-00300, Binder, Note Pad, Spring-Back, which has been cancelled.

This specification covers one type of aluminum, spring-back binder, suitable for firm retention of size 22 x 28 cm (8-1/2 x 11"), or smaller, sheets of paper that can be readily inserted and removed.

1. SALIENT CHARACTERISTICS:

A. Aluminum used in construction of the binder shall be 5005-H34, in accordance with ASTM B 209M, and shall be 1.3 ± 0.1 mm (0.051 ± 0.004") thick. (See Fig.1)

B. The binder shall be end opening, binder hinge located at width end (smaller dimension), and shall consist of a front cover, a binder-hinge section, a back cover, 2 hinge pins, and 3 binder-hinge springs. The binder shall be designed so that the front cover is capable of opening and closing while one sheet or a number of sheets of paper up to 13 mm (1/2") in total thickness remains firmly secured by pressure exerted by the binder-hinge springs between the front-cover hinge and the back cover. Hereinafter, the edge of the binder equipped with the binder hinge shall be referred to as the top edge, and the side opposite referred to as the bottom edge.

C. The back cover shall be formed from one piece of polished aluminum, 30 ± 0.32 cm (11-3/4 ± 1/8") long, including curved hinge knuckles, by 23 ± 0.32 cm (9 ± 1/8") wide.

D. The binder-hinge section shall be formed and shall run the full width of the binder. The binder-hinge section shall be designed to separate the binder hinge from the front-cover hinge by a distance of approximately one inch.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

E. The front cover shall be formed from one piece of polished aluminum, 26.7 ± 0.635 cm (10-1/2 ± 1/4") long, including curved hinge knuckles, by 23 ± 0.32 cm (9 ± 1/8") wide. The bottom edge of the front cover shall overlap a minimum of 0.32 cm (1/8") beyond the back cover of the binder. An overlap of 0.16 cm (1/16") is acceptable provided the back cover has a thumb notch at its bottom center edge. Eight parallel embossed ridges approximately 25 mm (1") long, spaced approximately 19 mm (3/4") apart, and vertically located on the front cover shall be provided for reinforcement. The tops of the ridges shall be located on a horizontal plane 13 to 26 mm (1/2 to 1") below the front-cover hinge.

F. The two hinges shall be of the piano type, running parallel to each other the full width of the binder. Hinge pins shall be adequately secured to prevent removal.


G. The binder hinge shall be formed from the top edge of the back cover and the top edge of the binder-hinge section. The hinge knuckles shall be curved around a steel hinge pin made of corrosion resisting steel wire with a 6.35 mm (1/4") diameter. Wire used for hinge pins shall be any of the American Iron and Steel Institute (AISI) 300 series. The binder hinge shall be equipped with 3 coiled torsion springs made of corrosion resisting steel wire each approximately 2.5 cm (1") long, and spaced proportionally. Wire used for springs shall be AISI 301 or 302, spring temper (full-hard) and shall be 1.65 mm (0.065") in diameter (16 gage). The tension of the springs shall be adjusted in such a manner that the bottom of the binder-hinge section (front-cover hinge) shall press firmly against the back cover. The binder hinge shall open or expand sufficiently, when covers are bent back toward a parallel position, to permit insertion and removal of papers up to a capacity of the binder, from 1 sheet to a 13 mm (1/2") thickness of sheets of paper. The hinge pin of the binder hinge shall be flush on each side or recessed to no more than 3.2 mm (1/8") on each side.

H. The front-cover hinge shall consist of 18 knuckles, 9 on the top edge of the front cover and 9 on the bottom edge of the binder hinge section. The 18 knuckles shall be curved around a steel hinge pin , as stated in the above paragraph, with a diameter of 2.5654 mm (0.101" - 10 gauge).

I. When specified, a lock opening shall be provided. The opening shall be a 6.4 mm (1/4") diameter hole through both the front and back covers, centered 9.5 mm (3/8") from the bottom of the front cover and 76 mm (3") from the left side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Fig. 1

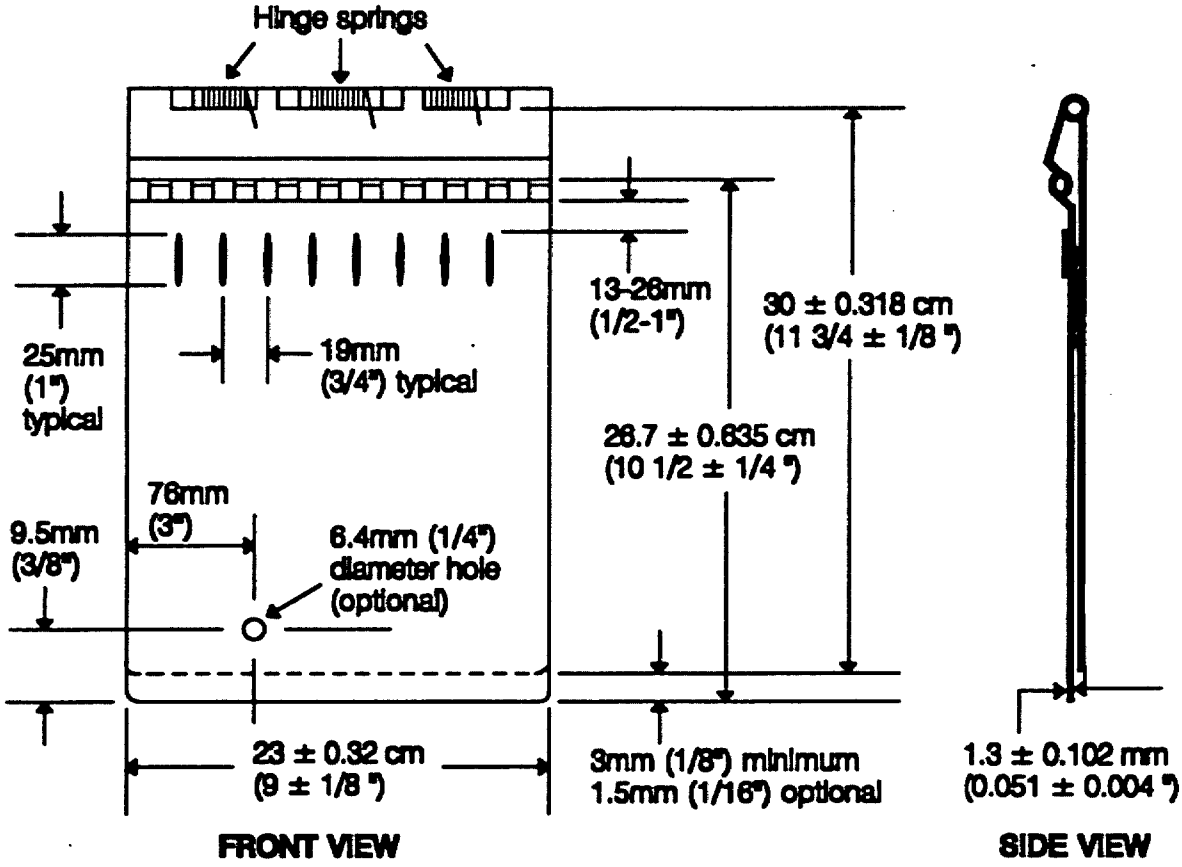

J. Finish. After being fabricated and prior to assembly, all aluminum parts, including edges, shall be cleaned, etched, and anodized to give a type II coating (water rinsed dried) in accordance with MIL-A-8625. The finish shall produce a hard smudgeproof surface, capable of providing adequate protection against corrosion.

K. Each binder shall be legibly and permanently die stamped on the outside of the back cover with the name or registered trademark of the manufacturer. The die stamping shall not penetrate the opposite side of the metal.

L. Workmanship. The finished binder's front and back plates shall be properly aligned and the finished binders shall be free of cracks, holes, ripples, heavy scratches, dents, burrs, sharp edges or any other defects or imperfections which detract from their appearance, constitute a personal hazard, or may impair their serviceability. Minor hairline scratches or marks not easily detectable from a distance of four feet should be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

2. QUALITY ASSURANCE:

A. Responsibility for Inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

B. Sampling. Samples shall be selected for inspection in accordance with MIL-STD-105, using the plans described in TABLE I. A lot shall consist of a number of binders manufactured by the same process from the same components at the same time. Random samples shall be drawn from each lot for the end item inspection. Unless otherwise specified, every lot shall be tested.

TABLE I

Inspection	Inspection Level	AQL (%) defective	Sample Unit	Requirements Paragraph/s
Salient Characteristics	S-3	4.0	1 Binder	1
Packaging, Packing & Marking	S-2	4.0	1 Shipping Container	4

NOTE: Certificates of compliance are acceptable for the requirements specified in paragraph (1.A.), (1.G.), & (1.J) herein. When certificates of compliance are submitted, the Government reserves the right to determine the validity of the certification.

3. REGULATORY REQUIREMENTS: The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

4. PACKAGING, PACKING, AND MARKING: Packaging, packing, and marking shall be as specified in the contract or order.

5. REFERENCED DOCUMENTS: The issue of the referenced documents in effect on the date of the solicitation for offers or request for proposals shall be used to determine conformance with the requirements of this Commercial Item Description.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

A. Public Law

Public Law 94-580 - Resource Conservation and Recovery Act, (Part of U.S. Code, Title 42)

Copies of the U.S. Code may be obtained through the Congressional Sales Office, U.S. Government Printing Office, Washington D.C. 20402.

B. Military Standards and Specifications

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-A-8625 - Anodic Coatings, For Aluminum And Aluminum Alloys

Available from: Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094

C. American Society for Testing of Materials (ASTM)

ASTM B 209M - Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate [Metric]

Available from: American Society for Testing and Materials (ASTM) 1916 Race Street; Philadelphia, PA 19103.

6. NOTES: Purchasers shall specify

A. Title, number and date of specification.
B. If lock opening is required.
C. Packaging and packing required.

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.