INCH-POUND
A-A-50194E
November 15, 2024
SUPERSEDING
A-A-50194D
November 24, 2021

COMMERCIAL ITEM DESCRIPTION

HOOD, BALACLAVA, EXTENDED COLD WEATHER

The General Services Administration has authorized the use of this Commercial Item Description (CID) by all Federal Agencies.

1. SCOPE. This CID covers the extended cold weather (ECW) balaclava hood which provides protection for the face, neck, and head in cold weather conditions.

2. CLASSIFICATION. The finished ECW hood shall be of the following types and sizes as specified:

2.1 Types.

Type I - DELETED
Type II - Hood (Multi-fabric design)

2.2 Sizes. The Type II hood shall be available in the following sizes:

SIZE SCHEDULE (Type II only):

SMALL/MEDIUM (S/M)
LARGE/X-LARGE (L/XL)

Comments, suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST online database at https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Design and construction. The hood shall be a pullover the head style with an adjustable face opening, allowing it to be worn up over the nose, or down under the chin. The Type II hood shall be a multi-fabric design using three (3) separate materials; one (1) for the shell, one (1) for the liner, and one (1) for the front panel covering the nose and mouth and extending to the bottom of the hood. The front panel shall be one (1) layer of fabric, and the rest of the hood shall be two (2) layers (shell and liner). The finished edges around the face opening and bottom edge of the hood shall be lined with binding tape. The materials covering the head shall partially overlap the mandible materials near the wearer's ears, allowing for the lower portion to be pulled down under the chin. The overlapping materials shall be secured with a bartack on either side of the face opening (see Figure 1).

3.1.1 Figures. Figures 1 and 2 are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Basic materials.

3.2.1 through 3.2.1.5, and Table I and Table II. DELETED.

3.2.2 Shell (Type II). The finished cloth for the outer shell shall be a woven cloth consisting of synthetic fiber and treated with a durable water repellant finish. The finished material shall conform to the requirements specified in Table III, when tested as specified in Table III.

TABLE III. Physical requirements, shell (Type II).

Characteristic	Requirement	Test Method
Weight, oz/yd^2	3.80 - 4.20	ASTM D3776/D3776M
Stretch, percent Warp Filling	 35 - 55 55 - 75	ASTM D4964
Air permeability, ft^3 /min/ft^2	50 - 85	ASTM D737
Dimensional stability, percent (maximum after three (3) cycles) Warp Filling	 5.0 5.0	AATCC TM135, Test 1, IV, A
Spray Rating, initial	90, 90, 80	AATCC TM22
Visual Shade Matching	3.2.1	1/

1/ The color and appearance of the Type II balaclava cloth shall match the standard sample when viewed using the AATCC EP 9, Option C, (see 7.4.1) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature of 6500 (± 200) Kelvin (K) illumination of 100 (± 20) foot candles. Alternatively, the color and appearance of the Type II balaclava cloth shall match the standard sample with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500K (± 200) illumination of 100 (± 20) foot candles in lieu of D65. (See 7.4.2). The Type II balaclava

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

cloth shall also be a good match to the standard sample with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856K (± 200).

3.2.2.1 Color (Type II). Unless otherwise specified in the contract or purchase order (see 7.6), the color of the Type II shell, liner, front panel, and binding tape and thread shall be Coyote 498. The finished Type II shell, liner, front panel, and binding tape shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.4).

3.2.3 Liner (Type II). The finished material for the liner shall be a lofted insulation without a backing cloth. The finished material shall conform to the requirements specified in Table IV, when tested as specified in Table IV.

TABLE IV. Physical requirements, liner (Type II).

Characteristic	Requirement	Test Method
Weight, oz./yd^2	2.30 - 2.80	ASTM D3776/D3776M
Stretch, percent (minimum) Length Width	 10 40	 ASTM D2594/D2594M, loose fitting
Air permeability, ft^3 /min/ft^2	800 - 1,100	ASTM D737
Colorfastness, rating (minimum) Crocking Wet Dry Perspiration Laundering	 3 4 3 3	 AATCC TM8, 1/ AATCC TM15, 2/ AATCC TM61, 2/, 3/
Dimensional stability, percent (maximum) after three (3) cycles Length Width	 5.0 5.0	AATCC TM135, Test 1, IV, A
Thermal insulation, clo	0.50 – 0.80	ASTM F1868, Part A

1/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.
2/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2 Evaluation Procedure for Gray Scale for Staining.
3/ Cold wash (80°F, 50 steel balls, 45 minutes).

3.2.4 Front panel (Type II). The finished cloth for the front panel shall be a knit cloth with a fleece back consisting of synthetic fiber and treated with a durable water repellant finish. The finished material shall conform to the requirements specified in Table V, when tested as specified in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

TABLE V. Physical requirements, front panel (Type II).

Characteristic	Requirement	Test Method
Weight, oz./yd^2	8.10 – 9.50	ASTM D3776/D3776M
Stretch, percent (minimum) Wales Courses	 35 45	 ASTM D2594/D2594M, form fitting
Air permeability, ft^3 /min/ft^2	40 – 90	ASTM D737
Colorfastness, rating (minimum) Crocking Wet Dry Perspiration Laundering	 3 4 3 3	 AATCC TM8 1/ AATCC TM15 2/ AATCC TM61, 2/, 3/
Dimensional stability, percent (maximum) after three (3) cycles Length Width	 5.0 5.0	AATCC TM135, Test 1, IV, A
Pilling, rating (minimum)	3	ASTM D3512/D3512M, 30 minutes
Spray Rating, initial	90, 90, 80	AATCC TM22

1/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.
2/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2 Evaluation Procedure for Gray Scale for Staining.
3/ Cold wash (80°F, 50 steel balls, 45 minutes).

3.2.5 Binding tape (Type II). The binding tape around the face opening and along the bottom edge of the hood shall be an elasticized material, 1-1/2 inches in width.

3.2.6 Thread (Type II). The thread for seaming and bartacks shall be a commercially acceptable thread for use in apparel.

3.3 Patterns. The contractor is responsible for generating the patterns for the Type II hood. The commercial patterns shall conform to the description (see 3.1) and finished measurements (see 3.3.1 and Table VII).

3.3.1 Measurements. The hood shall meet the finished measurements specified in Table VII for Type II, when measured according to the footnotes (see Figures 1 and 2).

NOTE: TABLE VI. DELETED.

THIS SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

TABLE VII. Finished measurements (Type II).

Size	Small/Medium	Large/X-Large	Tolerance
(D) Length, inches 1/	15-1/2	16-1/2	± 1
(E) Width, inches 2/	10	10-1/4	± 1/2
(F) Face opening, inches 3/	2	2-1/4	± 1/2

1/ (D) Place hood on a flat surface so that the bottom edge of the front extends approximately 2-1/4 inches past the bottom edge of the back. Press top and bottom edges of face opening flat. With the hood in this position, measure length in a straight line from folded edge at center of crown to front bottom edge of hood (see Figure 2).

2/ (E) With the hood positioned as indicated above, measure across the hood in a straight line from folded edge to folded edge at the widest point between the face opening and bottom edge (see Figure 2).

3/ (F) Place hood on a flat surface and fold in half lengthwise so that the side profile of the face opening lays flat and creates a “C” shape. Measure in a straight line from top to bottom of face opening (see Figure 2).

3.4 Weight (Type II). The weight of the finished Type II hood shall be in accordance with Table VIII when weighed on a calibrated scale.

TABLE VIII. Weight of finished hood, Type II.

Size	Small/Medium	Large/X-Large	Tolerance
Weight of finished hood, oz.	2.0	2.5	± 0.5

3.5 Labels. Each hood shall have an identification and a care label attached and Type II hood shall also have a size label attached. The labels may be combined. The labels shall be in accordance with MIL-DTL-32075, Type V or Type VI, except the font size shall be 10 points. Class 4 of the MIL-DTL-32075 shall be used for the identification and size labels, and Class 3 shall be used for the care label. When the labels are combined the item description shall be omitted from the Class 3 label.

3.5.1 Identification and size label. The label shall contain the item description, size, National Stock Number (NSN), contract number, lot number, contractor’s name, and Fur, Wool, or Fiber Products Act information.

3.5.2 Care label.

3.5.2.1 DELETED

THIS SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

3.5.2.2 Type II. The care label for Type II shall be the following:

TYPE II: WASH IN COLD WATER WITH LIKE COLORS. DO NOT BLEACH, IRON OR DRY CLEAN DRIP DRY

3.5.3 Barcode label/hang tag. Unless otherwise specified in the contract or purchase order, each packaged hood (see 6.) shall have a barcode label/hang tag conforming to Type VII, Class 17 of MIL-DTL-32075. The barcoding element shall be a 13 digit National Stock Number (NSN). There shall be a 12 digit Universal Product Code (UPC) number assigned for all NSN's by the contracting activity. The initials "UPC" shall appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be human-readable interpretation (HRI), located so that it is completely visible on the item when folded and/or packaged as specified causing no damage to the item.

3.6 Toxicity. Unless otherwise specified in the contract or procurement documents. The materials for the finished hoods shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.6.1.

3.6.1 Toxicity test. When the toxicity requirement (see 3.6) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required, (see 7.1.4 and 7.5).

3.7 Workmanship. The finished hood shall conform to the quality of the product established in this document. The hood shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13693; as applicable. (See 7.1.3).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The hood shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The hood offered or generic equivalent, must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

5.4 Visual examination. The finished ECW balaclava hood shall be examined for the defects listed in Table IX as defined in ASTM D3990. The lot size shall be expressed in units of hoods. The sample unit is one (1) hood. The inspection level and AQL shall be as specified in the contract or purchase order. Unless otherwise specified, scoring shall be performed on defects visible from a normal inspection distance of 3-feet.

TABLE IX. Visual defects.

Examine	Defect
Material and workmanship	Any hole, cut, tear, missing, broken, or loose yarn, needle chew, or weakening defect in the material. Seams: puckered, distorted, pleated, wavy, twisted, irregular or open, loose stitch tension resulting in loose seam; seam type not as specified, raw edges. Stitches: broken or missing thread or stitch, stitch type not as specified, any run or dropped stitches. Any thin areas, mends, or patches. Any material defects, distorted parts or poor workmanship. Any component part omitted or not as specified, distorted, full, tight or twisted parts. Any defect not specified in this table which affects, form, fit or function. Dimensions and finished measurements not as specified
Color	Any shade variation within a part or between parts. Color not as specified.
Cleanliness	Any spot or stain on outside clearly noticeable. Any excessive thread ends not trimmed or removed, raw edges. Any odor affecting serviceability.
Labels	Omitted, incorrect, illegible, not attached where specified; barcodes omitted, not readable by scanner; human-readable interpretation (HRI) omitted or illegible; barcode not visible on folded, packaged item; barcode attachment causes damage to the item.
Marking	Marking missing, incorrect or illegible.
Packaging	Any hood not packaged in accordance with the contract or purchase order.

5.5 End item dimensional examination. The hood shall be examined for conformance to the finished measurements specified in Table VII. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of hoods. The sample unit shall be one (1) hood. The inspection level, expressed in terms of defects per hundred units, shall be as specified in the contract or purchase order.

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.6).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or order (see 7.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Source of Government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA and EO 13693 information are available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.4 Toxicity testing. If dermal toxicity testing is required, it will be conducted in accordance with Title 40, Protection of Environment, Code of Federal Regulations current edition and applicable sections, which are also consistent with the following Organisation for Economic Co-operation and Development (OECD) tests:

Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).
Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).

7.2 Source of non-Government documents.

7.2.1 AATCC Test Methods are available online at https://aatcc.org.

7.2.2 ASQ/ANSI Z1.4 – Sampling Procedures and Tables for Inspection of Attributes are available online at https://asq.org.

7.2.3 ASTM Test Methods are available online at https://www.astm.org.

7.3 Intended use. These hoods are intended for wear by male and female military personnel of the Department of Defense operating in cold weather environments.

7.4 Standard samples. For access to standard samples address the contracting activity issuing the invitation for bids or request for proposal.

7.4.1 Visual shade matching. In 2017, Option A of AATCC EP9 was changed to Option C. NOTE: In case of confusion, the viewing geometry should be “The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

7.4.2 In 2022, the U.S. Military (All Services) accepted D65 as the new preferred light source for visual shade matching due to the supply chain issues with D75. DD1222's should reflect which light source is used. If the light source is not indicated on the DD1222, D65 will be assumed by the Government Shade Laboratory

7.5 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for stated requirement.

7.6 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Size required (see 2.2).
c. Labeling information (see 3.5).
d. When toxicity testing is required (see 3.6).
e Regulatory requirements (see 4.).
f. Product conformance provisions (see 5.).
g. Acceptance criteria (see 5.6).
h. Packaging requirement (see 6.)

7.7 Changes from previous revision. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

7.8 Subject term (keyword) listing.

Headwear
Knitted cloth
Water repellent
Wind barrier

THIS SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

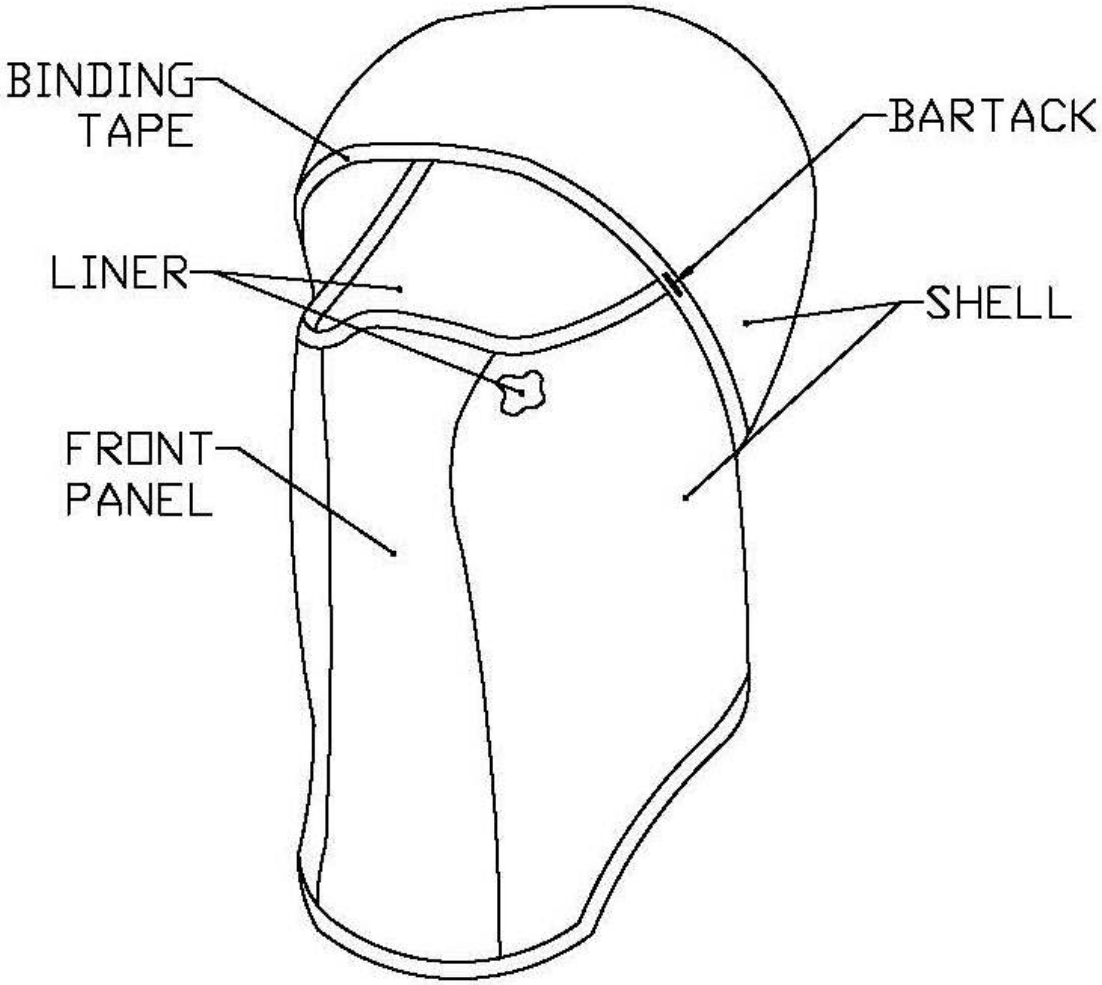


FIGURE 1. Hood, Balaclava, ECW (Type II).

THIS SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.

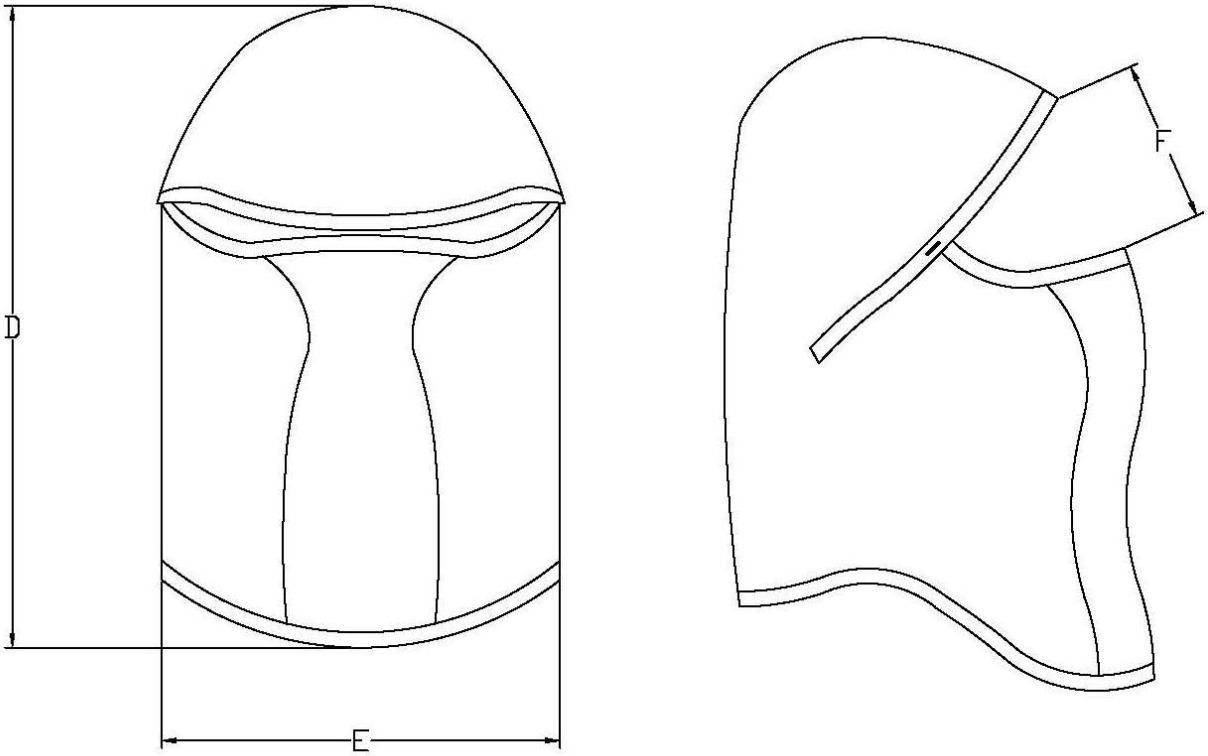


FIGURE 2. Measurement Guidelines (Type II).

MILITARY INTERESTS:

Custodians
Army - GL
Navy – NU
Air Force – 11

Review activities
Navy-MC

CIVIL AGENCY COORDINATING ACTIVITY: GSA - FAS

Preparing Activity:
DLA -CT

(Project: 8415-2024-017)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:40Z
Check the source to verify that this is the current version before use.