INCH-POUND

A-A-50374

11 December 1989

COMMERCIAL ITEM DESCRIPTION

BAG, FIREMAN'S, UTILITY

1. SALIENT CHARACTERISTICS

1.1 Design and construction.

1.1.1 Body. The body shall be constructed from fire, water, weather, and mildew resistant cotton duck cloth. The fabric shall have a minimum weight of 10 ounces per square yard and conform to CCC-C-419 except the color shall be natural, and shall have a finish conforming to class II of CCC-C-428. In addition, the cloth shall be treated with commercial fungicide 2,2 methylene-bis-(4-chlorophenol) also known as G-4.

1.1.2 Handle or carrying strap. The handle or carrying strap shall be fabricated from nylon webbing. The width shall be 2 inches with a thickness of .035-.050 inches (see figures 1 and 2). The weight shall be 1.25 ounces per linear yard with a minimum breaking strength of 1500 pounds. The color shall be Olive Green.

1.1.3 Thread. The thread shall be nylon of sufficient size and strength for the intended applications. The thread shall show good fastness to weathering. The color shall be Olive Green.

1.1.4 Size and dimensions. (see figures 3 and 4)

Characteristic	Dimensions (inches)
A. Height	21 1/2
B. Width	23 1/2
C. Depth	11 1/2

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8460

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

1.1.4.1 Dimensional tolerances. Unless otherwise specified the dimensional tolerances shall be as follows:

Less than 2 inches	±1/16
2 inches or more but less than 10 inches	±1/8
10 inches or more but less than 30 inches	±1/4
30 inches or more but less than 60 inches	±3/8
60 inches or more	±1/2

1.1.5 Snap fasteners. There shall be seven metal snap fasteners evenly spaced along the protective flap as shown in figures 5 and 6. The fasteners shall be black and finished to prevent corrosion and shall be of adequate strength and design to function properly over the life of the end item.

1.1.6 Slide fastener. The slide fastener shall run the length of the top of the bag. The slide fastener shall be medium heavy, brass, nonseparating, nonreversable type with closed stops at each end and a wire stirrup pull (see figure 5). All components of the slide fastener shall be Olive Green, except the brass chain and stops shall have a natural finish.

1.1.6.1 Slide fastener tape. The slide fastener tape shall be 3/4 inch wide with 1 1/4 inch tape extension. The color shall be Olive Green.

1.1.6.2 Thong. A thong shall be tied to the wire stirrup pull (see figure 5). The thong shall be 3/8 inch nylon webbing and 17 inches long before tying to wire stirrup pull. The color shall be Olive Green.

1.1.7 Protective flap. The protective flap shall extend past the length of the slide fastener. The flap dimensions shall be 36 1/4 inches long and 5 1/8 inches wide (see figure 6).

1.1.7.1 Binding. Binding tape shall be placed around edge of protective flap and shall be made of 3/4 to 1 inch nylon textile tape and applied as shown in figure 6. The color shall be Olive Green.

1.2 Figures. Figures 1 through 6 are provided for guidance in construction of this bag.

1.3 Label. A commercial type label is acceptable provided additional printed cloth labels containing the information in 1.3.1 and 1.3.2 are provided.

1.3.1 Contract number and NSN. The bag shall have a label containing the contract number and NSN caught in the seam connecting the top and side pieces on the inside of the bag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

1.3.2 Instruction label. The bag shall have an instruction label containing the information listed below. The label shall be caught in the seam connecting the top and side pieces on the inside of the bag.

Machine wash cold, tumble dry, low heat
DO NOT BLEACH

OR

Use NAVEDTRA 414-01-45-81 - Formula III

1.4 Approved styles. The following styles meet the requirements of this description:

Maine Center for the Blind - Style FKB-C-T10NC
Tennier Industries - Style TII01KIT

Other manufacturers may submit their styles to the procuring activity for evaluation by the Specification Preparing Activity and ultimate inclusion in this document if approved.

1.5 Workmanship. The bags shall be uniform in quality and shall be free from irregularities or defects which adversely affect performance, reliability, or durability.

1.6 Product demonstration model. During the solicitation phase, interested firms (including the manufacturer of the above approved styles) shall provide the Procuring Agency with two product demonstration models of the item they propose to furnish for evaluation. The two samples provided by the successful offerer shall be tagged and sealed. One shall be retained by the Procuring Agency and the other furnished the assigned Quality Assurance Representative for use as a reference in performing the examination in paragraph 2.2 and the scoring of defects in design, material and workmanship not otherwise classified herein.

2. QUALITY ASSURANCE

2.1 Certification. When requested by the contracting officer, the contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

2.2 Examination of the end item. The bags shall be inspected in accordance with MIL-STD-105. The defects found during the examination of the end item shall be classified as below. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 2.3. The lot size shall be expressed in units of bags. Sample unit shall be one bag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGE		
a. Open seam	X	
b. Any size hole (exept drill hole), cut, tear, smash, needle chew, abraded surface, or broken or missing yarn	X	
c. Binding tape applied improperly, raw edges showing	X	
d. Webbing not firmly or tightly woven, edge frayed or scalloped	X	
e. Hardware broken or malformed, corroded area, burrs or sharp areas	X	
f. Color not as specified		X
II. CLEANNESS		
a. Any spot or stain (outside)		X
b. Thread ends not trimmed		X
III. DESIGN AND ASSEMBLY		
a. Not cut or fabricated in accordance with the approved styles/product demonstration model	X	
IV. LABEL		
a. Label missing, incorrect, or illegible		X
V. GENERAL		
a. Any defect not otherwise classified herein but at variance with the approved style/product demonstration model		X
VI. DIMENSIONS		
a. Less than minimum specified	X	

2.3 Inspection level and AQL's. The inspection level and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
Major	2.5	I
Total (Major and minor combined)	15.0	I

3. PRESERVATION, PACKING AND MARKING

3.1 Preservation. Each bag shall be neatly folded to approximately 23 by 13 inches. Five folded bags shall then be evenly stacked in a bundle and securely tied at each end with cotton twine.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:42Z
Check the source to verify that this is the currentversion before use.

3.2 Packing. Twenty bags, preserved as specified in 3.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each fiberboard container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Bundles shall be packed on their sides, one in length, four in width, and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 20-1/2 inches in width, and 13 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of kraft paper. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

3.3 Marking. The unit package, intermediate and outer container and the palletized load, as applicable, shall be marked in accordance with MIL-STD-129. Each bundle shall have attached a manila colored paper shipping tag for the identification information.

3.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be banded with primary and secondary straps in accordance with the banding means C and D and F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contacting officer.

4. NOTES

4.1 Intended use. The fireman's utility bag is designed for use for storing and carrying firefighters suits and miscellaneous fire fighting equipment.

4.2 Acquisition requirements. The acquisition document shall specify the following:

(a) Title and date of this document.
(b) When palletization is required (see 3.4).

4.3 Fabric supplier. The following company can be contacted for acquisition of the fabric needed for this bag.

Excello Fabric Finishers, Inc.
P.O. Box 711
802 South Second Street
Coshocton, OH 43812
(614) 622-7444

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

4.4 Source of goverment documents. Copies of military and federal documents are available from:

Naval Publications and Forms Center
ATTN: NPODS
5801 Tabor Avenue
Philadelphia, PA 19120-5099

Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review activities:
Navy - MC
DLA - CT

Project 8460-0077

User activities:
Navy - AS, SH, CG

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:42Z
Check the source to verify that this is the current version before use.

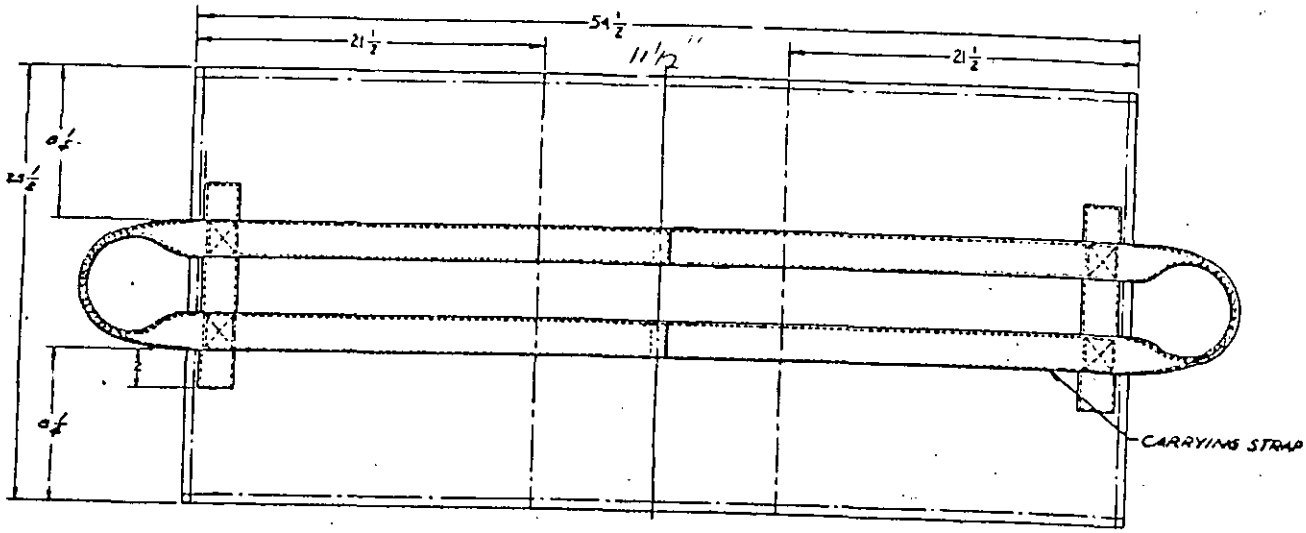


FIGURE 1 - BAG DIMENSIONS

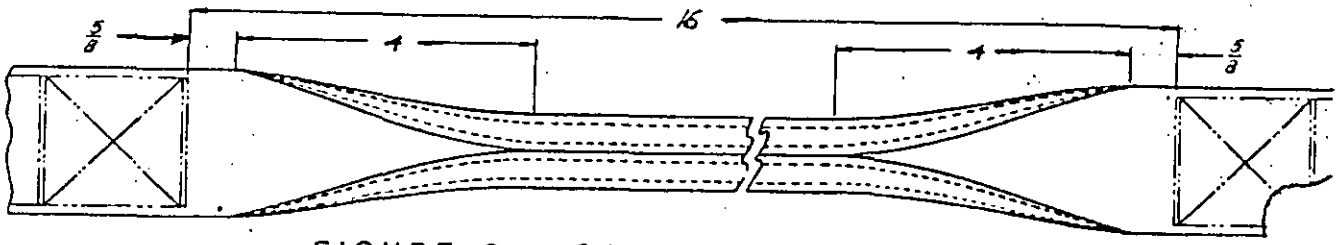


FIGURE 2 - CARRYING STRAP HANDLE

NOTE: ALL MEASUREMENTS ARE IN INCHES

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:42Z
Check the source to verify that this is the current version before use.

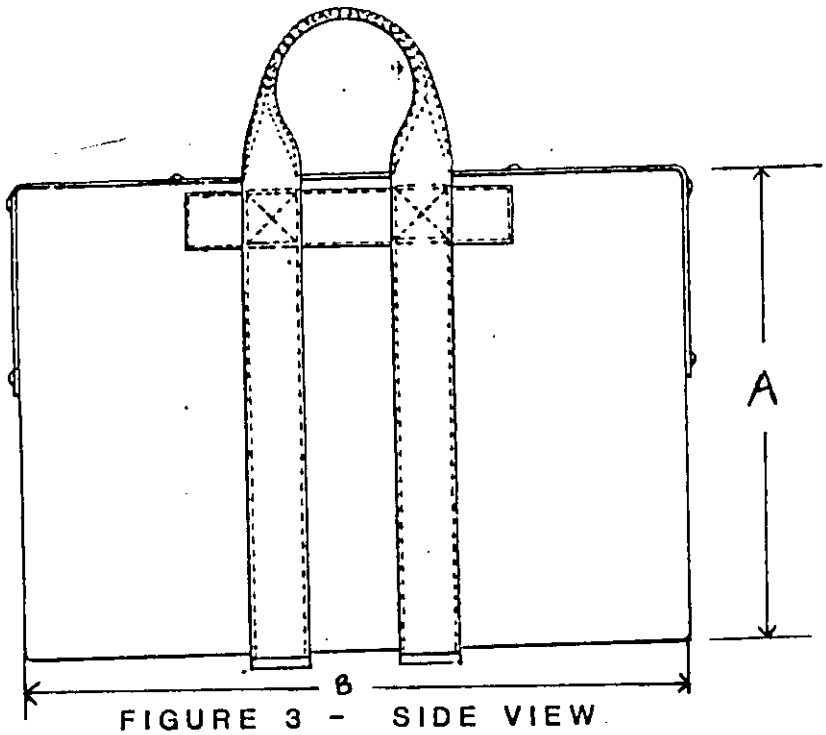


FIGURE 3 - SIDE VIEW

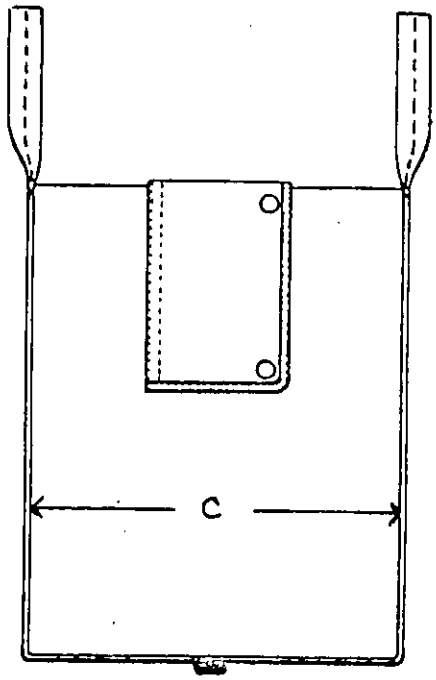


FIGURE 4 - END VIEW

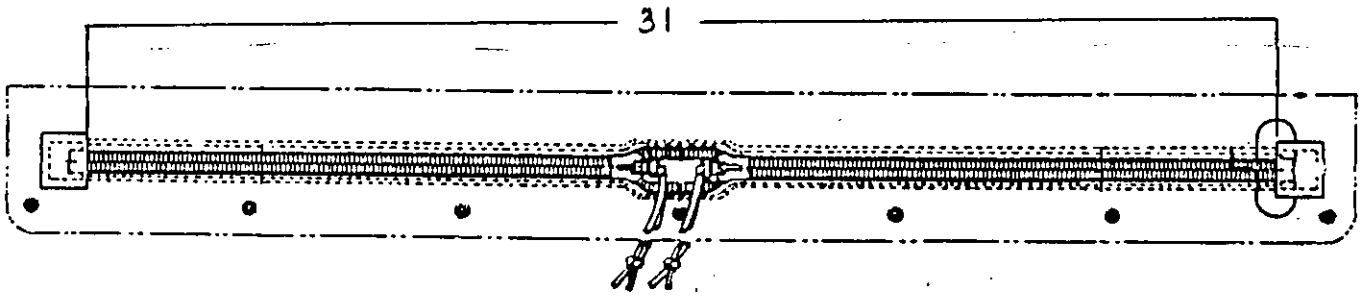


FIGURE 5 - SLIDE FASTENER

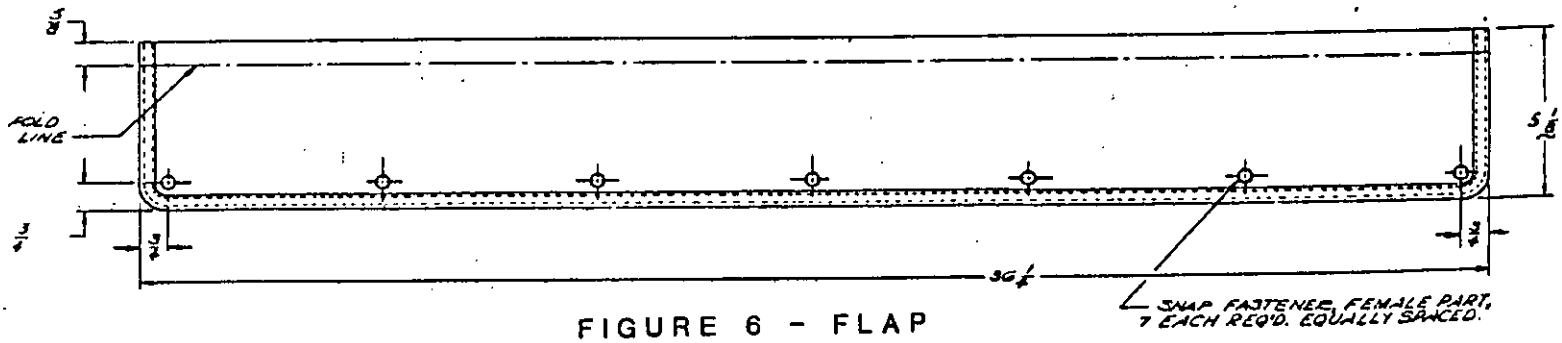


FIGURE 6 - FLAP

NOTE: ALL MEASUREMENTS ARE IN INCHES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.