INCH-POUND

A-A-50382

26 November 1990

COMMERCIAL ITEM DESCRIPTION

ANKLETS, WOMAN'S, ACRYLIC AND NYLON, RIBBED, STRETCH TYPE

This Commercial Item Description is authorized for use in preference to MIL-A-29131.

Description - The anklets shall be made of 80 (± 3) percent acrylic and 20 (± 3) percent stretch nylon which includes the reinforced toe and heel area. The anklets shall be made seamless, in one integral unit on a circular knit machine having a cylinder diameter of 4-1/2 inches and a minimum of 84 needles. The upper portion of the anklet (leg) shall be a 1 by 1 rib knit. The foot portion, including sole, heel and toe, of the anklet shall be a plain jersey knit. The acrylic yarn shall be plaited over the nylon stretch yarn throughout the entire anklet construction. The toe closure shall be as elastic as the knit portion of the anklet and shall be smooth, free from lumps and laps. A thread chain of 1/2 to 1 inch shall be left at the ends of the stitching to prevent raveling.

Material - The knitting yarns shall be acrylic and nylon. The acrylic yarn shall be a hi-bulk type and shall be size 2/29's (± 5%) worsted count. The nylon yarn shall be stretch-type and shall be size 70/2's (± 5%) denier. The yarn used for reinforcing the toe and heel area shall be a single end of 70 (± 5%) denier stretch type nylon. The color of the finished anklets shall black Navy Shade 3232, piece number 76238.

Sizes - The anklet shall be of one type only in the following sizes:

Medium (8 to 9-1/2) to fit shoe sizes 4 to 6-1/2
Large (10 to 11) to fit shoe sizes 7 to 11-1/2

Marking - The contractor's commercial marking label is acceptable.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

Measurements and weight - The finished anklets shall conform to the requirements stated below and tested in accordance with the stated test methods of FED-STD-191. All relaxed measurements shall be made with the anklets laid out flat, under no tension as shown in Figure 1.

See Figure 1	Leg (A)	Foot (B)	Ribbed Top (C)
Relaxed Inches			
Medium	8 to 9	8 to 9-1/2	5-1/2 to 6-1/2
Large	9 to 10	9-1/2 to 10-1/2	6-1/2 to 7
Stretched Inches (minimum) - Test Method 7560 1/			
Medium		12	
Large		13-1/2	
Conditioned weight/dozen ounces (minimum)			
Medium	15		
Large	18		

1/ The lengthwise stretch of the socks shall be measured using the sock measuring machine apparatus and measurement of specimen procedure specified in Test Method 7560 of FED-STD-191. The measurement shall be taken to the nearest 0.1 inch and the measured stretch "foot length" obtained in accordance with this procedure shall be considered as the lengthwise foot stretch.

Workmanship - After completion, the anklets shall be thoroughly cleaned and all foreign matter removed.

Product demonstration model - Offerers are required to submit two pairs of anklets of their intended production and style. Product demonstration model will consist of units independently developed. Product demonstration models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Responsibility for inspection - The supplier is responsible for assuring the product conforms to the requirements. Anklet lots will be inspected to determine conformance with the Commercial Item Description and the successful offerer's technical proposal as negotiated. Acceptability of anklet lots will be determined by the use of "Sampling Procedures and Tables for Inspection by Attributes", ANSI Z1.4, published by the Amercican Society for Quality Control. Sampling procedures will be designated by the Government at the time of award. The sample unit is one anklet and the selection done in pairs. The anklets shall be examined for commercial type defects only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

Defect - Anklets shall be examined for the following defects: any hole, cut, run or dropped stitch, including hole in seaming; thin area or mend; welt edge uneven, frayed, raveled; uneven knitting, not well shaped (boarding); color not as specified; any spot or stain; not knitted as specified; marking missing; any measurement of item not as specified; any defect not otherwise classified herein but at variance with the product demonstration model.

Preservation - Each pair of anklets shall be secured together at the tops of the leg by a pressure sensitive paper label. The pressure sensitive backing substance shall not adhere to the anklets when the label is removed. Each pair of anklets shall be folded at the heels in accordance with industry practice. Six pairs of anklets, with each pair reversed, or every three pairs reversed, shall be evenly stacked in a bundle. Each bundle shall be loosely bound around the center with any suitable commercial grade kraft paper. The ends of the paper wrapper shall be either pinned, pasted, or secured with gummed paper tape (1 inch minimum width) or pressure sensitive tape.

Packing - Seventy-two (72) pairs of anklets, preserved as specified above, shall be packed in a fiberboard shipping container assembled and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of suitable grade of commercial kraft paper.

Marking - In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

Palletization - When specified in the contract, anklets packed as specified above, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

Custodians:
Navy - NU
Air Force - 11

Review activities:
Air Force - 82, 99
DLA - CT

User activities:
Air Force - 45

Preparing activity:
Navy - NU

Project 8445-0116

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:42Z
Check the source to verify that this is the currentversion before use.

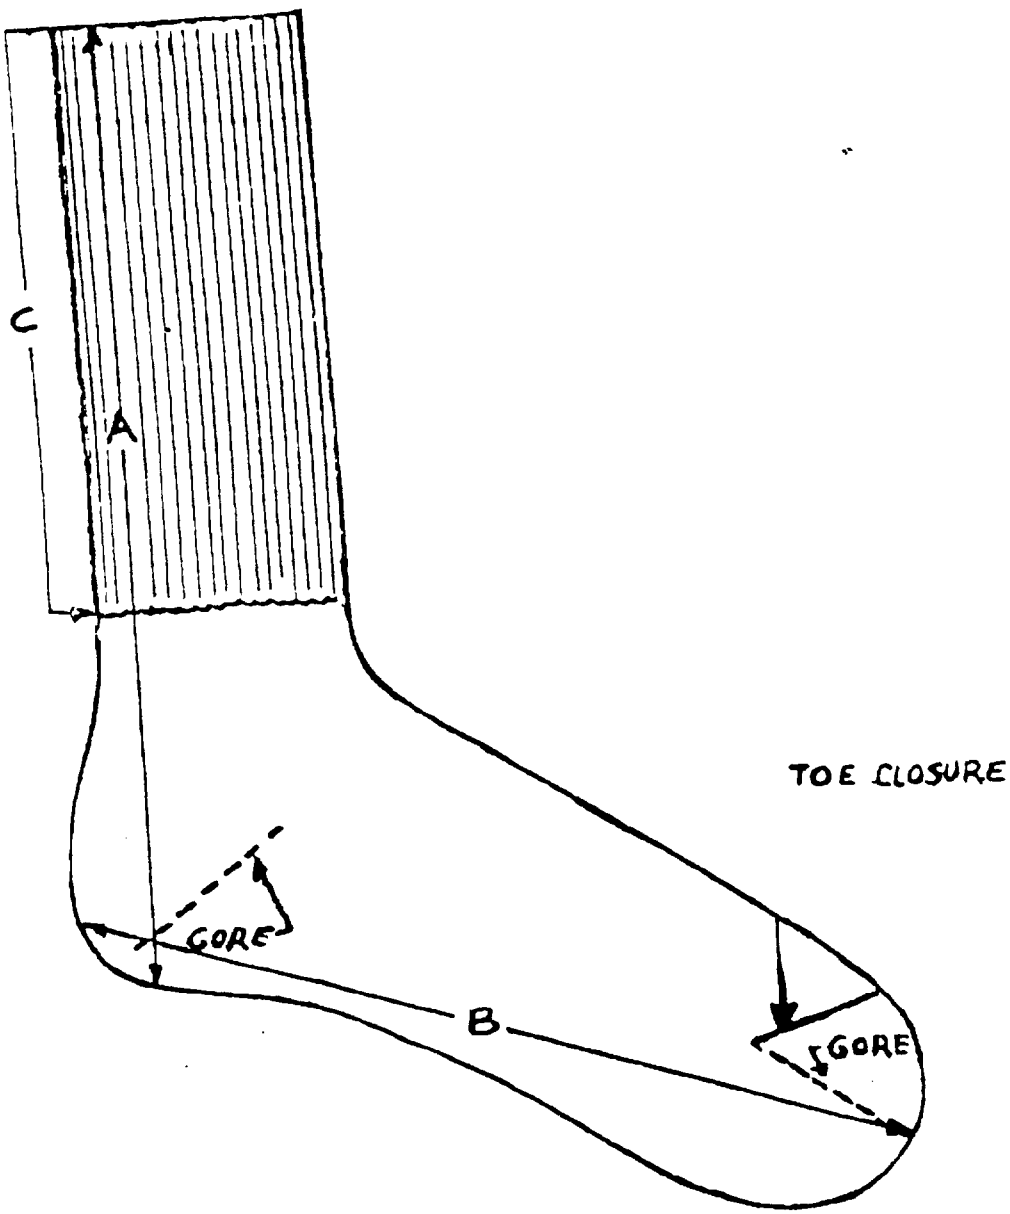


FIGURE 1

ANKLETS, WOMAN'S, ACRYLIC AND NYLON, RIBBED, STRETCH TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.