INCH-POUND

A-A-50390A
January 23, 1996

COMMERCIAL ITEM DESCRIPTION

SHIRT, DISPOSABLE

The General Services Administration has authorized the use of this commercial item description.

1. **SCOPE**. This commercial item description covers the requirements for a disposable shirt. The shirt is intended for use as part of an ensemble used to protect torpedo handlers from exposure to Otto fuels.

2. **SALIENT CHARACTERISTICS**

2.1 Description. The shirt shall be below-the-hip length style, and have full-length, set-in one or two piece sleeves, a sewn-on collar and a full front opening secured by 5 plastic snap fasteners.

2.2 Material. The material for the collar, front, and sleeves shall be a white polyethylene coated spun bonded olefin conforming to the requirements for type II of Table I. The coated side of the material is considered to be the face side. The material for the back shall be an uncoated spun bonded olefin conforming to the requirements for type I of Table I. The stitching thread and the plastic snap fasteners shall be of any commercial type suitable for the purpose intended. The color of the thread shall be natural or white. The of the snap fasteners shall be white.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FNSE, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. *Approved for public release; distribution is unlimited.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

TABLE I. - Material requirements.

Characteristic	Type I	Type II	Test method
Weight: (min.) oz./sq. yd.	1.1	2.0	ASTM-D3776, OPT. C
Breaking strength: (min.) pounds			
Machine direction	5.3	9.0	ASTM-D5034
Cross direction	7.5	10.0	ASTM-D5034
Tearing strength: (min.)			
Machine direction	-	2.0	ASTM-D1424
Cross direction	-	3.0	ASTM-D1424
Hydrostatic resistance: p.s.i. (min.)	-	30	ASTM-D751 1/ 2/
Air permeability ft^3 air/min/ft^2 (min.)	20.0	-	ASTM-D737

1/ The coated side shall be exposed to the water.
2/ Procedure A - Pressure application by Mullen type Hydrostatic Tester, sections 34-37, Procedure 1 (except that the rate of displacement shall be as specified in section 34.2) shall be used.

2.3 Sizes and measurements. The finished shirt shall conform to the measurements in Table II.

Table II. Finished measurements (in inches)

Sizes	**A Chest**	**B Inseam Sleeve Length**	**C Outer Back Length**
X-Small	20-1/2	22-1/4	29-1/2
Small	21-1/2	22-1/4	30
Medium	23-1/2	22-5/8	30-1/2
Large	25-1/2	23-1/8	31
X-Large	27-1/2	23-1/2	31-1/2
XX-Large	28-1/2	23-7/8	32
Tolerances:	± 1	+ 1/2, - 3/8	+ 1/2, - 3/8

NOTE: Refer to Figure 1 for A, B, and C measurements.

2.4 Pattern. The Government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The Government patterns shall be used to make the contractor's working patterns. The Government patterns shall not be altered in any way. The working patterns may be modified to accommodate automation; however, if the working patterns are modified the design and measurements must be maintained as intended by Government patterns. Commercial patterns may be used in lieu of Government patterns provided they are approved for used by the Government and conform to the cited design and finished measurements.

2.5 Labels. A commercial-type label is acceptable, provided that an additional label containing the contractor's name, contract number, size and National Stock Number (NSN), and cautionary statement is placed directly on the shirt by printing, stamping, stenciling or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

printed on a sensitive label that adhere to the inside of the garment. The cautionary statement shall be printed in larger letters than all other lettering on the label and shall read:

CAUTION: THIS GARMENT SHALL NOT BE REUSED AND MUST BE DISCARDED WHEN OTTO FUEL STAINS ARE OBSERVED

2.6 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3. **REGULATORY REQUIREMENTS**. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4. QUALITY ASSURANCE PROVISIONS

4.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Market acceptance criteria. The item offered, or a generic equivalent, must have been sold to the commercial market or to the Government for at least two years.

4.3 Warranty. The item offered shall include the standard warranty given to the commercial market beginning with the date of delivery of the individual items.

4.4 Visual examination. Each shirt shall be examined for the defects listed below:

Defects. Any hole, cut, or tear; color not as specified; any part shaded; any spot or stain (outside); raw edges, open seams, thread ends not removed, or loose tension resulting in loose seams; any material defects, distorted parts or poor workmanship; any component part omitted; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

5. **Preservation, packing, and marking**. The preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Source of Government documents. Copies of military and Federal documents are available from:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

6.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

MILITARY INTERESTS:

Custodians
Navy - NU

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Review Activities
Navy - SH, OS

PREPARING ACTIVITY:
DLA - CT

Project 8415-0063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

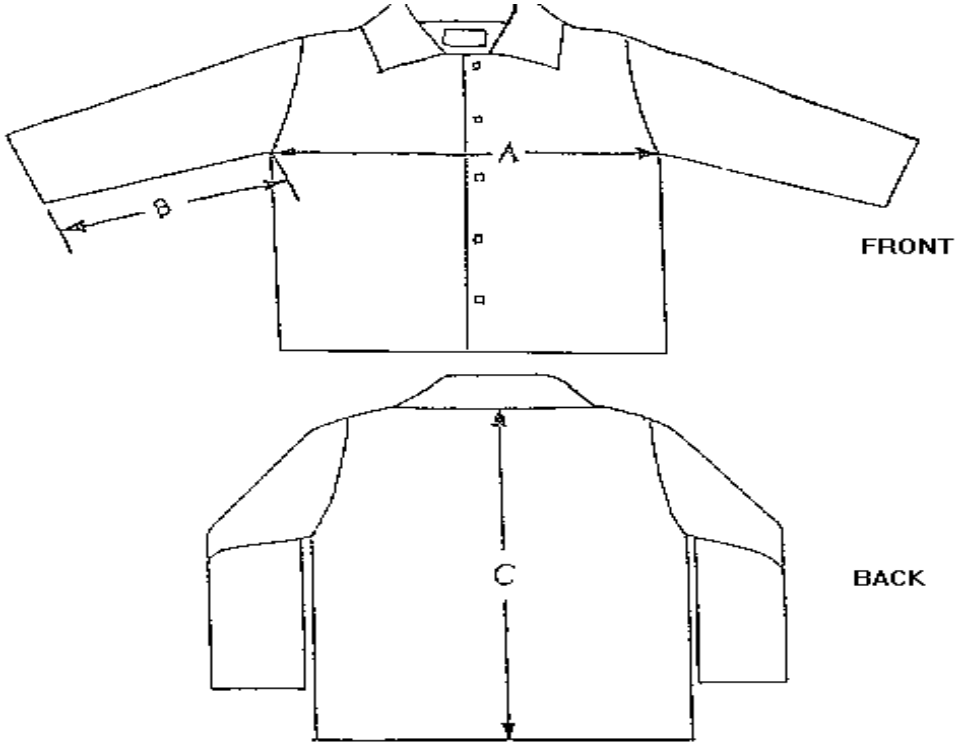

FIGURE 1 - SHIRT DISPOSABLE

A. **Chest** - Measure across the chest at the base of the armhole from folded edge to folded edge.

B. **Sleeve inseam** - Measure along inseam from armhole to bottom of sleeve.

C. **Length** - Measure along center back from lower edge of neckline to bottom of shirt.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.