FED. SUP CLASS
2805

REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

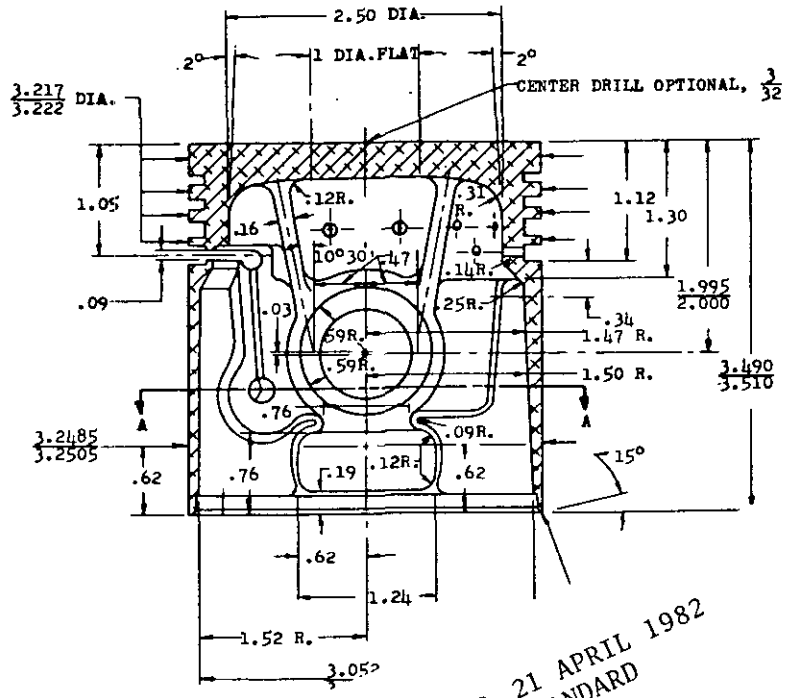

.125 DRILL-8 HOLES SPACED AS SHOWN ON ℄ OF #3 [illegible] GROOVE.

Ⓓ CANCELED AFTER 21 APRIL 1982
NO SUPERSEDING STANDARD

.ON SKIRT IS GROUND TAPERED .0005 TO .0015 (.001 DESIRED) MAX. DIA. AT BOTTOM.

RING LANDS MAY LOCALLY SHOW EFFECT OF CAM GRINDING SKIRT.

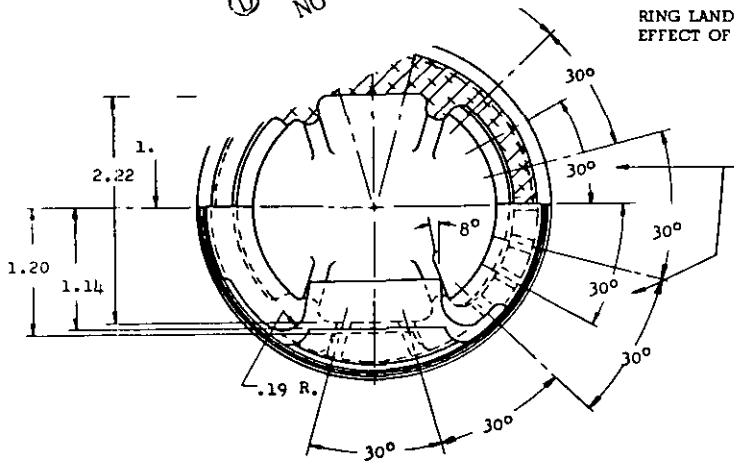

.125 DRILL, 3-HOLES ON ℄ OF #4 GROOVE.

WT. OF FIN. PISTON: 424 ± 3 GRAMS.

Ⓒ ENTIRE STANDARD REVISED

APPROVED 19 JUNE 1952 REVISED Ⓐ 27 NOVEMBER 1953 Ⓑ 24 OCTOBER 1955 Ⓒ 7 MAR 1966 Ⓓ 21 APRIL 1982

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY MO(ERDL) Other Cust A.F. - 69 NAVY - YD	TITLE PISTON, INTERNAL COMBUSTION ENGINE: 3-1/4" X 3-1/2"	PART NO. MS 13958-1 MILITARY STANDARD MS 13958
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 6

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:31Z
Check the source to verify that this is the current version before use.