
FED. SUP CLASS
5306

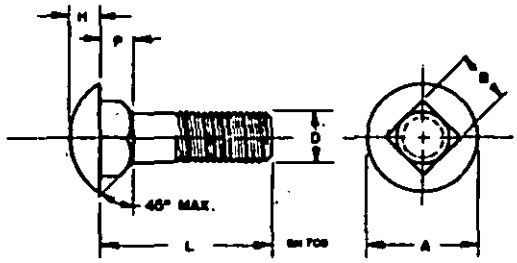

NOMINAL SIZE			1/4	5/16	3/8	7/16
THREADS PER INCH			20	18	16	14
(D) BODY DIAMETER		MAX.	0.250	0.324	0.388	0.452
(A) DIAMETER OF HEAD		MAX.	.594	.719	.813	.969
		MIN.	.563	.688	.782	.907
(H) HEIGHT OF HEAD		MAX.	.145	.176	.208	.239
		MIN.	.125	.156	.188	.219
(P) DEPTH OF SQUARE		MAX.	.156	.187	.219	.250
		MIN.	.125	.156	.188	.219
(B) WIDTH OF SQUARE		MAX.	.260	.324	.388	.452
		MIN.	.245	.307	.368	.431
(L) LENGTH	LENGTH TOLERANCE 1/4 to 3/8 DIA.	LENGTH TOLERANCE 7/16 DIA.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/2			1	21	--	--
3/4			2	22	42	62
1			3	23	43	63
1-1/4			4	24	44	64
1-1/2			5	25	45	65
1-3/4			6	26	46	66
2			7	27	47	67
2-1/4	±1/32	±1/16	8	28	48	68
2-1/2			9	29	49	69
2-3/4			10	30	50	70
3			11	31	51	71
3-1/2			12	32	52	72
4			13	33	53	73
4-1/2			14	34	54	74
5			15	35	55	75
5-1/2			--	--	122	--
6			16	36	56	76
6-1/2			120	--	--	--
7			17	37	57	77
7-1/2	±1/16	±3/32	121	--	--	--
8			18	38	58	78
9			19	39	59	79
10			20	40	60	80
11			--	--	123	--
12			--	--	124	--
14			--	--	125	--
15			--	--	--	--
16			--	--	126	--
18			--	--	127	--
20			--	--	128	--
22			--	--	129	--
24					--	

PROTECT 5306-0288

(C) FOR CHANGE SEE SHEETS 1 AND 2

APPROVED 8 MAY 1957 REVISED (A) 8 MARCH 1963 (B) 8 MARCH 1967 (C) 24 MAY 1967

This standard has been approved by the Naval Ship Engineering Center, Department of the Navy and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

P.A. SHIPS Other Cust	TITLE BOLTS, SQUARE NECK, (CARRIAGE BOLT), ROUND HEAD, UNC-2A, COPPER-SILICON ALLOY, NONMAGNETIC	MILITARY STANDARD MS16207(SHIPS)
PROCUREMENT SPECIFICATION (C) FF-B-584	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

FFD. SUP CLASS
5306

NOMINAL SIZE			1/2	5/8	3/4
THREADS PER INCH			13	11	10
(D) BODY DIAMETER		MAX.	0.515	0.642	0.768
(A) DIAMETER OF HEAD		MAX.	1.094	1.313	1.563
		MIN.	1.032	1.219	1.469
(H) HEIGHT OF HEAD		MAX.	0.270	0.344	0.406
		MIN.	.250	.313	.375
(P) DEPTH OF SQUARE		MAX.	.281	.344	.406
		MIN.	.250	.313	.375
(B) WIDTH OF SQUARE		MAX.	.515	.642	.768
		MIN.	.492	.616	.741
(L) LENGTH	LENGTH TOLERANCE 1/2 DIA.	LENGTH TOLERANCE 5/8 - 3/4 DIA.	DASH NO.	DASH NO.	DASH NO.
1	±1/16	±1/8	81	---	---
1-1/2			82	95	---
2			83	96	108
2-1/2			84	97	109
3			85	98	110
3-1/2			86	99	111
4			87	100	112
4-1/2			88	101	113
5			89	102	114
6			90	103	115
7	±3/32	±3/16	91	104	116
7-1/2			130	---	---
8			92	105	117
9			93	106	118
10			94	107	119
11			131	---	---
12			132	139	141
14			133	---	---
15			134	---	---
16			135	140	142
18			136	---	---
20			137	---	---
22			138	---	---
24			---	---	143

NOTES

1. MATERIAL: COPPER-SILICON ALLOY (SILICON BRONZE) SHALL BE IN ACCORDANCE WITH QQ-C-591 COPPER ALLOY NO. 651.
2. TENSILE STRENGTH: MINIMUM TENSILE STRENGTH OF BOLT SHALL BE 50,000 P.S.I.
3. PROTECTIVE COATING: NONE.
4. THREADS: THREADS SHALL BE UNC-2A IN ACCORDANCE WITH HANDBOOK H28.
5. THREAD LENGTH: FOR BOLTS 6 INCHES AND LESS IN LENGTH THE MINIMUM THREAD LENGTH SHALL BE TWICE THE NOMINAL SIZE PLUS 1/4 INCH. FOR BOLTS OVER 6 INCHES LONG THE MINIMUM THREAD LENGTH SHALL BE TWICE THE NOMINAL SIZE PLUS 1/2 INCH. BOLTS TOO SHORT FOR MINIMUM THREAD LENGTH SHALL BE THREADED AS CLOSE TO THE HEAD AS PRACTICABLE.
6. USE: COPPER-SILICON ALLOY BOLTS ARE INTENDED FOR USE IN SMALL BOATS AND NON-MAGNETIC MINESWEEPERS WHERE GOOD RESISTANCE TO SEA WATER CORROSION IS REQUIRED.
7. DIMENSIONS: ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 8 MAY 1957 REVISED © FOR CHANGE SEE SHEETS 1 AND 2.

This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. SHIPS Other Cust	TITLE BOLTS, SQUARE NECK, (CARRIAGE BOLT), ROUND HEAD, UNC-2A, COPPER-SILICON ALLOY, NONMAGNETIC	MILITARY STANDARD MS16207(SHIPS)
PROCUREMENT SPECIFICATION © 17-B-58A	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.