
FED. SUP CLASS
4820

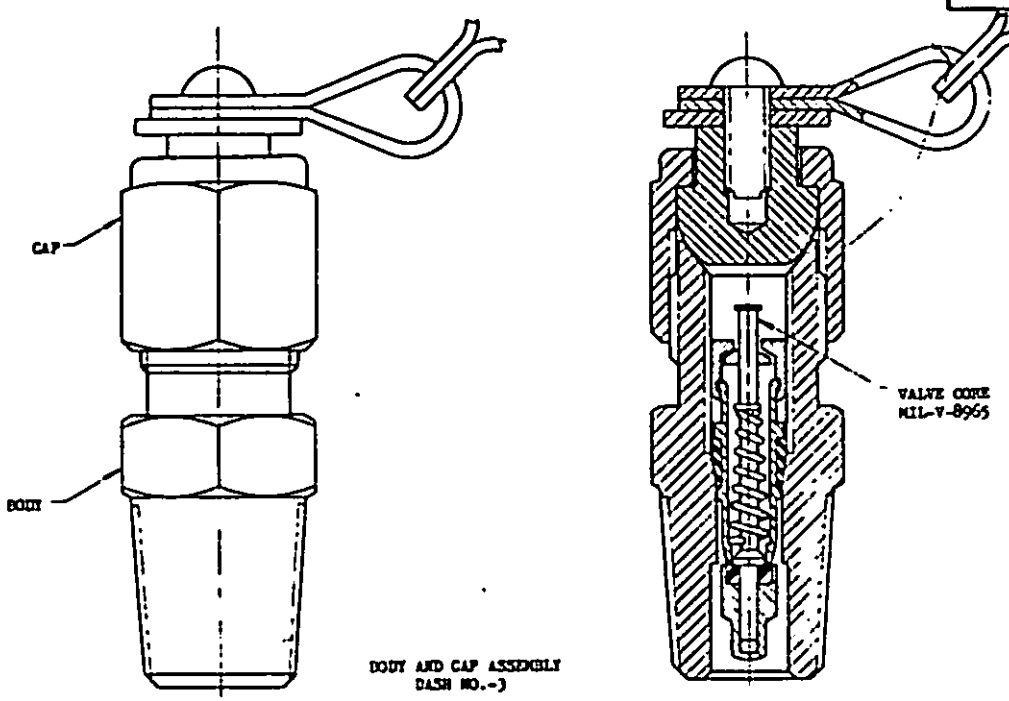

BODY AND CAP ASSEMBLY
DASH NO.-3)

CLEANLINESS: THE VALVE SHALL BE CLEAN, DRY, AND FREE OF OIL, GREASE, AND ANY OTHER FOREIGN MATTER.

TESTING: WITH THE CAP REMOVED, THE VALVE SHALL BE PRESSURIZED FROM THE OUTLET END TO A MINIMUM PRESSURE OF 2100 PSIG. UNDER THIS CONDITION, LEAKAGE SHALL NOT EXCEED 10 CUBIC CENTIMETERS PER MINUTE. THE CAP SHALL BE INSTALLED, THE VALVE PRESSURIZED FROM THE OUTLET END TO A MINIMUM PRESSURE OF 2100 PSIG AND COMPLETELY SUBMERGED IN WATER. LEAKAGE SHALL NOT EXCEED 1 BUBBLE PER 30 MINUTES.

MATERIAL: BODY, CAP, WASHER, AND PLUG STEEL, MIL-S-7720, COMPOSITION 302, PHYSICAL CONDITION B, SURFACE CONDITION D. RING, STEEL, QQ-W-423, FORM I, COMPOSITION FS302, CONDITION B.

FINISH: PLUG, WASHER, NUT, AND BODY PASSIVATE.

SURFACE ROUGHNESS: UNLESS OTHERWISE SPECIFIED, MAXIMUM SURFACE ROUGHNESS SHALL BE 125 INCH IN ACCORDANCE WITH ANSI 46.1. REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005. ANGLES ± 1/2°.

INTERCHANGEABILITY: THIS VALVE IS DIMENSIONALLY AND FUNCTIONALLY INTERCHANGEABLE WITH VALVE NUMBER 5883536 SHOULD BE USED UNTIL SUPPLY IS EXHAUSTED.

DASH NUMBER	ITEM
-1	BODY
-2	CAP ASSEMBLY
-3	BODY AND CAP ASSEMBLY

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(FOR CHANGES SEE SHEET 2)

© DENOTES CHANGES

APPROVED 28 Nov 1966 REVISED (A) 16 Sept 1970 (B) 28 AUG 73 © 6 Jun 86

Review activities: USAF-11,71
Navy-AS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 71 Other Cust Navy - AS AF - 99	TITLE VALVE, CHECK, OXYGEN CHARGING	MILITARY STANDARD MS 22066
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF DWG 5883536 , SBA3537	SHEET 1 OF 2

DD FORM 672-1 (Continued)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4820

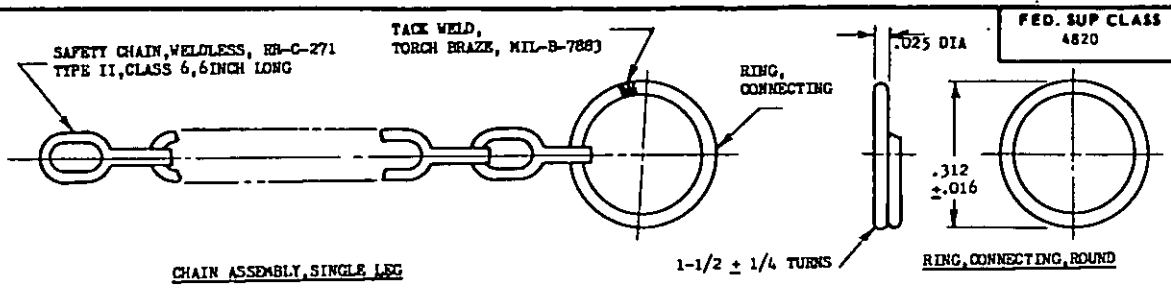


CHAIN ASSEMBLY, SINGLE LEG


RING, CONNECTING, ROUND

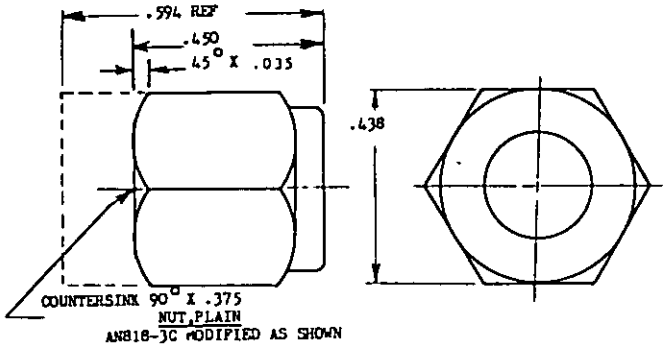


NUT, PLAIN
AN818-3C MODIFIED AS SHOWN

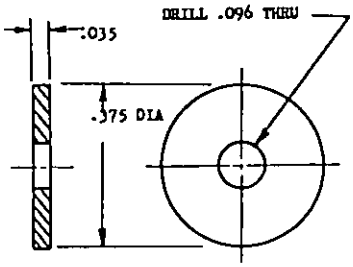


WASHER, FLAT CAP

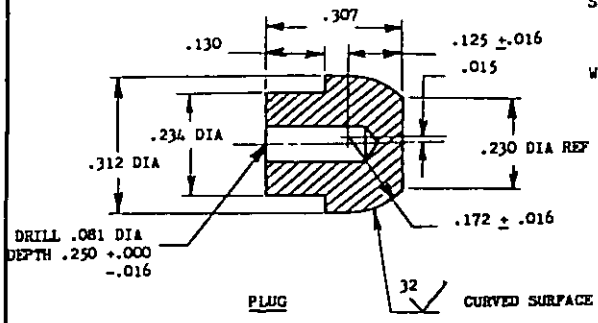

PLUG

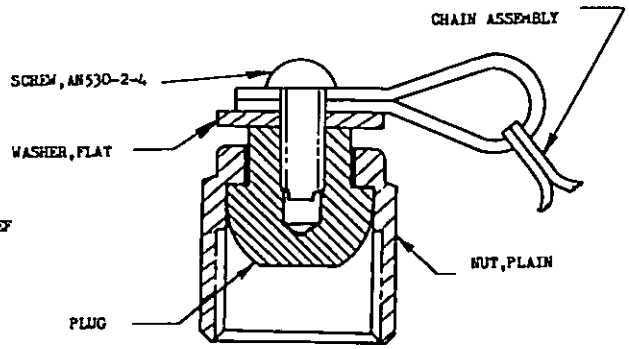

CAP ASSEMBLY
DASH NO. -2

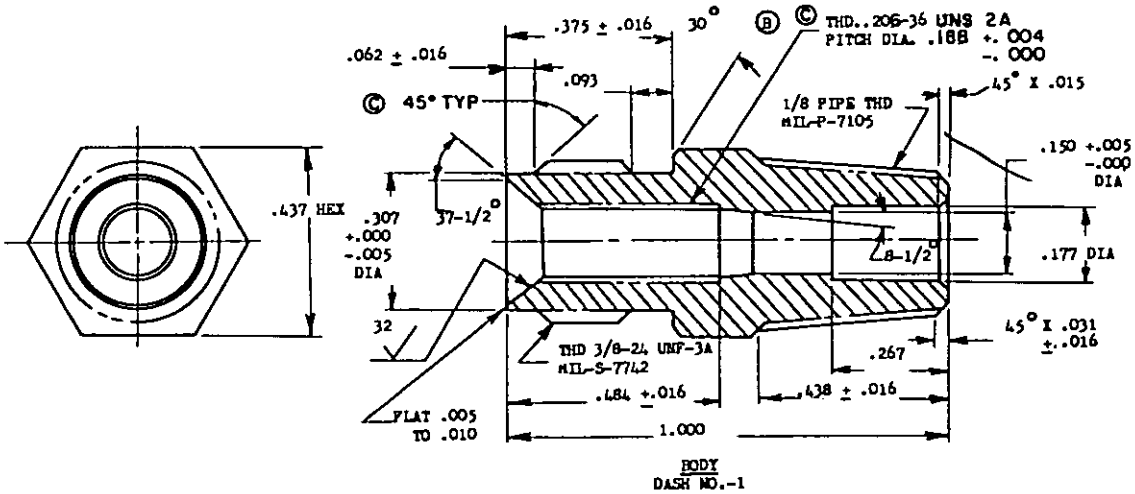

BODY
DASH NO.-1

(FOR CHANGES SEE SHEET 2)

APPROVED 28 NOV 1966

Ⓒ For changes see page 2

REVIEW ACTIVITIES: USAF-11, 71
NAVY-AS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-71 Other Cust NAVY-AS AF-99	TITLE VALVE, CHECK, OXYGEN CHARGING	MILITARY STANDARD MS22066
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF DWG 58A3539, 58A3540, 58A3541, 58B3542, 58A3543, 58A3544, 53B3538	SHEET 2 OF 2

DD FORM 1 SEP 63 672-1 (Coordinated)

PREVIOUS EDITION OF THIS SHEET IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.