

FED. SUP CLASS
5935

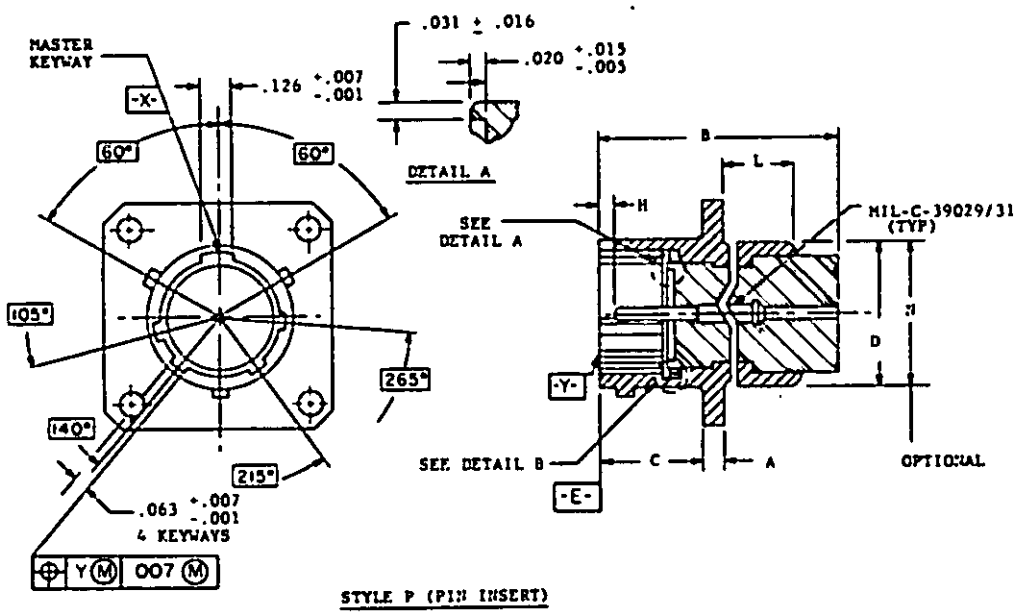

STYLE P (PIN INSERT)

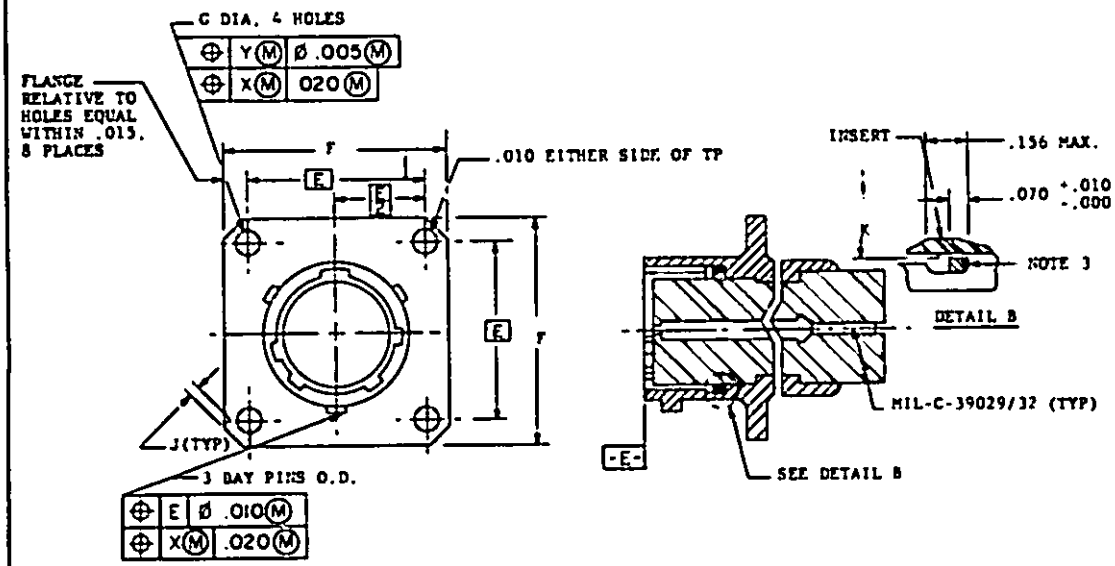

STYLE S (SOCKET INSERT)

REVISED	APPROVED
(A) 18 JUL 62	5 OCT 61
(B) 24 AUG 62	
(C) 15 FEB 67	
(D) 5 SEP 75	
(E) 30 July 1979	

(E) ENTIRE STANDARD REVISED AND REDRAWN

P.A. NAVY - AS Other Cust USAF - 85 ARMY - EL	TITLE: CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 1, CRIMP-TYPE, BOX MOUNTING, FLANGE, NO. 4 HOLES, BAYONET COUPLING	MILITARY STANDARD MS3122
PROCUREMENT SPECIFICATION MIL-C-26482	SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PROJECT NO. 5935-3089-2

REVIEWER SYMBOLS: ARMY - EL, MU, MI; NAVY - AS, SH; USAF - 17
USER SYMBOLS: ARMY - AV; NAVY - ; USAF - 11

"Basis/four information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

To military standard is approved for use by all Departments & Agencies of the Department of Defense. Detailed for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
ARMY - AV
NAVY -
USAF - 11

REVIEWER SYMBOLS:
ARMY - EL, MU, MI
NAVY - AS, SH
USAF - 17

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935

SIZE	A ±.016 THK MTG FLANGE	B MAX OVER-ALL LENGTH	C +.031 -.000 MTG FLANGE LOC	D DIA +.031 -.024 OD	E (TP) MTG HOLES	F MAX LENGTH SIDE	G ±.005 DIA MTG HOLES	H +.010 -.020 PIN CONTACT LOC	J MIN EDGE DIST	K MAX ID GASKET	L MAX	M MAX	N UNEF-2A THREAD OPTIONAL
8	.062	1.320	.431	.438	.594	.828	.120	.085	.035	.329	.406	.087	.4375-28
10				.562	.719	.954				.457			.5625-24
12				.688	.812	1.047				.564			.6875-24
14				.812	.906	1.141				.689			.8125-20
16				.938	.969	1.234				.814			.9375-20
18				1.062	1.062	1.328				.907			1.0625-18
20	.094	1.367	.556	1.188	1.156	1.453		.147	.050	1.039		.212	1.1875-18
22				1.312	1.250	1.578				1.164			1.3125-18
24		1.418	.589	1.438	1.375	1.703	.147			1.289			1.4375-18

NOTES

1. DIMENSIONS IN INCHES.
2. THE REAR OF CONNECTOR SHALL BE SUITABLE FOR POTTING IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
3. PACKING MATERIAL SHALL MEET THE REQUIREMENTS OF MIL-STD-417.
4. TRUE POSITION (TP) TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH ANSI Y14.5-1973.
5. MATERIAL: SHELL-ALUMINUM ALLOY; BAYONET PINS - STAINLESS STEEL, PASSIVATED.
6. INSERT ARRANGEMENT PER MIL-STD-1669.
7. INTERMATABILITY DIMENSIONS SHALL BE IN ACCORDANCE WITH MIL-C-26482.
8. EXAMPLE OF PART NUMBER:



9. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 5 OCT 61 REVISED (E) ENTIRE STANDARD REVISED

P.A.
NAVY - AS
Other Cust
USAF - 85
ARMY - EL

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 1, CRIMP-TYPE, BOX MOUNTING, FLANGE, NO. 4 HOLES, BAYONET COUPLING

MILITARY STANDARD
MS3122

PROCUREMENT SPECIFICATION
MIL-C-26482

SUPERSEDES

SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 23056

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.