
FED. SUP CLASS
5935

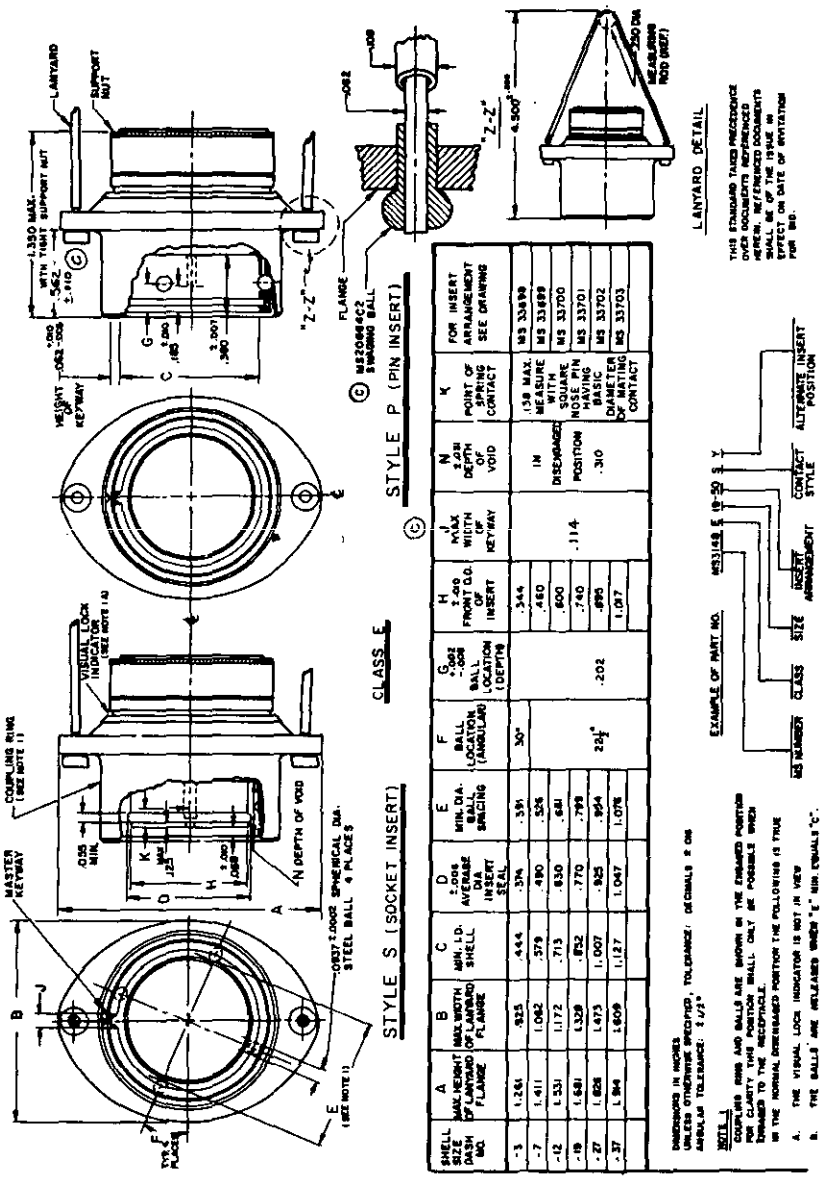

SHELL SIZE DASH NO.	A MAX. HEIGHT OF LANYARD FLANGE	B MAX. WIDTH OF LANYARD FLANGE	C MIN. I.D. SHELL	D ±.006 AVERAGE INSERT SEAL	E MIN. DIA. BALL SPACING	F BALL LOCATION (ANGULAR)	G ±.005 -.009 BALL LOCATION (DEPTH)	H ±.010 FRONT O.D. OF INSERT	J MAX WIDTH OF KEYWAY	N ±.031 DEPTH OF VOID	K POINT OF SPRING CONTACT	FOR INSERT ARRANGEMENT SEE DRAWING
-3	1.261	.925	.444	.374	.591	30°	.202	.344	.114	IN DISENGAGED POSITION .310	.130 MAX. MEASURE WITH SQUARE EDGE PIN HAVING BASIC DIAMETER OF MATING CONTACT	MS 33699
-7	1.411	1.062	.579	.490	.526			.460				MS 33699
-11	1.531	1.172	.713	.630	.681			.600				MS 33700
-15	1.681	1.329	.852	.770	.799	22½°		.740				MS 33701
-21	1.826	1.473	1.007	.925	.954			.895				MS 33702
-31	1.964	1.609	1.127	1.047	1.076			1.017				MS 33703

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS # ON ANGULAR TOLERANCE: ±1°.

NOTE 1
COUPLING RING AND BALLS ARE SHOWN IN THE ENGAGED POSITION FOR CLARITY THIS POSITION SHALL ONLY BE POSSIBLE WHEN CONNECTED TO THE RECEPTACLE.
IN THE NORMAL DISENGAGED POSITION THE FOLLOWING IS TRUE
A. THE VISUAL LOCK INDICATOR IS NOT IN VIEW
B. THE BALLS ARE RELEASED WHEN "E" MIN. EQUALS "C".

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. NEW EDITIONS OF THE ISSUE SHALL BE EFFECTIVE ON DATE OF INVITATION FOR BID.

APPROVED 10 SEPT. 62 REVISED ① 1 NOV 1965 Ⓑ 6 Mar 67 Ⓒ 20 JAN 1969 Ⓓ 21 JULY 1971

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY-EL	International interest	TITLE CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE LANYARD, PUSH-PULL COUPLING SERIES 2 (CLASS E AND J)	MILITARY STANDARD MS 3148
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 2

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1761-10

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:00Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisitions now shall be made from this document.

P.A. NAVY-AS | International Interest

Other Cust ARMY-EL

Procurement Specification MIL-C-81703

TITLE

CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, LANYARD, PUSH-PULL COUPLING (CLASS E AND J)

SERIES 2

SUPERSEDES:

MILITARY STANDARD

MS 3148


SHEET 2

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS 5935

CLASS J

JACKETED CABLE GLAND SEAL

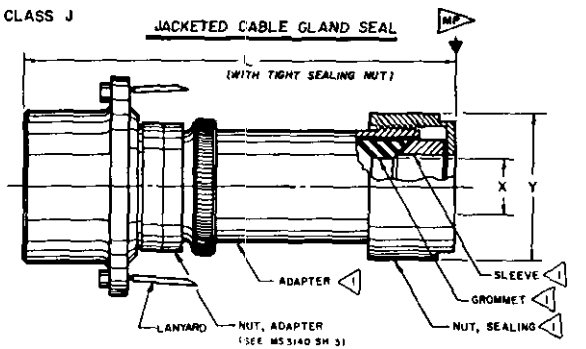


SHELL SIZE DASH NO.	L LENGTH MAX.	X INSIDE DIA. MIN.	X INSIDE DIA. MAX.	Y MAX.	MP MAX CABLE WEIGHTS IN POUNDS. (ALLOWABLE FORCE IN DIRECTION INDICATED)
-3	3.088	.178	.210	.645	2.0
-7	4.072	.381	.413	.926	2.7
-12	4.538	.412	.444	.988	4.0
-19	4.572	.522	.554	1.113	5.5
-27	4.572	.600	.632	1.113	8.0
-37	4.603	.662	.694	1.176	12.0

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCE: DECIMALS ±.016, ANGULAR TOLERANCE ±1/2°.

1 FOR ADAPTER, SEALING NUT, GROMMET & SLEEVE SEE MS3150 SH. 3

CLASS J JACKETED CABLE GLAND SEAL—WATERTIGHT TYPE—FOR USE WITH CLASS E CONNECTORS.

EXAMPLE OF PART NO.



THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 10 SEPT. 82

REVISED (D) FOR CHANGES SEE SHEETS 1 & 2.

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:00Z
Check the source to verify that this is the current version before use.