
FED. SUP CLASS
4730

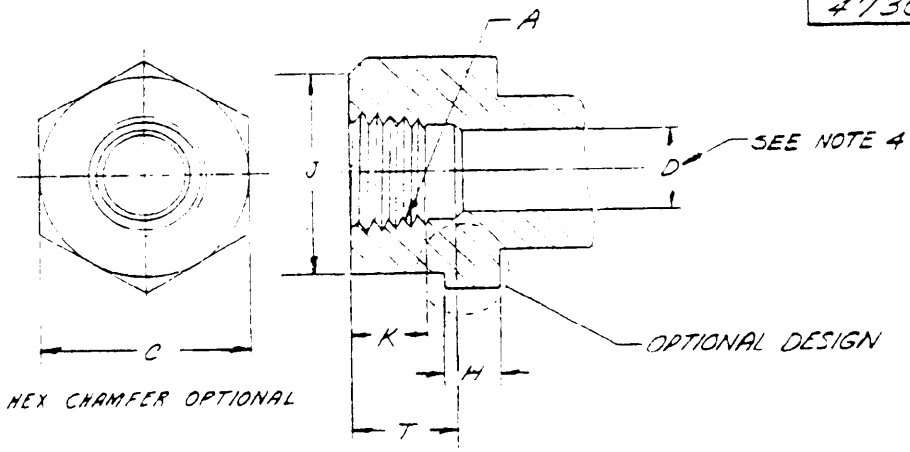


© PIPE SIZES AND DIMENSIONS

| TUBE OD NOM | TAPER THREAD A | HEX C MIN | MIN FULL THREAD K | DEPTH T | MIN LENGTH H | DIA J |
|---|---|---|---|---|---|---|
| 1/8 | 1/8-27NPTF | .563 | .320 | .375 | .210 | HEX C +.000 -.016 |
| 1/4 | 1/4-18NPTF | .687 | .460 | .562 | .240 | |
| 3/8 | 3/8-18NPTF | .812 | .460 | .562 | .300 | |
| 1/2 | 1/2-14NPTF | 1.000 | .640 | .750 | .370 | |
| 3/4 | 3/4-14NPTF | 1.250 | .640 | .750 | .490 | |

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. PIPE SIZE CORRESPONDS TO THE STANDARD NOMINAL PIPE SIZE FOR PIPE THREAD ENDS.
3. THREADS SHALL BE DRY SEAL AMERICAN STANDARD TAPER PIPE THREAD (NPTF) CONFORMING TO SOCIETY OF AUTOMOTIVE ENGINEERS STANDARD SAE J476.
© 4. DIMENSIONS AND TOLERANCES NOT SHOWN SHALL BE IN ACCORDANCE WITH SAE HANDBOOK FOR REFRIGERATION FITTINGS, SAE J513.
5. OPTIONAL DESIGN IS MANUFACTURERS' OPTION.
6. MINIMUM ACROSS CORNER DIMENSIONS OF HEXAGONS SHALL BE 1.1092 TIMES THE NOMINAL WIDTH ACROSS THE FLATS OF THE HEXAGON.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCY OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

APPROVED 22 SEPT 1958 REVISED ④ 9/28/1963 ⑧ 28 SEPT 1967 © 8 MAY 1970

REVIEW ACTIVITIES:
AMMT - ME
NAVY - YD MC, SH
USAF - 82
DSA - CS

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

| P.A. ARMY - GL Other Cust: NAVY - YD USAF - 82 | TITLE: CONNECTION END, INTERNAL PIPE THREAD, REFRIGERATION | MILITARY STANDARD MS 35326 |
|---|---|---|
| PROCUREMENT SPECIFICATION: NONE | SUPERSEDES | SHEET 1 OF 1 |

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:31Z
Check the source to verify that this is the current version before use.