
FED. SUP CLASS
5320

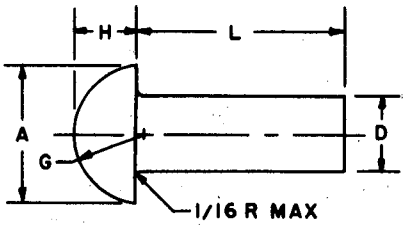

NOMINAL SIZE			1/2	5/8	3/4	7/8	1	1-1/8	1-1/4
BODY DIAMETER	D	Max	.520	.655	.780	.905	1.030	1.160	1.285
		Min	.478	.600	.725	.850	.975	1.098	1.223
HEAD DIAMETER	A	Max	.938	1.157	1.390	1.609	1.828	2.063	2.282
		Min	.844	1.063	1.281	1.500	1.719	1.938	2.157
HEAD HEIGHT	H	Max	.406	.500	.593	.687	.781	.891	.985
		Min	.375	.469	.562	.656	.750	.844	.938
HEAD RADIUS	G	Approx	.443	.553	.664	.775	.885	.996	1.107
* LENGTH	L		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/2			1						
9/16			2						
5/8			3	12					
11/16			4	13					
3/4			5	14					
13/16			6	15					
7/8			7	16					
15/16			8	17					
1			9	18	35				
1-1/8			10	19	36				
1-1/4			11	20	37	60	83		
1-3/8				21	38	61	84	106	
1-1/2				22	39	62	85	107	128
1-5/8				23	40	63	86	108	129
1-3/4				24	41	64	87	109	130
1-7/8				25	42	65	88	110	131
2				26	43	66	89	111	132
2-1/8				27	44	67	90	112	135
2-1/4				28	45	68	91	113	134
2-3/8				29	46	69	92	114	135
2-1/2				30	47	70	93	115	136
2-5/8				31	48	71	94	116	137
2-3/4				32	49	72	95	117	138
2-7/8				33	50	73	96	118	139
3				34	51	74	97	119	140
3-1/8					52	75	98	120	141
3-1/4					53	76	99	121	142
3-3/8					54	77	100	122	143
3-1/2					55	78	101	123	144
3-5/8					56	79	102	124	145
3-3/4					57	80	103	125	146
3-7/8					58	81	104	126	147
4					59	82	105	127	148

* See note 9 on sheet 2.

REVIEWER: MU, WC
USER: AT, AV, ME, MI

APPROVED 18 APR 1967 REVISED

This military standard is approved by the Weapons Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. WC Other Cust	TITLE RIVET, BUTTON HEAD, STEEL	MILITARY STANDARD MS51829 (WC)
PROCUREMENT SPECIFICATION MIL-R-1223	SUPERSEDES: BMCX3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5320

NOTES:

1. MATERIAL: Steel, in accordance with procurement specification or SAE 1008.
2. PROTECTIVE COATING: None.
3. TOLERANCE: Tolerances are in accordance with ASA B18.4-1960.
4. DIMENSIONS: All dimensions are in inches unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number plus the dash number.
   Example: MS 51829-1
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. The symbols used in this standard are in accordance with ASA B18.4-1960.
* 9. Tolerance on length shall be ±1/32 for sizes 1/2 to 5/8, inclusive; ±1/16 for sizes over 5/8 to and including 7/8; and ±3/32 for sizes over 7/8.

REVIEWER: MU, WC
USER: AT, AV, ME, MI

This military standard is approved by the Weapons Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 18 APR 1967 VISED

P.A. WC Other Cust	TITLE RIVET, BUTTON HEAD, STEEL	MILITARY STANDARD MS51829 (WC)
PROCUREMENT SPECIFICATION MIL-R-1223	SUPERSEDES: BMCX3	SHEET 2

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-519/6162

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:09Z
Check the source to verify that this is the current version before use.