
FED. SUP CLASS
5320

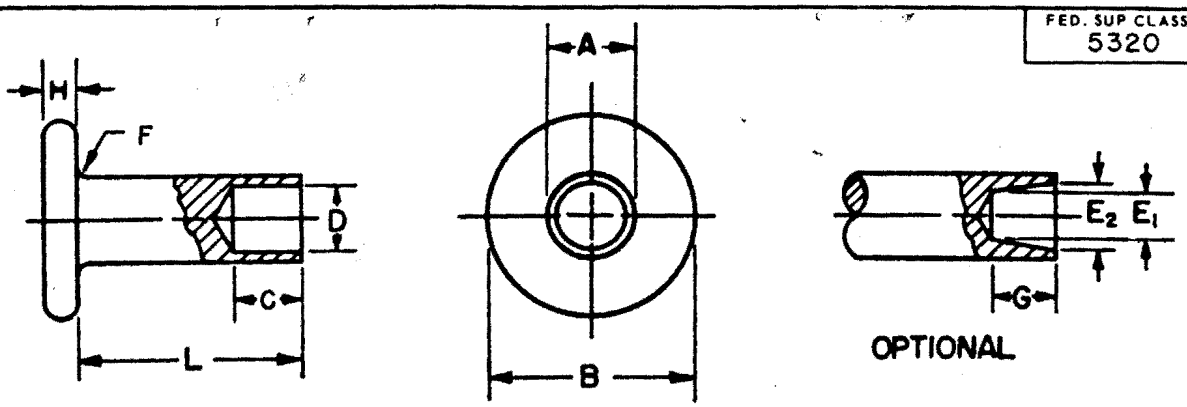

NOMINAL SIZE		0.123		0.146		0.188	
		MIN	MAX	MIN	MAX	MIN	MAX
BODY DIAMETER	A	0.118	0.123	0.141	0.146	0.182	0.188
HEAD DIAMETER	B	.213	.223	.307	.317	.369	.381
HEAD THICKNESS	H	.034	.041	.042	.052	.057	.067
STRAIGHT HOLE	D	.084	.090	.100	.107	.134	.141
TAPER AT BOTTOM OF HOLE	E_1	.079	---	.091	---	.120	---
TAPER AT END OF RIVET	E_2	.091	.095	.106	.112	.139	.145
FILLET	F	---	.016	---	.020	---	.025
HOLE DEPTH (TAPER)	G	.082	---	.104	---	.135	---
HOLE DEPTH (STRAIGHT)	C	.089	.104	.120	.135	.151	.166
CLINCH ALLOWANCE *		.074		.088		.120	

LENGTH L		STEEL DASH NUMBER			BRASS DASH NUMBER		
		0.123	0.146	0.188	0.123	0.146	0.188
3/32	0.094	1			50		
1/8	.125	2			51		
5/32	.156	3			52		
3/16	.187	4	17		53	66	
7/32	.219	5	18		54	67	
1/4	.250	6	19	32	55	68	
9/32	.281			33		69	
5/16	.312	8	21	34	57	70	84
3/8	.375	9	22	35	58	71	
1/2	.500		24	37		73	86
9/16	.562		25	38		74	
5/8	.625		26	39		75	

* For reference only. Optimum values vary with characteristics of materials to be riveted, and should be determined by actual test if possible.

NOTES:

1. MATERIAL: Steel, carbon, per Federal Standard No. 66, steel numbers C1005 thru C1022. Brass, per QQ-W-321, composition 260 or 270, quarter hard.
2. PROTECTIVE COATING: Uncoated.
3. DOUBLE SHEAR STRENGTH: Carbon steel rivets 32,000 P.S.I. Min. Brass rivets 35,000 P.S.I. Min.
4. DIMENSIONS: Dimensions are in inches.
5. TOLERANCES: ±0.005 for decimal dimensions, unless otherwise specified. Length tolerances shall be in agreement with ANSI B18.7.
6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51942-1.
7. The hole depth to point of Apex shall not be greater than the shank length.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.

(A) ENTIRE STANDARD REVISED

REVIEW: GL, IS, MI, MU, NSA
USER: AS, EL, MC, SH

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 24 JUNE 1963 REVISED (A) 7 JULY 1970

P.A. WC
Other Cust YD

TITLE
RIVET, TUBULAR — FLAT HEAD

MILITARY STANDARD
MS51942

PROCUREMENT SPECIFICATION
FF-R-556

SUPERSEDES: BMCX1

SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil — Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.