
FED. SUP CLASS
2330

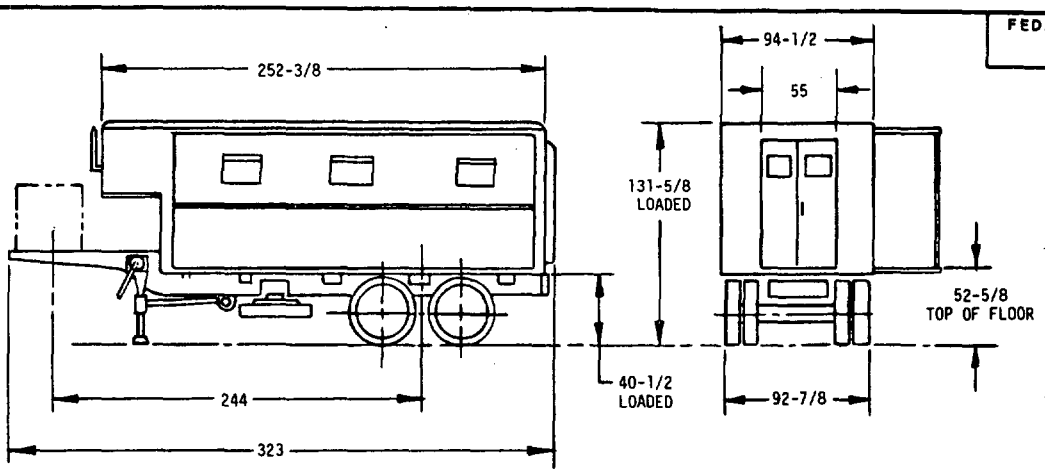

VEHICLE CHARACTERISTICS

PRIME MOVER:
TRUCK TRACTOR, 5 TON, 6 X 6 M52 OR M818

CURB WEIGHT: 13520 LBS

WEIGHT DISTRIBUTION:

KING PIN	4150
AXLE	9470
GVW	13,520 LBS

MAXIMUM WEIGHT: INCLUDING BODY AND WITH PAYLOAD EVENLY DISTRIBUTED.

	LOADED
PAYLOAD	12,000
KING PIN	7950
AXLE	17570
TOTAL	25520 LBS

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY)

GENERAL:
THE M447C SEMITRAILER IS DESIGNED TO HOUSE MOBILE ARMY-AIRCRAFT FIELD MAINTENANCE SHOP SETS, TOOLS, OR OTHER SUPPLIES USED TO MAINTAIN AND REPAIR MILITARY EQUIPMENT IN THE FIELD. IT HAS A FOLDING SIDE VAN BODY MOUNTED ON THE M295A1 CHASSIS-MS53020. THIS BODY, 17 FEET 4 INCHES LONG ON THE INSIDE, HAS DOUBLE REAR DOORS WITH DETACHABLE ALUMINUM LADDERS, THREE WINDOWS (EQUIPPED WITH BLACKOUT SHIELDS) ON EACH SIDE AND STATIONARY WINDOW IN EACH REAR DOOR. THE FOLDING DOORS, WHICH ARE BISECTED LONGITUDINALLY TO PERMIT THE LOWER HALVES TO HINGE DOWNWARD TO A HORIZONTAL PLANE, AND TO ALLOW UPPER HALVES TO HINGE UPWARD TO FORM A ROOF OVER THE THE EXTENDED AREA, THIS ROOF IN CONJUNCTION WITH INSULATED HARDSIDE PANELS PROVIDES ENVIRONMENTAL PROTECTION. A BONNET PROJECTING FROM THE FRONT WALL OF THE BODY PROVIDES INTERFACE CONNECTIONS FOR TWO MULITFUEL HEATERS OF 60,000 BTU CAPACITY AND HAS INTERFACE PROVISIONS FOR A CONVENTIAL 36,000 BTU AIR CONDITIONER.

KING PIN:
2 INCH DIA MS53036-1

ELECTRICAL SYSTEM: INST'N 8758754
POTENTIAL, 24 VOLTS
60,000 BTU HEATING UNIT, 2
36,000 BTU AIR CONDITIONER
POWER CABLE REEL ASSY. 7045796

REFLECTORS: 4, RED, MS35387-1
4, AMBER MS35387-2

BODY ASSEMBLY: INST'N 8736383

CHASSIS ASSEMBLY: 8736759

PINTLE: MS51335-2

AXLE: 2, 8758911

SPRINGS: 2, MAIN 7368629
2, HELPER, 8758890

WHEELS: DUAL, MS53044-5
SIZE, 7-1/2 X 20

TIRES: 9 X 20 8 PLY, MS35388-16
TREAD, DESIGN-NDCC
TUBE, MS35392-13

BRAKES: AIR/HYDRAULIC
SIZE, 15 X 3-11/32

BRAKE ASSY L H	8336701
BRAKE ASSY R H	8336702
EMERGENCY RELAY VALVE,	MS53004-1
AIR RESERVOIR	7411078

MAXIMUM TOWING SPEEDS:

LOADED	20 MPH
HIGHWAY	50 MPH

CHOCK BLOCKS: 2, 10869550

LEVELING JACKS: 2, 7534672

LANDING GEAR: 11681520
ACTUATION, 2 SPEED, MANUALLY OPERATED, WITH PADS WITH 19 INCHES TRAVEL

FORDING DEPTH: 44 INCHES

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH. 48090.

Ⓐ ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52134-1	8736383

APPROVED 30 SEPT 1976 REVISED Ⓐ 20 MAY 85

P.A. ARMY-AT Other Cust	TITLE SEMITRAILER, VAN: SHOP, FOLDING SIDE, AIR CONDITIONED, 6-TON, 4-WHEEL, M 447 C	MILITARY STANDARD MS52134(AT)
PROCUREMENT SPECIFICATION MIL-S-62049	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.