

FED. SUP CLASS
2330

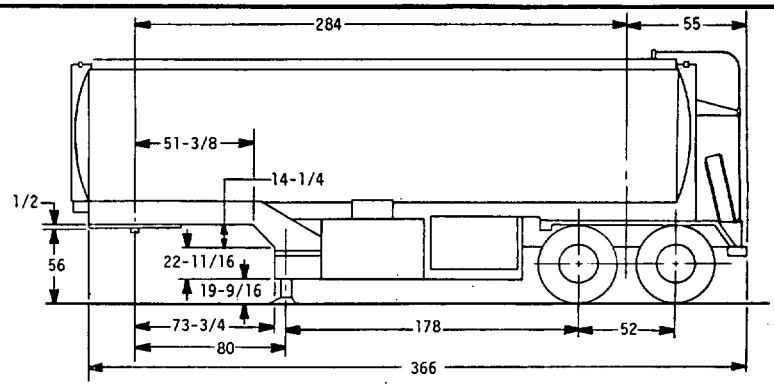

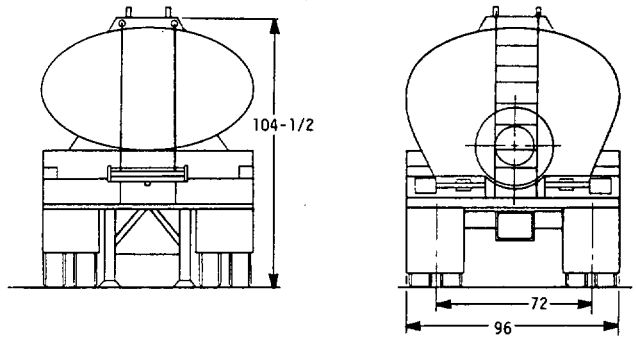

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR, 5 TON, 6 X 6, M818 SERIES

CURBWEIGHT: W/O PAYLOAD 16,060 LBS

PAYLOAD: (FUEL @ 6.79 LBS/GAL) LOADED
3,800 GALLONS
25,800 LBS

GROSSWEIGHT: W/PAYLOAD 41,860 LBS

GROSSWEIGHT OF TRACTOR (M818):
SEMITRAILER, W/O PAYLOAD 36,060 LBS
SEMITRAILER W/PAYLOAD 71,580 LBS

WEIGHT DISTRIBUTION:
(SEMITRAILER W/M818) W/O PAYLOAD
FRONT AXLE, TRACTOR M818 10,200 LBS
REAR BOGIE, TRACTOR M818 14,880 LBS
KINGPIN, SEMITRAILER 5,080 LBS
REAR BOGIE, SEMITRAILER 10,980 LBS
(W/5000 GAL PAYLOAD)
FRONT AXLE, TRACTOR M818 10,710 LBS
REAR BOGIE, TRACTOR M818 30,090 LBS
KINGPIN, SEMITRAILER 20,800 LBS
REAR BOGIE, SEMITRAILER 30,780 LBS

CENTER OF GRAVITY:	VERTICAL	HORIZONTAL FROM KINGPIN
EMPTY	40	211
LOADED	64	187-1/2

DEPARTURE ANGLE: 60°

FORDING DEPTH: 24

MILITARY VEHICLE CLASSIFICATION:

	EMPTY	LOADED	HIGHWAY
M818 & M969A1	14	25	30
M969A1	6	18	22

ENGINE: TYPE; (ONAN) 4 CYLINDER, 4 CYCLE, DIESEL,
AIR COOLED HORSEPOWER 27.5
BORE 3.25, STROKE 3.625
LUBE CAPACITY 7 QTS

ELECTRICAL SYSTEM: ENGINE, 12V DIRECT CURRENT 65 AMP ALTERNATOR, 2 12V BATTERIES CONNECTED IN PARALLEL; VEHICLE, 24 VOLTS

BRAKES: SERVICE; QTY 4 SETS, ACTUATION "S" TYPE CAM, PRESSURE 75 TO 95 PSI

DESCRIPTION: THE M969A1 IS A 5000 GALLON FUEL DISPENSING SEMITRAILER USED PRIMARILY FOR AUTOMOTIVE REFUELING. THE M969A1 HAS A 1-1/2 IN X 50 FT DISPENSING HOSE, OVERWING DISPENSING NOZZLE, AND HOSE REEL CABINET DOOR WITH ELECTRIC REWIND, AND TWO METERS CAPACITY 100 GPM IS INTRODUCED AND PROVIDES COMPLETE RECIRCULATION OF FUEL. THE M969A1 HAS A 4 IN CENTRIFUGAL PUMP. THE TRAILER HAS A STAINLESS STEEL, SINGLE COMPARTMENT TANK OF 5000 GALLON CAPACITY, PLUS 3% CAPACITY FOR PRODUCT EXPANSION. THE CHASSIS IS OF WELDED STEEL CONSTRUCTION AND EQUIPPED WITH TANDEM OVERSLUNG AXLES CAPACITY 25,000 LBS AND MANUALLY OPERATED LANDING GEAR W/FOOT PADS. THE M969A1 IS EQUIPPED WITH A NEW FUEL DISPENSING NOZZLE, HOSE TROUGH COVER, CONTROL PANEL COVER, REAR LADDER, FRONT AND REAR DRAIN, TACHOMETER AND LEAD ASSEMBLY. A VAPOR RECOVERY SYSTEM, REQUIRED IN CERTAIN AREAS, CAN BE INSTALLED ON THE M969A1.

SHIPPING DATA:
CUBIC FEET 2200
SQUARE FEET 250

TIRES: SIZE 11.00 X 20-12 PLY, TREAD NDCC, QTY 8 + 1 SPARE EQUIPPED WITH TUBES, INFLATION PRESSURE 75 PSI

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 26 AUG 85 REVISED

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY - AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, TANK: 5000 GAL, FUEL DISPENSING, M969A1.	MILITARY STANDARD MS52217(AT)
PROCUREMENT SPECIFICATION MIL-S-62180	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.