
MS9015

FED. SUP CLASS 5365

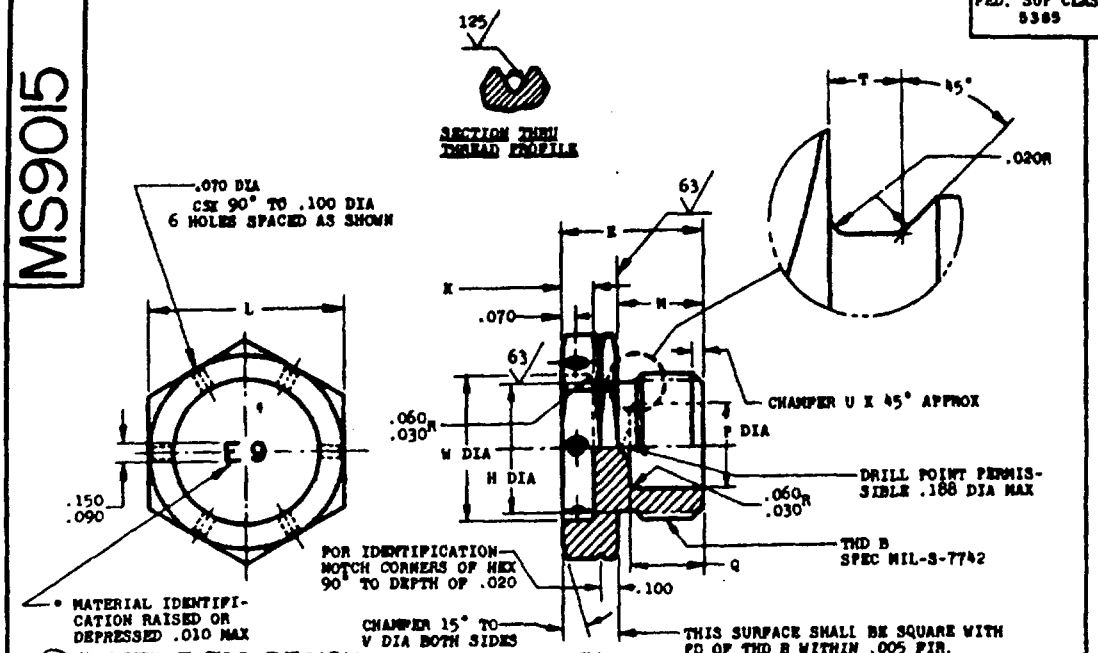

(n) INACTIVE FOR DESIGN AFTER 26 JULY 1974
FOR PARTS WITH MIL-S-8879 SCREW THREADS SEE MS9902 AND MS9954.

PART NO.	THD B	E	H +.002 -.003	J	K	L	M	P	Q	T +.015 -.000	U	V	W	APPROX WEIGHT LB EA
MS9015-01	.250-28 UNF-3A	.540	.196	.013	.130	.430- .439	.320	--	--	.063	.020-.050	.433	.250	.0105
MS9015-02	.3125-24 UNF-3A	.540	.250	.017	.130	.553- .564	.360	--	--	.063	.020-.050	.562	.312	.0184
MS9015-03	.375-24 UNF-3A	.540	.313	.019	.130	.616- .627	.360	--	--	.063	.020-.050	.625	.375	.0235
MS9015-04	.4375-20 UNF-3A	.640	.364	.021	.130	.679- .690	.400	--	--	.075	.030-.060	.688	.438	.0326
MS9015-05	.500-20 UNF-3A	.640	.427	.023	.130	.741- .752	.400	.219	.340	.075	.030-.060	.750	.500	.0357
MS9015-06	.5625-18 UNF-3A	.680	.482	.024	.130	.802- .814	.400	.219	.340	.083	.040-.070	.812	.562	.0502
MS9015-07	.625-18 UNF-3A	.730	.544	.026	.160	.865- .877	.440	.312	.380	.083	.040-.070	.875	.625	.0563
MS9015-08	.750-16 UNF-3A	.730	.660	.030	.160	.990-1.002	.440	.250	.400	.094	.040-.070	1.000	.750	.0309
MS9015-09	.8125-16 N-3	.740	.722	.030	.160	1.052-1.064	.440	.312	.400	.094	.040-.070	1.062	.812	.0341
MS9015-10	.875-14 UNF-3A	.740	.773	.030	.160	1.114-1.127	.440	.375	.400	.107	.050-.080	1.125	.875	.0414
MS9015-11	1.000-12 UNF-3A	.780	.882	.030	.180	1.301-1.314	.440	.500	.400	.125	.050-.080	1.312	1.000	.0543
MS9015-12	1.0625-12 UN-3A	.830	.945	.030	.200	1.364-1.377	.480	.562	.400	.125	.050-.080	1.375	1.062	.0602
MS9015-14	1.1875-12 UN-3A	.830	1.070	.030	.200	1.489-1.502	.480	.688	.400	.125	.050-.080	1.500	1.188	.0680
MS9015-16	1.3125-12 UN-3A	.840	1.195	.030	.200	1.614-1.627	.480	.812	.400	.125	.050-.080	1.625	1.312	.0790
MS9015-18	1.500-12 UNF-3A	.840	1.382	.030	.200	1.738-1.752	.480	1.000	.400	.125	.050-.080	1.750	1.438	.0861
MS9015-20	1.625-12 UN-3A	.850	1.507	.050	.200	1.986-1.940	.480	1.125	.400	.125	.050-.080	1.938	1.625	.1058
MS9015-24	1.875-12 UN-3A	.880	1.756	.050	.200	2.176-2.190	.480	1.375	.400	.125	.050-.080	2.188	1.875	.1300
MS9015-28	2.250-12 UN-3A	.870	2.131	.050	.200	2.550-2.564	.480	1.750	.400	.125	.050-.080	2.562	2.250	.1715
MS9015-32	2.500-12 UN-3A	.870	2.381	.050	.200	2.800-2.814	.480	2.000	.400	.125	.050-.080	2.812	2.500	.2030

NOTE: (1) THE CONCENTRICITY OF THE HEXAGON WITH THE THREAD PD SHALL BE WITHIN J FIR.
(2) DIA H SHALL BE CONCENTRIC WITH THD PD WITHIN .005 FIR. AND FREE FROM THD MARKS.

• USE MATERIAL CODE "B12" FOR ALUMINUM PLUGS.

MATERIAL: STEEL AMS 5024 FOR SIZES -01 THRU -07; ALUMINUM AMS 4120 FOR SIZES -08 AND UP.

FINISH: STEEL, CADMIUM PLATE AMS 2400; ALUMINUM, ANODIC TREATMENT AMS 2470. DO NOT DYE.

SURFACE ROUGHNESS: AS 291; 125 MICRO-INCHES UNLESS OTHERWISE SPECIFIED.

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 4 Oct 54 REVISED (A) 4 Jan 61 (B) 26 Jul 74

Use activities: Army – ME, Navy – MC, AN, DSA – CS

Review activities: Army – MI, Air Force – 11, DSA – IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. Air Force – 82 (B)
Other Cust. Army – AV, Navy – AS

PROCUREMENT SPECIFICATION NO:

MILITARY STANDARD

PLUG, MACHINE THREAD – "O" RING SEAL

MS9015

SHEET 1 OF 1

DD FORM 1 SEP 60 223

Proj. No. 5365-0009

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.