
FED SUP CLASS
5306

MS9519

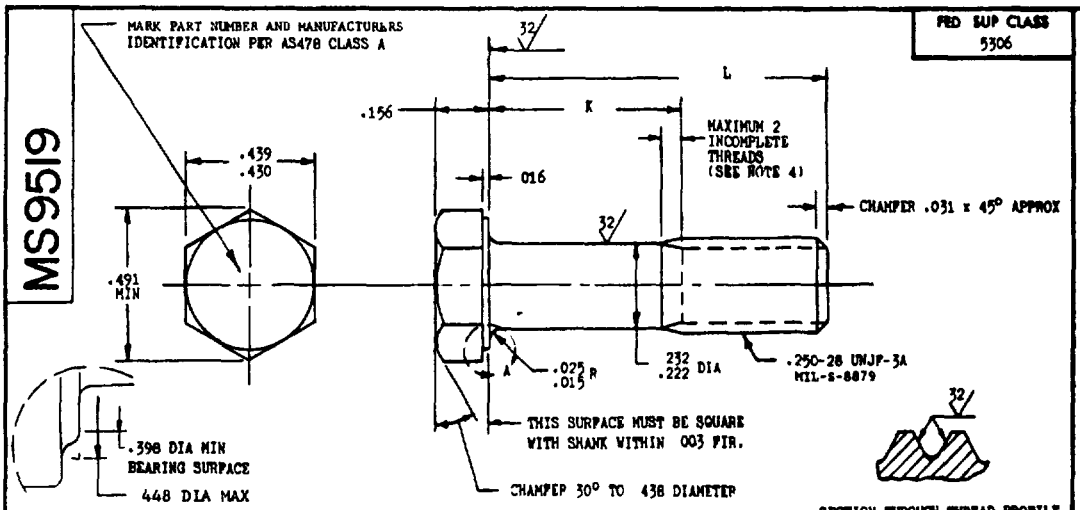

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9519-04	.375	.079-.099	1.16
MS9519-05	.438	.079- 099	1 23
MS9519-06	.500	.079-.099	1 30
MS9519-07	.562	.079- 099	1.37
MS9519-08	.625	079- 099	1.44
MS9519-09	.688	C79-.099	1 51
MS9519-10	.750	079- 099	1.58
MS9519-11	.812	.079-.C99	1 66
MS9519-12	.875	.079-.125	1 73
MS9519-13	.938	.128-.188	1.80
MS9519-14	1.000	.190- 250	1.87
MS9519-15	1.062	.252-.312	1 94
MS9519-16	1.125	.315-.375	2 01
MS9519-17	1.188	378- 438	2 09
MS9519-18	1.250	440-.500	2.16
MS9519-19	1.312	502-.562	2.23
MS9519-20	1.375	.565-.625	2.30
MS9519-21	1.438	.628-.688	2 37
MS9519-22	1.500	.690-.750	2 44
MS9519-23	1.562	.752-.812	2.52
MS9519-24	1.625	.815-.875	2 59
MS9519-25	1.688	.878-.938	2.66
MS9519-26	1.750	.940-1.000	2.73
MS9519-27	1.875	1.065-1.125	2.87
MS9519-28	2.000	1.190-1.250	3.02
MS9519-29	2 125	1.315-1.375	3.16
MS9519-30	2.250	1.440-1.500	3.30
MS9519-31	2.375	1.565-1.625	3.45
MS9519-32	2.500	1.690-1 750	3 59
MS9519-33	2 625	1 815-1.875	3.73
MS9519-34	2 750	1 940-2 000	3.88
MS9519-35	2.875	2.065-2.125	4.02
MS9519-36	3.000	2 190-2 250	4.16
MS9519-37	3.125	2.315-2.375	4.31
MS9519-38	3.250	2.440-2.500	4.45
MS9519-39	3.375	2.565-2.625	4.60
MS9519-40	3.500	2.690-2.750	4.74
MS9519-41	3 625	2.815-2.875	4 88
MS9519-42	3.750	2.940-3 000	5.03
MS9519-43	3.875	3 065-3 125	5 17
MS9519-44	4.000	3.190-3.250	5.31
MS9519-45	4.125	3 315-3.375	5.46
MS9519-46	4.250	3.440-3.500	5.60
MS9519-47	4.375	3.565-3 625	5.74
MS9519-48	4 500	3 690-3.750	5.89
MS9519-49	4.625	3.815-3.875	6.03
MS9519-50	4.750	3.940-4.000	6.17
MS9519-51	4.875	4 065-4.125	6.32
MS9519-52	5.000	4 190-4.250	6.46
MS9519-53	5.125	4.315-4.375	6.60
MS9519-54	5.250	4.440-4.500	6.75
MS9519-55	5.375	4.565-4.625	6.89
MS9519-56	5.500	4.690-4.750	7.03
MS9519-57	5.625	4.815-4.875	7.18
MS9519-58	5.750	4.940-5.000	7.32
MS9519-59	5.875	5.065-5.125	7.46
MS9519-60	6.000	5.190-5 250	7.61

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .013 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL STEEL AMS 6322.
6. HARDNESS ROCKWELL C26-32.
7. FINISH CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
9. MANUFACTURING SPECIFICATION AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. SURFACE TEXTURE USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON
11. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASSC AIR STD 3/2 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL ACTIVITIES WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICIALS SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE S A E AEROSPACE PROPULSION DIVISION

APPROVED 2 Feb 1968 REVISED

P A USAF - 11 Other Cust NAVY - AS ARMY - AV	INTERNATIONAL INTEREST	TITLE BOLT MACHINE STEEL AMS 6322, CADMIUM PLATE, HEXAGON HEAD, 250-28 UNJP-3A	MILITARY STANDARD MS 9519
PROCUREMENT SPECIFICATION NOT	SUPERSEDES.		SHEET 1 OF 1

DD FORM 672-1 (PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-301 514/4208

This military standard has been approved by the Department of Defense and is mandatory for use by all departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.