
MS9677 (ASG)

FED. SUP CLASS 5306

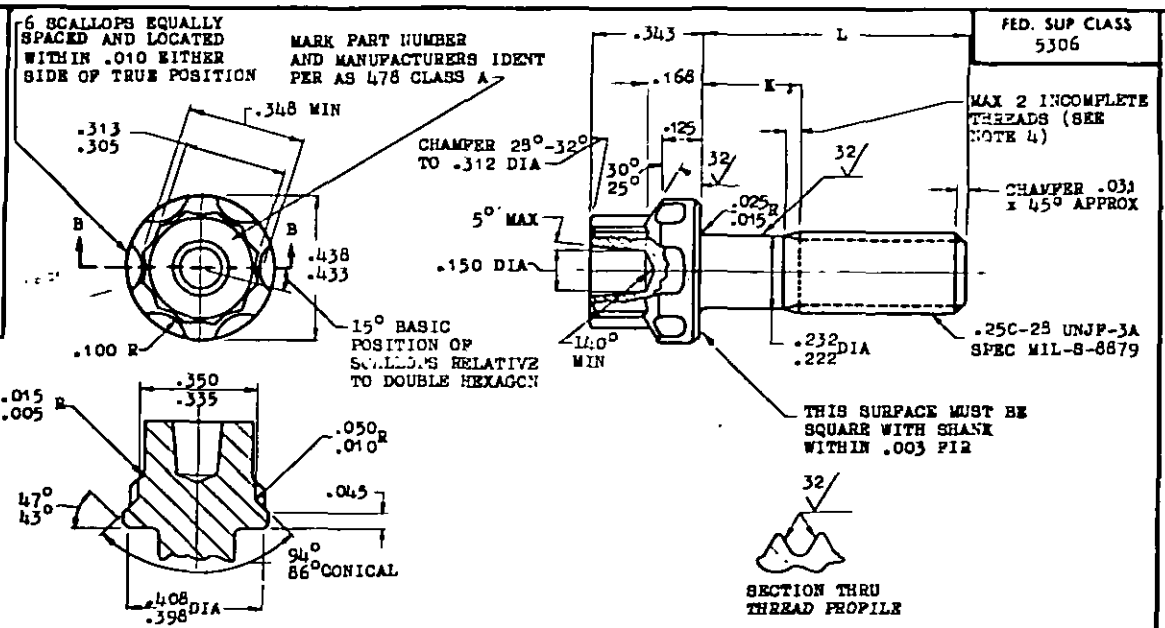

PART NUMBER	L	K	APPROX WEIGHT LB/100	PART NUMBER	L	K	APPROX WEIGHT LB/100	PART NUMBER	L	K	APPROX WEIGHT LB/100
				MS9677-22	1.500	.690- .750	2.52	MS9677-43	3.875	3.065-3.125	5.24
				MS9677-23	1.562	.752- .812	2.59	MS9677-44	4.000	3.190-3.250	5.38
				MS9677-24	1.625	.815- .875	2.66	MS9677-45	4.125	3.315-3.375	5.53
MS9677-04	.375	.079- .099	1.21	MS9677-25	1.688	.878- .938	2.73	MS9677-46	4.250	3.440-3.500	5.67
MS9677-05	.438	.079- .099	1.28	MS9677-26	1.750	.940-1.000	2.81	MS9677-47	4.375	3.565-3.625	5.82
MS9677-06	.500	.079- .099	1.36	MS9677-27	1.875	1.065-1.125	2.95	MS9677-48	4.500	3.690-3.750	5.96
MS9677-07	.562	.079- .099	1.44	MS9677-28	2.000	1.190-1.250	3.09	MS9677-49	4.625	3.815-3.875	6.11
MS9677-08	.625	.079- .099	1.52	MS9677-29	2.125	1.315-1.375	3.23	MS9677-50	4.750	3.940-4.000	6.25
MS9677-09	.688	.079- .099	1.59	MS9677-30	2.250	1.440-1.500	3.39	MS9677-51	4.875	4.065-4.125	6.40
MS9677-10	.750	.079- .099	1.66	MS9677-31	2.375	1.565-1.625	3.53	MS9677-52	5.000	4.190-4.250	6.54
MS9677-11	.812	.079- .099	1.73	MS9677-32	2.500	1.690-1.750	3.67	MS9677-53	5.125	4.315-4.375	6.67
MS9677-12	.875	.079- .125	1.80	MS9677-33	2.625	1.815-1.875	3.81	MS9677-54	5.250	4.440-4.500	6.81
MS9677-13	.938	.128- .188	1.87	MS9677-34	2.750	1.940-2.000	3.95	MS9677-55	5.375	4.565-4.625	6.95
MS9677-14	1.000	.190- .250	1.94	MS9677-35	2.875	2.065-2.125	4.10	MS9677-56	5.500	4.690-4.750	7.10
MS9677-15	1.062	.252- .312	2.01	MS9677-36	3.000	2.190-2.250	4.24	MS9677-57	5.625	4.815-4.875	7.24
MS9677-16	1.125	.315- .375	2.08	MS9677-37	3.125	2.315-2.375	4.40	MS9677-58	5.750	4.940-5.000	7.39
MS9677-17	1.188	.378- .438	2.16	MS9677-38	3.250	2.440-2.500	4.54	MS9677-59	5.875	5.065-5.125	7.53
MS9677-18	1.250	.440- .500	2.23	MS9677-39	3.375	2.565-2.625	4.69	MS9677-60	6.000	5.190-5.250	7.68
MS9677-19	1.312	.502- .562	2.30	MS9677-40	3.500	2.690-2.750	4.83				
MS9677-20	1.375	.565- .625	2.37	MS9677-41	3.625	2.815-2.875	4.96				
MS9677-21	1.438	.628- .688	2.45	MS9677-42	3.750	2.940-3.000	5.10				

1. SHANK SHALL BE STRAIGHT WITHIN .003 FIR PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731.
6. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
7. MANUFACTURING SPECIFICATION: AMS 7477.
8. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
9. BREAK SHARP EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
11. DO NOT USE UNASSIGNED PART NUMBERS.

Ⓑ REINSTATED AFTER 27 JUN 84

AS & AMS-ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

Reviewing activities:
AIR FORCE – 82
DLA – IS

APPROVED 18 Nov 65 REVISED (A) 21 DEC 83 (B) 27 JUN 84

This standard has been approved by the Department of the Air Force and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. AS Ⓑ	TITLE	MILITARY STANDARD
Other Cust 99	BOLT, MACHINE - CRES AMS 5731, DOUBLE HEXAGON *EXTENDED WASHER HEAD, CUPWASHER LOCKED* .250-28 UNJF-3A	MS9677 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	PAGE 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0860

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.