
MS9686

FED SUP CLASS 5306

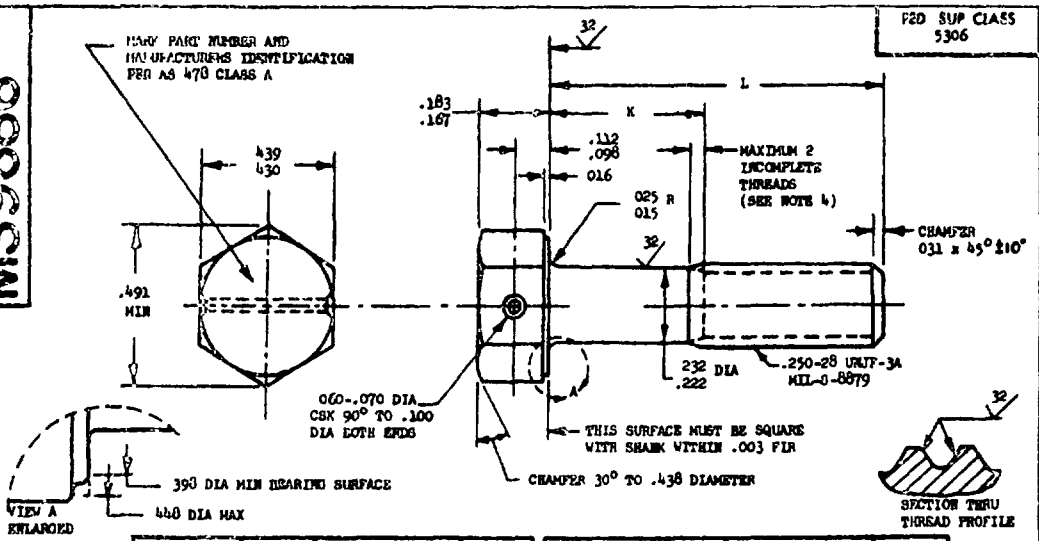

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9686-04	.375	.079- .099	1.29
MS9686-05	.438	.079- .099	1.36
MS9686-06	.500	.079- .099	1.43
MS9686-07	.562	.079- .099	1.50
MS9686-08	.625	.079- .099	1.57
MS9686-09	.688	.079- .099	1.64
MS9686-10	.750	.079- .099	1.71
MS9686-11	.812	.079- .099	1.79
MS9686-12	.875	.079- .125	1.86
MS9686-13	.938	.128- .188	1.93
MS9686-14	1.000	.190- .250	2.00
MS9686-15	1.062	.252- .312	2.07
MS9686-16	1.125	.315- .375	2.14
MS9686-17	1.188	.378- .438	2.22
MS9686-18	1.250	.440- .500	2.29
MS9686-19	1.312	.502- .562	2.36
MS9686-20	1.375	.565- .625	2.43
MS9686-21	1.438	.628- .688	2.50
MS9686-22	1.500	.690- .750	2.57
MS9686-23	1.562	.752- .812	2.65
MS9686-24	1.625	.815- .875	2.72
MS9686-25	1.688	.878- .938	2.79
MS9686-26	1.750	.940-1.000	2.86
MS9686-27	1.815	1.002-1.062	2.93
MS9686-28	1.875	1.065-1.125	3.00
MS9686-29	1.938	1.128-1.188	3.08
MS9686-30	2.000	1.190-1.250	3.15
MS9686-31	2.125	1.315-1.375	3.29
MS9686-32	2.250	1.440-1.500	3.43
MS9686-33	2.375	1.565-1.625	3.57
MS9686-34	2.500	1.690-1.750	3.71
MS9686-35	2.625	1.815-1.875	3.85
MS9686-36	2.750	1.940-2.000	3.99
MS9686-37	2.875	2.065-2.125	4.13
MS9686-38	3.000	2.190-2.250	4.27
MS9686-39	3.125	2.315-2.375	4.42
MS9686-40	3.250	2.440-2.500	4.56
MS9686-41	3.375	2.565-2.625	4.71
MS9686-42	3.500	2.690-2.750	4.85
MS9686-43	3.625	2.815-2.875	4.99
MS9686-44	3.750	2.940-3.000	5.14
MS9686-45	3.875	3.065-3.125	5.28
MS9686-46	4.000	3.190-3.250	5.42
MS9686-47	4.125	3.315-3.375	5.57
MS9686-48	4.250	3.440-3.500	5.71
MS9686-49	4.375	3.565-3.625	5.85
MS9686-50	4.500	3.690-3.750	6.00
MS9686-51	4.625	3.815-3.875	6.14
MS9686-52	4.750	3.940-4.000	6.28
MS9686-53	4.875	4.065-4.125	6.42
MS9686-54	5.000	4.190-4.250	6.56
MS9686-55	5.125	4.315-4.375	6.70
MS9686-56	5.250	4.440-4.500	6.85
MS9686-57	5.375	4.565-4.625	6.99
MS9686-58	5.500	4.690-4.750	7.13
MS9686-59	5.625	4.815-4.875	7.29
MS9686-60	5.750	4.940-5.000	7.42
MS9686-61	5.875	5.065-5.125	7.56
MS9686-62	6.000	5.190-5.250	7.71

1. SHANK SHALL BE STRAIGHT WITHIN .003 TOTAL FOR EACH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .013 FIR
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL STEEL AMS 6304
6. HARDNESS ROCKWELL C42-46
7. FINISH DIFFUSED NICKEL CADMIUM PLATE AMS 2416 DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE.
8. MANUFACTURING SPECIFICATION AMS 7459.
9. MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
10. SURFACE TEXTURE USAS B46 1-1962. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UPSET HEAD
11. BREAK SHARP EDGES .003- 015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 8 Jul 71 REVISED

PA Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, PD SHANK, STEEL AMS 6304, DIFFUSED NICKEL CADMIUM PLATE, .250-28 UNJF-3A	MILITARY STANDARD MS9686
PROCUREMENT SPECIFICATION AMS7460	SUPERSEDES		SHEET 1 OF 1

DD FORM NO. 672-1 (LATEST REVISION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the Department of the Air Force and the Department of the Navy and is mandatory for use by the Air Force and Navy. All other military activities are required to comply with standard where applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.