
MS9788

FED SUP CLASS 5306

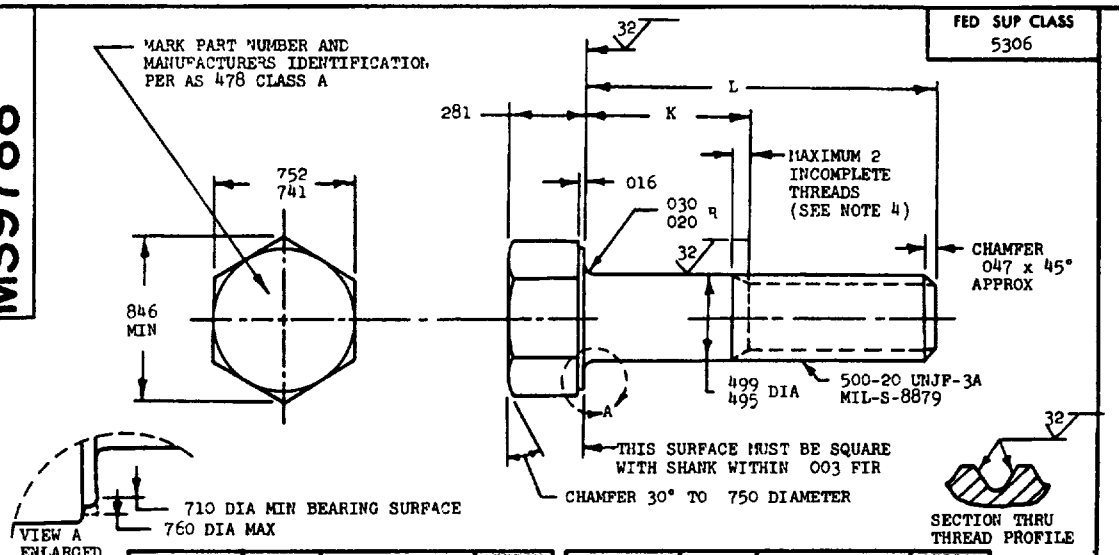

PART NUMBER	L	Y	APPROX WEIGHT LB/100
MS9788-14	1 438	128- 188	11 69
MS9788-15	1 500	190- 250	12 03
MS9788-16	1 562	252- 312	12 36
MS9788-17	1 625	315- 375	12 71
MS9788-18	1 688	378- 438	13 05
MS9788-19	1 750	440- 500	13 40
MS9788-20	1 812	502- 562	13 74
MS9788-21	1 875	565- 625	14 08
MS9788-22	1 938	628- 688	14 42
MS9788-23	2 000	690- 750	14 76
MS9788-24	2 125	815- 875	15 45
MS9788-25	2 250	940-1 000	16 13
MS9788-26	2 375	1.065-1 125	16 81
MS9788-27	2 500	1 190-1 250	17 50
MS9788-28	2 625	1 315-1 375	18 18
MS9788-29	2 750	1 440-1 500	18 86
MS9788-30	2 875	1 565-1 625	19 55

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9788-31	3 000	1 690-1 750	20 23
MS9788-32	3 125	1 815-1 875	20 92
MS9788-33	3 250	1 940-2 000	21 60
MS9788-34	3 375	2 065-2 125	22 28
MS9788-35	3 500	2 190-2 250	22 97
MS9788-36	3 625	2 315-2 375	23 65
MS9788-37	3 750	2 440-2 500	24 33
MS9788-38	3 875	2 565-2 625	25 02
MS9788-39	4 000	2 690-2 750	25 71
MS9788-40	4 125	2 815-2 875	26 39
MS9788-41	4.250	2 940-3.000	27 08
MS9788-42	4 375	3 065-3 125	27 77
MS9788-43	4 500	3 190-3 250	28 45
MS9788-44	4 625	3 315-3 375	29 13
MS9788-45	4 750	3 440-3 500	29.81
MS9788-46	4 875	3 565-3 625	30 49
MS9788-47	5 000	3 690-3 750	31 18
MS9788-48	5 125	3 815-3 875	31 86
MS9788-49	5 250	3 940-4 000	32 54
MS9788-50	5 375	4 065-4 125	33 23
MS9788-51	5 500	4 190-4 250	33 91
MS9788-52	5 625	4 315-4 375	34 60
MS9788-53	5 750	4 440-4 500	35 28
MS9788-54	5 875	4 565-4 625	35 96
MS9788-55	6 000	4 690-4 750	36 65

1. SHANK SHALL BE STRAIGHT WITHIN 002 TOTAL PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN 006 FIR
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN 023 FIR
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643
6. HARDNESS: ROCKWELL C32-38
7. MANUFACTURING SPECIFICATION AMS 7474
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645
9. SURFACE TEXTURE: USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
10. BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED
11. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°
12. DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV

APPROVED 11 MAR 70 REVISED

P.A. USAF-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust Army-AV Navy-AS	ASCC AIR STD 17/2	BOLT, MACHINE - HEXAGON HEAD, FULL SHANK, AMS 5643, 500-20 UNJF-3A	MS9788
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 61 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Review activities USAF - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:25Z
Check the source to verify that this is the current version before use.