
FED. SUP CLASS
4730

MS9901

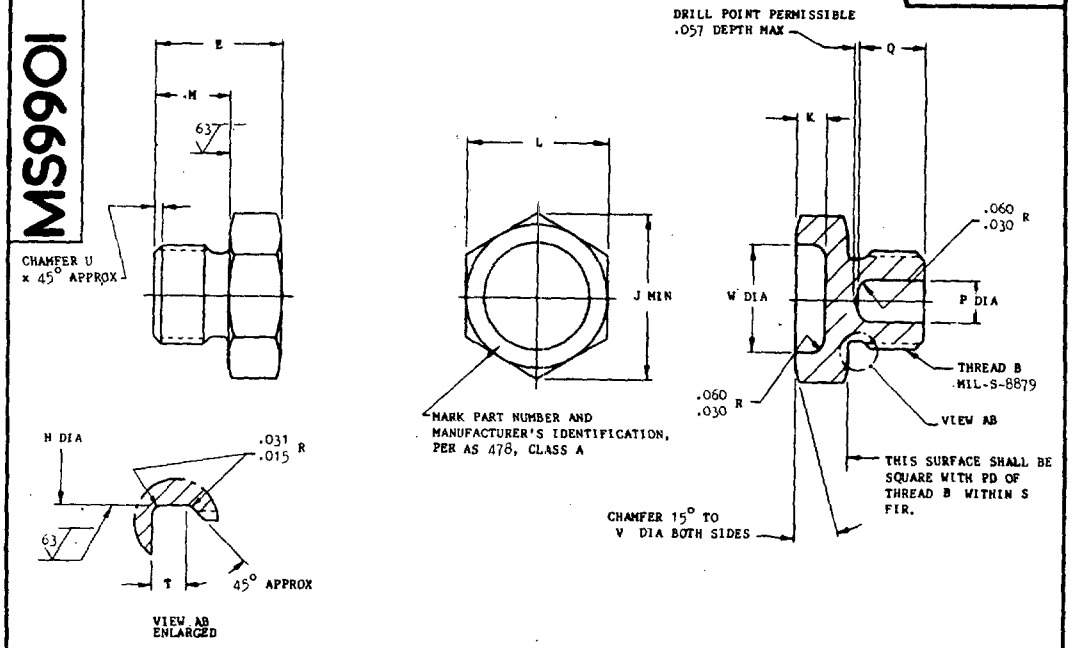

PART NO.	THREAD B	E	H +.002 -.003	J MIN	K	L	M	P	Q	S	T +.015 -.000	U	V	W	APPROX WEIGHT LB/100
MS9901-01	.250 -28 UNJF-3A	.480	.196	.482	.070	.430- .439	.320	-	-	.003	.063	.020-.050	.438	.250	.980
MS9901-02	.3125-24 UNJF-3A	.550	.250	.622	.100	.553- .564	.360	-	-	.003	.063	.020-.050	.562	.312	1.856
MS9901-03	.375 -24 UNJF-3A	.550	.312	.694	.100	.616- .627	.360	-	-	.003	.063	.020-.050	.625	.375	2.403
MS9901-04	.4375-20 UNJF-3A	.620	.364	.766	.110	.679- .690	.400	-	-	.003	.075	.030-.060	.688	.438	3.444
MS9901-05	.500 -20 UNJF-3A	.620	.426	.837	.100	.741- .752	.400	.219	.340	.003	.075	.030-.060	.750	.500	3.944
MS9901-06	.5625-18 UNJF-3A	.650	.481	.907	.120	.803- .814	.400	.219	.340	.003	.083	.040-.070	.812	.562	5.113
MS9901-07	.625 -18 UNJF-3A	.690	.544	.978	.120	.865- .877	.440	.312	.380	.003	.083	.040-.070	.875	.625	6.010
MS9901-08	.750 -16 UNJF-3A	.690	.660	1.121	.120	.990-1.002	.440	.438	.400	.003	.094	.040-.070	1.000	.750	7.594
MS9901-09	.8125-16 UNJ -3A	.690	.722	1.191	.110	1.052-1.064	.440	.500	.400	.003	.094	.040-.070	1.062	.812	8.677
MS9901-10	.875 -14 UNJF-3A	.740	.773	1.263	.160	1.115-1.127	.440	.548	.400	.003	.107	.050-.080	1.125	.875	10.205
MS9901-11	1.000 -12 UNJF-3A	.750	.882	1.475	.160	1.301-1.314	.440	.657	.400	.005	.125	.050-.080	1.312	1.000	14.333
MS9901-12	1.0625-12 UNJ-3A	.790	.945	1.475	.160	1.301-1.314	.480	.719	.400	.005	.125	.050-.080	1.312	1.000	15.189
MS9901-14	1.1875-12 UNJ-3A	.790	1.070	1.619	.160	1.427-1.440	.480	.844	.400	.005	.125	.050-.080	1.438	1.125	17.773
MS9901-16	1.3125-12 UNJ-3A	.840	1.195	1.833	.200	1.614-1.627	.480	.969	.400	.005	.125	.050-.080	1.625	1.312	23.520
MS9901-18	1.500 -12 UNJF-3A	.840	1.382	1.974	.200	1.738-1.752	.480	1.156	.400	.005	.125	.050-.080	1.750	1.438	27.472
MS9901-20	1.625 -12 UNJ-3A	.840	1.507	2.117	.190	1.863-1.877	.480	1.281	.400	.005	.125	.050-.080	1.875	1.562	31.607
MS9901-24	1.875 -12 UNJ-3A	.840	1.756	2.402	.180	2.113-2.127	.480	1.531	.400	.005	.125	.050-.080	2.125	1.812	40.290
MS9901-28	2.250 -12 UNJ-3A	.870	2.131	2.830	.200	2.488-2.502	.480	1.906	.400	.005	.125	.050-.080	2.500	2.188	56.558
MS9901-32	2.500 -12 UNJ-3A	.870	2.381	3.115	.200	2.738-2.752	.480	2.156	.400	.005	.125	.050-.080	2.750	2.438	67.242

1. HEXAGON AND DIAMETER V SHALL BE CONCENTRIC WITH THREAD PD WITHIN .010 FIR.
2. DIAMETER H SHALL BE CONCENTRIC WITH THREAD PD WITHIN .005 FIR. AND FREE FROM THREAD TOOL MARKS.
3. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5646.
4. SURFACE TEXTURE: USAS B46.1 - 1962. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
5. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
6. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
8. DO NOT USE UNASSIGNED PART NUMBERS.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

P.A. USAF-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust NAVY-AS	ASCC AIR STD 17/15	PLUG, MACHINE THREAD - AMS 5646, PREFORMED PACKING, MIL-S-8879 THREAD	MS9901
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 1 OF 1

APPROVED 11 MAR 70 REVISED

Review activities: USAF-82

This standard has been approved by the Department of the USAF (AFSC) and Department of the Navy and is mandatory for use by their activity. All other military activities are required to employ this standard where suitable.

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-096/5-5389

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.