MIL-S-27447A(USAF)
17 Feb 1976
SUPERSEDING
MIL-S-27447(USAF)
4 April 1961

MILITARY SPECIFICATION

SURVIVAL KIT, PARACHUTE PACK SRU-16/P

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of survival kit, design SRU-16/P.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

V-T-276	Thread, Cotton
V-T-285	Thread, Polyester
EE-M-101	Match, Safety: and Match, Nonsafety (Strike - Anywhere)
FF-N-180	Needles, Except Surgical, Hand
PPP-B-566	Boxes, Folding, Paperboard
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-60	Tape: Packaging, Waterproof

Military

MIL-P-116	Preservation-Packaging, Methods of
MIL-A-148	Aluminum Foil
MIL-C-557	Cloth, Wind Resistant Sateen, Cotton
MIL-E-5272	Environmental Testing, Aeronautical And Associated Equipment, General Specification For
MIL-C-6235	Compass, Magnetic, Unmounted,Pocket, Survival
MIL-S-13175	Starter, Fire, NP3, M2

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-129	Marking For Shipment Storage
MIL-STD-130	Identification Marking Of U.S. Military Property
MIL-STD-831	Test Reports, Preparation Of
MIL-STD-1458	Radioactive Materials: Marking and Labeling Of Items, Packages And Shipping Containers For Identification In Use, Storage and Transportation

DRAWINGS

Air Force

44A8838	Tab - Fire Starting Kit

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or requesat for proposal shall apply.

AFM 71-4	Packing and Handling of Dangerous Materials for Transportation by Military Aircraft

(Copies may be obtained from the procuring activity or as directed by the contracting officer.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATED, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Truckling Associa tion, Inc., Tariff Order Section, 1616 P Street, N.W., Washington DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Preproduction. This specification makes provisions for preproduction testing.

3.2 Components. The complete survival kit shall consist of the items specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

TABLE I

COMPONENTS

Item No.	Quantity	Description	See Requirement
1	1 ea	Outer Container	3.2.1
2	1 ea	Intermediate Container	3.2.3
3	1 ea	Breather Strip	3.2.3.1
4	1 ea	Inner Container	3.2.2
5	1 ea	Compass	3.2.4
6	2 ea	Fish Hooks Snell Size 8	3.2.5
7	1 ea	Fish Hooks Snell Size 4	3.2.5
8	1 ea	Knife	3.2.6
9	1 ea	Bag Water Prophylactic	3.2.7
10	10 ea	Matches Safety	3.2.8
11	2 ea	Needles	3.2.9
12	4 ea	Pads Fire Starting	3.3.4
13	1 ea (20 ft)	Corrosion Resistant Steel Wire	3.2.11
14	2 ea	Striker Strip	3.2.12
15	1 ea	Instructions and Contents Sheet	3.2.13

*3.2.1 Outer container. The outer container shall conform to Figure 1 and shall be fabricated from material conforming to MIL-C-577, type II, color sage green. The outer container shall consist of a closed stitched pocket with two flaps on one end of the container.

*3.2.1.1 Stitches, seams and stitchings. Stitches, seams and stitching shall conform to FED-STD-751. Thread breaks, skipped stitches and bobbin runouts shall be repaired by beginning 1/4 inch in back of the defective area and continuing 1/4 inch beyond the defect.

*3.2.1.2 Flaps. The flaps shall be overedge stitched with stitch type 504, stitching type Efd-1, 1/8 inch gage. 12 ±1 stitches per inch. The cotton thread
shall conform to type IA3, ticket No. 24, 4 ply of V-T-276.

*3.2.1.3 Edge seam. The pocket edge seam shall be stitched with a single row of stitch type 301, seam type SSa-1, 3/16 inch gage, 14 ± stitches per inch. The polyester thread shall conform to type 1, class 1, size E of V-T-285. The seam and stitch shall extend onto the flap area so that the ends of the overedge stitching are caught in the seams (see Figure 1). The ends of the type 301 stitch shall be backstitched a minimum of 3/8 inch.

*3.2.2 Inner container. The inner container material shall conform to PPP-B-566. The dimensions shall be 1/2 ±1/8 inches by 1-1/4 inches by 5 ±1/8 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

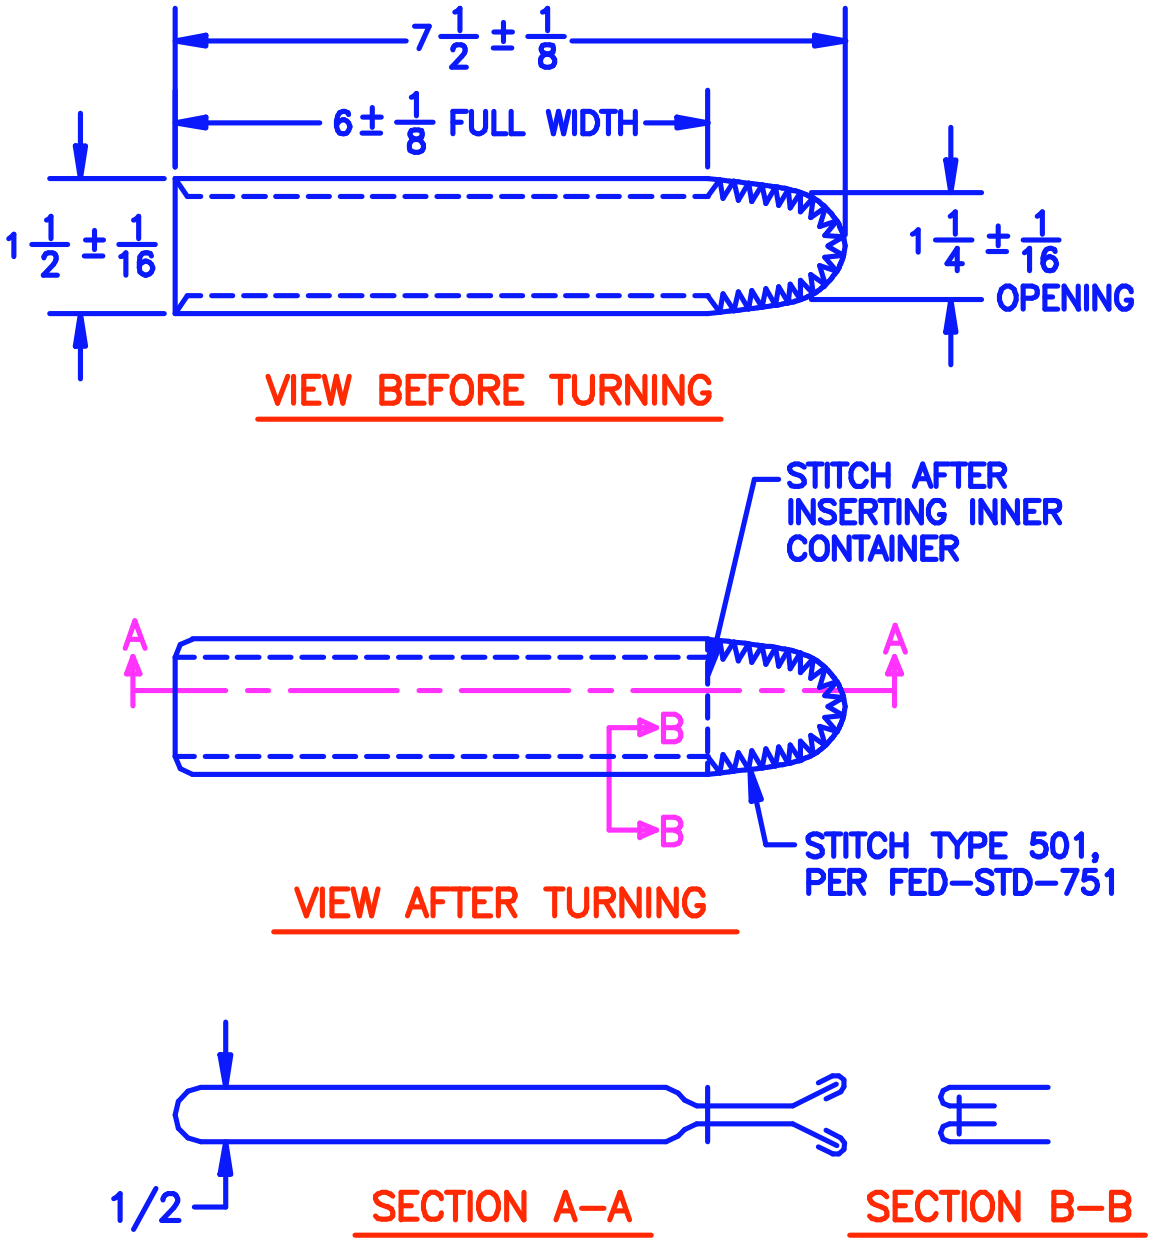

DIMENSIONS IN INCHES

SRU-16/P SURVIVAL KIT
OUTER CONTAINER

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

*3.2.3 Intermediate container. The intermediate container shall be fabricated from film conforming to Minnesota Mining and Manufacturing Company Part No. MMM, Medpar 1.001 (film) or equal. All edges of the container shall be heat sealed using the seal conditions suggested by the manufacturer of the film. The width of the heat seal on all edges shall be not less than ¼ inch. One edge of the heat seal shall contain a breather strip.

*3.2.3.1 Breather strip. The breather strip shall be fabricated from material conforming to MIL-C-557. The breather strip shall extend outward through the heat seal, inward not less than ¼ inch beyond the inside of the heat seal, and shall be ½ inch in width.

*3.2.4 Compass. The compass shall conform to MIL-C-6235.

*3.2.5 Fish hooks. Fish hooks shall be equal to Eagle Claw No. 139 for size 8 and No. 84 for size 4 (manufactured by the Wright and McGill Co., 1400 Yosemite, Denver, Colorado). All hooks shall be equipped with a nylon snell at least 6 inches long. The snells tied to the size 8 and 4 hooks shall have a minimum breaking strength of 6 and 8 pounds, respectively.

*3.2.6 Knife. The knife shall conform to the Schrade Walden Mfg Co Part No. 301 or equal.

*3.2.7 Water bag (prophylactic). The water bag shall conform to the Trojan No. 70, Rolled Prophylactic, Hermetically Sealed, Nonlubricated, or equal. The water bags shall conform in all respects to the regulations and requirements for the manufacture of latex prophylactics of the Food and Drug Administration of the U.S. Department of Health, Education, and Welfare.

*3.2.8 Safety matches. The matches shall conform to type I of EE-M-101.

*3.2.9 Needles. Needles shall conform to FF-N-180, type I, class 1, style C with a length of 2-1/2 inches. The eye of the needle shall be elliptical in shape, and the minimum allowable width and length of the eye shall be 0.020 and 1.187 inch, respectively.

*3.2.10 Fire starting pads. The fire starting pads shall conform to 44A8838 and shall meet the requirements of MIL-S-13175. They may be trimmed to a width not less than 5/8 inch if required to meet packaging requirements. The trimming cut if required, shall be made at an angle of 90 degrees to the striker edge.

*3.2.11 Wire. The wire shall be 20 feet of 0.0020 inch diameter corrosion resistant steel. The wire must easily bend over a quarter inch mandrel, hold its shape without breaking and shall not spring back over 30 percent from the bent condition.

*3.2.12 Striker strip. The striker strip shall conform to the performance requirements of EE-M-101 except that dimensions shall be 1 inch in length by 5/8 inch in width, and that it shall be mounted on solid, nonresistant paper-board conforming to PPP-B-566.

3.2.13 Instructions and contents sheet. The instruction and contents sheet shall be provided in the inner container. The sheet shall be made with parchment paper. One side of the sheet shall contain the following information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

CONTENTS

Matches	(10)	Steel Wire	(20 ft)
Fire Starters	(4)	Compass	(1)
Striker Strip	(2)	Fish Hooks	(3)
Knife	(1)	Water Bag	(1)
Needles	(2)		

The other side of the sheet shall contain the following:

INSTRUCTIONS

1. Save the parachute and cores.
2. The matches must be ignited by striking along the striker strips.
3. The fire starting pads can be ignited by striking along the striker strips or they can be lit with a match.
4. The matches are not water resistant. Keep them dry.
5. Thread for needles can be obtained from inner cord of parachute suspension line.

*3.3 Preparation for assembly. The contents of the survival kit shall be prepared for assembly as described in 3.3.1 through 3.3.4.

*3.3.1 Fish hooks. The fish hooks, needles and wire shall be attached to a base in the inner container in such a manner as to render them incapable of harming any other components, yet neatly accessible.

*3.3.2 Matches. Five matches and one striker strip shall be packed together in aluminum foil conforming to MIL-A-148 with a thickness of .005 inch ±.0005 inches. The heads of adjoining matches shall be placed at opposite ends of the package. Each package shall be wrapped so that two thicknesses of the foil covers all portions of the five matches.

*3.3.3 Needles. The two needles shall be placed along the sides of the knife blades in such a manner that the points and heads do not protrude beyond the ends of the knife. A strip of tape conforming to PPP-T-60, type 3, class 2, shall be placed around each end of the knife in such a manner that the points and heads are covered and secured to the knife by the strip of tape.

*3.3.4 Fire starting pads. The pads shall be wrapped separately in a aluminum foil conforming to MIL-A-148 with a thickness of 0.0015 inches, plus or minus 0.0005 inch. Each pad shall be wrapped so that two thicknesses of the foil cover all portions of the pad. Each pad shall be sealed with an encircling strip of tape conforming to PPP-T-60, type 3, class E.

*3.4 Assembly. The components listed in Table I shall be assembled in the inner container in a manner permitting insertion of the completely assembled container into the outer container. The knife shall be placed on a side with the folded blades toward the center of the package. The compass shall be placed with the face of the compass towards the center of the package. Prior to inserting the inner container in the outer container, the outer container shall be turned so the seams are on the inside. After inserting the inner container, the flaps of the outer container shall be secured with a single row or stitch type 301 (see Figure 1) approximately 6 stitches per inch to effect

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

a secure closure but not exceed the pull test requirement (see 3.5.4). The thread shall conform to type 1, class 1, size B of V-T-285.

3.5 Performance.

*3.5.1 Dimensional check - assembly. The completely assembled kit shall conform to the dimensional requirements specified on Figure 1, except in an area where the thickness may expand to a maximum of ¾ inch.

*3.5.2 Altitude. There shall be no leakage of the kit upon submersion in water, after subjection to an altitude of 50,000 feet, when tested as specified in 4.4.3.

*3.5.3 Humidity. There shall be no leakage of the kit after subjection to the humidity test specified in 4.4.4.

3.5.6 Pull test - tabs. The pull tabs shall separate, permitting removal of the inner container, when a maximum pull of 40 pounds is applied.

*3.6 Weight. The weight of the completely assembled kit shall not exceed ounces.

*3.7 Identification of product. The inner and outer container shall be durable and legibly marked using waterproof ink with the words “SURVIVAL KIT” in letters not less than ¼ inch high and “PARACHUTE PACK SRU-16/P” and “4240-00-741-9713LS” the date of manufacture in letters not less than 1/8 inch high. The letters shall be centered on the survival kit and shall be oriented along the length of the kit. The outside of one flap shall be marked with the words “PULL TO OPEN” in letters not less than 1/8 inch in height. The information shall be in accordance with MIL-STD-130.

3.8 Workmanship. The survival kits shall be constructed in a thoroughly workmanlike manner. The finished survival kit shall be clean and free from any defect that might affect appearance, uniformity, or functionability.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.2 Classification of tests. The inspection and testing of survival kits shall be classified as follows:

a. Quality conformance inspection See 4.3

b. Preproduction testing See 4.5

*4.3 Quality conformance inspection. Quality conformance inspection shall consist of:

a. Individual tests

b. Sampling plan and tests

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

*4.3.1 Individual tests. Each survival kit shall be subjected to the following tests:

a. Examination of product See 4.4.1

b. Dimensional check-assembly See 4.4.2

4.3.2 Sampling plan and tests.

*4.3.2.1 Lot. A lot shall consist of 200 survival kit assemblies or fraction thereof, manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

*4.3.2.2 Sampling plan. One survival kit assembly shall be selected at random from each lot and subjected to the following tests.

a. Altitude test See 4.4.3

b. Humidity test See 4.4.4

c. Pull test See 4.4.5

4.3.2.2.1 Rejection and retest. When one or more items from a lot fail to meet the specification, acceptance of all items in the lot will be withheld until the extent and cause of failure are determined. After corrections have been made, all necessary tests shall be repeated.

4.3.2.2.2 Individual tests may continue. For production reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of the entire lot shall not be made until it is determined
that the lot meets all the requirements of this specification.

4.3.2.2.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

4.4 Test methods.

Examination of product. Each survival kit shall be examined to determine conformance to this specification with respect to material, weight, workmanship, and marking.

*4.4.2 Dimensional check. Each complete survival kit assembly shall be examined for conformity to the dimensions specified in 3.5.1.

4.4.3 Altitude test. The survival kit assembly shall be placed horizontally in the test chamber with a 20 pound weight placed on top of the kit. The internal pressure of the chamber shall be reduced to 3.44 inches of mercury (50,000 feet, equivalent) within one minute. The equipment shall be maintained under these conditions for 30 minutes. At the conclusion of this period, the kit shall be removed from the chamber and shall be submerged in water to a depth of 1 foot for not less than five minutes. At the conclusion of this time, the kit shall be removed and dried by air blast. The kit shall then be opened and the survival components inspected or moisture. Any evidence of moisture shall be cause for rejection.

4.4.4 Humidity test. The complete kit shall be subjected to the humidity test outlined in procedure I of MIL-E-5272, for not less than 120 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

After lapse of this time, the kit shall be removed from the chamber and dried by air blast. The kit shall then be opened and the interior survival components inspected for moisture. Any evidence of moisture shall be cause for rejection.

4.4.5 Pull test. A kit complete with contents shall be tested to determine the amount of force required to pull open the outer container. The pull shall be measured by means of a tensile tester.

4.5 Preproduction testing.

4.5.1 Preproduction test sample tested by the contractor. The contractor shall subject two survival kits to the preproduction tests specified in 4.5.5.

*4.5.2 Preproduction test report. After the contractor completes the preproduction tests, he shall prepare a preproduction test report according to MIL-STD-813 and furnish a complete copy of the report to the procuring activity.

4.5.3 Preproduction test sample for the procuring activity. Along with the preproduction test report, the contractor shall submit two untested samples to the procuring activity.

*4.5.4 Preproduction tests. Preproduction tests shall consist of all tests described in 4.4.1 through 4.4.5.

5. PREPARATION FOR DELIVERY

*5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

*5.1.1 Level A. Prior to preservation and packaging, all components listed in Table I shall be thoroughly cleaned and dried in accordance with the applicable process of MIL-P-116 and then placed in the outer container. The outer container, when closed, shall be packaged one each in accordance with method IC-1 of MIL-P-116.

*5.1.1.1 Intermediate packaging. Fifty kits packaged in accordance with 5.1.1 shall be placed in an intermediate container conforming 5o PPP-B-636. Closing and sealing of the container shall be in accordance with the applicable container specification and appendix thereto.

*5.1.2 Level C. Components assembled and sealed in the outer container as specified in 3.4 shall be packaged in accordance with manufacturer's commercial practice.

*5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

*5.2.1 Level A. Kits preserved and packaged as specified in 5.1 shall be packed in overseas-type containers conforming to PPP-B-636. Closing and sealing of the containers shall be in accordance with the applicable container specification and appendix thereto. Containers shall be of minimum weight and cube, shall be of uniform size and shape, and shall contain like quantities, when practical.

*5.2.2 Level B. Packing for level B shall be the same as specified in 5.2.1, except that the containers shall be domestic type and closure shall be in accordance with the requirements for domestic-type containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.

*5.2.3 Level C. Kits shall be packed in a manner which will insure arrival at destination in satisfactory condition and be acceptable to the carrier at lowest rates. Containers and packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules applicable to the mode of transportation.

*5.3 Marking. Interior and exterior shipping containers shall be marked in accordance with MIL-STD-129.

*5.3.1 Additional marking. In addition to any other markings required by order or contract, the unit, intermediate, and exterior shipping container shall be marked in accordance with MIL-STD-129, MIL-STD-1458, and paragraph 11-57 of Air Force Manual 71-4, as applicable to the mode(s) of transportation.

6. NOTES

*6.1 Intended use. Survival kits covered by this specification are intended for use by personnel under emergency survival conditions.

*6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Level of packaging and packing desired. (see 5.1 and 5.2)\

c. Preproduction requirements. (see 3.1)

*6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Review Activity:
Air Force - 11

Preparing Activity:
Air Force - 82 (FCM-84)

Project No. 4240-F653

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:04Z
Check the source to verify that this is the current version before use.