DOD-STD-35-118 (MI)
23 JUNE 1978

MILITARY STANDARD

INSULATION, THERMAL AND ACOUSTIC

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Insulation, Thermal and Acoustic
Automated Engineering
Document Preparation System

MIL-STD-35-118(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-118(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification, Exceptions for thermal and acoustic insulation.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	9
	2.1	Issues of documents	9
	2.2	Other publications	9
	3.	DEFINITIONS	13
	4.	GENERAL REQUIREMENTS	15
	4.1	Introduction	15
	4.2	Specification Requirement Sheet (SRS)	15
	4.3	Configuration	15
	4.3.1	Dimensions	15
	4.3.2	Illustrtations	15
	4.4	Units of measure	15
	5.	DETAILED REQUIREMENTS	17
	5.1	Introduction	17
	5.2	MSE Formats	17
	5.3	Referenced documents	17
	5.4	Test matrix	17
	5.5	Tabulation	20
	5.6	Keyword Code Indes (KCI) and Standard Paragraphs	21
	5.6.1	Interrelationship of Codes	21
	5.6.2	Automatic MSE Data	21
	5.6.3	DOD-STD-35 Tables	21

TABLES

Table	I.	Title Index	3
	II.	Test matrix	18
	III.	Tabulation Candidates	20

APPENDICES

Appendix	A	Illustrations	153
	B	Characteristic Code Index	157
		Index	165

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for thermal and acoustic insulation.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging HANDBOOK H6, However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION, ACOUSTICAL	815001	AMS3676	GLASS FIBER, RESIN
		AMS3720	HONEYCOMB PAPER 60 LB
		AMS3722	HONEYCOMB PAPER 125 LB
		MIL-D-47000	SHEET, DAMPING
		MIL-I-47149	MAT
		SS-S-111	TROWEL OR SPRAY
INSULATION, BATT, SOUND CONTROLLING	815002	HH-I-528	COTTON
INSULATION, BLANKET, SOUND CONTROLLING	815003	MIL-I-7171	AIRCRAFT
INSULATION, BLOCK, SOUND CONTROLLING	815004	SS-S-118	TILES AND PANELS, PREFABRICATED
INSULATION, BOARD, SOUND CONTROLLING	815005	SS-S-118	TILES AND PANELS PREFABRICATED
		MIL-A-23054	FIBROUS GLASS
INSULATION, FELT, SOUND CONTROLLING	815006	MIL-I-22023	FIBROUS GLASS, FLEXIBLE
INSULATION, BATT, THERMAL	815007	HH-I-528	COTTON
		MIL-B-47080	GLASS FIBER, RESIN
		MIL-I-52172	NYLON

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION, BLANKET, THERMAL	815008	HH-I-521	MINERAL FIBER
		HH-I-570	ASBESTOS
		MIL-I-2818	FIBROUS MINERAL
		MIL-I-7171	AIRCRAFT
		MIL-I-8776	TURBINE ENGINE
		MIL-I-23128	REFRACTORY FIBER
INSULATION, BLOCK, THERMAL	815009	HH-I-523	BLOCK OR CEMENT, PIPE
		HH-I-551	CELLULAR GLASS
		HH-I-554	MAGNESIA, PIPE AND TUBE
		HH-I-561	ASBESTOS
		HH-I-578	VERMICULITE
		LLL-I-535	FIBERBOARD
		MIL-I-2819	MACHINERY AND EQUIPMENT
INSULATION, BOARD, THERMAL	815010	HH-I-524	POLYSTYRENE
		HH-I-525	CORK
		HH-I-526	MINERAL FIBER
		HH-I-529	MINERAL AGGREGATE
		HH-I-530	URETHANE
		HH-I-551	CELLULAR GLASS

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION, BOARD, THERMAL	815010 (CONT)	LLL-I-535	FIBERBOARD
		MIL-I-742	FIBROUS GLASS
INSULATION, CLOTH, THERMAL	815011	MIL-I-22344	FIBROUS GLASS
		SS-C-466	ASBESTOS
INSULATION, COMPOUND, THERMAL	815012	MIL-B-19564	BEDDING, PIPE
		MIL-C-22608	HIGH TEMPERATURE
		MIL-I-47293	POLYSULFIDE
		MIL-P-81255	ASBESTOS, PHENOLIC
		MIL-C-83895	SEALING
		SS-C-160	CEMENT
INSULATION, FELT, THERMAL	815013	MIL-I-15475	FIBERGLASS, SEMIRIGID
		MIL-I-16411	GLASS FIBER
		MIL-F-18999	ASBESTOS, GLASS FIBER, COAL TAR
		MIL-I-22023	FIBROUS GLASS, FLEXIBLE
		MIL-A-47094	ASBESTOS, PHENOLIC
		MIL-A-47270	ASBESTOS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION, PAPER, THERMAL	815014	HH-P-1784	ASBESTOS
		MIL-I-46894	ASBESTOS, CHRYSOLITE
		UU-B-790	BUILDING, FIBER
INSULATION, SHEET AND STRIP, THERMAL	815015	HH-I-573	FLEXIBLE UNICELLULAR
		HH-I-1252	REFLECTIVE ALUMINUM FOIL
		MIL-I-14511	CELLULAR PLASTIC
		MIL-P-15280	UNICELLULAR PLASTIC
		MIL-P-16562	SYNTHETIC, RUBBER-LIKE, CELLULAR
		MIL-I-46882	CELLULAR, ELASTOMERIC
		MIL-I-46899	CORK
		MIL-I-47198	GLASS FIBER, NEOPRENE
INSULATION, SLEEVING AND TUBING, THERMAL	815016	HH-I-550	URETHANE
		HH-I-554	MAGNESIA, PIPE AND TUBE
		HH-I-561	ASBESTOS
		HH-I-573	FLEXIBLE UNICELLULAR
		HH-I-578	VERMICULITE

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION, SLEEVING AND TUBING, THERMAL	815016 (CONT)	HH-I-1751	SLEEVING, PIPE AND TUBE
		MIL-I-13042	FLEXIBLE
		MIL-P-15280	UNICELLULAR PLASTIC
		MIL-T-47051	HEAT SHRINKABLE
		MIL-I-47100	FLEXIBLE POLYAMIDE
INSULATION, TAPE, THERMAL	815017	HH-T-1782	ASBESTOS
		MIL-I-15349	PIPE AND TUBE
		SS-C-466	ASBESTOS
INSULATION, THERMAL AND ACOUSTICAL	815018	HH-I-545	MINERAL, DUCT LINING
		MIL-W-15427	GLASS WOOL
		MIL-I-22023	FIBROUS GLASS, FLEXIBLE
		MIL-I-7171	AIRCRAFT
INSULATION, THERAML	815019	AMS-3676	GLASS FIBER, RESIN
		AMS-3720	HONEYCOMB PAPER 60 LB
		AMS-3722	HONEYCOMB PAPER 125 LB
		HH-B-100	VAPOR BARRIER
		HH-I-515	LOOSE FILL, CELLULOSE

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION, THERMAL	815019 (CONT)	HH-I-558	MINERAL FIBER, PIPE AND TUBE
		HH-I-574	PERLITE
		HH-I-585	VERMICULITE
		HH-I-1030	MINERAL FIBER, PNEUMATIC OR POURED
		MIL-I-2781	PIPE
		MIL-C-2861	CEMENT
		MIL-I-22344	FIBROUS GLASS, PIPE
		MIL-I-24172	POLYURETHANE, PREFORMED OR FOAM IN PLACE
		MIL-P-43110	POLYURETHANE
		MIL-I-47047	POTASSIUM TITANATE, FIBER
		MIL-I-47096	SILICONE RUBBER TWO COMPONENT
		MIL-M-47148	MAT, ASBESTOS, RESIN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

STANDARDS

FEDERAL

FED-STD-141	Paint, Varnish, Laquer and Related Materials; Method of Inspection, Sampling and Testing
FED-STD-191	Textile Test Methods
FED-STD-406	Plastics, Methods of Testing
FED-STD-601	Rubber, Sampling and Testing

MILITARY

MIL-STD-1623	Fire Performance Requirements and Approved Specifidations for Interior Finish Materials and Furnishings

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMC165	Compressive Strength of Preformed Block-Type Thermal Insulation, Test For
ASTMC167	Thickness and Density of Blanket or Batt-Type Thermal Insulating Materials, Tests For
ASTMC177	Thermal Conductivity of Materials by Means of The Guarded Hot Plate, Test For

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

ASTMC209	Insulating Board (Cellulose Fiber), Structural and Decorative
ASTMC236	Thermal Conductance and Transmittance of Built-up Sections by Means of The Guarded Hot Box, Test For
ASTMC272	Water Absorption of Core Materials for Structural Sandwich Constructions, Test For
ASTMC303	Density of Preformed Block-Type Thermal Insulation, Test For
ASTMC355	Water Vapor Transmission of Thick Materials, Test For
ASTMC423	Sound Absorption of Acoustical Materials in Reverberation Rooms, Test For
ASTMC520	Density of Granular Loose Fill Insulations, Test For
ASTMC553	Mineral Fiber Blanket and Felt Insulation, Industrial Type, Specification For
ASTMD146	Felted and Woven Fabrics Saturated With Bituminous Substances for Use in Waterproofing and Roofing, Sampling and Testing
ASTMD395	Compression Set of Vulcanized Rubber, Tests For
ASTMD412	Tension Testing of Vulcanized Rubber
ASTMD746	Birttleness Temperature of Plastics and Elastomers by Impact, Standard Method of Test For
ASTMD1056	Sponge and Expanded Cellular Rubber Products, Specification For
ASTMD1149	Accelerated Ozone Cracking of Vulcanized Rubber, Test For

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

ASTMD1621	Compressive Strength of Rigid Cellular Plastics, Test For
ASTMD1622	Apparent Desity of Rigid Cellular Plastics, Test For
ASTMD1667	Sponge Made From Closed Cell Polyvinyl Chloride or Copolymers Thereof, Specification and Tests For
ASTMD1918	Asbestos Content of Asbestos Textile Materials, Test For
ASTMD2137	Low-Temperature Impact Test For Brittleness Determination of Flexible Polymeric Materials or Fabrics Coated Therewith, or Both
ASTME380	Metric Practice Guide
ASTMF36	Compressibility and Recovery of Gasket Materials, Standard Method of Test For

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Insulation, Thermal and Acoustic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Insulation, Thermal and Acoustic, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Insulation, Thermal and Acoustic.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Insulation, Thermal and Acoustic.

4.3.2 Illustrations. Illustrations applicable to Thermal and Acoustic Insulation are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desirec MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE 1704 Test Specimen Preparation	1744 Adhesion	1892 Alkalinity	1804 Breaking Strength	1906 Chemical Composition	1954 1976 1986 Color	2004 Corrosion	2216 Drying	2304 Flammability	2364 Flexibility	2412 Fungus	2436 Hardness	2484 Hygroscopic Moisture	2682 Oil and Solvent Resistant	2976 Tensile Strength	3046 Viscosity
ASTMC464							X									
ASTMC581														X		
ASTMC661												X				
ASTMD785												X				
ASTMD902														X		
ASTMD1056														X		
ASTMD1084																X
ASTMD1343																X
ASTMD1474												X				
ASTMD2240												X				
ASTMD2393																X
ASTMD2556																X
ASTME154														X		
ASTMG21											X					
FED-STD-141						X										
FED-STD-595						X										
HH-I-545							X			X			X			
HH-I-554					X											
HH-I-558							X			X			X			
HH-I-573										X						
HH-I-1030					X		X						X			
HH-I-1751													X			
HH-T-1782					X								X			
HH-P-1784	X								X							
SS-C-466				X	X								X			
UU-B-790				X												
MIL-I-742			X						X							
MIL-I-2818			X													
MIL-I-2819									X							
MIL-E-5272											X					
MIL-I-13042										X			X			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX. (Cont)

DOCUMENT	TEST CODE	Test Specimen Preparation 1704	Adhesion 1744	Alkalinity 1892	Breaking Strength 1804	Chemical Composition 1906	Color 1954 1976 1986	Corrosion 2004	Drying 2216	Flammability 2304	Flexibility 2364	Fungus 2412	Hardness 2436	Hygroscopic Moisture 2484	Oil and Solvent Resistant 2682	Tensile Strength 2976	Viscosity 3046
MIL-I-14511										X						X	
MIL-P-15280										X	X				X	X	
MIL-I-15349				X	X												
MIL-I-15475				X													
MIL-I-16411				X												X	
MIL-I-16562			X							X					X	X	
MIL-F-18999																X	
MIL-B-19564										X							
MIL-I-22023										X	X						
MIL-I-22344										X							
MIL-C-22608			X				X			X							
MIL-I-23128																X	
MIL-I-24172		X															
MIL-I-46882							X				X	X					
MIL-I-46894														X			
MIL-I-46899											X					X	
MIL-D-47000										X	X						
MIL-A-47094		X															
MIL-I-47096			X						X			X	X			X	X
MIL-I-47149			X							X	X	X					
MIL-I-47293									X								
MIL-P-81255		X				X											
MIL-C-83895		X	X					X	X		X						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for additional specific column headings which may be used for thermal and acoustic insulation characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either feet or yards.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1650	ROLL MIN LENGTH (FEET)	1652	ROLL MIN LENGTH (YARDS)	1654	ROLL MIN LENGTH (METERS)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*Requester's Name	0101
*Company Name/Command	0102
*Street/Building	0103
*City, State, Zip	0104
*Phone Number, Include Area Code, Autovon if Applicable	0105
*Date	1003
*Requester FSCM	1004
*Contract Number/Office Symbol	1005
*Base Document	1006
*System Application	1008
*Government Design Activity FSCM	6369
*Format (Select One)	
Six section document.	0700
One section document.	0800
*Control (Select One)	
Source.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Control (Cont)	6874
*Source Table	
Note: Refer to table V of DOD-STD-35.	
Aperture Cards Required.	0107
Revision of AEDPS Document Number	0108
Scope	
Note: This entry is automatic and determined by the title code used.	
Part Number	
Note: Automatic with a single item MSE.	
Note: Automatic with a multi-item MSE.	
Units of Measure (Select One)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108.
	SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Classification	
Type per base document (type des)	1562
Class per base document (class des)	1564
Form per base document (form des)	1566
Grade per base document (grade des)	1568
Temperature Ratings	
Service temperature maximum (degrees Celsius)	4905
Service temperature minumum (degrees Celsius)	4904
Storage temperature maximum (degrees Celsius)	7302
Storage temperature minimum (degrees Celsius)	7301
Altitude Rating (Select One)	
Sea level to (feet)	5060
Sea level to (meters)	5061

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION. ITEMS COVERED BY THIS SPECIFICATION SHALL BE OF THE FOLLOWING TYPES, CLASSES, FORMS, GRADES:
1562	THE TYPE DESIGNATION SHALL BE 1562 IN ACCORDANCE WTIH THE BASE DOCUMENT.
1564	THE CLASS DESIGNATION SHALL BE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1566	THE FORM SHALL BE 1566 IN ACCORDANCE WITH THE BASE DOCUMENT.
1568	THE GRADE SHALL BE 1568 IN ACCORDANCE WITH THE BASE DOCUMENT.
	TEMPERATURE RATING.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Configuration	
(Illustration number), see Appendix A	1009
Dimension table, (see table III, DOD-STD-35)	
*Units (select one)	
U.S. (select one)	
(inches)	7572
(feet)	7573
(yards)	7574
SI (select one)	
(centimeters)	7576
(millimeters)	7577
(meters)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Illustrations	
(Number)	4950

Note: This code is used to enter applicable illustrations which dod not have dimensions.

Tabulated Characteristics (See Table IV, DOD-STD-35)

Materials (See Tables VI and VII, DOD-STD-35)

Note: Automatic when table VII is used.

Finishes (See Tables VIII and IX, DOD-STD-35)

Note: Automatic when table IX is used.

Composition	
Composition, formulation or mixture.	6375

*Ingredient table, (see table XI, DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
6375	COMPOSITION. THE COMPOSITION, FORMULATION OR MIXTURE (AS APPLICABLE) SHALL BE AS SPECIFIED HEREIN. THE INGREDIENT QUANTITIES SHALL BE SHOWN IN INTERNATIONAL (SI) SYSTEM OF UNITS SUCH AS GRAMS, LITERS, ETC., OR U.S. STANDARDS SUCH AS PINTS, QUARTS OR GALLONS, AS SPECIFIED IN THE TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design And Construction	
Blanket Construction	
As follows:	1570
Quilted.	1591
Cemented.	1593
Semi-stitched.	1595
Fully-stitched.	1596
Non-porous trim cloth.	1597
Porous trim cloth.	1599
Wire reinforced.	1601
Cloth backed.	1602
Cloth	
Minimum allowable strands in warp (select one)	
(Per linear inch)	1928
(Per linear millimeter)	1932
Minimum allowable strands in filling (select one)	
(Per linear inch)	1930
(Per linear millimeter)	1934

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION
1570	BLANKET CONSTRUCTION. THE BLANKET CONSTRUCTION SHALL BE AS FOLLOWS:
1591	QUILTED.
1593	CEMENTED.
1595	SEMI-STITCHED.
1596	FULLY-STITCHED.
1597	NON-POROUS TRIM CLOTH.
1599	POROUS TRIM CLOTH.
1601	WIRE REINFORCED.
1602	CLOTH BACKED.
	CLOTH
1928	THE NUMBER OF STRANDS PER LINEAR INCH IN THE WARP SHALL BE NOT LESS THAN 1928 STRANDS.
1932	THE NUMBER OF STRANDS PER LINEAR MILLIMETER IN THE WARP SHALL BE NOT LESS THAN 1932 STRANDS.
1930	THE NUMBER OF STRANDS PER LINEAR INCH IN THE FILLING SHALL BE NOT LESS THAN 1930 STRANDS.
1934	THE NUMBER OF STRANDS PER LINEAR MILLIMETER IN THE FILLING SHALL BE NOT LESS THAN 1934 STRANDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Cloth (cont)	
Picks (select one)	
Per inch (quantity)	1936
Per millimeter (quantity)	1938
Cut (select one)	
Bias.	1940
Straight.	1942
Treatment (select one)	
Impregnated.	1944
Coated.	1946
Minimum material weight (select one)	
U.S.	
(ounces per square yard)	1992
SI	
(grams per square meter)	1996
Maximum material weight (select one)	
U.S.	
(ounces per square yard)	1994

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1936	THE CLOTH SHALL HAVE 1936 PICKS PER INCH.
1938	THE CLOTH SHALL HAVE 1938 PICKS PER MILLIMETER.
1940	THE CLOTH CUT SHALL BE BIAS.
1942	THE CLOTH CUT SHALL BE STRAIGHT.
1944	THE MATERIAL SHALL BE IMPREGNATED.
1946	THE MATERIAL SHALL BE COATED.
1992	THE MATERIAL WEIGHT PER SQUARE YARD SHALL BE NOT LESS THAN 1992 OUNCES.
1996	THE MATERIAL WEIGHT PER SQUARE METER SHALL BE NOT LESS THAN 1996 GRAMS.
1994	THE MATERIAL WEIGHT PER SQUARE YARD SHALL BE NOT GREATER THAN 1994 OUNCES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Maximum material weight (cont)	
SI	
(grams per square meter)	1998
Container	
As follows:	
Package maximum weight (select one)	
(pounds)	1646
(kilograms)	1648
Roll minimum length total (select one)	
U.S. (select one)	
(feet)	1650
(yards)	1652
SI	
(meters)	1654
Roll continuous.	1656
Minimum lengths (select one)	
U.S. (select one)	
(feet)	1658
(yards)	1660

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1998	THE MATERIAL WEIGHT PER SQUARE METER SHALL BE NOT GREATER THAN 1998 GRAMS.
	CONTAINER. THE CONTAINER SIZE(S) SHALL BE AS FOLLOWS:
1646	THE PACKAGE WEIGHT SHALL BE NOT GREATER THAN 1646 POUND(S).
1648	THE PACKAGE WEIGHT SHALL BE NOT GREATER THAN 1648 KILOGRAM(S).
1650	THE ROLL TOTAL LENGTH SHALL BE NOT LESS THAN 1650 FEET.
1652	THE ROLL TOTAL LENGTH SHALL BE NOT LESS THAN 1652 YARD(S).
1654	THE ROLL TOTAL LENGTH SHALL BE NOT LESS THAN 1654 METER(S).
1656	THE ROLL SHALL BE ONE CONTINUOUS LENGTH.
1658	THE ROLL SHALL CONTAIN LENGTHS NOT LESS THAN 1658 FEET.
1660	THE ROLL SHALL CONTAIN LENGTHS NOT LESS THAN 1660 YARD(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (cont)	
Minimum lengths (cont)	
SI	
(meters)	1662
Roll core ID (select one)	
(inches)	1680
(millimeters)	1682
Roll core OD (select one)	
(inches)	1684
(millimeters)	1686
Sleeving minimum length (select one)	
(inches)	1688
(millimeters)	1690
Minimum pieces in package (quantity)	1694
Maximum pieces in package (quantity)	1696
Pot Life	
Minimum duration (select one)	
(minutes)	1620
(hours)	1622

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1662	THE ROLL SHALL CONTAIN LENGTHS NOT LESS THAN 1662 METER(S).
1680	THE ROLL CORE INSIDE DIAMETER SHALL BE 1680 INCH(S).
1682	THE ROLL CORE INSIDE DIAMETER SHALL BE 1682 MILLIMETER(S).
1684	THE ROLL CORE OUTSIDE DIAMETER SHALL BE 1684 INCH(S).
1686	THE ROLL CORE OUTSIDE DIAMETER SHALL BE 1686 MILLIMETER(S).
1688	THE SLEEVING LENGTH SHALL BE NOT LESS THAN 1688 INCH(S).
1690	THE SLEEVING LENGTH SHALL BE NOT LESS THAN 1690 MILLIMETER(S).
1694	THE NUMBER OF PIECES IN A PACKAGE SHALL BE NOT LESS THAN 1694.
1696	THE NUMBER OF PIECES IN A PACKAGE SHALL BE NOT GREATER THAN 1696.
	POT LIFE.
1620	THE POT LIFE SHALL BE NOT LESS THAN 1620 MINUTES.
1622	THE POT LIFE SHALL BE NOT LESS THAN 1622 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Pot Life (Cont)	
Temperature (degrees Celsius)	1624
Temperature tolerance plus or minus (degrees Celsius)	1626
Material conforms to viscosity requirements at end of pot life.	1630
Material conforms to moisture resistance requirements at end of pot life.	1632
Material conforms to density requirements at end of pot life.	1634
Material conforms to bond strength requirements at end of pot life.	1636
Material conforms to hardness requirements at end of pot life.	1640
Material conforms to all physical requirements at end of pot life.	3201
Shelf Life	
Storage conditions.	
Maximum storage relative humidity (percent)	2807

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1624	THE POT LIFE TEMPERATURE SHALL BE 1624 DEGREES CELSIUS.
1626	THE POT LIFE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1626 DEGREES CELSIUS.
1630	THE MATERIAL SHALL CONFORM TO THE VISCOSITY REQUIREMENTS AT THE END OF POT LIFE.
1632	THE MATERIAL SHALL CONFORM TO THE MOISTURE RESISTANCE REQUIREMENTS AT THE END OF POT LIFE.
1634	THE MATERIAL SHALL CONFORM TO THE DENSITY REQUIREMENTS AT THE END OF POT LIFE.
1636	THE MATERIAL SHALL CONFORM TO THE BOND STRENGTH REQUIREMENTS AT THE END OF POT LIFE.
1640	THE MATERIAL SHALL CONFORM TO THE HARDNESS REQUIREMENTS AT THE END OF POT LIFE.
3201	THE MATERIAL SHALL CONFORM TO ALL PHYSICAL REQUIREMENTS AT THE END OF POT LIFE.
	SHELF LIFE.
	THE STORAGE CONDITIONS SHALL BE AS FOLLOWS:
2807	THE STORAGE RELATIVE HUMIDITY SHALL BE NOT GREATER THAN 2807 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Storage conditions (cont)	
Maximum storage period (months)	2806
Storage temperature (select one)	
Storage temperature as specified by manufacturer.	2794
Storage temperature limits as specified herein.	2796
Material conforms to density requirements at end of shelf life.	2790
No adhesive flow on tape sides.	2814
Maximum tape telescoping (select one)	
(inches)	2816
(millimeters)	2817
Maximum tape roll gapping (select one)	
(inches)	2818
(millimeters)	2819
Material conforms to moisture resistance at the end of shelf life.	2820

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2806	THE STORAGE PERIOD SHALL BE NOT GREATER THAN 2806 MONTHS.
2794	THE STORAGE TEMPERATURE SHALL BE AS SPECIFIED BY THE MANUFACTURER.
2796	THE STORAGE TEMPERATURE LIMITS SHALL BE AS SPECIFIED HEREIN.
2790	THE MATERIAL SHALL CONFORM TO THE DENSITY REQUIREMENTS AT THE END OF THE SHELF LIFE.
2814	THERE SHALL BE NO ADHESIVE FLOW ON TAPE SIDES.
2816	THE TAPE TELESCOPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2816 INCH(S).
2817	THE TAPE TELESCOPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2817 MILLIMETER(S).
2818	THE TAPE ROLL GAPPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2818 INCH(S).
2819	THE TAPE ROLL GAPPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2819 MILLIMETER(S).
2820	THE MATERIAL SHALL CONFORM TO THE MOISTURE RESISTANCE REQUIREMENTS AT THE END OF THE SHELF LIFE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Shelf Life (Cont)	
Manufacturer certifies that material meets physical requirements at the end of shelf life.	2808
Material conforms to breaking strength at end of shelf life.	2810
Material conforms to viscosity requirements at the end of shelf life.	2812
Sleeve/Tube Construction	
Minimum carriers (quantity)	1572
Ends per carrier (quantity)	1574
Picks (select one)	
per inch (quantity)	1576
per millimeter (quantity)	1578
Yarn plies (quantity)	1580
Threads per ply (quantity)	1582
Treatment	
Impregnated.	1584
Coated.	1586
Tape Construction	
As follows:	1587

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2808	THE MANUFACTURER SHALL CERTIFY THE MATERIAL MEETS ALL PHYSICAL REQUIREMENTS AT THE END OF THE SHELF LIFE.
2810	THE MATERIAL SHALL CONFORM TO THE BREAKING STRENGTH REQUIREMENTS AT THE END OF THE SHELF LIFE.
2812	THE MATERIAL SHALL CONFORM TO THE VISCOSITY REQUIREMENTS AT THE END OF THE SHELF LIFE.
	SLEEVE/TUBE CONSTRUCTION.
1572	THE NUMBER OF CARRIERS SHALL BE NOT LESS THAN 1572.
1574	THE NUMBER OF ENDS PER CARRIER SHALL BE NOT LESS THAN 1574.
1576	THE NUMBER OF PICKS PER INCH SHALL BE 1576.
1578	THE NUMBER OF PICKS PER MILLIMETER SHALL BE 1578.
1580	THE NUMBER OF PLIES IN THE YARN SHALL BE 1580.
1582	THE NUMBER OF THREADS IN EACH PLY SHALL BE 1582.
1584	THE ITEM SHALL BE IMPREGNATED.
1586	THE ITEM SHALL BE COATED.
1587	TAPE CONSTRUCTION. TAPE CONSTRUCTION SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
As follows: (cont)	
Impregnated.	1588
Laminated.	1590
Adhesive backed.	1592
Coated.	1594
Application Method	
As follows:	
Brushing.	3244
Casting.	1598
Covering.	1600
Embedding.	1604
Encapsulating.	1606
Foam in place.	1642
Potting.	1612
Pouring.	1644
Spraying.	1614
Wrapping.	1618

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1588	IMPREGNATED.
1590	LAMINATED.
1592	ADHESIVE BACKED.
1594	COATED.
	APPLICATION METHOD. THE METHOD(S) OF APPLICATION SHALL BE AS FOLLOWS:
3244	BRUSHING.
1598	CASTING.
1600	COVERING.
1604	EMBEDDING.
1606	ENCAPSULATING.
1642	FOAM IN PLACE.
1612	POTTING.
1644	POURING.
1614	SPRAYING.
1618	WRAPPING.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Test Specimen Preparation	
Requirements (select one)	
Per base document except ____	1726
As follows:	1727
Material cured throughout.	1728
Material has no voids.	1730
Test methods (select one)	
Per base document except ____	1702
Per document (doc des)	1704
Specimen size (select one)	
(Square inches)	1706
(Square millimeters)	1708
Specimen thickness (select one)	
(inches)	1710
(millimeters)	1712
Cure temperature (degrees Celsius)	1714
Temperature tolerance, plus or minus (degrees Celsius)	1716

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1726	TEST SPECIMEN PREPARATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1726.
1727	TEST SPECIMEN PREPARATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1728	THE MATERIAL SHALL BE CURED THROUGHOUT.
1730	THE MATERIAL SHALL HAVE NO VOIDS.
1702	TEST SPECIMEN PREPARATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	TEST SPECIMEN PREPARATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1704.
1706	THE TEST SPECIMEN SIZE SHALL BE 1706 SQUARE INCH(S).
1708	THE TEST SPECIMEN SIZE SHALL BE 1708 SQUARE MILLIMETER(S).
1710	THE TEST SPECIMEN THICKNESS SHALL BE 1710 INCH(S).
1712	THE TEST SPECIMEN THICKNESS SHALL BE 1712 MILLIMETER(S).
1714	THE CURING TEMPERATURE SHALL BE 1714 DEGREES CELSIUS.
1716	THE CURING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1716 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Test Specimen Preparation (Cont)	
Per document (Cont)	
Cure relative humidity (percent)	1718
Humidity tolerance, plus or minus (degrees Celsius)	1720
Cure period	
Minimum (hours)	1722
Maximum (hours)	1723
Acoustical (Sound-Absorption Coefficient)	
Requirements (select one)	
Per base document except ____	2044
As follows:	2046
Minimum damping rate (decibels per second)	2048
Minimum loss factor (des)	2050
Minimum critical damping (percent)	2052
Minimum sound attenuation (decibels)	2054
Minimum sound-absorption coefficient (decibels)	2056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1718	THE CURING RELATIVE HUMIDITY SHALL BE 1714 DEGREES CELSIUS.
1720	THE CURING RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 1720 PERCENT.
1722	THE CURE PERIOD SHALL BE NOT LESS THAN 1722 HOUR(S).
1723	THE CURE PERIOD SHALL BE NOT GREATER THAN 1723 HOUR(S).
2044	ACOUSTICAL (SOUND-ABSORPTION COEFFICIENT). THE REQUIREMENT(S) SHALL BE IN ACCORCANCE WITH THE BASE DOCUMENT, EXCEPT 2044.
2046	ACOUSTICAL (SOUND-ABSORPTION COEFFICIENT). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2048	THE DAMPING RATE SHALL BE NOT LESS THAN 2048 DECIBELS. PER SECOND.
2050	THE MINIMUM LOSS FACTOR DESIGNATION SHALL BE 2050.
2052	THE CRITICAL DAMPING SHALL BE NOT LESS THAN 2052 PERCENT.
2054	THE SOUND ATTENUATION SHALL BE NOT LESS THAN 2054 DECIBELS.
2056	THE SOUND-ABSORPTION COEFFICIENT SHALL BE NOT LESS THAN 2056 DECIBELS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Acoustical (Sound-Absorption Coefficient) (Cont)	
Test methods (select one)	
Per base document except ____	2060
Per ASTMC423.	2062
Frequency (hertz)	2064
Test temperature (degrees Celsius)	2066
Tolerance, plus or minus (degrees Celsius)	2068
Test period (hours)	2070
Adhesion	
Requirements (select one)	
Per base document except ____	1770
As follows:	1771
Minimum shear strength (select one)	
(psi)	1772
(kilopascals)	1774
Minimum separation force (select one)	
(pounds/inch width)	1776

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2060	ACOUSTICAL (SOUND-ABSORPTION COEFFICIENT). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2060.
2062	ACOUSTICAL (SOUND-ABSORTPION COEFFICIENT). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC423.
2064	THE TEST FREQUENCY SHALL BE 2064 HERTZ.
2066	THE TEST TEMPERATURE SHALL BE 2066 DEGREES CELSIUS.
2068	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2068 DEGREES CELSIUS.
2070	THE TEST PERIOD SHALL BE 2070 HOUR(S).
1770	ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770.
1771	ADHESION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1772	THE SHEAR STRENGTH SHALL BE NOT LESS THAN 1772 POUND(S) PER SQUARE INCH.
1774	THE SHEAR STRENGTH SHALL BE NOT LESS THAN 1774 KILOPASCAL(S).
1776	THE SEPARATION FORCE SHALL BE NOT LESS THAN 1776 POUND(S) PER INCH OF WIDTH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Adhesion (Cont)	
Minimum separation force (cont)	
(newtons/millimeter width)	1778
No removal of test film by the tape.	1780
No effect by contact by distilled water.	1782
Adheres tightly without lifting or scaling.	1784
No flaking, chipping, or powdering.	1786
No swelling or softening of material.	1788
Adheres to self or metal.	1790
Test methods (select one)	
Per base document except ____	1742
Per document (doc des)	1744
Test specimen thickness (select one)	
(inches)	1746
(millimeters)	1748
Test specimen length (select one)	
(inches)	1732
(millimeters)	1734

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1778	THE SEPARATION FORCE SHALL BE NOT LESS THAN 1778 NEWTON(S) PER MILLIMETER OF WIDTH.
1780	THERE SHALL BE NO REMOVAL OF TEST FILM BY THE TAPE.
1782	CONTACT WITH DISTILLED WATER SHALL NOT CAUSE ADVERSE EFFECT.
1784	ITEM SHALL ADHERE TIGHTLY WITHOUT LIFTING OR SCALING.
1786	THERE SHALL BE NO FLAKING, CHIPPING OR POWDERING.
1788	THERE SHALL BE NO SWELLING OR SOFTENING OF MATERIAL.
1790	THE MATERIAL SHALL ADHERE TO SELF OR METAL.
1742	ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1744	ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1744.
1746	THE TEST SPECIMEN THICKNESS SHALL BE 1746 INCH(S).
1748	THE TEST SPECIMEN THICKNESS SHALL BE 1748 MILLIMETER(S).
1732	THE TEST SPECIMEN LENGTH SHALL BE 1732 INCH(S).
1734	THE TEST SPECIMEN LENGTH SHALL BE 1734 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Adhesion (Cont)	
Per document (cont)	
Test specimen width (select one)	
(inches)	1736
(millimeters)	1738
Maximum cure temperature (degrees Celsius)	1750
Maximum cure period (select one)	
(hours)	1752
(minutes)	1754
Cure relative humidity (percent)	1756
Cure humidity tolerance, plus or minus	1758
Minimum interval between application and removal of tape (minutes)	1762
Low temperature (degrees Celsius)	1764
High temperature (degrees Celsius)	1766
Alkalinity	
Requirements (select one)	
Per base document except ____	1884
Maximum alkalinity (percent)	1886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1736	THE TEST SPECIMEN WIDTH SHALL BE 1736 INCH(S).
1738	THE TEST SPECIMEN WIDTH SHALL BE 1738 MILLIMETER(S).
1750	THE CURING TEMPERATURE SHALL BE NOT GREATER THAN 1750 DEGREES CELSIUS.
1752	THE CURING PERIOD SHALL BE NOT GREATER THAN 1752 HOUR(S).
1754	THE CURING PERIOD SHALL BE NOT GREATER THAN 1754 MINUTE(S).
1756	THE CURING RELATIVE HUMIDITY SHALL BE 1756 PERCENT.
1758	THE CURING RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 1758 PERCENT.
1762	THE INTERVAL BETWEEN APPLICATION AND REMOVAL OF THE TAPE SHALL BE NOT LESS THAN 1762 MINUTE(S).
1764	TESTING AT LOW TEMPERATURE SHALL BE PERFORMED AT 1764 DEGREES CELSIUS.
1766	TESTING AT HIGH TEMPERATURE SHALL BE PERFORMED AT 1776 DEGREES CELSIUS.
1884	ALKALINITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1884.
1886	ALKALINITY. THE ALKALINITY (SODIUM OXIDE EQUIVALENT) SHALL BE NOT GREATER THAN 1886 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Alkalinity (Cont)	
Test methods (select one)	
Per base document except ____	1890
Per document (doc des)	1892
Test method (des)	1894
Specimen amount (grams)	1896
Wetting agent	
Number 1 (media)	1898
Number 2 (media)	2072
Number 3 (media)	2074
Reflux period (hours)	2076
Asbestos Content	
Requirements (select one)	
Per base document except ____	2080
Minimum asbestos content by weight (percent)	2082
Test method (select one)	
Per base document except ____	2086
Per ASTMD146	2088

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1890	ALKALINITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1890.
1892	ALKALINITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1892.
1894	THE APPLICABLE TEST METHOD SHALL BE 1894.
1896	THE TEST SPECIMEN AMOUNT SHALL BE 1896 GRAM(S).
1898	THE MEDIA FOR WETTING AGENT NUMBER 1 SHALL BE 1898.
2072	THE MEDIA FOR WETTING AGENT NUMBER 2 SHALL BE 2072.
2074	THE MEDIA FOR WETTING AGENT NUMBER 3 SHALL BE 2074.
2076	THE REFLUX PERIOD SHALL BE 2076 HOUR(S).
2080	ASBESTOS CONTENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2080.
2082	ASBESTOS CONTENT. THE ASBESTOS CONTENT BY WEIGHT SHALL BE NOT LESS THAN 2082 PERCENT.
2086	ASBESTOS CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2086.
2088	ASBESTOS CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD146.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Asbestos Content (Cont)	
Per ASTMD146. (Cont)	
Furnace temperature (degrees Celsius)	2090
Tolerance, plus or minus (degrees Celsius)	2092
Burn period (hours)	2094
Per ASTMD1918.	2096
Breaking Strength	
Requirements (select one)	
Per base document except ____	1816
As follows:	1818
Minimum strength (select one)	
(pounds/inch width)	1820
(newtons/millimeter width)	1822
Cold band breaking load (select one)	
(pounds)	1824
(newtons)	1826

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2090	THE FURNACE TEMPERATURE SHALL BE 2090 DEGREES CELSIUS.
2092	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2092 DEGREES CELSIUS.
2094	THE BURN PERIOD SHALL BE 2094 HOUR(S).
2096	ASBESTOS CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1918.
1816	BREAKING STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1818	BREAKING STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1820	THE BREAKING STRENGTH SHALL BE NOT LESS THAN 1820 POUND(S) PER INCH OF WIDTH.
1822	THE BREAKING STRENGTH SHALL BE NOT LESS THAN 1822 NEWTON(S) PER MILLIMETER OF WIDTH.
1824	THE COLD BAND BREAKING LOAD SHALL BE 1824 POUND(S).
1826	THE COLD BAND BREAKING LOAD SHALL BE 1826 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Breaking Strength (Cont)	
As follows: (Cont)	
Hot band breaking load (select one)	
(pounds)	1828
(newtons)	1830
Test methods (select one)	
Per base document except ____	1802
Per FED-STD-191, Method 5104.	1801
Condition per ASTME171:	1803
Per document (doc des)	1804
Hot band test period (hours)	1806
*Test temperature (degrees Celsius)	1808
Cold band test period (hours)	1810
*Test temperature (degrees Celsius)	1812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1828	THE HOT BAND BREAKING LOAD SHALL BE 1828 POUND(S).
1830	THE HOT BAND BREAKING LOAD SHALL BE 1830 NEWTON(S).
1802	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1801	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5104 OF FED-STD-191.
1803	THE TEST SPECIMEN SHALL BE CONDITIONED IN ACCORDANCE WITH ASTME171.
1804	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1804.
1806	THE HOT BAND TEST PERIOD SHALL BE 1806 HOUR(S).
1808	THE HOT BAND TEST TEMPERATURE SHALL BE 1808 DEGREES CELSIUS.
1810	THE COLD BAND TEST PERIOD SHALL BE 1810 HOUR(S).
1812	THE COLD BAND TEST TEMPERATURE SHALL BE 1812 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2022610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Brittle Point	
Requirements (select one)	
Per base document except ____	2102
As follows:	2104
No cracking.	2106
Temperature (degrees Celsius)	2108
Test methods (select one)	
Per base document except ____	2112
Per ASTMD2137.	2114
Per ASTMD746, Method B.	2116
Chemical Composition	
Requirements (select one)	
Per base document except ____	1912
Per Chemical Composition Table.	1914

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2102	BRITTLE POINT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2102.
2104	BRITTLE POINT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2106	THERE SHALL BE NO CRACKING.
2108	THE BRITTLE POINT TEMPERATURE SHALL BE NOT GREATER THAN 2108 DEGREES CELSIUS.
2112	BRITTLE POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2112.
2114	BRITTLE POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD2137.
2116	BRITTLE POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD B OF ASTMD746.
1912	CHEMICAL COMPOSITION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	CHEMICAL COMPOSITION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE CHEMICAL COMPOSITION TABLE.

Source: https://assist.dla.mil -- Downloaded: 2025-12-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Chemical Composition (Cont)	
Per Chemical Composition Table (Cont)	
Test methods (select one)	
Per base document except ____	1902
Suppliers certification of compliance may be accepted in lieu of a specific test.	1904
Per document (doc des)	1906
Test method (des)	1908
Cloth Construction	
Requirements (select one)	
Per base document except ____	1924

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

CHEMICAL COMPOSITION TABLE

INGREDIENT	QUANTITY	UNITS
3500	3501	3502
3503	3504	3505
3506	3507	3508
3509	3510	3511
3512	3513	3514
3515	3516	3517
3518	3519	3520
3521	3522	3523
3524	3525	3526
3527	3528	3529

1902 CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.

1904 CHEMICAL COMPOSITION. SUPPLIERS CERTIFICATE OF COMPLIANCE WITH THE CHEMICAL COMPOSITION REQUIREMENTS MAY BE ACCEPTED IN LIEU OF A SPECIFIC TEST.

1906 CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1906.

1908 THE APPLICABLE TEST METHOD SHALL BE 1908.

1924 CLOTH CONSTRUCTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1924.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Cloth Construction (Cont)	
Requirements (Cont)	
As specified herein.	1926
Test methods (select one)	
Per base document except ____	1918
Per FED-STD-191, Method 5050.	1920
Color	
Requirements (select one)	
Per base document except ____	1958
As follows:	1960
Catalyzed or single material (select one)	
Color (name)	1962
(Designation)	1964
*Applicable (doc des)	1966
Class (no.)	1968
Gardner scale (no.)	1970

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1926	CLOTH CONSTRUCTION. THE REQUIREMENT(S) SHALL BE AS SPECIFIED HEREIN.
1918	CLOTH CONSTRUCTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1918.
1920	CLOTH CONSTRUCTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5050 OF FED-STD-191.
1958	COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1958.
1960	COLOR. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1962	THE CATALYZED OR SINGLE MATERIAL COLOR SHALL BE 1962.
1964 1966	THE COLOR DESIGNATION SHALL BE 1964 IN ACCORDANCE WITH 1966.
1968	THE COLOR CLASS SHALL BE 1968.
1970	THE COLOR SHALL BE IN ACCORDANCE WITH GARDNER SCALE NUMBER 1970.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Color (Cont)	
As follows: (Cont)	
Base material (select one)	
Color (name)	1972
(Designation)	1974
*Applicable (doc des)	1976
Class (no.)	1978
Gardner scale (no.)	1980
Catalyst material (select one)	
Color (name)	1982
(Designation)	1984
*Applicable (doc des)	1986
Class (no.)	1988
Gardner scale (no.)	1990
Test methods (select one)	
Per base document except ____	1950
Per FED-STD-141, Method 4243.	1952
Per applicable color document.	1954

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1972	THE BASE MATERIAL COLOR SHALL BE 1972.
1974 1976	THE COLOR DESIGNATION SHALL BE 1974 IN ACCORDANCE WITH 1976.
1978	THE COLOR CLASS SHALL BE 1978.
1980	THE COLOR SHALL BE IN ACCORDANCE WITH GARDNER SCALE NUMBER 1980.
1982	THE CATALYST MATERIAL COLOR SHALL BE 1982.
1984 1986	THE COLOR DESIGNATION SHALL BE 1984 IN ACCORDANCE WITH 1986.
1988	THE COLOR CLASS SHALL BE 1988.
1990	THE COLOR SHALL BE IN ACCORDANCE WITH GARDNER SCALE NUMBER 1990.
1950	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1950.
1952	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4243 OF FED-STD-141.
1954	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE APPLICABLE COLOR DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Compression Set	
Requirements (select one)	
Per base document except ____	2120
Maximum compression set (percent)	2122
Test methods (select one)	
Per base document except ____	2126
Per ASTMD395.	2128
Number of specimens (quantity)	2130
Specimen length (select one)	
(inches)	2132
(millimeters)	2134
Specimen width (select one)	
(inches)	2136
(millimeters)	2138
Specimen thickness (select one)	
(inches)	2140
(millimeters)	2142

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2120	COMPRESSION SET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.
2122	COMPRESSION SET. THE COMPRESSION SET SHALL BE NOT GREATER THAN 2122 PERCENT.
2126	COMPRESSION SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2126.
2128	COMPRESSION SET. TESTING SHALL BE IN ACCORDANCE WITH ASTMD395.
2130	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2130.
2132	THE TEST SPECIMEN LENGTH SHALL BE 2132 INCH(S).
2134	THE TEST SPECIMEN LENGTH SHALL BE 2134 MILLIMETER(S).
2136	THE TEST SPECIMEN WIDTH SHALL BE 2136 INCH(S).
2138	THE TEST SPECIMEN WIDTH SHALL BE 2138 MILLIMETER(S).
2140	THE TEST SPECIMEN THICKNESS SHALL BE 2140 INCH(S).
2142	THE TEST SPECIMEN THICKNESS SHALL BE 2142 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Compression Set (Cont)	
Per ASTMD395. (Cont)	
Specimen diameter (select one)	
(inches)	2144
(millimeters)	2146
Number of test cycles (quantity)	2148
Per ASTMD1667.	2150
Number of specimens (quantity)	2152
Specimen size (select one)	
(square inches)	2154
(square millimeters)	2156
Compression Strength	
Requirements (select one)	
Per base document except ____	2160
As follows:	2161
Compression strength (select one)	
(psi)	2162
Tolerance, plus or minus (psi)	2164

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2144	THE TEST SPECIMEN DIAMETER SHALL BE 2144 INCH(S).
2146	THE TEST SPECIMEN DIAMETER SHALL BE 2146 MILLIMETER(S).
2148	THE NUMBER OF TEST CYCLES SHALL BE 2148.
2150	COMPRESSION SET. TESTING SHALL BE IN ACCORDANCE WITH ASTMD1667.
2152	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2152.
2154	THE TEST SPECIMEN SIZE SHALL BE 2154 SQUARE INCH(S).
2156	THE TEST SPECIMEN SIZE SHALL BE 2156 SQUARE MILLIMETER(S).
2160	COMPRESSION STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2161	COMPRESSION STRENGTH. THE COMPRESSION STRENGTH SHALL BE AS FOLLOWS:
2162	THE COMPRESSION STRENGTH SHALL BE 2162 POUND(S) PER SQUARE INCH.
2164	THE COMPRESSION STRENGTH TOLERANCE SHALL BE PLUS OR MINUS 2164 POUND(S) PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Compression Strength (Cont)	
Compression strength (Cont)	
(kilopascals)	2166
Tolerance, plus or minus (kilopascals)	2168
Minimum compression strength (select one)	
(psi)	2170
(kilopascals)	2172
Test methods (select one)	
Per base document except ____	2176
Per FED-STD-406, Method 1021.	2178
Per ASTMC165.	2180
Per ASTMD1056.	2182
Test temperature (degrees Celsius)	2184
Maximum period to deflection measurement after load application (seconds)	2186
Compressed to percent of original thickness (percent)	2188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2166	THE COMPRESSION STRENGTH SHALL BE 2166 KILOPASCAL(S).
2168	THE COMPRESSION STRENGTH TOLERANCE SHALL BE PLUS OR MINUS 2168 KILOPASCAL(S).
2170	THE COMPRESSION STRENGTH SHALL BE NOT LESS THAN 2170 POUND(S) PER SQUARE INCH.
2172	THE COMPRESSION STRENGTH SHALL BE NOT LESS THAN 2172 KILOPASCAL(S).
2176	COMPRESSION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2176.
2178	COMPRESSION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1021 OF FED-STD-406.
2180	COMPRESSION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC165.
2182	COMPRESSION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1056.
2184	THE TEST TEMPERATURE SHALL BE 2184 DEGREES CELSIUS.
2186	THE PERIOD TO DEFLECTION MEASUREMENT AFTER LOAD APPLICATION SHALL BE NOT GREATER THAN 2186 SECOND(S).
2188	THE MATERIAL SHALL BE COMPRESSED TO 2188 PERCENT OF ORIGINAL THICKNESS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Compression Strength (Cont)	
Test methods (Cont)	
Per ASTMD1621, procedure A	2190
Number of specimens (quantity)	2192
Specimen width (select one)	
(inches)	2194
(millimeters)	2196
Specimen thickness (select one)	
(inches)	2198
(millimeters)	2200
Specimen length (select one)	
(inches)	2204
(millimeters)	2205
Specimen diameter (select one)	
(inches)	2206
(millimeters)	2207
Number of cycles (quantity)	2208
Compressed to percent of original thickness (percent)	2209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2190	COMPRESSION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH PROCEDURE A OF ASTMD1621.
2192	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2192.
2194	THE TEST SPECIMEN WIDTH SHALL BE 2194 INCH(S).
2196	THE TEST SPECIMEN WIDTH SHALL BE 2196 MILLIMETER(S).
2198	THE TEST SPECIMEN THICKNESS SHALL BE 2198 INCH(S).
2200	THE TEST SPECIMEN THICKNESS SHALL BE 2200 MILLIMETER(S).
2204	THE TEST SPECIMEN LENGTH SHALL BE 2204 INCH(S).
2205	THE TEST SPECIMEN LENGTH SHALL BE 2205 MILLIMETER(S).
2206	THE TEST SPECIMEN DIAMETER SHALL BE 2206 INCH(S).
2207	THE TEST SPECIMEN DIAMETER SHALL BE 2207 MILLIMETER(S).
2208	THE NUMBER OF TEST CYCLES SHALL BE 2208.
2209	THE MATERIAL SHALL BE COMPRESSED TO 2209 PERCENT OF ORIGINAL THICKNESS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Compression Strength (Cont)	
Test methods (Cont)	
Per ASTMF36, procedure F.	2272
Conditioning temperature (degrees Celsius)	2273
Conditioning relative humidity (percent)	2274
Number of specimens (quantity)	2275
Specimen width (select one)	
(inches)	2276
(millimeters)	2277
Specimen thickness (select one)	
(inches)	2279
(millimeters)	2281
Specimen length (select one)	
(inches)	2283
(millimeters)	2284
Specimen diameter (select one)	
(inches)	2286
(millimeters)	2288

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2272	COMPRESSION STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH PROCEDURE F OF ASTMF36.
2273	THE CONDITIONING TEMPERATURE SHALL BE 2273 DEGREES CELSIUS.
2274	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 2274 PERCENT.
2275	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2275.
2276	THE TEST SPECIMEN WIDTH SHALL BE 2276 INCH(S).
2277	THE TEST SPECIMEN WIDTH SHALL BE 2277 MILLIMETER(S).
2279	THE TEST SPECIMEN THICKNESS SHALL BE 2279 INCH(S).
2281	THE TEST SPECIMEN THICKNESS SHALL BE 2281 MILLIMETER(S).
2283	THE TEST SPECIMEN LENGTH SHALL BE 2283 INCH(S).
2284	THE TEST SPECIMEN LENGTH SHALL BE 2284 MILLIMETER(S).
2286	THE TEST SPECIMEN DIAMETER SHALL BE 2286 INCH(S).
2288	THE TEST SPECIMEN DIAMETER SHALL BE 2288 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Corrosion	
Requirements (select one)	
Per base document except ____	2036
No pitting, corrosion, or adverse effect.	2038
No copper removable from test mirror.	2040
No more corrosiveness than sterile cotton in contact with steel plate.	3246
Test methods (select one)	
Per base document except ____	2002
Per document (doc des)	2004
Specimen length (select one)	
(inches)	2006
(millimeters)	2008
Specimen width (select one)	
(inches)	2010
(millimeters)	2012

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2036	CORROSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2036.
2038	CORROSION. THERE SHALL BE NO PITTING, CORROSION, OR ADVERSE EFFECT.
2040	CORROSION. THERE SHALL BE NO COPPER REMOVABLE FROM THE TEST MIRROR.
3246	CORROSION. THERE SHALL BE NO MORE CORROSIVENESS THAN STERILE COTTON IN CONTACT WITH A STEEL PLATE.
2002	CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2004.
2006	THE TEST SPECIMEN LENGTH SHALL BE 2006 INCH(S).
2008	THE TEST SPECIMEN LENGTH SHALL BE 2008 MILLIMETER(S).
2010	THE TEST SPECIMEN WIDTH SHALL BE 2010 INCH(S).
2012	THE TEST SPECIMEN WIDTH SHALL BE 2012 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Corrosion (Cont)	
Per document (Cont)	
Specimen thickness (select one)	
(inches)	2014
(millimeters)	2016
Test period (select one)	
(hours)	2018
(days)	2020
Test temperature (degrees Celsius)	2022
Test relative humidity (percent)	2024
Number of specimens (quantity)	2026
Preconditioning temperature (degrees Celsius)	2028
Preconditioning period (hours)	2030
Preconditioning relative humidity (percent)	2032
Density/Specific Gravity	
Requirements (select one)	
Per base document except ____	3202

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2014	THE TEST SPECIMEN THICKNESS SHALL BE 2014 INCH(S).
2016	THE TEST SPECIMEN THICKNESS SHALL BE 2016 MILLIMETER(S).
2018	THE TEST PERIOD SHALL BE 2018 HOUR(S).
2020	THE TEST PERIOD SHALL BE 2020 DAY(S).
2022	THE TEST TEMPERATURE SHALL BE 2022 DEGREES CELSIUS.
2024	THE TEST RELATIVE HUMIDITY SHALL BE 2024 PERCENT.
2026	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2026.
2028	THE PRECONDITIONING TEMPERATURE SHALL BE 2028 DEGREES CELSIUS.
2030	THE PRECONDITIONING PERIOD SHALL BE 2030 HOUR(S).
2032	THE PRECONDITIONING RELATIVE HUMIDITY SHALL BE 2032 PERCENT.
3202	DENSITY/SPECIFIC GRAVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Density/Specific Gravity (Cont)	
Requirements (Cont)	
As follows:	3204
Minimum density (select one)	
SI	
(grams/cubic millimeter)	3206
U.S. (select one)	
(pounds/cubic foot)	3208
(ounces/cubic inch)	3210
Maximum density	
SI	
(Grams/cubic millimeter)	3212
U.S. (select one)	
(pounds/cubic foot)	3214
(ounces/cubic inch)	3216
Minimum specific gravity (number)	3218
Maximum specific gravity (number)	3220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3204	DENSITY/SPECIFIC GRAVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3206	THE DENSITY SHALL BE NOT LESS THAN 3206 GRAM(S) PER CUBIC MILLIMETER.
3208	THE DENSITY SHALL BE NOT LESS THAN 3208 POUND(S) PER CUBIC FOOT.
3210	THE DENSITY SHALL BE NOT LESS THAN 3210 OUNCE(S) PER CUBIC INCH.
3212	THE DENSITY SHALL BE NOT GREATER THAN 3212 GRAM(S) PER CUBIC MILLIMETER.
3214	THE DENSITY SHALL BE NOT GREATER THAN 3214 POUND(S) PER CUBIC FOOT.
3216	THE DENSITY SHALL BE NOT GREATER THAN 3216 OUNCE(S) PER CUBIC INCH.
3218	THE SPECIFIC GRAVITY SHALL BE NOT LESS THAN 3218.
3220	THE SPECIFIC GRAVITY SHALL BE NOT GREATER THAN 3220.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Density/Specific Gravity (Cont)	
Test methods (select one)	
Per base document except ____	3224
Per ASTMC303.	3226
Per ASTMC520.	3228
Per ASTMC167.	3230
Per ASTMD1622.	3232
Per FED-STD-406, Method 5011.	3234
Test temperature (degrees Celsius)	3236
Tolerance, plus or minus (degrees Celsius)	3238
Per ASTMD1667.	3240
By any conventional method.	3242

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3224	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3224.
3226	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC303.
3228	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC520.
3230	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC167.
3232	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1622.
3234	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5011 OF FED-STD-406.
3236	THE TEST TEMPERATURE SHALL BE 3236 DEGREES CELSIUS.
3238	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3238 DEGREES CELSIUS.
3240	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1667.
3242	DENSITY/SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANY CONVENTIONAL METHOD.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Drying (Cure, Gel)	
Requirements (select one)	
Per base document except ____	2246
As follows:	2248
Period to reach stringy state (select one)	
(hours)	2250
(minutes)	2252
Period to reach tack free state (select one)	
(hours)	2254
(minutes)	2256
Period to reach full cure (select one)	
(hours)	2258
(minutes)	2260
Specimen conforms to color requirements.	2262
Specimen conforms to hardness requirements.	2264

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2246	DRYING (CURE, GEL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2246.
2248	DRYING (CURE, GEL). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2250	THE PERIOD TO REACH STRINGY STATE SHALL BE 2250 HOUR(S).
2252	THE PERIOD TO REACH STRINGY STATE SHALL BE 2252 MINUTE(S).
2254	THE PERIOD TO REACH TACK FREE STATE SHALL BE 2254 HOUR(S).
2256	THE PERIOD TO REACH TACK FREE STATE SHALL BE 2256 MINUTE(S).
2258	THE PERIOD TO REACH FULL CURE SHALL BE 2258 HOUR(S).
2260	THE PERIOD TO REACH FULL CURE SHALL BE 2260 MINUTE(S).
2262	THE SPECIMEN SHALL CONFORM TO THE COLOR REQUIREMENTS AFTER TEST.
2264	THE SPECIMEN SHALL CONFORM TO THE HARDNESS REQUIREMENTS AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Drying (Cure, Gel) (Cont)	
Test methods (select one)	
Per base document except ____	2214
Per document (doc des)	2216
Specimen length (select one)	
(inches)	2218
(millimeters)	2220
Specimen width (select one)	
(inches)	2222
(millimeters)	2224
Specimen thickness (select one)	
(inches)	2226
(millimeters)	2228
Relative humidity (percent)	2230
Humidity tolerance, plus or minus (percent)	2232
Maximum drying temperature (degrees Celsius)	2234

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2214	DRYING (CURE, GEL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2214.
2216	DRYING (CURE, GEL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2216.
2218	THE TEST SPECIMEN LENGTH SHALL BE 2218 INCH(S).
2220	THE TEST SPECIMEN LENGTH SHALL BE 2220 MILLIMETER(S).
2222	THE TEST SPECIMEN WIDTH SHALL BE 2222 INCH(S).
2224	THE TEST SPECIMEN WIDTH SHALL BE 2224 MILLIMETER(S).
2226	THE TEST SPECIMEN THICKNESS SHALL BE 2226 INCH(S).
2228	THE TEST SPECIMEN THICKNESS SHALL BE 2228 MILLIMETER(S).
2230	THE TEST RELATIVE HUMIDITY SHALL BE 2230 PERCENT.
2232	THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2232 PERCENT.
2234	THE DRYING TEMPERATURE SHALL BE NOT GREATER THAN 2234 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Drying (Cure, Gel) (Cont)	
Per document (Cont)	
Maximum drying period (select one)	
(hours)	2236
(minutes)	2238
Test specimen amount	
(ounces)	2240
(grams)	2242
Elongation	
Requirements (select one)	
Per base document except ____	2280
Minimum elongation (percent)	2282
Test methods (select one)	
Per base document except ____	2268
Per ASTMD412, die C.	2270

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2236	THE DRYING PERIOD SHALL BE NOT GREATER THAN 2236 HOUR(S).
2238	THE DRYING PERIOD SHALL BE NOT GREATER THAN 2238 MINUTE(S).
2240	THE TEST SPECIMEN AMOUNT SHALL BE 2240 OUNCE(S).
2242	THE TEST SPECIMEN AMOUNT SHALL BE 2242 GRAM(S).
2280	ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	ELONGATION. THE ELONGATION SHALL BE NOT LESS THAN 2282 PERCENT.
2268	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2268.
2270	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412 USING DIE C FOR THE SAMPLE CONFIGURATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flammability (Combustibility, Smoke Density, Flame Spread Index, Fire Resistance, Surface Burn Classification, Resistance to Smoldering)	
Requirements (select one)	
Per base document except ____	2332
Per MIL-STD-1623.	2343
No melting, dripping, or flowing.	2345
Maximum flame spread index (des)	2347
No sparking, burning, or smoking.	2348
As follows:	2334
Specimen (select one)	
Self-extinguishing.	2336
Non-burning.	2338

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2332	FLAMMABILITY (COMBUSTIBILITY, SMOKE DENSITY, FLAME SPREAD INDEX, FIRE RESISTANCE, SURFACE BURN CLASSIFICATION, RESISTANCE TO SMOLDERING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2332.
2343	FLAMMABILITY (COMBUSTIBILITY, SMOKE DENSITY, FLAME SPREAD INDEX, FIRE RESISTANCE, SURFACE BURN CLASSIFICATION, RESISTANCE TO SMOLDERING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-STD-1623.
2345	THERE SHALL BE NO MELTING DRIPPING, OR FLOWING.
2347	THE FLAME SPREAD INDEX DESIGNATION SHALL BE NOT GREATER THAN 2347.
2348	FLAMMABILITY (COMBUSTIBILITY, SMOKE DENSITY, FLAME SPREAD INDEX, FIRE RESISTANCE, SURFACE BURN CLASSIFICATION, RESISTANCE TO SMOLDERING). THERE SHALL BE NO SPARKING, BURNING, OR SMOKING.
2334	FLAMMABILITY (COMBUSTIBILITY, SMOKE DENSITY, FLAME SPREAD INDEX, FIRE RESISTANCE, SURFACE BURN CLASSIFICATION, RESISTANCE TO SMOLDERING). THE REQUIREMENTS SHALL BE AS FOLLOWS:
2336	THE SPECIMEN SHALL BE SELF-EXTINGUISHING.
2338	THE SPECIMEN SHALL BE NON-BURNING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flammability (Combustibility, Smoke Density, Flame Spread Index, Fire Resistance, Surface Burn Classification, Resistance to Smoldering) (Cont)	
As follows: (Cont)	
Smoke density index	
Maximum flaming (des)	2350
Maximum nonflaming (des)	2351
Maximum burn distance (select one)	
(inches)	2340
(millimeters)	2342
Maximum burn period (seconds)	2344
Maximum char distance (select one)	
(inches)	2352
(millimeters)	2353
Maximum smoldering period (seconds)	2346
Minimum melt temperature (degrees Celsius)	2354

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2350	THE SMOKE DENSITY INDEX, WITH MATERIAL FLAMING, SHALL BE NOT GREATER THAN 2350.
2351	THE SMOKE DENSITY INDEX, WITH MATERIAL NON-FLAMING, SHALL BE NOT GREATER THAN 2351.
2340	THE BURN DISTANCE SHALL BE NOT GREATER THAN 2340 INCH(S).
2342	THE BURN DISTANCE SHALL BE NOT GREATER THAN 2342 MILLIMETER(S).
2344	THE BURN PERIOD SHALL BE NOT GREATER THAN 2344 SECOND(S).
2352	THE CHAR DISTANCE SHALL BE NOT GREATER THAN 2352 INCH(S).
2353	THE CHAR DISTANCE SHALL BE NOT GREATER THAN 2353 MILLIMETER(S).
2346	THE SMOLDERING PERIOD SHALL BE NOT GREATER THAN 2346 SECOND(S).
2354	THE MELTING TEMPERATURE SHALL BE NOT LESS THAN 2354 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flammability (Combustibility, Smoke Density, Flame Spread Index, Fire Resistance, Surface Burn Classification, Resistance to Smoldering). (Cont)	
As follows: (Cont)	
Minimum char temperature (degrees Celsius)	2355
Minimum ignition temperature (degrees Celsius)	2356
Maximum flame spread index (value)	2357
Maximum smoke development index (des)	2358
Test methods (select one)	
Per base document except ____	2302
Per document (doc des)	2304
Test method (des)	2306
Number of specimens (quantity)	2308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2355	THE CHAR TEMPERATURE SHALL BE NOT LESS THAN 2355 DEGREES CELSIUS.
2356	THE IGNITION TEMPERATURE SHALL BE NOT LESS THAN 2356 DEGREES CELSIUS.
2357	THE FLAME SPREAD INDEX SHALL BE NOT GREATER THAN 2357.
2358	THE SMOKE DEVELOPMENT INDEX SHALL BE NOT GREATER THAN 2358.
2302	FLAMMABILITY (COMBUSTIBILITY, SMOKE DENSITY, FLAME SPREAD INDEX, FIRE RESISTANCE, SURFACE BURN CLASSIFICATION, RESISTANCE TO SMOLDERING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT, 2302.
2304	FLAMMABILITY (COMBUSTIBILITY, SMOKE DENSITY, FLAME SPREAD INDEX, FIRE RESISTANCE, SURFACE BURN CLASSIFICATION, RESISTANCE TO SMOLDERING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2304.
2306	THE APPLICABLE TEST METHOD SHALL BE 2306.
2308	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2308.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flammability (Combustibility, Smoke Density, Flame Spread Index, Fire Resistance, Surface Burn Classification, Resistance to Smoldering) (Cont)	
Per document (Cont)	
Specimen length (select one)	
(inches)	2310
(millimeters)	2312
Specimen width (select one)	
(inches)	2314
(millimeters)	2316
Specimen thickness (select one)	
(inches)	2318
(millimeters)	2320
Specimen weight (select one)	
(ounces)	2322
(grams)	2324
Times flame applied (quantity)	2326
Flame application period (seconds)	2328
Test rod temperature (degrees Celsius)	2290
Test period (hours)	2292

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2310	THE TEST SPECIMEN LENGTH SHALL BE 2310 INCH(S).
2312	THE TEST SPECIMEN LENGTH SHALL BE 2312 MILLIMETER(S).
2314	THE TEST SPECIMEN WIDTH SHALL BE 2314 INCH(S).
2316	THE TEST SPECIMEN WIDTH SHALL BE 2316 MILLIMETER(S).
2318	THE TEST SPECIMEN THICKNESS SHALL BE 2318 INCH(S).
2320	THE TEST SPECIMEN THICKNESS SHALL BE 2320 MILLIMETER(S).
2322	THE TEST SPECIMEN WEIGHT SHALL BE 2322 OUNCE(S).
2324	THE TEST SPECIMEN WEIGHT SHALL BE 2324 GRAM(S).
2326	THE FLAME SHALL BE APPLIED TO THE TEST SPECIMEN 2326 TIME(S).
2328	THE FLAME APPLICATION PERIOD SHALL BE 2328 SECOND(S).
2290	THE TEST ROD TEMPERATURE SHALL BE 2290 DEGREES CELSIUS.
2292	THE TEST PERIOD SHALL BE 2292 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flexibility	
Requirements (select one)	
Per base document except ____	2394
As follows:	2393
No evidence of cracking, chipping, crazing, splitting, or delamination.	2396
Minimum flexural strength (select one)	
(psi)	2395
(kilopascals)	2397
No rupture and springs back to original shape and dimension.	2398
Minimum flexural strength three times density.	2399
Test methods (select one)	
Per base document except ____	2362

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2394	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2394.
2393	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2396	THERE SHALL BE NO EVIDENCE OF CRACKING, CHIPPING, CRAZING, SPLITTING, OR DELAMINATION.
2395	THE FLEXURAL STRENGTH SHALL BE NOT LESS THAN 2395 POUND(S) PER SQUARE INCH.
2397	THE FLEXURAL STRENGTH SHALL BE NOT LESS THAN 2397 KILOPASCAL(S).
2398	THERE SHALL BE NO RUPTURES AND MATERIAL SPRINGS BACK TO ORIGINAL SHAPE AND DIMENSION.
2399	THE FLEXURAL STRENGTH SHALL BE NOT LESS THAN THREE TIMES THE DENSITY.
2362	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flexibility (Cont)	
Test methods (Cont)	
Per document (doc des)	2364
Test method (des)	2366
Conditioning temperature (degrees Celsius)	2368
Temperature tolerance, plus or minus (degrees Celsius)	2370
Number of specimens (quantity)	2372
Specimen length	
(inches)	2374
(millimeters)	2376
Specimen width	
(inches)	2378
(millimeters)	2380
Specimen thickness	
(inches)	2382
(millimeters)	2384
Mandrel diameter	
(inches)	2386
(millimeters)	2388

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2364	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2364.
2366	THE APPLICABLE TEST METHOD SHALL BE 2366.
2368	THE CONDITIONING TEMPERATURE SHALL BE 2368 DEGREES CELSIUS.
2370	THE CONDITIONING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2370 DEGREES CELSIUS.
2372	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2372.
2374	THE TEST SPECIMEN LENGTH SHALL BE 2374 INCH(S).
2376	THE TEST SPECIMEN LENGTH SHALL BE 2376 MILLIMETER(S).
2378	THE TEST SPECIMEN WIDTH SHALL BE 2378 INCH(S).
2380	THE TEST SPECIMEN WIDTH SHALL BE 2380 MILLIMETER(S).
2382	THE TEST SPECIMEN THICKNESS SHALL BE 2382 INCH(S).
2384	THE TEST SPECIMEN THICKNESS SHALL BE 2384 MILLIMETER(S).
2386	THE BEND MANDREL DIAMETER SHALL BE 2386 INCH(S).
2388	THE BEND MANDREL DIAMETER SHALL BE 2388 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flexibility (Cont)	
Per document (Cont)	
Specimen bend around mandrel (degrees)	2390
Maximum time to effect bend (seconds)	2400
Conditioning relative humidity (percent)	2402
Tolerance, plus or minus (percent)	2404
Fungus	
Requirements (select one)	
Per base document except ____	4760
Fungus resistant by certification or by test.	4761
No evidence of fungus growth by test.	4762
Maximum growth rating per ASTMG21 (des)	2430

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2390	THE SPECIMEN BEND AROUND THE MANDREL SHALL BE 2390 DEGREE(S).
2400	THE TIME TO EFFECT BEND SHALL BE NOT GREATER THAN 2400 SECOND(S).
2402	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 2402 PERCENT.
2404	THE CONDITIONING RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2404 PERCENT.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2430	FUNGUS. THE GROWTH RATING SHALL BE NOT GREATER THAN 2430 IN ACCORDANCE WITH ASTMG21.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Fungus (Cont)	
Test methods (select one)	
Per base document except ____	4754
Per document (doc des)	2412
Test method (des)	2414
Specimen length (select one)	
(inches)	2416
(millimeters)	2418
Specimen width (select one)	
(inches)	2420
(millimeters)	2422
Specimen thickness (select one)	
(inches)	2424
(millimeters)	2426
Test period (days)	4756
Hardness	
Requirements (select one)	
Per base document except ____	2466

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
2412	FUNGUS. TESTING SHALL BE PREFORMED IN ACCORDANCE WITH 2412.
2414	THE APPLICABLE TEST METHOD SHALL BE 2414.
2416	THE TEST SPECIMEN LENGTH SHALL BE 2416 INCH(S).
2418	THE TEST SPECIMEN LENGTH SHALL BE 2418 MILLIMETER(S).
2420	THE TEST SPECIMEN WIDTH SHALL BE 2420 INCH(S).
2422	THE TEST SPECIMEN WIDTH SHALL BE 2422 MILLIMETER(S).
2424	THE TEST SPECIMEN THICKNESS SHALL BE 2424 INCH(S).
2426	THE TEST SPECIMEN THICKNESS SHALL BE 2426 MILLIMETER(S).
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2466	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2466.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Hardness (Cont)	
Requirements (Cont)	
As follows:	2468
Minimum average durometer reading (no.)	2470
Minimum durometer reading (no.)	2472
Test methods (select one)	
Per base document except ____	2434
Per document (doc des)	2436
Test method (des)	2437
Test temperature (degrees Celsius)	2438
Temperature tolerance, plus or minus (degrees Celsius)	2440
Applicable durometer scale (letter)	2442
Indentation duration (seconds)	2444
Specimen length (select one)	
(inches)	2446
(millimeters)	2448

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2468	HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2470	THE AVERAGE DUROMETER READING SHALL BE NOT LESS THAN 2470.
2472	THE DUROMETER READING SHALL BE NOT LESS THAN 2472.
2434	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2434.
2436	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2436.
2437	THE APPLICABLE TEST METHOD SHALL BE 2437.
2438	THE TEST TEMPERATURE SHALL BE 2438 DEGREES CELSIUS.
2440	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2440 DEGREES CELSIUS.
2442	THE APPLICABLE TESTER DUROMETER SCALE LETTER SHALL BE 2442.
2444	THE INDENTATION DURATION SHALL BE 2444 SECOND(S).
2446	THE TEST SPECIMEN LENGTH SHALL BE 2446 INCH(S).
2448	THE TEST SPECIMEN LENGTH SHALL BE 2448 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Hardness (Cont)	
Per document (Cont)	
Specimen width (select one)	
(inches)	2450
(millimeters)	2452
Specimen thickness (select one)	
(inches)	2454
(millimeters)	2456
Specimen diameter (select one)	
(inches)	2458
(millimeters)	2460
Number of specimens (quantity)	2462
Hygroscopic Moisture	
Requirements (select one)	
Per base document except ____	2476
Maximum average moisture content by weight (percent)	2478

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2450	THE TEST SPECIMEN WIDTH SHALL BE 2450 INCH(S).
2452	THE TEST SPECIMEN WIDTH SHALL BE 2452 MILLIMETER(S).
2454	THE TEST SPECIMEN THICKNESS SHALL BE 2454 INCH(S).
2456	THE TEST SPECIMEN THICKNESS SHALL BE 2456 MILLIMETER(S).
2458	THE TEST SPECIMEN DIAMETER SHALL BE 2458 INCH(S).
2460	THE TEST SPECIMEN DIAMETER SHALL BE 2460 MILLIMETER(S).
2462	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2462.
2476	HYGROSCOPIC MOISTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2476.
2478	HYGROSCOPIC MOISTURE. THE AVERAGE MOISTURE CONTENT BY WEIGHT SHALL BE NOT GREATER THAN 2478 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Hygroscopic Moisture (Cont)	
Test methods (select one)	
Per base document except ____	2482
Per document (doc des)	2484
Number of specimens (quantity)	2486
Amount of specimen (grams)	2488
Drying temperature (degrees Celsius)	2490
Tolerance, plus or minus (degrees Celsius)	2492
Drying period (hours)	2494
Cooling period in desiccant (hours)	2496
Moisture Resistance/Water Repellency	
Requirements (select one)	
Per base document except ____	3132
Maximum increase in volume (percent)	2648
Maximum increase by weight (percent)	2650

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2482	HYGROSCOPIC MOISTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2482.
2484	HYGROSCOPIC MOISTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2484.
2486	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2486.
2488	THE AMOUNT OF EACH SPECIMEN SHALL BE 2488 GRAM(S).
2490	THE DRYING TEMPERATURE SHALL BE 2490 DEGREES CELSIUS.
2492	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2492 DEGREES CELSIUS.
2494	THE DRYING PERIOD SHALL BE 2494 HOUR(S).
2496	THE COOLING PERIOD IN DESICCANT SHALL BE 2496 HOUR(S).
3132	MOISTURE RESISTANCE/WATER REPELLENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3132.
2648	MOISTURE RESISTANCE/WATER REPELLENCY. THE INCREASE IN VOLUME SHALL BE NOT GREATER THAN 2648 PERCENT.
2650	MOISTURE RESISTANCE/WATER REPELLENCY. THE INCREASE IN WEIGHT SHALL BE NOT GREATER THAN 2650 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Moisture Resistance/Water Repellency (Cont)	
Requirements (Cont)	
Minimum water repelled (milliliters)	2656
As follows:	2672
Maximum water absorption (select one)	
U.S. (select one)	
(pounds/square foot)	2652
(ounces/square inch)	2658
SI	
(grams/square millimeter)	2654
Test methods (select one)	
Per base document except ____	3136
Per ASTMC553.	2660
Per ASTMD1056.	2662

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2656	MOISTURE RESISTANCE/WATER REPELLENCY. THE AMOUNT OF WATER REPELLED SHALL BE NOT LESS THAN 2656 MILLILITER(S).
2672	MOISTURE RESISTANCE/WATER REPELLENCY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2652	THE WATER ABSORBED SHALL BE NOT GREATER THAN 2652 POUND(S) PER SQUARE FOOT.
2658	THE WATER ABSORBED SHALL BE NOT GREATER THAN 2658 OUNCE(S) PER SQUARE INCH.
2654	THE WATER ABSORBED SHALL BE NOT GREATER THAN 2654 GRAM(S) PER SQUARE MILLIMETER.
3136	MOISTURE RESISTANCE/WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3136.
2660	MOISTURE RESISTANCE/WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC553.
2662	MOISTURE RESISTANCE/WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1056.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Moisture Resistance/Water Repellency (Cont)	
Test methods (Cont)	
Per FED-STD-601, Method 12411.	2664
Per ASTMC272.	2666
Immersion period (hours)	2668
Per ASTMC209.	2670
Oil And Solvent Resistance	
Requirements (select one)	
Per base document except ____	2709
No evidence of warping, splitting, or softening of materials.	2711
Maximum dimensional change (percent)	2713
Test methods (select one)	
Per base document except ____	2680

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2664	MOISTURE RESISTANCE/WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 12411 OF FED-STD-601.
2666	MOISTURE RESISTANCE/WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC272.
2668	THE IMMERSION PERIOD SHALL BE 2668 HOUR(S).
2670	MOISTURE RESISTANCE/WATER REPELLENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC209.
2709	OIL AND SOLVENT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2709.
2711	OIL AND SOLVENT RESISTANCE. THERE SHALL BE NO EVIDENCE OF WRAPING, SPLITTING, OR SOFTENING OF MATERIALS.
2713	OIL AND SOLVENT RESISTANCE. THE CHANGE IN ANY DIMENSION FROM INITIAL DIMENSION SHALL BE NOT GREATER THAN 2713 PERCENT.
2680	OIL AND SOLVENT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2680.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Oil And Solvent Resistance (Cont)	
Test methods (Cont)	
Per document (doc des)	2682
Media (select one)	
Per designated document.	2684
Per designated document except ____	2686
Media per document (doc des)	2690
Temperature (degrees Celsius)	2692
Duration (hours)	2694
Portion of solution (percent)	2696
Media per document (doc des)	2698
Temperature (degrees Celsius)	2700
Duration (hours)	2702
Portion of solution (percent)	2704

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2682	OIL AND SOLVENT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2682.
2684	THE TEST MEDIA SHALL BE IN ACCORDANCE WITH THE TEST DOCUMENT.
2686	THE TEST MEDIA SHALL BE IN ACCORDANCE WITH THE TEST DOCUMENT EXCEPT 2686.
2690	THE TEST SPECIMEN SHALL BE EXPOSED TO OIL OR SOLVENT IN ACCORDANCE WITH 2690.
2692	THE TEST MEDIA TEMPERATURE SHALL BE 2692 DEGREES CELSIUS.
2694	THE DURATION OF EXPOSURE TO THE TEST MEDIA SHALL BE 2694 HOUR(S).
2696	THE PERCENTAGE OF THE TEST MEDIA IN A SOLUTION SHALL BE 2696 PERCENT.
2698	THE TEST SPECIMEN SHALL BE EXPOSED TO OIL OR SOLVENT IN ACCORDANCE WITH 2698.
2700	THE TEST MEDIA TEMPERATURE SHALL BE 2700 DEGREES CELSIUS.
2702	THE DURATION OF EXPOSURE TO THE TEST MEDIA SHALL BE 2702 HOUR(S).
2704	THE PERCENTAGE OF THE TEST MEDIA IN A SOLUTION SHALL BE 2704 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Oil And Solvent Resistance (Cont)	
Per document (Cont)	
Media per document (doc des)	2706
Temperature (degrees Celsius)	2708
Duration (hours)	2710
Portion of solution (percent)	2712
Specimen length (select one)	
(inches)	2752
(millimeters)	2754
Specimen width (select one)	
(inches)	2756
(millimeters)	2758
Specimen thickness (select one)	
(inches)	2760
(millimeters)	2762
Specimen diameter (select one)	
(inches)	2764
(millimeters)	2766
Number of specimens (quantity)	2768

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2706	THE TEST SPECIMEN SHALL BE EXPOSED TO OIL OR SOLVENT IN ACCORDANCE WITH 2706.
2708	THE TEST MEDIA TEMPERATURE SHALL BE 2708 DEGREES CELSIUS.
2710	THE DURATION OF EXPOSURE TO THE TEST MEDIA SHALL BE 2710 HOUR(S).
2712	THE PERCENTAGE OF THE TEST MEDIA IN A SOLUTION SHALL BE 2712 PERCENT.
2752	THE TEST SPECIMEN LENGTH SHALL BE 2752 INCH(S).
2754	THE TEST SPECIMEN LENGTH SHALL BE 2754 MILLIMETER(S).
2756	THE TEST SPECIMEN WIDTH SHALL BE 2756 INCH(S).
2758	THE TEST SPECIMEN WIDTH SHALL BE 2758 MILLIMETER(S).
2760	THE TEST SPECIMEN THICKNESS SHALL BE 2760 INCH(S).
2762	THE TEST SPECIMEN THICKNESS SHALL BE 2762 MILLIMETER(S).
2764	THE TEST SPECIMEN DIAMETER SHALL BE 2764 INCH(S).
2766	THE TEST SPECIMEN DIAMETER SHALL BE 2766 MILLIMETER(S).
2768	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2768.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ozone Resistance	
Requirements (select one)	
Per base document except ____	2748
No cracking.	2750
Test methods (select one)	
Per base document except ____	2716
Per ASTMD1149.	2734
Minimum ozone percent by volume (percent)	2735
Minimum ozone concentration by volume (parts per 100 million)	2736
Ozone concentration temperature (degrees Celsius)	2738
Tolerance, plus or minus (degrees Celsius)	2740
Exposure duration (select one)	
(hours)	2742
(minutes)	2744

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2748	OZONE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2748.
2750	OZONE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CRACKING OF THE TEST SPECIMEN.
2716	OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2716.
2734	OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1149.
2735	THE OZONE CONCENTRATION SHALL BE NOT LESS THAN 2735 PERCENT BY VOLUME.
2736	THE OZONE CONCENTRATION SHALL BE NOT LESS THAN 2736 PARTS PER 100 MILLION BY VOLUME.
2738	THE TEMPERATURE OF THE OZONE CONCENTRATION SHALL BE 2738 DEGREES CELSIUS.
2740	THE TEMPERATURE TOLERANCE OF THE OZONE CONCENTRATION SHALL BE PLUS OR MINUS 2740 DEGREES CELSIUS.
2742	THE EXPOSURE DURATION SHALL BE 2742 HOUR(S).
2744	THE EXPOSURE DURATION SHALL BE 2744 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Tensile Strength	
Requirements (select one)	
Per base document except ____	2988
Single direction	
As follows:	2960
Minimum tensile strength (select one)	
(psi)	2992
(kilopascals)	2994
Dual direction	
As follows:	2962
Minimum warp tensile strength (select one)	
(psi)	2996
(kilopascals)	2998
Minimum fill tensile strength (select one)	
(psi)	3000
(kilopascals)	3002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2988	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2988.
2960	TENSILE STRENGTH. THE SINGLE DIRECTION REQUIREMENT(S) SHALL BE AS FOLLOWS:
2992	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2992 POUND(S) PER SQUARE INCH.
2994	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2994 KILOPASCAL(S).
2962	TENSILE STRENGTH. THE DUAL DIRECTION REQUIREMENT(S) SHALL BE AS FOLLOWS:
2996	THE WARP TENSILE STRENGTH SHALL BE NOT LESS THAN 2996 POUND(S) PER SQUARE INCH.
2998	THE WARP TENSILE STRENGTH SHALL BE NOT LESS THAN 2998 KILOPASCAL(S).
3000	THE FILL TENSILE STRENGTH SHALL BE NOT LESS THAN 3000 POUND(S) PER SQUARE INCH.
3002	THE FILL TENSILE STRENGTH SHALL BE NOT LESS THAN 3002 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Tensile Strength (Cont)	
Test methods (select one)	
Per base document except ____	2974
Per document (doc des)	2976
Test method (des)	2978
Test temperature (degrees Celsius)	2980
Tolerance, plus or minus (degrees Celsius)	2982
Number of specimens (quantity)	2984
Die (letter)	2900
Strain speed, warp direction (select one)	
(inches/minute)	2902
(millimeters/minute)	2904
Strain speed, fill direction (select one)	
(inches/minute)	2906
(millimeters/minute)	2908

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2974	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2974.
2976	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2976.
2978	THE APPLICABLE TEST METHOD SHALL BE 2978.
2980	THE TEST TEMPERATURE SHALL BE 2980 DEGREES CELSIUS.
2982	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2982 DEGREES CELSIUS.
2984	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2984.
2900	THE APPLICABLE DIE LETTER SHALL BE 2900.
2902	THE SPEED OF THE STRAIN APPLICATION IN THE WARP DIRECTION SHALL BE 2902 INCH(S) PER MINUTE.
2904	THE SPEED OF THE STRAIN APPLICATION IN THE WARP DIRECTION SHALL BE 2904 MILLIMETER(S) PER MINUTE.
2906	THE SPEED OF THE STRAIN APPLICATION IN THE FILL DIRECTION SHALL BE 2906 INCHE(S) PER MINUTE.
2908	THE SPEED OF THE STRAIN APPLICATION IN THE FILL DIRECTION SHALL BE 2908 MILLIMETER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Tensile Strength (Cont)	
Per document (Cont)	
Strain direction parallel to surface.	2910
Strain direction perpendicular to surface.	2912
Thermal Conductivity	
Requirements (select one)	
Per base document except ____	2916
As follows:	2918
Insulation rating per ASTMC236 (select one)	
R11.	2920
R19.	2922
R22.	2924
Maximum conductivity per ASTMC177 (select one)	
(BTU/square foot/hour/degree fahrenheit/inch)	2926

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2910	THE DIRECTION OF STRAIN APPLICATION SHALL BE PARALLEL TO THE MATERIAL SURFACE.
2912	THE DIRECTION OF STRAIN APPLICATION SHALL BE PERPENDICULAR TO THE MATERIAL SURFACE.
2916	THERMAL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2916.
2918	THERMAL CONDUCTIVITY. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2920	THE INSULATION RATING SHALL BE R11 IN ACCORDANCE WITH ASTMC236.
2922	THE INSULATION RATING SHALL BE R19 IN ACCORDANCE WITH ASTMC236.
2924	THE INSULATION RATING SHALL BE R22 IN ACCORDANCE WITH ASTMC236.
2926	THE CONDUCTIVITY, IN ACCORDANCE WITH ASTMC177, SHALL BE NOT GREATER THAN 2926 BTU PER SQUARE FOOT PER HOUR PER DEGREE FAHRENHEIT PER INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Thermal Conductivity (Cont)	
Maximum conductivity per ASTMC177. (Cont)	
(watts/millimeter/degree kelvin)	2928
Test methods (select one)	
Per base document except ____	2932
Per ASTMC236.	2934
Per ASTMC177.	2936
Test temperature (degrees Celsius)	2942
Tolerance, plus or minus (degrees Celsius)	2944
Toxicity	
Requirements (select one)	
Per base document except ____	1627
No health hazard.	1628

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2928	THE CONDUCTIVITY, IN ACCORDANCE WITH ASTMC177, SHALL BE NOT GREATER THAN 2928 WATT(S) PER MILLIMETER DEGREE KELVIN.
2932	THERMAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2932.
2934	THERMAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC236.
2936	THERMAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC177.
2942	THE TEST TEMPERATURE SHALL BE 2942 DEGREES CELSIUS.
2944	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2944 DEGREES CELSIUS.
1627	TOXICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1627.
1628	TOXICITY. THE TOXICITY OF THE MATERIAL SHALL BE SUCH THAT IT WILL NOT PRESENT A HEALTH HAZARD TO INDIVIDUALS FROM INHALATION, SKIN CONTACT, OR INGESTION, WHEN USED IN THE MANNER INTENDED OR AS A RESULT OF EXPOSURE AFTER ITS APPLICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Toxicity (Cont)	
Test methods (select one)	
Per base document except ____	1633
Contractor furnish evaluation data.	1635
Ultimate Elongation	
Requirements (select one)	
Per base document except ____	3038
Minimum ultimate elongation of unaged specimen (percent)	3040
Test methods (select one)	
Per base document except ____	3028
Per ASTMD412.	3030
Die (letter)	3003
Test temperature (degrees Celsius)	3032
Tolerance, plus or minus (degrees Celsius)	3034
Number of specimens (quantity)	3004

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1633	TOXICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1633.
1635	TOXICITY. THE CONTRACTOR SHALL FURNISH THE TOXICOLOGICAL DATA AND FORMULATIONS REQUIRED TO EVALUATE THE SAFETY OF THE MATERIAL FOR THE PROPOSED USE.
3038	ULTIMATE ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3038.
3040	ULTIMATE ELONGATION. THE ULTIMATE ELONGATION OF THE UNAGED SPECIMEN SHALL BE NOT LESS THAN 3040 PERCENT.
3028	ULTIMATE ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3028.
3030	ULTIMATE ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.
3003	THE APPLICABLE DIE LETTER SHALL BE 3003.
3032	THE TEST TEMPERATURE SHALL BE 3032 DEGREES CELSIUS.
3034	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3034 DEGREES CELSIUS.
3004	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 3004.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ultimate Elongation (Cont)	
Per ASTMD412 (Cont)	
Specimen length (select one)	
(inches)	3006
(millimeters)	3008
Specimen width (select one)	
(inches)	3010
(millimeters)	3012
Specimen thickness (select one)	
(inches)	3014
(millimeters)	3016
Specimen diameter (select one)	
(inches)	3018
(millimeters)	3020
Viscosity	
Requirements (select one)	
Per base document except ____	3062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3006	THE TEST SPECIMEN LENGTH SHALL BE 3006 INCH(S).
3008	THE TEST SPECIMEN LENGTH SHALL BE 3008 MILLIMETER(S).
3010	THE TEST SPECIMEN WIDTH SHALL BE 3010 INCH(S).
3012	THE TEST SPECIMEN WIDTH SHALL BE 3012 MILLIMETER(S).
3014	THE TEST SPECIMEN THICKNESS SHALL BE 3014 INCH(S).
3016	THE TEST SPECIMEN THICKNESS SHALL BE 3016 MILLIMETER(S).
3018	THE TEST SPECIMEN DIAMETER SHALL BE 3018 INCH(S).
3020	THE TEST SPECIMEN DIAMETER SHALL BE 3020 MILLIMETER(S).
3062	VISCOSITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3062.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Viscosity (Cont)	
Requirements (Cont)	
As follows:	3064
Mixed insulation material (select one)	
Efflux period (seconds)	3066
Efflux period tolerance, plus or minus (seconds)	3068
Friction (select one)	
(centipoises)	3070
Tolerance, plus or minus (centipoises)	3072
(pascals/second)	3074
Tolerance, plus or minus (pascals/second)	3076
Base material (select one)	
Efflux period (seconds)	3078
Efflux period tolerance, plus or minus (seconds)	3080
Friction (select one)	
(centipoises)	3082
Tolerance, plus or minus (centipoises)	3084

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3064	VISCOSITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3066	THE MIXED MATERIAL EFFLUX PERIOD SHALL BE 3066 SECOND(S).
3068	THE MIXED MATERIAL EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3068 SECOND(S).
3070	THE MIXED MATERIAL FRICTION SHALL BE 3070 CENTIPOISES.
3072	THE MIXED MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3072 CENTIPOISE(S).
3074	THE MIXED MATERIAL FRICTION SHALL BE 3074 PASCALS PER SECOND.
3076	THE MIXED MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3076 PASCAL(S) PER SECOND.
3078	THE BASE MATERIAL EFFLUX PERIOD SHALL BE 3078 SECOND(S).
3080	THE BASE MATERIAL EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3080 SECOND(S).
3082	THE BASE MATERIAL FRICTION SHALL BE 3082 CENTIPOISES.
3084	THE BASE MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3084 CENTIPOISE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Viscosity (Cont)	
Friction (Cont)	
(pascals/second)	3086
Tolerance, plus or minus (pascals/second)	3090
Thinner material (select one)	
Efflux period (seconds)	3104
Efflux period tolerance, plus or minus (seconds)	3106
Friction (select one)	
(centipoises)	3108
Tolerance, plus or minus. (centipoises)	3110
(pascals/second)	3112
Tolerance, plus or minus (pascals/second)	3114
Ingredient per (doc des)	3116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3086	THE BASE MATERIAL FRICTION SHALL BE 3086 PASCALS PER SECOND.
3090	THE BASE MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3090 PASCAL(S) PER SECOND.
3104	THE THINNER MATERIAL EFFLUX PERIOD SHALL BE 3104 SECOND(S).
3106	THE THINNER MATERIAL EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3106 SECOND(S).
3108	THE THINNER MATERIAL FRICTION SHALL BE 3108 CENTIPOISES.
3110	THE THINNER MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3110 CENTIPOISE(S).
3112	THE THINNER MATERIAL FRICTION SHALL BE 3112 PASCALS PER SECOND.
3114	THE THINNER MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3114 PASCAL(S) PER SECOND.
3116	THE INGREDIENT SHALL BE IN ACCORDANCE WITH 3116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Viscosity (Cont)	
Ingredient per (Cont)	
Ingredient (select one)	
Efflux period (seconds)	3118
Efflux period tolerance, plus or minus (seconds)	3120
Friction (select one)	
(centipoises)	3122
Tolerance, plus or minus (centipoises)	3124
(pascals/second)	3126
Tolerance, plus or minus (pascals/second)	3128
Test methods (select one)	
Per base document except ____	3044
Per document (doc des)	3046
Test method (des)	3048
Test temperature (degrees Celsius)	3050
Temperature tolerance, plus or minus (degrees Celsius)	3052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3118	THE INGREDIENT EFFLUX PERIOD SHALL BE 3118 SECOND(S).
3120	THE INGREDIENT EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3120 SECOND(S).
3122	THE INGREDIENT FRICTION SHALL BE 3122 CENTIPOISES.
3124	THE INGREDIENT FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3124 CENTIPOISE(S).
3126	THE INGREDIENT FRICTION SHALL BE 3126 PASCALS PER SECOND.
3128	THE INGREDIENT FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3128 PASCAL(S) PER SECOND.
3044	VISCOSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3044.
3046	VISCOSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3046.
3048	THE APPLICABLE TEST METHOD SHALL BE 3048.
3050	THE TEST TEMPERATURE SHALL BE 3050 DEGREES CELSIUS.
3052	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3052 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Viscosity (Cont)	
Per document (Cont)	
Relative humidity (percent)	3054
Humidity tolerance, plus or minus (percent)	3056
Water Vapor Transmission	
Requirements (select one)	
Per base document except ____	2502
As follows: (select one)	2503
Maximum permeability per inch (value)	2504
Maximum permeability per millimeter (value)	2506
Test methods (select one)	
Per base document except ____	2510
Per ASTMC355.	2512
Test method (select one)	
Desiccant method.	2514
Water method.	2516

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3054	THE TEST RELATIVE HUMIDITY SHALL BE 3054 PERCENT.
3056	THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 3056 PERCENT.
2502	WATER VAPOR TRANSMISSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2502.
2503	WATER VAPOR TRANSMISSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2504	THE MATERIAL PERMEABILITY SHALL BE NOT GREATER THAN 2504 PER INCH.
2506	THE MATERIAL PERMEABILITY SHALL BE NOT GREATER THAN 2506 PER MILLIMETER.
2510	WATER VAPOR TRANSMISSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2510.
2512	WATER VAPOR TRANSMISSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC355.
2514	THE DESICCANT TEST METHOD SHALL APPLY.
2516	THE WATER TEST METHOD SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Water Vapor Transmission (Cont)	
Per ASTMC355 (Cont)	
Mounting method (des)	2518
Specimen thickness (select one)	
(inches)	2520
(millimeters)	2522
Conditioning temperature (degrees Celsius)	2524
Tolerance, plus or minus (degrees Celsius)	2526
Conditioning relative humidity (percent)	2528
Tolerance, plus or minus (percent)	2530
Workmanship	
(Doc Des)	6870
Additional Requirements	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2518	THE MOUNTING METHOD SHALL BE 2518.
2520	THE TEST SPECIMEN THICKNESS SHALL BE 2520 INCH(S).
2522	THE TEST SPECIMEN THICKNESS SHALL BE 2522 MILLIMETER(S).
2524	THE CONDITIONING TEMPERATURE SHALL BE 2524 DEGREES CELSIUS.
2526	THE CONDITIONING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2526 DEGREES CELSIUS.
2528	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 2528 PERCENT.
2530	THE CONDITIONING RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2530 PERCENT.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Part Marking (Select One)	
(Doc Des)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
Additional Part Marking	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Applicable Documents (See DOD-STD-35)

Quality Assurance Provisions (See DOD-STD-35)

Packaging (See DOD-STD-35)

Notes (See DOD-STD-35)

Nomenclature (See DOD-STD-35)

Superseded Document (See DOD-STD-35)

Part Number Cross-Reference (See DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Armu-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A211)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

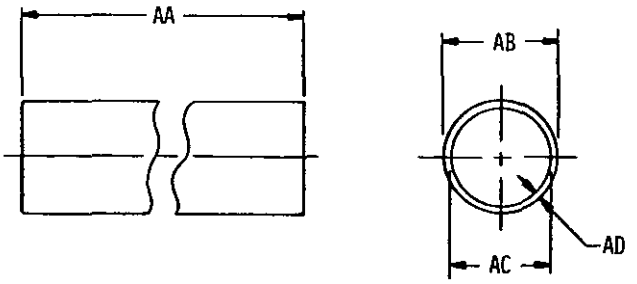


815-01-1

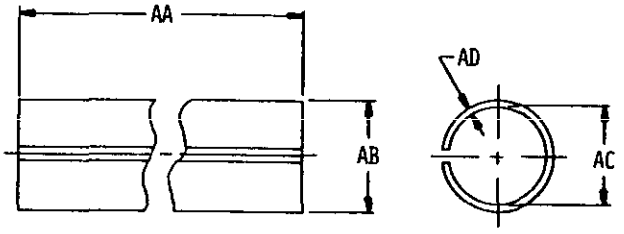

815-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

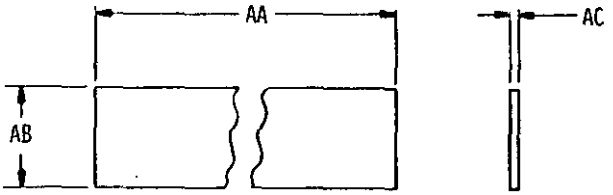

815-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	22	1600	46	1702	48	1786	54
0102	22	1601	32	1704	48	1788	54
0103	22	1602	32	1706	48	1790	54
0104	22	1604	46	1708	48	1801	62
0105	22	1606	46	1710	48	1802	62
0107	24	1612	46	1712	48	1803	62
0108	24	1614	46	1714	48	1804	62
0700	22	1618	46	1716	48	1806	62
0800	22	1620	38	1718	50	1808	62
1003	22	1622	38	1720	50	1810	62
1004	22	1624	40	1722	50	1812	62
1005	22	1626	40	1723	50	1816	60
1006	22	1627	134	1726	48	1818	60
1008	22	1628	134	1727	48	1820	60
1009	28	1630	40	1728	48	1822	60
1562	26	1632	40	1730	48	1824	60
1564	26	1633	136	1732	54	1826	60
1566	26	1634	40	1734	54	1828	62
1568	26	1635	136	1736	56	1830	62
1570	32	1636	40	1738	56	1884	56
1572	44	1640	40	1742	54	1886	56
1574	44	1642	46	1744	54	1890	58
1576	44	1644	46	1746	54	1892	58
1578	44	1646	36	1748	54	1894	58
1580	44	1648	36	1750	56	1896	58
1582	44	1650	36	1752	56	1898	58
1584	44	1652	36	1754	56	1902	66
1586	44	1654	36	1756	56	1904	66
1587	44	1656	36	1758	56	1906	66
1588	46	1658	36	1762	56	1908	66
1590	46	1660	36	1764	56	1912	64
1591	32	1662	38	1766	56	1914	64
1592	46	1680	38	1770	52	1918	68
1593	32	1682	38	1772	52	1920	68
1594	46	1684	38	1774	52	1924	66
1595	32	1686	38	1776	52	1926	68
1596	32	1688	38	1778	54	1928	32
1597	32	1690	38	1780	54	1930	32
1598	46	1694	38	1782	54	1932	32
1599	32	1696	38	1784	54	1934	32

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1936	34	2022	84	2120	72	2205	78
1938	34	2024	84	2122	72	2206	78
1940	34	2026	84	2126	72	2207	78
1942	34	2028	84	2128	72	2208	78
1944	34	2030	84	2130	72	2209	78
1946	34	2032	84	2132	72	2214	92
1950	70	2036	82	2134	72	2216	92
1952	70	2038	82	2136	72	2218	92
1954	70	2040	82	2138	72	2220	92
1958	68	2044	50	2140	72	2222	92
1960	68	2046	50	2142	72	2224	92
1962	68	2048	50	2144	74	2226	92
1964	68	2050	50	2146	74	2228	92
1966	68	2052	50	2148	74	2230	92
1968	68	2054	50	2150	74	2232	92
1970	68	2056	50	2152	74	2234	92
1972	70	2060	52	2154	74	2236	94
1974	70	2062	52	2156	74	2238	94
1976	70	2064	52	2160	74	2240	94
1978	70	2066	52	2161	74	2242	94
1980	70	2068	52	2162	74	2246	90
1982	70	2070	52	2164	74	2248	90
1984	70	2072	58	2166	76	2250	90
1986	70	2074	58	2168	76	2252	90
1988	70	2076	58	2170	76	2254	90
1990	70	2080	58	2172	76	2256	90
1992	34	2082	58	2176	76	2258	90
1994	34	2086	58	2178	76	2260	90
1996	34	2088	58	2180	76	2262	90
1998	36	2090	60	2182	76	2264	90
2002	82	2092	60	2184	76	2268	94
2004	82	2094	60	2186	76	2270	94
2006	82	2096	60	2188	76	2272	80
2008	82	2102	64	2190	78	2273	80
2010	82	2104	64	2192	78	2274	80
2012	82	2106	64	2194	78	2275	80
2014	84	2108	64	2196	78	2276	80
2016	84	2112	64	2198	78	2277	80
2018	84	2114	64	2200	78	2279	80
2020	84	2116	64	2204	78	2280	94

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2281	80	2356	100	2438	112	2528	148
2282	94	2357	100	2440	112	2530	148
2283	80	2358	100	2442	112	2648	116
2284	80	2362	104	2444	112	2650	116
2286	80	2364	106	2446	112	2652	118
2288	80	2366	106	2448	112	2654	118
2290	102	2368	106	2450	114	2656	118
2292	102	2370	106	2452	114	2658	118
2302	100	2372	106	2454	114	2660	118
2304	100	2374	106	2456	114	2662	118
2306	100	2376	106	2458	114	2664	120
2308	100	2378	106	2460	114	2666	120
2310	102	2380	106	2462	114	2668	120
2312	102	2382	106	2466	110	2670	120
2314	102	2384	106	2468	112	2672	118
2316	102	2386	106	2470	112	2680	120
2318	102	2388	106	2472	112	2682	122
2320	102	2390	108	2476	114	2684	122
2322	102	2393	104	2478	114	2686	122
2324	102	2394	104	2482	116	2690	122
2326	102	2395	104	2484	116	2692	122
2328	102	2396	104	2486	116	2694	122
2332	96	2397	104	2488	116	2696	122
2334	96	2398	104	2490	116	2698	122
2336	96	2399	104	2492	116	2700	122
2338	96	2400	108	2494	116	2702	122
2340	98	2402	108	2496	116	2704	122
2342	98	2404	108	2502	146	2706	124
2343	96	2412	110	2503	146	2708	124
2344	98	2414	110	2504	146	2709	120
2345	96	2416	110	2506	146	2710	124
2346	98	2418	110	2510	146	2711	120
2347	96	2420	110	2512	146	2712	124
2348	96	2422	110	2514	146	2713	120
2350	98	2424	110	2516	146	2716	126
2351	98	2426	110	2518	148	2734	126
2352	98	2430	108	2520	148	2735	126
2353	98	2434	112	2522	148	2736	126
2354	98	2436	112	2524	148	2738	126
2355	100	2437	112	2526	148	2740	126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2742	126	2928	134	3050	144	3214	86
2744	126	2932	134	3052	144	3216	86
2748	126	2934	134	3054	146	3218	86
2750	126	2936	134	3056	146	3220	86
2752	124	2942	134	3062	138	3224	88
2754	124	2944	134	3064	140	3226	88
2756	124	2960	128	3066	140	3228	88
2758	124	2962	126	3068	140	3230	88
2760	124	2974	130	3070	140	3232	88
2762	124	2976	130	3072	140	3234	88
2764	124	2978	130	3074	140	3236	88
2765	124	2980	130	3076	140	3238	88
2768	124	2982	130	3078	140	3240	88
2790	42	2984	130	3080	140	3242	88
2794	42	2988	128	3082	140	3244	46
2796	42	2992	128	3084	140	3246	82
2806	42	2994	128	3086	142	3500	67
2807	40	2996	128	3090	142	3501	67
2808	44	2998	128	3104	142	3502	67
2810	44	3000	128	3106	142	3503	67
2812	44	3002	128	3108	142	3504	67
2814	42	3003	136	3110	142	3505	67
2816	42	3004	136	3112	142	3506	67
2817	42	3006	138	3114	142	3507	67
2818	42	3008	138	3116	142	3508	67
2819	42	3010	138	3118	144	3509	67
2820	42	3012	138	3120	144	3510	67
2900	130	3014	138	3122	144	3511	67
2902	130	3016	138	3124	144	3512	67
2904	130	3018	138	3126	144	3513	67
2906	130	3020	138	3128	144	3514	67
2908	130	3028	136	3132	116	3515	67
2910	132	3030	136	3136	118	3516	67
2912	132	3032	136	3201	40	3517	67
2916	132	3034	136	3202	84	3518	67
2918	132	3038	136	3204	86	3519	67
2920	132	3040	136	3206	86	3520	67
2922	132	3044	144	3208	86	3521	67
2924	132	3046	144	3210	86	3522	67
2926	132	3048	144	3212	86	3523	67

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3524	67	7577	28				
3525	67	7578	28				
3526	67	7629	150				
3527	67	7630	150				
3528	67						
3529	67						
4754	110						
4756	110						
4760	108						
4761	108						
4762	108						
4904	26						
4905	26						
4950	30						
5060	26						
5061	26						
6369	22						
6372	150						
6375	30						
6870	148						
6873	22						
6874	24						
6941	24						
6942	24						
6991	150						
6992	150						
6993	150						
6994	150						
6995	150						
7001	148						
7002	148						
7003	148						
7004	148						
7005	148						
7301	26						
7302	26						
7572	28						
7573	28						
7574	28						
7576	28						

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acoustical (Sound-Absorption Coefficient)	50
Additional Part Marking	150
Additional Requirements	148
Adhesion	52
Alkalinity	56
Altitude Rating	26
Aperture Cards Required	24
Applicable Documents	150
Application Method	46
Asbestos Content	58
Base Document	22
Blanket Construction	32
Breaking Strength	60
Brittle Point	64
Chemical Composition	64
City, State, Zip	22
Classification	26
Cloth	32
Cloth Construction	66
Color	68
Company Name/Command	22
Composition	30
Compression Set	72
Compression Strength	74
Configuration	28
Container	36
Contract Number/Office Symbol	22
Control	22
Corrosion	82
Date	22
Density/Specific Gravity	84
Design and Construction	32
Drying (Cure, Gel)	90
Elongation	94
Finishes	30
Flammability (Combustibility, Smoke Density, Flame Spread Index, Fire Resistance, Surface Burn Classification, Resistance to Smoldering)	96
Flexibility	104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Format	22
Fungus	108
Government Design Activity FSCM	22
Hardness	110
Hygroscopic Moisture	114
Illustrations	30
Materials	30
Moisture Resistance/Water Repellency	116
Nomenclature	150
Notes	150
Oil and Solvent Resistance	120
Ozone Resistance	126
Packaging	150
Part Marking	150
Part Number	24
Part Number Cross-Reference	150
Phone Number	22
Pot Life	38
Quality Assurance Provisions	150
Requester FSCM	22
Requester's Name	22
Revision of AEDPS Document Number	24
Scope	24
Shelf Life	40
Sleeve/Tube Construction	44
Source Table	24
Street/Building	22
Superseded Document	150
System Application	22
Tabulated Characteristics	30
Tape Construction	44
Temperature Ratings	26
Tensile Strength	128
Test Specimen Preparation	48

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Thermal Conductivity	132
Toxicity	134
Ultimate Elongation	136
Units of Measure	24
Viscosity	138
Water Vapor Transmission	146
Workmanship	148

☆U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/589

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-118(MI), dated 23 Jun 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-118(MI), dated 23 Jun 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD-STD 35-118

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil/online/start/ Downloaded on 2026-01-26T07:25:57
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.