MILITARY STANDARD

CABLES, FIBER OPTIC

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Cables, Fiber Optic
Automated engineering
Document Preparation System

DOD-STD-35-119, Proposed

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRSMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-119(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification, Exceptions for fiber optic cables.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	System of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	10
	5.5.1	Interrelationship of Codes	10
	5.5.2	Automatic MSE Data	10
	5.5.3	DOD-STD-35 Tables	10

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	9

APPENDIX

Appendix	Illustrations	139
	Characteristic Code Index	145
	Index	153

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS) provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for fiber optic cables.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

Each MSE Title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CABLE, FIBER OPTICS	910001	DOD-C-85045	GENERAL SPECIFICATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

DOD-C- 85045	Cables, Fiber Optics, General Specification for

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System, Basic
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
DOD-STD-1678	Fiber Optics Test Methods and Instrumentation

FEDERAL

FED-STD-228	Cable and Wire, Insulated; Methods of Testing

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Cables, Fiber Optic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Cables, Fiber Optic, the user will find it necessary to use DOD-STD-35 in conjunction with this standard. In the event the instructions or the writing methodology are not followed, an AEDPS edit program will print error messages rather than the desired MSE document.

4.2 Specification Requirements Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Cables, Fiber Optic.

4.3 Configuration.

4.3.1 Dimensions. Specification requirments for dimensions described in DOD-STD-35 are applicable to Cables, Fiber Optic.

4.3.2 Illustrations. Illustrations applicable to Cables, Fiber Optic are contained in Appendix A to this document.

4.4 Systems of measure. The International System of Units (SI) or the U.S. System, or both, may be used to specify one specific characteristic (e.g. weight). Refer to ASTME380 for guidance in using SI. However, when different units of measure with a system are available for specifying a characteristic, only one may be used; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

Code	
0700	for a six-section format
0800	for a single-section format

5.3 Referenced documents. Section 2 of the MSE shall contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for additional specific column headings which may be used for Fiber Optic Cable characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g either ounces or pounds.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING
1590	FIBERS PER BUNDLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically dpeneding on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 KEYWORD CODE INDEX (KCI)

AND

STANDARD PARAGRAPH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE	
BASE DOCUMENT TYPE (DES)	1562
CLASS	
BASE DOCUMENT CLASS (DES)	1564
COMPOSITION	
BASE DOCUMENT COMPOSITION (DES)	1566
ATTENUATION RANGE	
BASE DOCUMENT ATTENUATION RANGE (DES)	1568
TEMPERATURE RATINGS	
MAXIMUM TEMPERATURE	
SERVICE (DEGREES CELSIUS)	4905
STORAGE (DEGREES CELSIUS)	7302
MINIMUM TEMPERATURE	
SERVICE (DEGREES CESLIUS)	4904
STORAGE (DEGREES CELSIUS)	7301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1562	THE TYPE DESIGNATION SHALL BE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT.
1564	THE CLASS DESIGNATION SHALL BE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1566	THE COMPOSITION DESIGNATION SHALL BE 1566 IN ACCORDANCE WITH THE BASE DOCUMENT.
1568	THE ATTENUATION RANGE DESIGNATION SHALL BE 1568 IN ACCORDANCE WITH THE BASE DOCUMENT.
	TEMPERATURE RATINGS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
YARDS.	7574
SI (SELECT ONE)	
MILLIMETERS.	7577
METERS.	7578
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSIONL DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE CONSTRUCTION	
BUNDLE STRANDING	
LAY METHOD (SELECT ONE)	
CONCENTRIC LAY STRANDED.	1572
RANDOM.	1574
STRAIGHT.	1576
LAY DIRECTION (SELECT ONE)	
RIGHT-HAND	1578
LEFT-HAND.	1580
MAXIMUM LAY LENGTH (SELECT ONE)	
(INCHES)	1582
(MILLIMETERS)	1584
MINIMUM LAY LENGTH (SELECT ONE)	
(INCHES)	1586
(MILLIMETERS)	1588
EACH BUNDLE NUMBER OF TRANSMITTING FIBERS (QUANTITY)	1590
BUNDLES (NUMBERS)	1592
*NUMBER OF FIBERS (QUANTITY)	1594
BUNDLES (NUMBERS)	1596
*NUMBER OF FIBERS (QUANTITY)	1598
BUNDLES (NUMBERS)	1600
*NUMBER OF FIBERS (QUANTITY)	1602

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

CABLE CONSTRUCTION.

1572 THE LAY METHOD SHALL BE CONCENTRIC LAY STRANDED.

1574 THE LAY METHOD SHALL BE RANDOM.

1576 THE LAY METHOD SHALL BE STRAIGHT.

1578 THE LAY DIRECTION SHALL BE RIGHT-HAND.

1580 THE LAY DIRECTION SHALL BE LEFT-HAND.

1582 THE LAY LENGTH SHALL BE NOT GREATER THAN 1582 INCH(S).

1584 THE LAY LENGTH SHALL BE NOT GREATER THAN 1584 MILLIMETER(S).

1586 THE LAY LENGTH SHALL BE NOT LESS THAN 1586 INCH(S).

1588 THE LAY LENGTH SHALL BE NOT LESS THAN 1588 MILLIMETER(S).

1590 EACH BUNDLE SHALL CONTAIN 1590 TRANSMITTING FIBER(S).

1592 BUNDLE(S) NUMBERED 1592 SHALL EACH CONTAIN
1594 1594 FIBER(S).

1596 BUNDLE(S) NUMBERED 1596 SHALL EACH CONTAIN
1598 1598 FIBER(S).

1600 BUNDLE(S) NUMBERED 1600 SHALL EACH CONTAIN
1602 1602 FIBER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE CONSTRUCTION (CONT)	
CABLING AS FOLLOWS:	
LAY METHOD (SELECT ONE)	
CONCENTRIC LAY STRANDED.	1606
RANDOM.	1608
STRAIGHT.	1610
LAY DIRECTION (SELECT ONE)	
RIGHT-HAND.	1612
LEFT-HAND.	1614
MAXIMUM LAY LENGTH (SELECT ONE)	
(INCHES)	1616
(MILLIMETERS)	1618
MINIMUM LAY LENGTH (SELECT ONE)	
(INCHES)	1620
(MILLIMETERS)	1622
CONCENTRICITY (SELECT ONE)	
(INCHES)	1623
(MILLIMETERS)	1624

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE CABLING OF DISCRETE OPTICAL TRANSMISSION ELEMENTS SHALL BE AS FOLLOWS:
1606	THE LAY METHOD SHALL BE CONCENTRIC LAY STRANDED.
1608	THE LAY METHOD SHALL BE RANDOM.
1610	THE LAY METHOD SHALL BE STRAIGHT.
1612	THE LAY DIRECTION SHALL BE RIGHT-HAND.
1614	THE LAY DIRECTION SHALL BE LEFT-HAND.
1616	THE LAY LENGTH SHALL BE NOT GREATER THAN 1616 INCH(S).
1618	THE LAY LENGTH SHALL BE NOT GREATER THAN 1618 MILLIMETER(S).
1620	THE LAY LENGTH SHALL BE NOT LESS THAN 1620 INCH(S).
1622	THE LAY LENGTH SHALL BE NOT LESS THAN 1622 MILLIMETER(S).
1623	THE CONCENTRICITY SHALL BE NOT GREATER THAN 1623 INCH(S).
1624	THE CONCENTRICITY SHALL BE NOT GREATER THAN 1624 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE PUT-UP	
AS FOLLOWS:	
REEL OR SPOOL MINIMUM LENGTH TOTAL (SELECT ONE)	
U.S. (SELECT ONE)	
(FEET)	2698
(YARDS)	2700
SI	
(METERS)	2702
REEL OR SPOOL BARREL DIAMETER	
MINIMUM (SELECT ONE)	
(INCHES)	2728
(MILLIMETERS)	2730
MAXIMUM (SELECT ONE)	
(INCHES)	2732
(MILLIMETERS)	2734

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CABLE PUT-UP. THE CABLE PUT-UP SHALL BE AS FOLLOWS:
2698	THERE SHALL BE NOT LESS THAN 2698 FEET OF CABLE ON THE REEL OR SPOOL.
2700	THERE SHALL BE NOT LESS THAN 2700 YARDS OF CABLE ON THE REEL OR SPOOL.
2702	THERE SHALL BE NOT LESS THAN 2702 METERS OF CABLE ON THE REEL OR SPOOL.
2728	THE REEL OR SPOOL BARREL DIAMETER SHALL BE NOT LESS THAN 2728 INCHES.
2730	THE REEL OR SPOOL BARREL DIAMETER SHALL BE NOT LESS THAN 2730 MILLIMETERS.
2732	THE REEL OR SPOOL BARREL DIAMETER SHALL BE NOT GREATER THAN 2732 INCHES.
2734	THE REEL OR SPOOL BARREL DIAMETER SHALL BE NOT GREATER THAN 2734 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT/MASS PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7050
(POUNDS)	7051
PER 100 FEET (POUNDS)	7056
PER 1000 FEET (POUNDS)	7347

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
7050	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7050 OUNCE(S).
7051	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7051 POUND(S).
7056	MAXIMUM WEIGHT PER 100 FEET. THE WEIGHT PER 100 FEET SHALL BE NOT GREATER THAN 7056 POUND(S).
7347	MAXIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT GREATER THAN 7347 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS (CONT)	
MAXIMUM WEIGHT/MASS PER UNIT LENGTH (CONT)	
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	7400
(KILOGRAMS)	7401
PER KILOMETER (KILOGRAMS)	7407
NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7400	MAXIMUM MASS PER METER. THE MASS PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).
7401	MAXIMUM MASS PER METER. THE MASS PER METER SHALL BE NOT GREATER THAN 7401 KILOGRAM(S).
7407	MAXIMUM MASS PER METER. THE MASS PER KILOMETER SHALL BE NOT GREATER THAN 7407 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT/MASS (CONT)	
NOMINAL WEIGHT/MASS PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7047
(POUNDS)	7049
PER 100 FEET (POUNDS)	7055
PER 1000 FEET (POUNDS)	7060
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	6927
(KILOGRAMS)	7344
PER KILOMETER (KILOGRAMS)	7405
ACCELERATED AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7047	NOMINAL WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE 7047 OUNCE(S).
7049	NOMINAL WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE 7049 POUND(S).
7055	NOMINAL WEIGHT PER 100 FEET. THE WEIGHT PER 100 FEET SHALL BE 7055 POUND(S).
7060	NOMINAL WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE 7060 POUND(S).
6927	NOMINAL MASS PER METER. THE MASS PER METER SHALL BE 6927 GRAM(S).
7344	NOMINAL MASS PER METER. THE MASS PER METER SHALL BE 7344 KILOGRAM(S).
7405	NOMINAL MASS PER KILOMETER. THE MASS PER KILOMETER SHALL BE 7405 KILOGRAM(S).
1670	ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1670.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED AGING (CONT)	
AS FOLLOWS:	1672
NO MELTING OF JACKET MATERIAL.	1674
IDENTIFICATION MARKING LEGIBLE.	1676
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	1678
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	1680
(QUANTITY)	1682
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1684
PER DOD-STD-1678, METHOD 4010.	1686
CONDITIONING TEMPERATURE	
HIGH (DEGREES CELSIUS)	1688
LOW (DEGREES CELSIUS)	1692

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1672	ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1674	THERE SHALL BE NO MELTING OF JACKET MATERIAL.
1676	THE IDENTIFICATION MARKING SHALL REMAIN LEGIBLE.
1678	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 1678.
1680	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 1680 PERCENT OF THE TOTAL FIBERS.
1682	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 1682.
1684	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1684.
1686	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4010 OF DOD-STD-1678.
1688	THE HIGH CONDITIONING TEMPERATURE SHALL BE 1688 DEGREES CELSIUS.
1692	THE LOW CONDITIONING TEMPERATURE SHALL BE 1692 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED AGING (CONT)	
PER DOD-STD-1678, METHOD 4010. (CONT)	
TEMPERATURE CONDITIONING PERIOD	
HIGH (HOURS)	1696
LOW (HOURS)	1698
SPECIMEN LENGTH (SELECT ONE)	
(YARDS)	1700
(METERS)	1702
LENGTH OF SPECIMEN IN CHAMBER (SELECT ONE)	
(YARDS)	1704
(METERS)	1706
ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1708
PER ATTENUATION MEASUREMENTS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1696	THE HIGH TEMPERATURE TEST CONDITIONING PERIOD SHALL BE 1696 HOUR(S).
1698	THE LOW TEMPERATURE TEST CONDITIONING PERIOD SHALL BE 1698 HOUR(S).
1700	THE SPECIMEN LENGTH SHALL BE 1700 YARD(S).
1702	THE SPECIMEN LENGTH SHALL BE 1702 METER(S).
1704	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 1704 YARD(S).
1706	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 1706 METER(S).
1708	ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1708. ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE ATTENUATION MEASUREMENTS TABLE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
PER ATTENUATION MEASUREMENTS TABLE. (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1712
PER DOD-STD-1678, METHOD 6020.	1714
LENGTH OF SPECIMEN ONE (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	1716
(YARDS)	1718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ATTENUATION MEASUREMENTS TABLE

CENTER WAVELENGTH (NM)	MAXIMUM (DB/KM)	RADIANT POWER (WATTS)	RADIANT POWER RELATIVE OR ABSOLUTE
3300	3301	3302	3303
3304	3305	3306	3307
3308	3309	3310	3311
3312	3313	3314	3315
3316	3317	3318	3319
3320	3321	3322	3323
3324	3325	3326	3327
3328	3329	3330	3331
3332	3333	3334	3335
3336	3337	3338	3339
3340	3341	3342	3343

1712 ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1712.

1714 ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6020 OF DOD-STD-1678.

1716 THE LENGTH OF SPECIMEN ONE SHALL BE 1716 INCH(S).

1718 THE LENGTH OF SPECIMEN ONE SHALL BE 1718 YARD(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
LENGTH OF SPECIMEN ONE (CONT)	
SI	
(METERS)	1720
LENGTH OF SPECIMEN TWO (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	1722
(YARDS)	1724
SI	
(METERS)	1726
BLOCKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1728
NO ADHERENCE TO SELF OR SPOOL.	1730
EXTENT (SPECIFY)	1731
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1732
PER DOD-STD-1678, METHOD 8010.	1734
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1736
CONDITIONING DURATION (HOURS)	1740

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1720	THE LENGTH OF SPECIMEN ONE SHALL BE 1720 METER(S).
1722	THE LENGTH OF SPECIMEN TWO SHALL BE 1722 INCH(S).
1724	THE LENGTH OF SPECIMEN TWO SHALL BE 1724 YARD(S).
1726	THE LENGTH OF SPECIMEN TWO SHALL BE 1726 METER(S).
1728	BLOCKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1728.
1730	BLOCKING. THERE SHALL BE NO ADHERENCE OF COILS TO SELF OR SPOOL.
1731	BLOCKING. THE EXTENT OF ADHESION SHALL BE 1731.
1732	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
1734	BLOCKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 8010 OF DOD-STD-1678.
1736	THE CONDITIONING TEMPERATURE SHALL BE 1736 DEGREES CELSIUS.
1740	THE CONDITIONING DURATION SHALL BE 1740 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE TWIST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2614
AS FOLLOWS:	2616
NO VISIBLE DAMAGE.	2618
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	2620
(QUANTITY)	2622
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2624
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2626
PER DOD-STD-1678, METHOD 2050.	2628
PROCEDURE (SELECT ONE)	
I.	2630
II.	2632
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2634
(MILLIMETERS)	2636

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2614	CABLE TWIST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2614.
2616	CABLE TWIST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2618	THERE SHALL BE NO VISIBLE DAMAGE.
2620	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2620 PERCENT OF THE TOTAL FIBERS.
2622	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2622.
2624	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2624.
2626	CABLE TWIST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2626.
2628	CABLE TWIST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2050 OF DOD-STD-1678.
2630	PROCEDURE I SHALL APPLY.
2632	PROCEDURE II SHALL APPLY.
2634	THE SPECIMEN LENGTH SHALL BE 2634 INCH(S).
2636	THE SPECIMEN LENGTH SHALL BE 2636 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE TWIST (CONT)	
PER MIL-STD-1678, METHOD 2050 (CONT)	
INSTALLATION METHOD ____	2638
NUMBER OF CYCLES (QUANTITY)	2640
CABLE TWIST-BEND	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2736
AS FOLLOWS:	2738
NO VISIBLE DAMAGE.	2740
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	2742
(QUANTITY)	2744
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2746
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2748
PER DOD-STD-1678, METHOD 2060.	2750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2638	THE INSTALLATION METHOD SHALL BE 2638.
2640	THE NUMBER OF TEST CYCLES SHALL BE 2640.
2736	CABLE TWIST-BEND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2736.
2738	CABLE TWIST-BEND. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2740	THERE SHALL BE NO VISIBLE DAMAGE.
2742	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2742 PERCENT OF THE TOTAL FIBERS.
2744	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2744.
2746	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2746.
2748	CABLE TWIST-BEND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2748.
2750	CABLE TWIST-BEND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2060 OF DOD-STD-1678.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE TWIST-BEND (CONT)	
PER DOD-STD-1678, METHOD 2060. (CONT)	
PROCEDURE (SELECT ONE)	
I.	2752
II.	2754
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2756
(MILLIMETERS)	2758
INSTALLATION METHOD ____	2760
NUMBER OF CYCLES (QUANTITY)	2762
COLOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
PER COLOR TABLE.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2752	PROCEDURE I SHALL APPLY.
2754	PROCEDURE II SHALL APPLY.
2756	THE SPECIMEN LENGTH SHALL BE 2756 INCH(S).
2758	THE SPECIMEN LENGTH SHALL BE 2758 MILLIMETER(S).
2760	THE INSTALLATION METHOD SHALL BE 2760.
2762	THE NUMBER OF TEST CYCLES SHALL BE 2762.
1762	COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762. COLOR. THE COLOR REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE COLOR TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLOR (CONT)	
PER COLOR TABLE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1766
PER COLOR TABLE.	1768
COMPRESSIVE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1770
AS FOLLOWS:	1772

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

COLOR TABLE

COMPONENT NAME	MIL-STD-681 IDENTIFICATION NAME	MIL-STD-104 CLASS 1 LIMITS
3400	3401	3402
3403	3404	3405
3406	3407	3408
3409	3410	3411
3412	3413	3414
3415	3416	3417
3418	3419	3420
3421	3422	3423
3424	3425	3426
3427	3428	3429
3430	3431	3432
3433	3434	3435

1766 COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1766.

1768 COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE DOCUMENT(S) INDICATED IN THE COLOR TABLE.

1770 COMPRESSIVE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770.

1772 COMPRESSIVE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPRESSIVE STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
NO CRACKING OR SPLITTING OF JACKET.	1774
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	1776
(QUANTITY)	1778
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	1780
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
PER DOD-STD-1678, METHOD 2040.	1784
PROCEDURE (SELECT ONE)	
I.	1786
II.	1788
III.	1790
CONDITIONING RELATIVE HUMIDITY (PERCENT)	1792
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1796
CONDITIONING PERIOD (HOURS)	1800

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1774	THERE SHALL BE NO CRACKING OR SPLITTING OF THE JACKET MATERIAL.
1776	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 1776 PERCENT OF THE TOTAL FIBERS.
1778	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 1778.
1780	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 1780.
1782	COMPRESSIVE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
1784	COMPRESSIVE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2040 OF DOD-STD-1678.
1786	PROCEDURE I SHALL APPLY.
1788	PROCEDURE II SHALL APPLY.
1790	PROCEDURE III SHALL APPLY.
1792	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 1792 PERCENT.
1796	THE CONDITIONING TEMPERATURE SHALL BE 1796 DEGREES CELSIUS.
1800	THE CONDITIONING PERIOD SHALL BE 1800 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPRESSIVE STRENGTH (CONT)	
PER DOD-STD-1678, METHOD 2040. (CONT)	
LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1802
(POUNDS)	1804
SI (SELECT ONE)	
(KILOPASCALS)	1806
(KILOGRAMS)	1808
APPLICATION DURATION (SELECT ONE)	
(SECONDS)	1810
(MINUTES)	1812
LOAD REMOVED DURATION (SELECT ONE)	
(SECONDS)	1814
(MINUTES)	1816
LOADING RATE (SELECT ONE)	
(INCHES/MINUTE)	1818
(MILLIMETERS/MINUTE)	1820
TEST CYCLES (QUANTITY)	1822

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1802	THE MACHINE LOAD SHALL BE 1802 POUND(S) PER SQUARE INCH.
1804	THE MACHINE LOAD SHALL BE 1804 POUND(S) FORCE.
1806	THE MACHINE LOAD SHALL BE 1806 KILOPASCAL(S).
1808	THE MACHINE LOAD SHALL BE 1808 KILOGRAM(S).
1810	DURING A TEST CYCLE THE LOAD SHALL BE APPLIED FOR 1810 SECOND(S).
1812	DURING A TEST CYCLE THE LOAD SHALL BE APPLIED FOR 1812 MINUTE(S).
1814	DURING A TEST CYCLE, THE LOAD SHALL BE REMOVED FOR 1814 SECOND(S).
1816	DURING A TEST CYCLE, THE LOAD SHALL BE REMOVED FOR 1816 MINUTE(S).
1818	THE LOADING RATE SHALL BE 1818 INCH(S) PER MINUTE.
1820	THE LOADING RATE SHALL BE 1820 MILLIMETER(S) PER MINUTE.
1822	THE NUMBER OF TEST CYCLES SHALL BE 1822.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPRESSIVE STRENGTH (CONT)	
PER DOD-STD-1678, *METHOD 2040. (CONT)*	
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	1824
(MILLIMETERS)	1826
CYCLIC FLEXING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1828
AS FOLLOWS:	1830
NO CRACKING OR SPLITTING OF JACKET.	1832
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	1834
(QUANTITY)	1836
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	1838
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1824	THE SPECIMEN LENGTH SHALL BE 1824 INCH(S).
1826	THE SPECIMEN LENGTH SHALL BE 1826 MILLIMETER(S).
1828	CYCLIC FLEXING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1828.
1830	CYCLIC FLEXING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1832	THERE SHALL BE NO CRACKING OR SPLITTING OF JACKET MATERIAL.
1834	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 1834 PERCENT OF THE TOTAL FIBERS.
1836	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 1836.
1838	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 1838.
1840	CYCLIC FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CYCLIC FLEXING (CONT)	
TEST METHODS (CONT)	
PER DOD-STD-1678, METHOD 2010.	1842
PROCEDURE (SELECT ONE)	
I.	1844
II.	1846
CONDITIONING PERIOD (HOURS)	1848
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1850
CONDITIONING RELATIVE HUMIDITY (PERCENT)	1854
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	1858
(MILLIMETERS)	1860
TEST WEIGHT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	1862
(POUNDS)	1864
SI (SELECT ONE)	
(GRAMS)	1866
(KILOGRAMS)	1868

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1842 CYCLIC FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2010 OF DOD-STD-1678.

1844 PROCEDURE I SHALL APPLY.

1846 PROCEDURE II SHALL APPLY.

1848 THE CONDITIONING PERIOD SHALL BE 1848 HOUR(S).

1850 THE CONDITIONING TEMPERATURE SHALL BE 1850 DEGREES CELSIUS.

1854 THE CONDITIONING RELATIVE HUMIDITY SHALL BE 1854 PERCENT.

1858 THE MANDREL DIAMETER SHALL BE 1858 INCH(S).

1860 THE MANDREL DIAMETER SHALL BE 1860 MILLIMETER(S).

1862 THE TEST WEIGHT SHALL BE 1862 OUNCE(S).

1864 THE TEST WEIGHT SHALL BE 1864 POUND(S).

1866 THE TEST WEIGHT SHALL BE 1866 GRAM(S).

1868 THE TEST WEIGHT SHALL BE 1868 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CYCLIC FLEXING (CONT)	
PER DOD-STD-1678, METHOD 2010 (CONT)	
NUMBER OF TEST CYCLES (QUANTITY)	1870
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	1872
(MILLIMETERS)	1874
DURABILITY OF IDENTIFICATION MARKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1918
IDENTIFICATION MARKING LEGIBLE.	1920
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
PER DOD-C-85045.	1924
TEST TEMPERATURE (DEGREES CELSIUS)	1926
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	1930
(MILLIMETERS)	1932

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1870	THE NUMBER OF TEST CYCLES SHALL BE 1870.
1872	THE SPECIMEN LENGTH SHALL BE 1872 INCH(S).
1874	THE SPECIMEN LENGTH SHALL BE 1874 MILLIMETER(S).
1918	DURABILITY OF IDENTIFICATION MARKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1918.
1920	DURABILITY OF IDENTIFICATION MARKING. THE IDENTIFICATION OF PRODUCT SHALL BE LEGIBLE.
1922	DURABILITY OF IDENTIFICATION MARKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1924	DURABILITY OF IDENTIFICATION MARKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH DOD-C-85045.
1926	THE TEST TEMPERATURE SHALL BE 1926 DEGREES CELSIUS.
1930	THE TEST MANDREL DIAMETER SHALL BE 1930 INCH(S).
1932	THE TEST MANDREL DIAMETER SHALL BE 1932 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY OF IDENTIFICATION MARKING (CONT)	
PER DOD-C-85045 (CONT)	
TEST WEIGHT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	1934
(POUNDS)	1936
SI (SELECT ONE)	
(GRAMS)	1938
(KILOGRAMS)	1940
STROKE LENGTH (SELECT ONE)	
(INCHES)	1942
(MILLIMETERS)	1944
STROKE PER MINUTE (QUANTITY)	1946
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	1948
(MILLIMETERS)	1950
ELONGATION AND TENSILE STRENGTH OF FIBER OR BUNDLE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2048

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1934	THE TEST WEIGHT SHALL BE 1934 OUNCE(S).
1936	THE TEST WEIGHT SHALL BE 1936 POUND(S).
1938	THE TEST WEIGHT SHALL BE 1938 GRAM(S).
1940	THE TEST WEIGHT SHALL BE 1940 KILOGRAM(S).
1942	THE TEST MACHINE STROKE LENGTH SHALL BE 1942 INCH(S).
1944	THE TEST MACHINE STROKE LENGTH SHALL BE 1944 MILLIMETER(S).
1946	THE TEST MACHINE STROKES PER MINUTE SHALL BE 1946.
1948	THE SPECIMEN LENGTH SHALL BE 1948 INCH(S).
1950	THE SPECIMEN LENGTH SHALL BE 1950 MILLIMETER(S).
2048	ELONGATION AND TENSILE STRENGTH OF FIBER OR BUNDLE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2048.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELONGATION AND TENSILE STRENGTH OF FIBER OR BUNDLE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2050
MINIMUM ELONGATION (PERCENT)	2052
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2054
(KILOPASCALS)	2056
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2058
PER FED-STD-228, METHOD 3021.	2060
SPEED OF POWER ACTUATED GRIP (SELECT ONE)	
(INCHES/MINUTE)	2062
(MILLIMETERS/MINUTE)	2064

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2050	ELONGATION AND TENSILE STRENGTH OF FIBER OR BUNDLE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2052	THE ELONGATION SHALL BE NOT LESS THAN 2052 PERCENT OF THE INITIAL LENGTH.
2054	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2054 POUND(S) PER SQUARE INCH.
2056	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2056 KILOPASCAL(S).
2058	ELONGATION AND TENSILE STRENGTH OF FIBER OR BUNDLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2058.
2060	ELONGATION AND TENSILE STRENGTH OF FIBER OR BUNDLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3021 OF FED-STD-228.
2062	THE SPEED OF THE POWER ACTUATED GRIP SHALL BE 2062 INCH(S) PER MINUTE.
2064	THE SPEED OF THE POWER ACTIVTATED GRIP SHALL BE 2064 MILLIMETER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FAR-END CROSSTALK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2028
AS FOLLOWS:	2030
MINIMUM DECIBELS DOWN (DECIBELS)	2032
MAXIMUM (DECIBELS)	2034
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2036
PER DOD-STD-1678, METHOD 6060.	2038
PROCEDURE (SELECT ONE)	
I.	2040
II.	2042
SPECIMEN LENGTH (SELECT ONE)	
(YARDS)	2044
(METERS)	2046

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2028	FAR-END CROSSTALK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2028.
2030	FAR-END CROSSTALK. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2032	THE NEIGHBORING FIBER (OR BUNDLE) RADIANT POWER SHALL BE NOT LESS THAN 2032 DECIBELS DOWN.
2034	THE NEIGHBORING FIBER (OR BUNDLE) RADIANT POWER SHALL BE NOT GREATER THAN 2034 DECIBELS.
2036	FAR-END CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2036.
2038	FAR-END CROSSTALK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6060 OF DOD-STD-1678.
2040	PROCEDURE I SHALL APPLY.
2042	PROCEDURE II SHALL APPLY.
2044	THE SPECIMEN LENGTH SHALL BE 2044 YARD(S).
2046	THE SPECIMEN LENGTH SHALL BE 2046 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIBER SIZE (FIBER DIAMETER, CORE DIAMETER)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2068
CONFORMS TO SPECIFIED DIMENSIONS.	2070
CORE/CLAD AREA RATIO (NUMBER)	2071
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
PER DOD-STD-1678, METHOD 1010.	2074
PROCEDURE (SELECT ONE)	
I.	2076
II.	2078
TYPE OF MICROSCOPE ____	2080
TYPE OBJECTIVE LENS ____	2082
MAGNIFICATION (POWER)	2084
TEST SPECIMENS (QUANTITY)	2086

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2068	FIBER SIZE (FIBER DIAMETER, CORE DIAMETER). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2068.
2070	FIBER SIZE (FIBER DIAMETER, CORE DIAMETER). THE FIBER SIZE SHALL CONFORM TO THE SPECIFIED DIMENSIONS.
2071	THE CORE/CLAD AREA RATIO SHALL BE 2071.
2072	FIBER SIZE (FIBER DIAMETER, CORE DIAMETER). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.
2074	FIBER SIZE (FIBER DIAMETER, CORE DIAMETER). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1010 OF DOD-STD-1678.
2076	PROCEDURE I SHALL APPLY.
2078	PROCEDURE II SHALL APPLY.
2080	THE MICROSCOPE SHALL BE TYPE 2080.
2082	THE OBJECTIVE LENS SHALL BE TYPE 2082.
2084	THE LENS MAGNIFICATION SHALL BE 2084 POWER.
2086	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2086.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIBER TRANSFER FUNCTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2590
PER TRANSFER FUNCTION TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2594
PER DOD-STD-1678, METHOD 6070.	2596
PROCEDURE (SELECT ONE)	
I.	2598
II.	2600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2590 FIBER TRANSFER FUNCTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2590.

FIBER TRANSFER FUNCTION. THE TRANSFER FUNCTION SHALL BE IN ACCORDANCE WITH THE TRANSFER FUNCTION TABLE.

TRANSFER FUNCTION TABLE

FREQUENCY (MHZ)	TRANSFER FUNCTION
3500	3501
3502	3503
3504	3505
3506	3507
3508	3509
3510	3511
3512	3513
3514	3515
3516	3517
3518	3519
3520	3521
3522	3523

2594 FIBER TRANSFER FUNCTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2594.

2596 FIBER TRANSFER FUNCTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6070 OF DOD-STD-1678.

2598 PROCEDURE I SHALL APPLY.

2600 PROCEDURE II SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIBER TRANSFER FUNCTION (CONT)	
PER DOD-STD-1678, METHOD 6070. (CONT)	
TEST SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2602
(MILLIMETERS)	2604
REFERENCE SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2606
(MILLIMETERS)	2608
SPECIMEN CONFIGURATION (SELECT ONE)	
LOOSELY COILED.	2610
WOUND ON REEL OR SPOOL.	2612
FINISHED CABLE DIAMETER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1876
CONFORMS TO SPECIFIED DIMENSIONS.	1878
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT.	1880
PER FED-STD-228, METHOD 1441.	1882

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2602	THE TEST SPECIMEN LENGTH SHALL BE 2602 INCH(S).
2604	THE TEST SPECIMEN LENGTH SHALL BE 2604 MILLIMETER(S).
2606	THE REFERENCE SPECIMEN LENGTH SHALL BE 2606 INCH(S).
2608	THE REFERENCE SPECIMEN LENGTH SHALL BE 2608 MILLIMETER(S).
2610	THE SPECIMEN SHALL BE LOOSELY COILED DURING TESTING.
2612	THE SPECIMEN SHALL BE WOUND ON REEL OR SPOOL DURING TESTING.
1876	FINISHED CABLE DIAMETER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1876.
1878	FINISHED CABLE DIAMETER. THE DIAMETER OF THE FINISHED CABLE SHALL CONFORM TO THE SPECIFIED DIMENSION(S).
1880	FINISHED CABLE DIAMETER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1880.
1882	FINISHED CABLE DIAMETER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1441 OF FED-STD-228.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHED CABLE DIAMETER (CONT)	
PER FED-STD-118, METHOD 1441. (CONT)	
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	1884
(MILLIMETERS)	1886
NUMBER OF TEST SPECIMENS (QUANTITY)	1888
FINISHED CABLE MASS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2642
MAXIMUM MASS (SELECT ONE)	
(POUNDS/1000 FEET)	2648
(KILOGRAMS/KILOMETER)	2652
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2654
PER FED-STD-228, METHOD 8311.	2656
NUMBER OF SPECIMENS (QUANTITY)	2658

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1884	THE SPECIMEN LENGTH SHALL BE 1884 INCH(S).
1886	THE SPECIMEN LENGTH SHALL BE 1886 MILLIMETER(S).
1888	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 1888.
2642	FINISHED CABLE MASS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2642.
2648	FINISHED CABLE MASS. THE FINISHED CABLE MASS SHALL BE NOT GREATER THAN 2648 POUNDS PER 1000 FEET.
2652	FINISHED CABLE MASS. THE FINISHED CABLE MASS SHALL BE NOT GREATER THAN 2652 KILOGRAMS PER KILOMETER.
2654	FINISHED CABLE MASS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2654.
2656	FINISHED CABLE MASS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 8311 OF FED-STD-228.
2658	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2658.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISHED CABLE MASS (CONT)	
PER FED-STD-228, METHOD 8311. (CONT)	
SPECIMEN LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	2660
(YARDS)	2662
SI (SELECT ONE)	
(MILLIMETERS)	2664
(METERS)	2666
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2088
AS FOLLOWS:	2090
NO BURNING OF TISSUE PAPER.	2092
MAXIMUM BURN DURATION (SECONDS)	2094
MAXIMUM BURN DISTANCE (SELECT ONE)	
(INCHES)	2096
(MILLIMETERS)	2098
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2100

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2660	THE SPECIMEN LENGTH SHALL BE 2660 INCH(S).
2662	THE SPECIMEN LENGTH SHALL BE 2662 YARD(S).
2664	THE SPECIMEN LENGTH SHALL BE 2664 MILLIMETER(S).
2666	THE SPECIMEN LENGTH SHALL BE 2666 METER(S).
2088	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2088.
2090	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2092	THERE SHALL BE NO BURNING OF TISSUE PAPER.
2094	THE BURN DURATION SHALL BE NOT GREATER THAN 2094 SECOND(S).
2096	THE BURN DISTANCE SHALL BE NOT GREATER THAN 2096 INCH(S).
2098	THE BURN DISTANCE SHALL BE NOT GREATER THAN 2098 MILLIMETER(S).
2100	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
TEST METHODS (CONT)	
PER DOD-STD-1678, METHOD 5010.	2102
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2104
(MILLIMETERS)	2106
MOUNTING METHOD ____	2108
MINIMUM FLAME TEMPERATURE (DEGREES CELSIUS)	2110
FLAME APPLICATION DURATION (SECONDS)	2112
FLUID IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2188
AS FOLLOWS:	2190
MAXIMUM CHANGE IN CABLE DIAMETER (PERCENT)	2192
NO CRACKS OR VOIDS IN JACKET.	2194
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2102 FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5010 OF DOD-STD-1678.

2104 THE SPECIMEN LENGTH SHALL BE 2104 INCH(S).

2106 THE SPECIMEN LENGTH SHALL BE 2106 MILLIMETER(S).

2108 THE MOUNTING METHOD SHALL BE 2108.

2110 THE FLAME TEMPERATURE SHALL BE NOT LESS THAN 2110 DEGREES CELSIUS.

2112 THE FLAME APPLICATION DURATION SHALL BE 2112 SECOND(S).

2188 FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2188.

2190 FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2192 THE CHANGE IN CABLE DIAMETER SHALL BE NOT GREATER THAN 2192 PERCENT OF THE INITIAL DIAMETER.

2194 THERE SHALL BE NO CRACKS OR VOIDS IN THE JACKET MATERIAL.

2198 THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2198.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200
PER DOD-STD-1678, METHOD 8030.	2202
SPECIMEN LENGTH (SELECT ONE)	
(YARDS)	2204
(METERS)	2206
MEDIA (NAME)	2208
DOCUMENT (DES)	2210
TYPE (DES)	2212
IMMERSION DURATION (HOURS)	2214
MEDIA TEMPERATURE (DEGREES CELSIUS)	2216
IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
AS FOLLOWS:	2282
NO CRACKING OR SPLITTING OF JACKET.	2284
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	2286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2200	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.
2202	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 8030 OF DOD-STD-1678.
2204	THE SPECIMEN LENGTH SHALL BE 2204 YARD(S).
2206	THE SPECIMEN LENGTH SHALL BE 2206 METER(S).
2208	THE MEDIA SHALL BE 2208.
2210	THE MEDIA SHALL BE IN ACCORDANCE WITH 2210.
2212	MEDIA TYPE 2212 SHALL APPLY.
2214	MEDIA IMMERSION DURATION SHALL BE 2214 HOUR(S).
2216	MEDIA TEMPERATURE SHALL BE 2216 DEGREES CELSIUS.
2280	IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	IMPACT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2284	THERE SHALL BE NO CRACKING OR SPLITTING OF JACKET MATERIAL.
2286	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2286 PERCENT OF THE TOTAL FIBERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPACT (CONT)	
MAXIMUM BROKEN TRANSMITTING FIBERS (CONT)	
(QUANTITY)	2288
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2290
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2292
PER DOD-STD-1678, METHOD 2030.	2294
PROCEDURE (SELECT ONE)	
I.	2296
II.	2298
CONDITIONING RELATIVE HUMIDITY (PERCENT)	2300
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2304
CONDITIONING PERIOD (HOURS)	2308
TEST WEIGHT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2310
(POUNDS)	2312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2288	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2288.
2290	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2290.
2292	IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2292.
2294	IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2030 OF DOD-STD-1678.
2296	PROCEDURE I SHALL APPLY.
2298	PROCEDURE II SHALL APPLY.
2300	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 2300 PERCENT.
2304	THE CONDITIONING TEMPERATURE SHALL BE 2304 DEGREES CELSIUS.
2308	THE CONDITIONING PERIOD SHALL BE 2308 HOUR(S).
2310	THE TEST WEIGHT SHALL BE 2310 OUNCE(S).
2312	THE TEST WEIGHT SHALL BE 2312 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPACT (CONT)	
TEST WEIGHT (CONT)	
SI (SELECT ONE)	
(GRAMS)	2314
(KILOGRAMS)	2316
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2318
(MILLIMETERS)	2320
NUMBER OF TEST CYCLES (QUANTITY)	2322
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2324
(MILLIMETERS)	2326
DROP HAMMER RADIUS OF CURVATURE (MILLIMETERS)	2328
JACKET ELONGATION	
REQUIREMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2346
MINIMUM ELONGATION (PERCENT)	2348
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2314	THE TEST WEIGHT SHALL BE 2314 GRAM(S).
2316	THE TEST WEIGHT SHALL BE 2316 KILOGRAM(S).
2318	THE MANDREL DIAMETER SHALL BE 2318 INCH(S).
2320	THE MANDREL DIAMETER SHALL BE 2320 MILLIMETER(S).
2322	THE NUMBER OF TEST CYCLES SHALL BE 2322.
2324	THE SPECIMEN LENGTH SHALL BE 2324 INCH(S).
2326	THE SPECIMEN LENGTH SHALL BE 2326 MILLIMETER(S).
2328	THE DROP HAMMER RADIUS OF CURVATURE SHALL BE 2328 MILLIMETER(S).
2346	JACKET ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2346.
2348	JACKET ELONGATION. THE ELONGATION SHALL BE NOT LESS THAN 2348 PERCENT OF THE INITIAL LENGTH.
2350	JACKET ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
JACKET ELONGATION (CONT)	
TEST METHODS (CONT)	
PER FED-STD-228, METHOD 3031.	2352
NUMBER OF TEST SPECIMENS (QUANTITY)	2354
JACKET LEAK (FLAWS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2358
AS FOLLOWS:	2360
MAXIMUM LEAK RATE (ATM CC/SECOND/FOOT)	2361
MAXIMUM VAPOR LEAK RATE (ATM CC/SECOND)	2362
NO CONTINUOUS BUBBLES.	2364
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2366
PER DOD-STD-1678, METHOD 8070.	2384
PROCEDURE (SELECT ONE)	
PROCEDURE I.	2386
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2388
(MILLIMETERS)	2390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2352	JACKET ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3031 OF FED-STD-228.
2354	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2354.
2358	JACKET LEAK (FLAWS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2358.
2360	JACKET LEAK (FLAWS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2361	THE LEAK RATE SHALL BE NOT GREATER THAN 2361 ATM CC/SECOND/FOOT.
2362	THE VAPOR LEAK RATE SHALL BE NOT GREATER THAN 2362 ATM CC/SECOND.
2364	THERE SHALL BE NO CONTINUOUS BUBBLES.
2366	JACKET LEAK (FLAWS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2366.
2384	JACKET LEAK (FLAWS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 8070 OF DOD-STD-1678.
2386	PROCEDURE I SHALL APPLY.
2388	THE SPECIMEN LENGTH SHALL BE 2388 INCH(S).
2390	THE SPECIMEN LENGTH SHALL BE 2390 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
JACKET LEAK (FLAWS) CONT	
PROCEDURE I. (CONT)	
SUBMERGED DEPTH (SELECT ONE)	
(INCHES)	2392
(MILLIMETERS)	2394
INITIAL PRESSURE (SELECT ONE)	
(INCHES OF MERCURY)	2396
(TORR)	2398
INITIAL PRESSURE PERIOD (MINUTES)	2400
FINAL PRESSURE (SELECT ONE)	
(INCHES OF MERCURY)	2402
(TORR)	2404
FINAL PRESSURE PERIOD (MINUTES)	2406
PROCEDURE II.	2408
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2410
(MILLIMETERS)	2412
TEST DURATION (MINUTES)	2414
MEASUREMENT INTERVALS (MINUTES)	2416

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2392	THE SUBMERGED DEPTH SHALL BE 2392 INCH(S).
2394	THE SUBMERGED DEPTH SHALL BE 2394 MILLIMETER(S).
2396	THE INITIAL PRESSURE SHALL BE 2396 INCHES OF MERCURY.
2398	THE INITIAL PRESSURE SHALL BE 2398 TORR.
2400	THE INITIAL PRESSURE PERIOD SHALL BE 2400 MINUTE(S).
2402	THE FINAL PRESSURE SHALL BE 2402 INCHES OF MERCURY.
2404	THE FINAL PRESSURE SHALL BE 2404 TORR.
2406	THE FINAL PRESSURE PERIOD SHALL BE 2406 MINUTE(S).
2408	PROCEDURE II SHALL APPLY.
2410	THE SPECIMEN LENGTH SHALL BE 2410 INCH(S).
2412	THE SPECIMEN LENGTH SHALL BE 2412 MILLIMETER(S).
2414	THE TEST DURATION SHALL BE 2414 MINUTE(S).
2416	THE TEST MEASUREMENT INTERVALS SHALL BE 2416 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
JACKET STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1890
AS FOLLOWS:	1892
MAXIMUM JACKET DIMENSIONAL CHANGE	
DIAMETER (PERCENT)	1894
LENGTH (PERCENT)	1896
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1898
PER DOD-STD-1678, METHOD 4060.	1900
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	1902
(MILLIMETERS)	1904
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1906
CONDITIONING DURATION (SELECT ONE)	
(MINUTES)	1910
(HOURS)	1912
TEST TEMPERATURE (DEGREES CELSIUS)	1914

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1890	JACKET STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1890.
1892	JACKET STABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1894	THE CHANGE IN JACKET DIAMETER SHALL BE NOT GREATER THAN 1894 PERCENT OF THE INITIAL DIAMETER.
1896	THE CHANGE IN JACKET LENGTH SHALL BE NOT GREATER THAN 1896 PERCENT OF THE INITIAL LENGTH.
1898	JACKET STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1898.
1900	JACKET STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4060 OF DOD-STD-1678.
1902	THE SPECIMEN LENGTH SHALL BE 1902 INCH(S).
1904	THE SPECIMEN LENGTH SHALL BE 1904 MILLIMETER(S).
1906	THE CONDITIONING TEMPERATURE SHALL BE 1906 DEGREES CELSIUS.
1910	THE CONDITIONING DURATION SHALL BE 1910 MINUTE(S).
1912	THE CONDITIONING DURATION SHALL BE 1912 HOUR(S).
1914	THE TEST TEMPERATURE SHALL BE 1914 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
JACKET TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2418
AS FOLLOWS:	2420
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2422
(KILOPASCALS)	2424
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2426
PER FED-STD-228, METHOD 3021.	2428
SPEED OF POWER ACTIVATED GRIP (SELECT ONE)	
(INCHES PER MINUTE)	2430
(MILLIMETERS PER MINUTE)	2432
JACKET THICKNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2436
CONFORMS TO SPECIFIED DIMENSIONS.	2438

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2418	JACKET TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2418.
2420	JACKET TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2422	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2422 POUNDS PER SQUARE INCH.
2424	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2424 KILOPASCAL(S).
2426	JACKET TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2428	JACKET TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3021 OF FED-STD-228.
2430	THE SPEED OF THE POWER ACTIVATED GRIP SHALL BE 2430 INCH(S) PER MINUTE.
2432	THE SPEED OF THE POWER ACTIVATED GRIP SHALL BE 2432 MILLIMETER(S) PER MINUTE.
2436	JACKET THICKNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2436.
2438	JACKET THICKNESS. THE JACKET THICKNESS SHALL CONFORM TO SPECIFIED DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
JACKET THICKNESS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2440
PER FED-STD-228, METHOD 1018.	2442
NUMBER OF SPECIMENS (QUANTITY)	2444
LOW TEMPERATURE FLEXIBILITY (COLD BEND)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2114
AS FOLLOWS:	2116
NO CRACKING OR SPLITTING OF JACKET.	2118
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	2120
(QUANTITY)	2122
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2124
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2126
PER DOD-STD-1678, METHOD 2020.	2128

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2440	JACKET THICKNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2440.
2442	JACKET THICKNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1018 OF FED-STD-228.
2444	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2444.
2114	LOW TEMPERATURE FLEXIBILITY (COLD BEND). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2114.
2116	LOW TEMPERATURE FLEXIBILITY (COLD BEND). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2118	THERE SHALL BE NO CRACKING OR SPLITTING OF JACKET MATERIAL.
2120	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2120 PERCENT OF THE TOTAL FIBERS.
2122	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2122.
2124	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2124.
2126	LOW TEMPERATURE FLEXIBILITY (COLD BEND). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2126.
2128	LOW TEMPERATURE FLEXIBILITY (COLD BEND). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2020 OF DOD-STD-1678.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE FLEXIBILITY (COLD BEND) (CONT)	
PER DOD-STD-1678, METHOD 2020. (CONT)	
PROCEDURE (SELECT ONE)	
I.	2130
II.	2132
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2134
CONDITIONING DURATION (SELECT ONE)	
(MINUTES)	2138
(HOURS)	2140
MANDREL DIAMETER (SELECT ONE)	
(INCHES)	2142
(MILLIMETERS)	2144
TEST WEIGHT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2146
(POUNDS)	2148
SI (SELECT ONE)	
(GRAMS)	2150
(KILOGRAMS)	2152
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2154
(MILLIMETERS)	2156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2130	PROCEDURE I SHALL APPLY.
2132	PROCEDURE II SHALL APPLY.
2134	THE CONDITIONING TEMPERATURE SHALL BE 2134 DEGREES CELSIUS.
2138	THE CONDITIONING DURATION SHALL BE 2138 MINUTE(S).
2140	THE CONDITIONING DURATION SHALL BE 2140 HOUR(S).
2142	THE MANDREL DIAMETER SHALL BE 2142 INCH(S).
2144	THE MANDREL DIAMETER SHALL BE 2144 MILLIMETER(S).
2146	THE TEST WEIGHT SHALL BE 2146 OUNCE(S).
2148	THE TEST WEIGHT SHALL BE 2148 POUND(S).
2150	THE TEST WEIGHT SHALL BE 2150 GRAM(S).
2152	THE TEST WEIGHT SHALL BE 2152 KILOGRAM(S).
2154	THE SPECIMEN LENGTH SHALL BE 2154 INCH(S).
2156	THE SPECIMEN LENGTH SHALL BE 2156 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NUMBER OF FIBERS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2446
FIBERS (QUANTITY)	2448
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2452
PER DOD-STD-1678, METHOD 1030.	2454
PROCEDURE (SELECT ONE)	
I.	2456
II.	2458
III.	2460
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2462
(MILLIMETERS)	2464
NUMBER OF TRANSMITTING FIBERS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2466
MINIMUM TRANSMITTING FIBERS (SELECT ONE)	
(QUANTITY)	2468

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2446	NUMBER OF FIBERS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2446.
2448	NUMBER OF FIBERS. THERE SHALL BE 2448 FIBERS PER BUNDLE.
2452	NUMBER OF FIBERS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2452.
2454	NUMBER OF FIBERS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1030 OF DOD-STD-1678.
2456	PROCEDURE I SHALL APPLY.
2458	PROCEDURE II SHALL APPLY.
2460	PROCEDURE III SHALL APPLY.
2462	THE SPECIMEN LENGTH SHALL BE 2462 INCH(S).
2464	THE SPECIMEN LENGTH SHALL BE 2464 MILLIMETER(S).
2466	NUMBER OF TRANSMITTING FIBERS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2466.
2468	NUMBER OF TRANSMITTING FIBERS. THE NUMBER OF TRANSMITTING FIBERS SHALL BE NOT LESS THAN 2468.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NUMBER OF TRANSMITTING FIBERS (CONT)	
MINIMUM TRANSMITTING FIBERS (CONT)	
(PERCENT)	2470
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2472
PER DOD-STD-1678, METHOD 1040.	2474
TYPE OF MICROSCOPE ____	2476
TYPE OF LENS ____	2478
MAGNIFICATION (POWER)	2480
LENGTH OF SPECIMEN (SELECT ONE)	
(INCHES)	2482
(MILLIMETERS)	2484
NUMERICAL APERTURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
NUMERICAL APERTURE (VALUE)	1954

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2470	NUMBER OF TRANSMITTING FIBERS. THE PERCENTAGE OF TRANSMITTING FIBERS SHALL BE NOT LESS THAN 2470 PERCENT OF THE TOTAL FIBERS.
2472	NUMBER OF TRANSMITTING FIBERS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2472.
2474	NUMBER OF TRANSMITTING FIBERS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1040 OF DOD-STD-1678.
2476	MICROSCOPE TYPE 2476 SHALL APPLY.
2478	THE LENS TYPE SHALL BE 2478.
2480	THE MAGNIFICATION SHALL BE 2480 POWER.
2482	THE SPECIMEN LENGTH SHALL BE 2482 INCH(S).
2484	THE SPECIMEN LENGTH SHALL BE 2484 MILLIMETER(S).
1952	NUMERICAL APERTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	NUMERICAL APERTURE. THE NUMERICAL APERTURE SHALL BE 1954.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NUMERICAL APERTURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1958
PER DOD-STD-1678, METHOD 6030.	1960
PROCEDURE (SELECT ONE)	
I.	1962
II.	1964
SPECIMEN LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	1966
(YARDS)	1968
SI (SELECT ONE)	
(MILLIMETERS)	1970
(METERS)	1972
HOLDING SPOOL OR REEL REQUIRED.	1988
HOLDING SPOOL OR REEL DIAMETER (SELECT ONE)	
(INCHES)	1990
(MILLIMETERS)	1992

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1958	NUMERICAL APERTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1958.
1960	NUMERICAL APERTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6030 OF DOD-STD-1678.
1962	PROCEDURE I SHALL APPLY.
1964	PROCEDURE II SHALL APPLY.
1966	THE SPECIMEN LENGTH SHALL BE 1966 INCH(S).
1968	THE SPECIMEN LENGTH SHALL BE 1968 YARD(S).
1970	THE SPECIMEN LENGTH SHALL BE 1970 MILLIMETER(S).
1972	THE SPECIMEN LENGTH SHALL BE 1972 METER(S).
1988	THE SPECIMEN SHALL BE WOUND ON A HOLDING SPOOL OR REEL FOR TEST.
1990	THE HOLDING SPOOL OR REEL DIAMETER SHALL BE 1990 INCH(S).
1992	THE HOLDING SPOOL OR REEL DIAMETER SHALL BE 1992 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NUMERICAL APERTURE (CONT)	
TEST METHODS (CONT)	
PER DOD-STD-1678, METHOD 6040.	1994
PROCEDURE (SELECT ONE)	
I.	1996
II.	1998
SPECIMEN LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	2000
(YARDS)	2002
SI (SELECT ONE)	
(MILLIMETERS)	2004
(METERS)	2006
HOLDING SPOOL OR REEL REQUIRED.	2022
HOLDING SPOOL OR REEL DIAMETER (SELECT ONE)	
(INCHES)	2024
(MILLIMETERS)	2026

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1994	NUMERICAL APERTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6040 OF DOD-STD-1678.
1996	PROCEDURE I SHALL APPLY.
1998	PROCEDURE II SHALL APPLY.
2000	THE SPECIMEN LENGTH SHALL BE 2000 INCH(S).
2002	THE SPECIMEN LENGTH SHALL BE 2002 YARD(S).
2004	THE SPECIMEN LENGTH SHALL BE 2004 MILLIMETER(S).
2006	THE SPECIMEN LENGTH SHALL BE 2006 METER(S).
2022	THE CABLE SHALL BE WOUND ON A HOLDING SPOOL OR REEL FOR TEST.
2024	THE HOLDING SPOOL OR REEL DIAMETER SHALL BE 2024 INCH(S).
2026	THE HOLDING SPOOL OR REEL DIAMETER SHALL BE 2026 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER TRANSMISSION AFTER TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2764
AS FOLLOWS:	2766
NO CRACKING OR MELTING OF JACKET MATERIAL	2768
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2770
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2772
PER DOD-STD-1678, METHOD 4020.	2774
TEMPERATURE CYCLES (NUMBER)	2776
TEST CONDITION (LETTER)	2778
SPECIMEN LENGTH (SELECT ONE)	
(YARDS)	2780
(METERS)	2782
SPECIMEN LENGTH IN CHAMBER (SELECT ONE)	
(YARDS)	2784
(METERS)	2786

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2764	POWER TRANSMISSION AFTER TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2764.
2766	POWER TRANSMISSION AFTER TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2768	THERE SHALL BE NO CRACKING OR MELTING OF JACKET MATERIAL.
2770	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2770.
2772	POWER TRANSMISSION AFTER TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2772.
2774	POWER TRANSMISSION AFTER TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4020 OF DOD-STD-1678.
2776	THERE SHALL BE 2776 TEMPERATURE CYCLE(S).
2778	THE TEST CONDITION LETTER SHALL BE 2778.
2780	THE SPECIMEN LENGTH SHALL BE 2780 YARD(S).
2782	THE SPECIMEN LENGTH SHALL BE 2782 METER(S).
2784	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 2784 YARD(S).
2786	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 2786 METER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER TRANSMISSION AFTER HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2158
AS FOLLOWS:	2160
NO SOFTENING OR SWELLING OF JACKET.	2162
MINIMUM RATIO OF OUTPUT POWER (PERCENT)	2164
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2166
PER DOD-STD-1678, METHOD 4030.	2168
CONDITIONING RELATIVE HUMIDITY (PERCENT)	2170
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2174
CONDITIONING PERIOD (HOURS)	2178
SPECIMEN LENGTH (SELECT ONE)	
(YARDS)	2180
(METERS)	2182
LENGTH OF SPECIMEN IN CHAMBER (SELECT ONE)	
(YARDS)	2184
(METERS)	2186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPY
2158	POWER TRANSMISSION AFTER HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2158.
2160	POWER TRANSMISSION AFTER HUMIDITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2162	THERE SHALL BE NO SOFTENING OR SWELLING OF JACKET MATERIAL.
2164	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2164.
2166	POWER TRANSMISSION AFTER HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2166.
2168	POWER TRANSMISSION AFTER HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4030 OF DOD-STD-1678.
2170	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 2170 PERCENT.
2174	THE CONDITIONING TEMPERATURE SHALL BE 2174 DEGREES CELSIUS.
2178	THE CONDITIONING PERIOD SHALL BE 2178 HOUR(S).
2180	THE SPECIMEN LENGTH SHALL BE 2180 YARD(S).
2182	THE SPECIMEN LENGTH SHALL BE 2182 METER(S).
2184	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 2184 YARD(S).
2186	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 2186 METER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER TRANSMISSION AT ELEVATED TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2788
AS FOLLOWS:	2790
NO MELTING OF JACKET MATERIAL	2792
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2794
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2796
PER DOD-STD-1678, METHOD 4010.	2798
TEST TEMPERATURE (DEGREES CELSIUS)	2800
TEST PERIOD (HOURS)	2802
SPECIMEN LENGTH (SELECT ONE)	
(YARDS)	2804
(METERS)	2806
SPECIMEN LENGTH IN CHAMBER (SELECT ONE)	
(YARDS)	2808
(METERS)	2810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2788	POWER TRANSMISSION AT ELEVATED TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2788.
2790	POWER TRANSMISSION AT ELEVATED TEMPERATURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2792	THERE SHALL BE NO MELTING OF JACKET MATERIAL.
2794	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2794.
2796	POWER TRANSMISSION AT ELEVATED TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2796.
2798	POWER TRANSMISSION AT ELEVATED TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4010 OF DOD-STD-1678.
2800	THE TEST TEMPERATURE SHALL BE 2800 DEGREES CELSIUS.
2802	THE TEST PERIOD SHALL BE 2802 HOUR(S).
2804	THE SPECIMEN LENGTH SHALL BE 2804 YARD(S).
2806	THE SPECIMEN LENGTH SHALL BE 2806 METER(S)
2808	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 2808 YARD(S).
2810	THE SPECIMEN LENGTH IN THE CHAMBER SHALL BE 2810 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PULSE SPREADING (BROADENING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2490
PULSE WIDTH AS FOLLOWS:	2492
MAXIMUM AT 50 PERCENT AMPLITUDE (NANOMETERS)	2494
MAXIMUM AT 20 PERCENT AMPLITUDE (NANOMETERS)	2496
PULSE SPREADING (VALUE)	2497
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2498
PER DOD-STD-1678, METHOD 6050.	2500
PROCEDURE (SELECT ONE)	
I.	2502
II.	2504
WAVELENGTH (NANOMETERS)	2505
BANDWIDTH (NANOMETERS)	2507
TEST SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2506
(MILLIMETERS)	2508

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2490	PULSE SPREADING (BROADENING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2490.
2492	PULSE SPREADING (BROADENING). THE PULSE WIDTH SHALL BE AS FOLLOWS:
2494	THE PULSE WIDTH AT 50 PERCENT OF AMPLITUDE SHALL BE NOT GREATER THAN 2494 NANOMETER(S).
2496	THE PULSE WIDTH AT 20 PERCENT OF AMPLITUDE SHALL BE NOT GREATER THAN 2496 NANOMETER(S).
2497	THE PULSE SPREADING SHALL BE NOT GREATER THAN 2497.
2498	PULSE SPREADING (BROADENING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2498.
2500	PULSE SPREADING (BROADENING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6050 OF DOD-STD-1678.
2502	PROCEDURE I SHALL APPLY.
2594	PROCEDURE II SHALL APPLY.
2505	THE SOURCE WAVELENGTH SHALL BE 2505 NANOMETER(S).
2507	THE SOURCE BANDWIDTH SHALL BE 2507 NANOMETER(S).
2506	THE TEST SPECIMEN LENGTH SHALL BE 2506 INCH(S).
2508	THE TEST SPECIMEN LENGTH SHALL BE 2508 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PULSE SPREADING BROADENING (CONT)	
PER DOD-STD-1678. METHOD 6050. (CONT)	
REFERENCE SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2510
(MILLIMETERS)	2512
SPECIMEN CONFIGURATION (SELECT ONE)	
LOOSELY COILED.	2514
WOUND ON REEL OR SPOOL.	2516
RADIANT POWER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1626
AS FOLLOWS:	1628
MINIMUM TOTAL POWER (WATTS ABSOLUTE)	1630
MINIMUM TOTAL POWER (WATTS RELATIVE)	1632
MINIMUM FUNDAMENTAL COMPONENT OF MODULATED POWER (WATTS RMS ABSOLUTE)	1634
MINIMUM FUNDAMENTAL COMPONENT OF MODULATED POWER (WATTS RMS RELATIVE)	1636

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2510	THE REFERENCE SPECIMEN LENGTH SHALL BE 2510 INCH(S).
2512	THE REFERENCE SPECIMEN LENGTH SHALL BE 2512 MILLIMETER(S).
2514	THE SPECIMEN CONFIGURATION SHALL BE LOOSELY COILED.
2516	THE SPECIMEN CONFIGURATION SHALL BE MOUNTED ON REEL OR SPOOL.
1626	RADIANT POWER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1626.
1628	RADIANT POWER. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1630	THE TOTAL POWER SHALL BE NOT LESS THAN 1630 WATT(S) ABSOLUTE.
1632	THE TOTAL POWER SHALL BE NOT LESS THAN 1632 WATT(S) RELATIVE.
1634	THE VALUE OF THE FUNDAMENTAL COMPONENT OF THE MODULATED POWER SHALL BE NOT LESS THAN 1634 WATT(S) RMS ABSOLUTE.
1636	THE VALUE OF THE FUNDAMENTAL COMPONENT OF THE MODULATED POWER SHALL BE NOT LESS THAN 1636 WATT(S) RMS RELATIVE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIANT POWER (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1638
PER DOD-STD-1678, METHOD 6010.	1640
PROCEDURE (SELECT ONE)	
I.	1642
II.	1644
III.	1646
RADIATION SOURCE ____	1648

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1638	RADIANT POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1638.
1640	RADIANT POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6010 OF DOD-STD-1678.
1642	PROCEDURE I SHALL APPLY.
1644	PROCEDURE II SHALL APPLY.
1646	PROCEDURE III SHALL APPLY.
1648	THE RADIATION SOURCE SHALL BE 1648.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIANT POWER (CONT)	
PER MIL-STD-1678, METHOD 6020. (CONT)	
SOURCE SIGNAL DESCRIPTION TABLE.	
NUMERICAL APERTURE OF LAUNCHED RADIATION CONE (VALUE)	1650
LAUNCHED RADIATION UNIFORM LAMBERTIAN.	1652

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE SOURCE SIGNAL SHALL BE IN ACCORDANCE WITH THE SOURCE SIGNAL DESCRIPTION TABLE.

SOURCE SIGNAL DESCRIPTION TABLE

CENTER WAVELENGTH (NM)	BANDWIDTH (NM)	PULSEWIDTH 50 PCT AMPLITUDE (NM)	PULSEWIDTH 20 PCT AMPLITUDE (NM)	PULSE RATE (PPS)	MODULATION FREQUENCY (MHZ)
3000	3001	3002	3003	3004	3005
3006	3007	3008	3009	3010	3011
3012	3013	3014	3015	3016	3017
3018	3019	3020	3021	3022	3023
3024	3025	3026	3027	3028	3029
3030	3031	3032	3033	3034	3035
3036	3037	3038	3039	3040	3041
3042	3043	3044	3045	3046	3047
3048	3049	3050	3051	3052	3053
3054	3055	3056	3057	3058	3059
3060	3061	3062	3063	3064	3065
3066	3067	3068	3069	3070	3071

1650 THE NUMERICAL APERTURE OF THE LAUNCHED RADIATION CONE SHALL BE 1650.

1652 THE LAUNCHED RADIATION SHALL BE UNIFORM LAMBERTIAN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIANT POWER (CONT)	
PER DOD-STD-1678, METHOD 6010 (CONT)	
SOURCE LAUNCH ANGLES TABLE.	
CLADDING MODE STRIPPER ____	1654
TERMINATION METHOD (SELECT ONE)	
FERRULE (PART NUMBER)	1655
INDEX MATCHING FLUID.	1656
END PREPARATION PER DOD-STD-1678, METHOD 8040.	1657
PROCEDURE (SELECT ONE)	
I.	1658
II.	1659
III.	1660

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE SOURCE LAUNCH ANGLE(S) SHALL BE IN ACCORDANCE WITH THE LAUNCH ANGLES TABLE.

LAUNCH ANGLES TABLE

LAUNCH ANGLE (DEGREES)	RADIANT POWER ABSOLUTE (WATTS)	RELATIVE (PERCENT)	RELATIVE (WATTS)
3100	3101	3102	3103
3104	3105	3106	3107
3108	3109	3110	3111
3112	3113	3114	3115
3116	3117	3118	3119
3120	3121	3122	3123

1654 THE CLADDING MODE STRIPPER SHALL BE 1654.

1655 THE SPECIMEN SHALL BE TERMINATED WITH FERRULE 1655.

1656 THE SPECIMEN SHALL BE TERMINATED WITH INDEX MATCHING FLUID.

1657 THE SPECIMEN ENDS SHALL BE PREPARED IN ACCORDANCE WITH METHOD 8040 OF DOD-STD-1678.

1658 PROCEDURE I SHALL APPLY.

1659 PROCEDURE II SHALL APPLY.

1660 PROCEDURE III SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIANT POWER (CONT)	
PER DOD-STD-1678, METHOD 6010 (CONT)	
AMPLIFIER ____	1661
DETECTOR TYPE ____	1662
DETECTOR SIZE ____	1663
DETECTOR RESPONSIVITY TABLE.	
SPECIMEN LENGTH (SELECT ONE)	
(YARDS)	1666
(METERS)	1668

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1661 THE AMPLIFIER SHALL BE 1661.

1662 THE DETECTOR TYPE SHALL BE 1662.

1663 THE DETECTOR SIZE SHALL BE 1663.

THE DETECTOR RESPONSIVITY SHALL BE IN ACCORDANCE WITH THE DETECTOR RESPONSIVITY TABLE.

DETECTOR RESPONSIVITY TABLE

WAVELENGTH (NM)	PARAMETERS
3200	3201
3202	3203
3204	3205
3206	3207
3208	3209
3210	3211
3212	3213
3214	3215
3216	3217
3218	3219
3220	3221
3222	3223

1666 THE SPECIMEN LENGTH SHALL BE 1666 YARD(S).

1668 THE SPECIMEN LENGTH SHALL BE 1668 METER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE LOADING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2518
AS FOLLOWS:	2520
NO CRACKING OR SPLITTING OF JACKET.	2522
NO STRENGTH MEMBER BREAKAGE.	2524
MAXIMUM STRENGTH MEMBER ELONGATION (PERCENT)	2526
MAXIMUM LENGTH INCREASE (PERCENT)	2528
MAXIMUM BROKEN TRANSMITTING FIBERS (SELECT ONE)	
(PERCENT)	2530
(QUANTITY)	2532
MAXIMUM RATIO OF OUTPUT POWER (NUMBER)	2534
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2536

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2518	TENSILE LOADING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2518.
2520	TENSILE LOADING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2522	THERE SHALL BE NO CRACKING OR SPLITTING OF THE JACKET MATERIAL.
2524	THERE SHALL BE NO STRENGTH MEMBER BREAKAGE.
2526	THE STRENGTH MEMBER ELONGATION SHALL BE NOT GREATER THAN 2526 PERCENT OF THE INITIAL LENGTH.
2528	THE INCREASE IN LENGTH SHALL BE NOT GREATER THAN 2528 PERCENT OF THE INITIAL LENGTH.
2530	THE PERCENTAGE OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2530 PERCENT OF THE TOTAL FIBERS.
2532	THE NUMBER OF BROKEN TRANSMITTING FIBERS SHALL BE NOT GREATER THAN 2532.
2534	THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2534.
2536	TENSILE LOADING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2536.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE LOADING (CONT)	
TEST METHODS (CONT)	
PER DOD-STD-1678, METHOD 3010.	2538
PROCEDURE (SELECT ONE)	
I.	2540
II.	2542
TENSILE LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2544
(POUNDS)	2546
SI (SELECT ONE)	
(GRAMS)	2548
(KILOGRAMS)	2550
INSTALLATION METHOD ____	2560
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2562
CONDITIONING RELATIVE HUMIDITY (PERCENT)	2566
CONDITIONING DURATION (HOURS)	2570

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2538	TENSILE LOADING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3010 OF DOD-STD-1678.
2540	PROCEDURE I SHALL APPLY.
2542	PROCEDURE II SHALL APPLY.
2544	THE TENSILE LOAD SHALL BE 2544 OUNCE(S).
2546	THE TENSILE LOAD SHALL BE 2546 POUND(S).
2548	THE TENSILE LOAD SHALL BE 2548 GRAM(S).
2550	THE TENSILE LOAD SHALL BE 2550 KILOGRAM(S).
2560	THE SPECIMEN INSTALLATION METHOD SHALL BE 2560.
2562	THE CONDITIONING TEMPERATURE SHALL BE 2562 DEGREES CELSIUS.
2566	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 2566 PERCENT.
2570	THE CONDITIONING DURATION SHALL BE 2570 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE LOADING (CONT)	
PER DOD-STD-1678, METHOD 3010. (CONT)	
PRELOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	2572
(POUNDS)	2574
SI (SELECT ONE)	
(GRAMS)	2576
(KILOGRAMS)	2578
SPECIMEN LENGTH PRIOR TO LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	2580
(YARDS)	2582
SI (SELECT ONE)	
(MILLIMETERS)	2584
(METERS)	2586

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2572	THE PRELOAD SHALL BE 2572 OUNCE(S).
2574	THE PRELOAD SHALL BE 2574 POUND(S).
2576	THE PRELOAD SHALL BE 2576 GRAM(S).
2578	THE PRELOAD SHALL BE 2578 KILOGRAM(S).
2580	THE SPECIMEN LENGTH BEFORE LOADING SHALL BE 2580 INCH(S).
2582	THE SPECIMEN LENGTH BEFORE LOADING SHALL BE 2582 YARD(S).
2584	THE SPECIMEN LENGTH BEFORE LOADING SHALL BE 2584 MILLIMETER(S).
2586	THE SPECIMEN LENGTH BEFORE LOADING SHALL BE 2586 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE LOADING AFTER HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2812
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2816
PER DOD-C-85045.	2818
TENSILE LOADING AFTER ACCELERATED AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2820
MINIMUM RATIO OF OUTPUT POWER (NUMBER)	2822
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2824
PER DOD-C-85045.	2826

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2812	TENSILE LOADING AFTER HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2812.
2814	TENSILE LOADING AFTER HUMIDITY. THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2814.
2816	TENSILE LOADING AFTER HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2816.
2818	TENSILE LOADING AFTER HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH DOD-C-85045.
2820	TENSILE LOADING AFTER ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2820.
2822	TENSILE LOADING AFTER ACCELERATED AGING. THE RATIO OF MEASURED TRANSMITTED POWER SHALL BE NOT LESS THAN 2822.
2824	TENSILE LOADING AFTER ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2824.
2826	TENSILE LOADING AFTER ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH DOD-C-85045.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WICKING	
REQUIRMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2668
AS FOLLOWS:	2670
MAXIMUM MASS INCREASE (PERCENT)	2672
MAXIMUM DYE TRAVEL DISTANCE (SELECT ONE)	
(INCHES)	2674
(MILLIMETERS)	2676
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2678
PER DOD-STD-1678, METHOD 8020.	2680
PROCEDURE (SELECT ONE)	
I.	2682
II.	2684
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	2686
(MILLIMETERS)	2690
CONDITIONING PERIOD (HOURS)	2694

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2668	WICKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2668.
2670	WICKING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2672	THE MASS INCREASE SHALL BE NOT GREATER THAN 2672 PERCENT.
2674	THE DYE TRAVEL SHALL BE NOT GREATER THAN 2674 INCH(S).
2676	THE DYE TRAVEL SHALL BE NOT GREATER THAN 2676 MILLIMETER(S).
2678	WICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2878.
2680	WICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 8020 OF DOD-STD-1678.
2682	PROCEDURE I SHALL APPLY.
2684	PROCEDURE II SHALL APPLY.
2686	THE SPECIMEN LENGTH SHALL BE 2686 INCH(S).
2690	THE SPECIMEN LENGTH SHALL BE 2690 MILLIMETER(S).
2694	THE CONDITIONING PERIOD SHALL BE 2694 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE XII IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	STORAGE CONDITIONS
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130	7629

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH ADDITIONAL PART MARKING
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army - MI

Review activities:
Army - AT
Army - AV
Army - ER
Army - ME
Army - MR
Army - SG
Army - CR

User activity:
Army - AR

Preparing activity:
Army - MI


(Project EDS-A307)

Source: https://assist.dla.mil -- Downloaded: 2022640-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

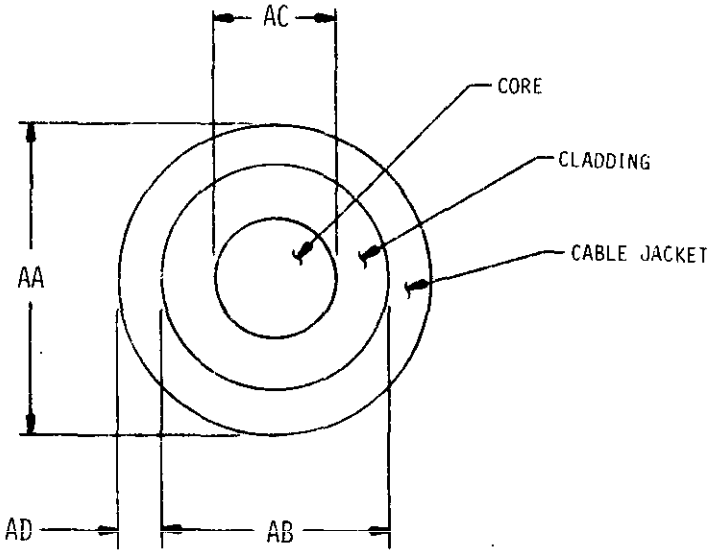

910-01-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

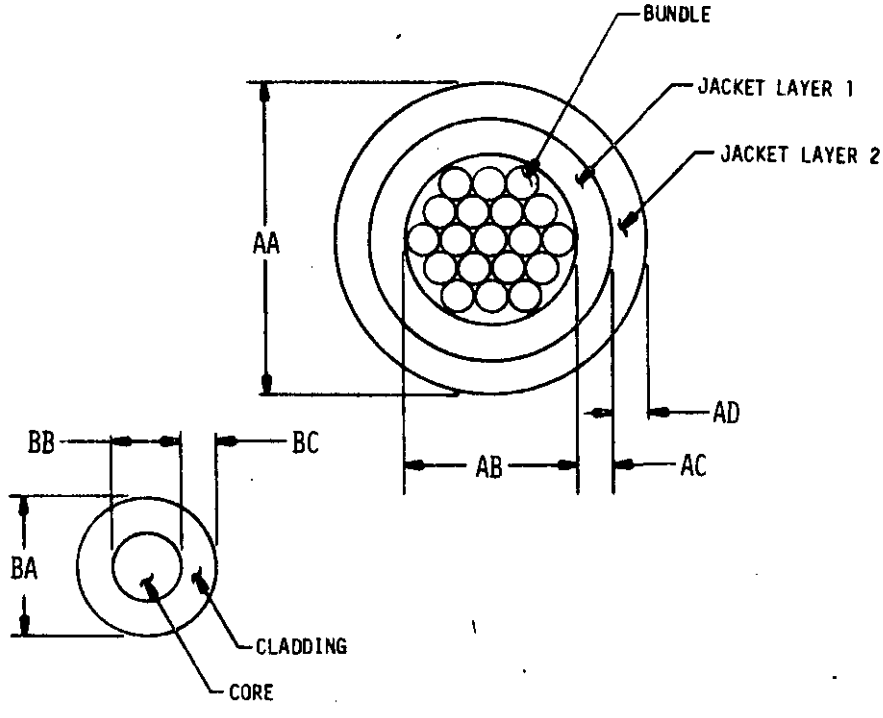

FIBER DETAIL

910-02-1


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

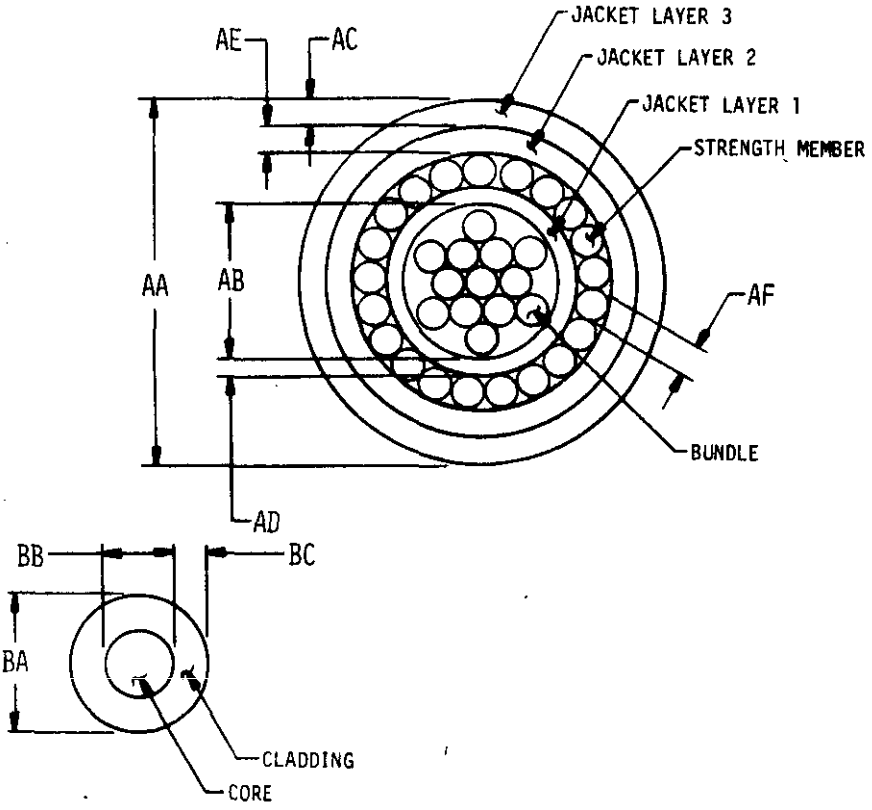


FIBER DETAIL

910-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

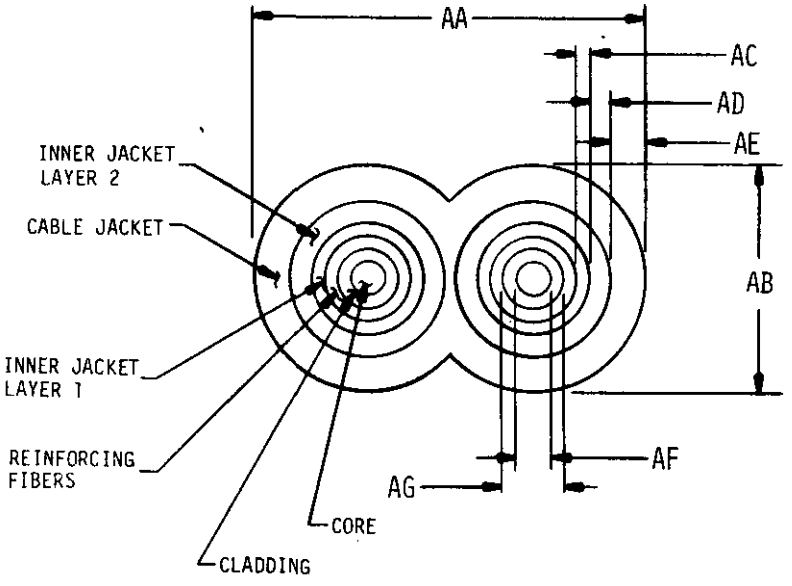

910-04-1

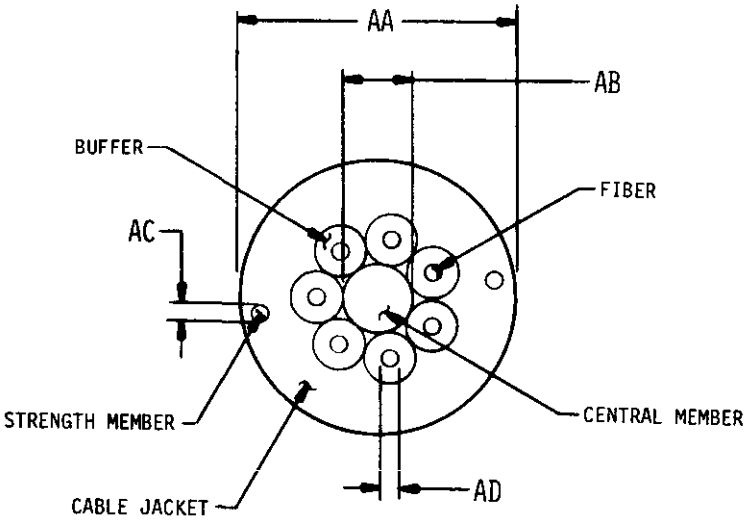

910-05-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1614	24	1684	34	1792	50
0102	12	1616	24	1686	34	1796	50
0103	12	1618	24	1688	34	1800	50
0104	12	1620	24	1692	34	1802	52
0105	12	1622	24	1696	36	1804	52
0107	14	1623	24	1698	36	1806	52
0108	14	1624	24	1700	36	1808	52
0700	12	1626	112	1702	36	1810	52
0800	12	1628	112	1704	36	1812	52
1003	12	1630	112	1706	36	1814	52
1004	12	1632	112	1708	36	1816	52
1005	12	1634	112	1712	38	1818	52
1006	12	1636	112	1714	38	1820	52
1008	12	1638	114	1716	38	1822	52
1009	18	1640	114	1718	38	1824	54
1529	132	1642	114	1720	40	1826	54
1562	16	1644	114	1722	40	1828	54
1564	16	1646	114	1724	40	1830	54
1566	16	1648	114	1726	40	1832	54
1568	16	1650	116	1728	40	1834	54
1572	22	1652	116	1730	40	1836	54
1574	22	1654	118	1731	40	1838	54
1576	22	1655	118	1732	40	1840	54
1578	22	1656	118	1734	40	1842	56
1580	22	1657	118	1736	40	1844	56
1582	22	1658	118	1740	40	1846	56
1584	22	1659	118	1762	46	1848	56
1586	22	1660	118	1766	48	1850	56
1588	22	1661	120	1768	48	1854	56
1590	22	1662	120	1770	48	1858	56
1592	22	1663	120	1772	48	1860	56
1594	22	1666	120	1774	50	1862	56
1596	22	1668	120	1776	50	1864	56
1598	22	1670	32	1778	50	1866	56
1600	22	1672	34	1780	50	1868	56
1602	22	1674	34	1782	50	1870	58
1606	24	1676	34	1784	50	1872	58
1608	24	1678	34	1786	50	1874	58
1610	24	1680	34	1788	50	1876	70
1612	24	1682	34	1790	50	1878	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1880	70	1970	100	2080	66	2162	106
1882	70	1972	100	2082	66	2164	106
1884	70	1988	100	2084	66	2166	106
1886	70	1990	100	2086	66	2168	106
1888	70	1992	100	2088	74	2170	106
1890	88	1994	102	2090	74	2174	106
1892	88	1996	102	2092	74	2178	106
1894	88	1998	102	2094	74	2180	106
1896	88	2000	102	2096	74	2182	106
1898	88	2002	102	2098	74	2184	106
1900	88	2004	102	2100	74	2186	106
1902	88	2006	102	2102	76	2188	76
1904	88	2022	102	2104	76	2190	76
1906	88	2024	102	2106	76	2192	76
1910	88	2026	102	2108	76	2194	76
1912	88	2028	64	2110	76	2198	76
1914	88	2030	64	2112	76	2200	78
1918	58	2032	64	2114	92	2202	78
1920	58	2034	64	2116	92	2204	78
1922	58	2036	64	2118	92	2206	78
1924	58	2038	64	2120	92	2208	78
1926	58	2040	64	2122	92	2210	78
1930	58	2042	64	2124	92	2212	78
1932	58	2044	64	2126	92	2214	78
1934	60	2046	64	2128	92	2216	78
1936	60	2050	62	2130	94	2280	78
1938	60	2052	62	2132	94	2282	78
1940	60	2054	62	2134	94	2284	78
1942	60	2056	62	2138	94	2286	78
1944	60	2058	62	2140	94	2288	80
1946	60	2060	62	2142	94	2290	80
1948	60	2062	62	2144	94	2292	80
1952	98	2064	62	2146	94	2294	80
1954	98	2068	66	2148	94	2296	80
1958	100	2070	66	2150	94	2298	80
1960	100	2071	66	2152	94	2300	80
1962	100	2072	66	2154	94	2304	80
1964	100	2074	66	2156	94	2306	80
1966	100	2076	66	2158	106	2310	80
1968	100	2078	66	2160	106	2312	80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2314	80	2426	90	2508	110	2606	70
2316	80	2428	90	2510	112	2608	70
2318	80	2430	90	2512	112	2610	70
2320	80	2432	90	2514	112	2612	70
2322	80	2436	90	2516	112	2614	42
2324	80	2438	90	2518	122	2616	42
2326	80	2440	92	2520	122	2618	42
2328	80	2442	92	2522	122	2620	42
2346	80	2444	92	2524	122	2622	42
2348	80	2446	96	2526	122	2624	42
2350	80	2448	96	2528	122	2626	42
2352	84	2452	96	2530	122	2628	42
2354	84	2454	96	2532	122	2630	42
2358	84	2456	96	2534	122	2632	42
2360	84	2458	96	2536	122	2634	42
2361	84	2460	96	2538	122	2636	42
2362	84	2462	96	2540	122	2638	44
2364	84	2464	96	2542	122	2640	44
2366	84	2466	96	2544	122	2642	70
2384	84	2468	96	2546	122	2648	70
2386	84	2470	98	2548	122	2652	70
2388	84	2472	98	2550	122	2654	70
2390	84	2474	98	2560	122	2656	70
2392	86	2476	98	2562	122	2658	70
2394	86	2478	98	2566	122	2660	74
2396	86	2480	98	2570	122	2662	74
2398	86	2482	98	2572	126	2664	74
2400	86	2484	98	2574	126	2666	74
2402	86	2490	110	2576	126	2668	130
2404	86	2492	110	2578	126	2670	130
2406	86	2494	110	2580	126	2672	130
2408	86	2496	110	2582	126	2674	130
2410	86	2497	110	2584	126	2676	130
2412	86	2498	110	2586	126	2678	130
2414	86	2500	110	2594	68	2680	130
2416	86	2502	110	2596	68	2682	130
2418	90	2504	110	2598	68	2684	130
2420	90	2505	110	2600	68	2686	130
2422	90	2506	110	2602	70	2690	130
2424	90	2507	110	2604	70	2694	130

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2698	26	2802	108	3027	117	3067	117
2700	26	2804	108	3028	117	3068	117
2702	26	2806	108	3029	117	3069	117
2728	26	2808	108	3030	117	3070	117
2730	26	2810	108	3031	117	3071	117
2732	26	2812	128	3032	117	3100	119
2734	26	2814	128	3033	117	3101	119
2736	44	2816	128	3034	117	3102	119
2738	44	2818	128	3035	117	3103	119
2740	44	2820	128	3036	117	3104	119
2742	44	2822	128	3037	117	3105	119
2744	44	2824	128	3038	117	3106	119
2746	44	2826	128	3039	117	3107	119
2748	44	3000	117	3040	117	3108	119
2750	44	3001	117	3041	117	3109	119
2752	46	3002	117	3042	117	3110	119
2754	46	3003	117	3043	117	3111	119
2756	46	3004	117	3044	117	3112	119
2758	46	3005	117	3045	117	3113	119
2760	46	3006	117	3046	117	3114	119
2762	46	3007	117	3047	117	3115	119
2764	104	3008	117	3048	117	3116	119
2766	104	3009	117	3049	117	3117	119
2768	104	3010	117	3050	117	3118	119
2770	104	3011	117	3051	117	3119	119
2772	104	3012	117	3052	117	3120	119
2774	104	3013	117	3053	117	3121	119
2776	104	3014	117	3054	117	3122	119
2778	104	3015	117	3055	117	3123	119
2780	104	3016	117	3056	117	3200	121
2782	104	3017	117	3057	117	3201	121
2784	104	3018	117	3058	117	3202	121
2786	104	3019	117	3059	117	3203	121
2788	108	3020	117	3060	117	3204	121
2790	108	3021	117	3061	117	3205	121
2792	108	3022	117	3062	117	3206	121
2794	108	3023	117	3063	117	3207	121
2796	108	3024	117	3064	117	3208	121
2798	108	3025	117	3065	117	3209	121
2800	108	3026	117	3066	117	3210	121

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3211	121	3327	39	3423	49	4943	132
3212	121	3328	39	3424	49	4944	132
3213	121	3329	39	3425	49	4950	18
3214	121	3330	39	3426	49	5209	132
3215	121	3331	39	3427	49	6369	12
3216	121	3332	39	3428	49	6372	134
3217	121	3333	39	3429	49	6870	134
3218	121	3334	39	3430	49	6873	12
3219	121	3335	39	3431	49	6874	14
3220	121	3336	39	3432	49	6924	14
3221	121	3337	39	3433	49	6927	32
3222	121	3338	39	3434	49	6941	14
3223	121	3339	39	3435	49	6991	136
3300	39	3340	39	3500	69	6992	136
3301	39	3341	39	3501	69	6993	136
3302	39	3342	39	3502	69	6994	136
3303	39	3343	39	3503	69	6995	136
3304	39	3400	49	3504	69	6996	30
3305	39	3401	49	3505	69	6997	30
3306	39	3402	49	3506	69	6998	30
3307	39	3403	49	3507	69	6999	30
3308	39	3404	49	3508	69	7001	134
3309	39	3405	49	3509	69	7002	134
3310	39	3406	49	3510	69	7003	134
3311	39	3407	49	3511	69	7004	134
3312	39	3408	49	3512	69	7005	134
3313	39	3409	49	3513	69	7021	28
3314	39	3410	49	3514	69	7022	28
3315	39	3411	49	3515	69	7023	28
3316	39	3412	49	3516	69	7024	28
3317	39	3413	49	3517	69	7047	32
3318	39	3414	49	3518	69	7049	32
3319	39	3415	49	3519	69	7050	28
3320	39	3416	49	3520	69	7051	28
3321	39	3417	49	3521	69	7055	32
3322	39	3418	49	3522	69	7056	28
3323	39	3419	49	3523	69	7060	32
3324	39	3420	49	4904	16	7301	16
3325	39	3421	49	4905	16	7302	16
3326	39	3422	49	4942	132	7344	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7347	28						
7400	30						
7401	30						
7405	32						
7407	30						
7572	16						
7573	16						
7574	16						
7577	16						
7578	16						
7580	20						
7629	134						
7630	134						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Accelerated Aging	32
Additional Part Marking	136
Additional Requirements	134
Aperture Cards Required	14
Applicable Documents	136
Attenuation	36
Base Document	12
Blocking	40
Cable Construction	22
Cable Put-up	26
Cable Twist	42
Cable Twist Bend	44
City	12
Classification	16
Color	46
Company Name/Command	12
Compressive Strength	48
Configuration	18
Contract Number	12
Control, Source	12
Control, Specification	14
Cyclic Flexing	54
Date	12
Design and Construction	20
Durability of Identification Marking	58
Elongation and Tensile Strength of Fiber or Bundle	60
Far-End Crosstalk	64
Fiber Size (Fiber Diameter, Core Diameter)	66
Fiber Transfer Function	68
Finished Cable Diameter	70
Finished Calbe Mass	72
Finishes	20
Flammability	74
Fluid Immersion	76
Format	12
Government Design Activity	12
Illustrations	18
Impact	78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Jacket Elongation	82
Jacket Leak (Flaws)	84
Jacket Stability	88
Jacket Tensile Strength	90
Jacket Thickness	90
Low Temperature Flexibility (Cold Bend)	92
Materials	20
Metals	20
Mounting Hardware	134
Nomenclature	136
Notes	136
Number of Fibers	96
Number of Transmitting Fibers	96
Numerical Aperture	98
Packaging	136
Part Marking	134
Part Number	14
Part Number Cross-Reference	136
Performance Characteristics	132
Phone Number	12
Power Transmission after Humidity	106
Power Transmission after Temperature Cycling	104
Power Transmission at Elevated Temperature	108
Pulse Spreading (Broadening)	110
Quality Assurance Provisions	136
Radiant Power	112
Requester FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
Source Table	14
Scope	14
Storage Conditions	132
Street/Building	12
Superseded Document	136
System Application	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Tabulated Characteristics	18
Temperature Ratings	16
Tensile Loading	122
Tensile Loading After Accelerated Aging	128
Tensile Loading After Humidity	128
Units of Measure	14, 18
Weight/Mass	28
Wicking	130
Workmanship	134

☆U.S. GOVERNMENT PRINTING OFFICE:1980-603-121/843

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-119 (MI), dated 04 Feb 1980 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-119 (MI), dated 04 Feb 1980 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to *preparing activity*. *Comments submitted on this form do not constitute or imply authorization to waive any* portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD STD 35-119

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
U.S. Army Missile Command
Attn: DRSMI-ED
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.