DOD-STD-35-120 (MI)
17 July 1978

MILITARY STANDARD

LENSES, FILTERS, AND MIRRORS (OPTICAL)

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Lenses, Filters, and Mirrors (Optical)
Automated Engineering
Document Preparation System

DOD-STD-35-120(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-120(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification, Exceptions for Lenses, Filters, and Mirrors (Optical).

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirements Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE formats	11
	5.3	Referenced documents	11
	5.4	Test matrix	11
	5.5	Tabulation	12
	5.6	Keyword Code Index (KCI) and Standard Paragraph	15
	5.6.1	Interrelationship of codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title index	2
	II.	Test matrix	12
	III.	Tabulation candidates	13

APPENDICES

Appendix	A.	Illustrations	139
	B.	Characteristic Code Index	145
		Index	153

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Lenses, Filters, and Mirrors (Optical).

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Doucments
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
LENSES	905001	MIL-L-2574	TRIAL LENS SET
		MIL-L-4352	GUN CAMERA LENSES
		MIL-L-5630	BEACON LIGHT LENS AND DOVER
		MIL-L-10114	3 PLY LENS, CYLINDRICAL
		MIL-L-11931	COPYING LENS
		MIL-L-16221	LIGHT LENSES AND GLOBES
		MIL-L-16991	GLASS LENS OPHTHALMIC
		MIL-L-22257	TV LENS SYSTEM
		MIL-L-25743	AERIAL CAMERA LENS
		MIL-L-36065	GONIOSCOPE OPHTHALMOLOGICAL LENS SET
		MIL-L-36304	OPHTHALMIC LENS MEASURING INST.
		MIL-L-36460	NEUTRAL ABSORP. OPHTHALMIC LENS
		MIL-L-36824	PLASTIC LENS; OPHTHALMIC
		MIL-L-37126	RED DIPLOPIA TEST LENS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
LENSES (CONT)	905001 (CONT)	MIL-L-37184	ONE PIECE LENS BLANK, BIFOCAL
		MIL-L-38169	GOGGLE AND VISOR LENSES
		MIL-L-47178	PLASTIC LENS
		MIL-L-50064	SIMPLE LENSES OPHTHALMIC
		MS16867	GLASS MARINE LENSES
		MS17998	NAVIGATIONAL LIGHTS, LENSES
		MS25391	DOUBLE BEAM LENS
		MS35420	BLACKOUT LENS
		MS35421	MARKER LIGHT LENS
FILTERS	905002	MIL-F-2763	BINOCULAR FILTER
		MIL-F-8953	COLORED FILTERS AIRPORT MARKER LIGHTS
		MIL-F-9329	PHOTOGRAPHIC LIGHT FILTERS
		MIL-F-12716	LAMINATED LIGHT FILTERS, TELESCOPIC
		MIL-F-13455	BLACKOUT LIGHT FILTER
		MIL-F-21241	FINISHED COLOR FILTERS
		MIL-F-21424	POLARIZING FILTERS
		MIL-F-45289	INFRARED FILTER INTERFERENCE
		MIL-F-52393	INFRARED FILTER KIT
		MIL-F-55608	INFRARED FILTER INTERFERENCE
		MIL-F-55614	INFRARED FILTER INTERFERENCE

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FILTERS (CONT)	905002 (CONT)	MIL-F-83236	SIGNAL LIGHT FILTER
		MS24489	MARKER LIGHT FILTER
		MS24502	MARKER LIGHT FILTER
		MS51600	OPTICAL INSTRUMENT LIGHT FILTER
MIRRORS	905003	DD-M-411	FRAMED PLATE GLASS MIRRORS
		GGG-M-350	INSPECTION MIRROR
		MIL-M-1715	GLASS, TRIPLE-SECTION, FULL-LENGTH MIRROR
		MIL-M-13508	FRONT SURFACED ALUMINIZED MIRROR
		MIL-M-18371	EMERGENCY SIGNALING MIRRORS
		MIL-M-21188	OPTICAL LANDING MIRROR ASSEMBLY
		MIL-M-21236	FRAMED GLASS MIRROR

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-25050	Colors, Aeronautical Lights and Lighting Equipment, General Requirements For
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification For

STANDARDS

FEDERAL

FED-STD-406	Plastics: Methods of Testing
FED-STD-595	Colors

MILITARY

MIL-STD-35	Automated Engineering Document Preparation System, Basic
MIL-STD-150	Photographic Lenses
MIL-STD-810	Environmental Test Methods
MIL-STD-1241	Optical Terms and Definitions
MIL-STD-1278	Filters, Light, Photographic

PUBLICATIONS

MIL-HDBK-141	Optical Design

(copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD785	Rockwell Hardness of Plastics and Electrical Insulating Materials
ASTMD792	Standard Methods of Test for Specific Gravity and Density of Plastics by Displacement
ASTMD2240	Standard Method of Test for Indentation Hardness of Rubber and Plastics by Means of a Durometer
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

ANSIC29.1	American National Standard Test Methods for Electrical Power Insulators

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, N. Y. 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Lenses, Filters, and Mirrors (Optical).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Lenses, Filters, and Mirrors (Optical), it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Lenses, Filters, and Mirrors (Optical).

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Lenses, Filters, and Mirrors (Optical).

4.3.2 Illustrations. Illustrations applicable to Lenses, Filters, and Mirrors (Optical) are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table II. Test matrix.

DOCUMENT	CODE 1686	1877	2104	2125	2141	2158	2238
	TEST: Bonding Strength	Distortion/Image Quality	Prismatic Effect	Reflection	Refraction	Resolving Power/Resolution	Weathering
MIL-F-2763						X	
MIL-L-4352						X	
MIL-F-9329						X	
MIL-L-10114	X	X	X		X		
MIL-L-11931		X				X	
MIL-F-12716		X			X		
MIL-F-13455							X
MIL-M-13508	X	X		X			
MIL-M-18371		X		X			
MIL-M-21188	X			X			
MIL-F-21241	X				X	X	X
MIL-F-21424	X					X	X
MIL-L-22257		X				X	
MIL-L-25743		X				X	
MIL-L-36824					X		
MIL-L-37184					X		
MIL-L-38169	X	X	X		X		
MIL-L-47178							X
MIL-L-50064		X	X		X		
MIL-F-55608	X						
MIL-F-55614	X						

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for additional specific column headings which may be used for Lenses, Filters and Mirrors (Optical) characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE 1562	COLUMN HEADING TYPE	CODE 1563	COLUMN HEADING GRADE	CODE 1564	COLUMN HEADING CLASS
1575	WAVELENGTH MIN (NM)	1576	WAVELENGTH MAX (NM)	1579	BFD MIN. (MM)
1580	BFD MIN. (INCHES)	1581	EFL (MM)	1582	EFL TOL. PLUS (MM)
1583	EFL TOL. MINUS (MM)	1584	EFL (INCH)	1585	EFL TOL. PLS (INCH)
1586	EFL TOL. MNS (INCH)	1587	FVFD (MM)	1588	FVFD TOL. PLUS (MM)
1589	FVFD TOL. MINUS (MM)	1590	FVFD (IN.)	1591	FVFD TOL. PLUS (IN.)
1592	FVFD TOL. MINUS (IN)	1593	FFD (MM)	1594	FFD TOL. PLUS (MM)
1595	FFD TOL. MINUS (MM)	1596	FFD (INCH)	1597	FFD TOL. PLUS (IN)
1598	FFD TOL. MINUS (IN)	1599	REL APERT. MIN F/(NO)	1600	TRANS MIN. (PERCENT)
1606	DISTORTION MAX (NM)	1607	FIELD OF VIEW FORMT (INCH)	1608	FIELD OF VIEW FORMT (MM)
1609	BIFCL ADD PWR (DIOP)	1610	BIFCL ADD PWR TOL PLS (DIOP)	1611	BIFCL ADD PWR TOL MNS (DIOP)
1612	INDX OF RFRCN (NO)	1613	INDX OF RFRCN TOL PLUS (NO)	1614	INDX OF RFRCN TOL MINUS (NO)
1616	SP GR (NO)	1617	SP GR TOL PLUS (NO)	1618	SP GR TOL MINUS (NO)
1620	LENS PWR (DIOPTERS)	1621	LENS PWR (NO)/METER		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*Requester's Name	0101
*Company Name/Command	0102
*Street/Building	0103
*City, State, Zip	0104
*Phone Number, Include Area Code, Autovon If Applicable	0105
*Date	1003
*Requester FSCM	1004
*Contract Number/Office Symbol	1005
*Base Document	1006
*System Application	1008
*Government Design Activity FSCM	6369
*Format (Select One)	
Six section document.	0700
One section document.	0800
*Control (Select One)	
Source.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Control (Cont)	
Specification.	6874
*Source Table	
Note: Refer to table V of DOD-STD-35.	
Aperture Cards Required.	0107
Revision of AEDPS Document (Number)	0108
Scope	
Note: This entry is automatic and determined by the title code used.	
Part Number	
Note: Automatic with a single item MSE.	
Note: Automatic with a multi-item MSE.	
Units of Measure (Select One)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Classification	
Type per base document (designation)	1562
Grade per base document (designation)	1563
Class per base document (designation)	1564
Form (select one)	
Double convex.	1565
Plano convex.	1566
Concavo convex.	1567
Double concave.	1568
Plano concave.	1569
Convexo concave.	1570

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1562	TYPE SHALL BE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT.
1563	GRADE SHALL BE 1563 IN ACCORDANCE WITH THE BASE DOCUMENT.
1564	CLASS SHALL BE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1565	DEVICE FORM SHALL BE DOUBLE CONVEX.
1566	DEVICE FORM SHALL BE PLANO CONVEX.
1567	DEVICE FORM SHALL BE CONCAVO CONVEX.
1568	DEVICE FORM SHALL BE DOUBLE CONCAVE.
1569	DEVICE FORM SHALL BE PLANO CONCAVE.
1570	DEVICE FORM SHALL BE CONVEXO CONCAVE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX.(KCI)

CHARACTERISTIC NAME	CHAR CODE
Altitude Rating	
Operating (select one)	
Sea level to (feet)	5060
Sea level to (meters)	5061
Nonoperating (select one)	
Sea level to (feet)	5062
Sea level to (meters)	5063
Temperature Rating	
Maximum operating (degrees celsius)	5069
Maximum storage (degrees celsius)	7302
Minimum operating (degrees celsius)	5068
Minimum storage (degrees celsius)	7301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Configuration	
(Illustration number), See Appendix A	1009
Dimension table, (see table III, DOD-STD-35)	
*Units (select one)	
U.S. (select one)	
(inches)	7572
(feet)	7573
(yards)	7574
SI (select one)	
(centimeters)	7576
(millimeters)	7577
(meters)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Illustrations	
(Number), See Appendix A	4950
Note: This code is used to enter applicable illustrations which do not have dimensions.	
Tabulated Characteristics (See Table IV, DOD-STD-35)	
Materials (See Tables VI and VII, DOD-STD-35)	
Note: Automatic when table VII is used.	
Finishes (See Tables VIII and IX, DOD-STD-35)	
Note: Automatic when table IX is used.	
Composition	
Composition, formulation or mixture.	6375
*Ingredient table, (see table XI, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE MUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
6375	COMPOSITION. THE COMPOSITION, FORMULATION OR MIXTURE (AS APPLICABLE) SHALL BE AS SPECIFIED HEREIN. THE INGREDIENT QUANTITIES SHALL BE SHOWN IN INTERNATIONAL (SI) SYSTEM OF UNITS SUCH AS GRAMS, LITERS, ETC., OR U.S. STANDARDS SUCH AS PINTS, QUARTS OR GALLONS, AS SPECIFIED IN THE TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction	
Color	
Wavelength	
Minimum (nanometers)	1575
Maximum (nanometers)	1576
Film	
(type)	1577
(class)	1578
Minimum back focal distance (select one)	
(millimeters)	1579
(inches)	1580
Equivalent focal length (select one)	
(millimeters)	1581
Tolerance	
Plus (millimeters)	1582
Minus (millimeters)	1583
(inches)	1584
Tolerance	
Plus (inches)	1585
Minus (inches)	1586

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1575	COLOR WAVELENGTH SHALL BE NOT LESS THAN 1575 NANOMETER(S).
1576	COLOR WAVELENGTH SHALL BE NOT GREATER THAN 1576 NANOMETER(S).
1577	COLOR CORRECTION SHALL BE FOR FILM TYPE 1577.
1578	COLOR CORRECTION SHALL BE FOR FILM CLASS 1578.
1579	BACK FOCAL DISTANCE SHALL BE NOT LESS THAN 1579 MILLIMETER(S).
1580	BACK FOCAL DISTANCE SHALL BE NOT LESS THAN 1580 INCH(S).
1581	EQUIVALENT FOCAL LENGTH SHALL BE 1581 MILLIMETER(S).
1582	PLUS EQUIVALENT FOCAL LENGTH TOLERANCE SHALL BE 1582 MILLIMETER(S).
1583	MINUS EQUIVALENT FOCAL LENGTH TOLERANCE SHALL BE 1583 MILLIMETER(S).
1584	EQUIVALENT FOCAL LENGTH SHALL BE 1584 INCH(S).
1585	PLUS EQUIVALENT FOCAL LENGTH TOLERANCE SHALL BE 1585 INCH(S).
1586	MINUS EQUIVALENT FOCAL LENGTH TOLERANCE SHALL BE 1586 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Front vertex focal distance (select one)	
(millimeters)	1587
Tolerance	
Plus (millimeters)	1588
Minus (millimeters)	1589
(inches)	1590
Tolerance	
Plus (inches)	1591
Minus (inches)	1592
Flange focal distance (select one)	
(millimeters)	1593
Tolerance	
Plus (millimeters)	1594
Minus (millimeters)	1595
(inches)	1596
Tolerance	
Plus (inches)	1597
Minus (inches)	1598

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1587	FRONT VERTEX FOCAL DISTANCE SHALL BE 1587 MILLIMETER(S).
1588	PLUS FRONT VERTEX FOCAL DISTANCE TOLERANCE SHALL BE 1588 MILLIMETER(S).
1589	MINUS FRONT VERTEX FOCAL DISTANCE TOLERANCE SHALL BE 1589 MILLIMETER(S).
1590	FRONT VERTEX FOCAL DISTANCE SHALL BE 1590 INCH(S).
1591	PLUS FRONT VERTEX FOCAL DISTANCE TOLERANCE SHALL BE 1591 INCH(S).
1592	MINUS FRONT VERTEX FOCAL DISTANCE TOLERANCE SHALL BE 1592 INCH(S).
1593	FLANGE FOCAL DISTANCE SHALL BE 1593 MILLIMETER(S).
1594	PLUS FLANGE FOCAL DISTANCE TOLERANCE SHALL BE 1594 MILLIMETER(S).
1595	MINUS FLANGE FOCAL DISTANCE TOLERANCE SHALL BE 1595 MILLIMETER(S).
1596	FLANGE FOCAL DISTANCE SHALL BE 1596 INCH(S).
1597	PLUS FLANGE FOCAL DISTANCE TOLERANCE SHALL BE 1597 INCH(S).
1598	MINUS FLANGE FOCAL DISTANCE TOLERANCE SHALL BE 1598 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Minimum relative aperture F/(no.)	1599
Minimum transmittance (percent)	1600
Minimum relative illumination at F/(no.)	1601
*Percent at Degrees	
0 degrees (percent)	1602
15 degrees (percent)	1603
30 degrees (percent)	1604
45 degrees (percent)	1605
Maximum distortion (nanometres)	1606
Field of view format (select one)	
(inches)	1607
(millimeters)	1608
Bifocal addition power (diopters)	1609
Tolerance	
Plus (diopters)	1610
Minus (diopters)	1611

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1599	RELATIVE APERTURE SHALL BE NOT LESS THAN F/1599.
1600	TRANSMITTANCE SHALL BE NOT LESS THAN 1600 PERCENT.
1601	WITH THE RELATIVE APERTURE AT F/1601, THE RELATIVE ILLUMINATION SHALL BE NOT LESS THAN THE FOLLOWING:
1602	0 DEGREES 1602 PERCENT.
1603	15 DEGREES 1603 PERCENT.
1604	30 DEGREES 1604 PERCENT.
1605	45 DEGREES 1605 PERCENT.
1606	DISTORTION SHALL BE NOT GREATER THAN 1606 NANOMETRE(S).
1607	FIELD OF VIEW FORMAT SHALL BE 1607 INCH(S).
1608	FIELD OF VIEW FORMAT SHALL BE 1608 MILLIMETER(S).
1609	BIFOCAL ADDITION POWER SHALL BE 1609 DIOPTER(S).
1610	PLUS BIFOCAL ADDITION POWER TOLERANCE SHALL BE 1610 DIOPTER(S).
1611	MINUS BIFOCAL ADDITION POWER TOLERANCE SHALL BE 1611 DIOPTER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Index of refraction (no.)	1612
Tolerance	
Plus (no.)	1613
Minus (no.)	1614
Temperature (degrees Celsius)	1615
Specific gravity (no.)	1616
Tolerance	
Plus (no.)	1617
Minus (no.)	1618
Temperature (degrees Celsius)	1619
Lens power (select one)	
(diopters)	1620
(no.) per meter	1621
Weight	
Minimum weight per unit (select one)	
U.S.	
(ounces)	6943
SI	
(Grams)	6945

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1612	INDEX OF REFRACTION SHALL BE 1612.
1613	PLUS INDEX OF REFRACTION TOLERANCE SHALL BE 1613.
1614	MINUS INDEX OF REFRACTION TOLERANCE SHALL BE 1614.
1615	TEMPERATURE SHALL BE 1615 DEGREE(S) CELSIUS.
1616	SPECIFIC GRAVITY SHALL BE 1616.
1617	PLUS SPECIFIC GRAVITY TOLERANCE SHALL BE 1617.
1618	MINUS SPECIFIC GRAVITY TOLERANCE SHALL BE 1618.
1619	TEMPERATURE SHALL BE 1619 DEGREE(S) CELSIUS.
1620	LENS POWER SHALL BE 1620 DIOPTER(S).
1621	LENS POWER SHALL BE 1621 PER METER.
6943	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).
6945	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Weight (Cont)	
Maximum weight per unit (select one)	
U.S.	
(ounces)	7022
SI	
(grams)	7021
Abrasion	
Requirements (select one)	
Per base document except ____	1641
As follows:	1642
No major damage to rubbed area.	1643
No removal of coating.	1644
Maximum haze (percent)	1645
Maximum reduction in reflectance (percent)	1646
Test methods (select one)	
Per base document except ____	1648
Per FED-STD-406, Method 1093.	1649

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
1641	ABRASION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1641.
1642	ABRASION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1643	THERE SHALL BE NO MAJOR DAMAGE TO RUBBED AREA(S).
1644	THERE SHALL BE NO REMOVAL OF THE COATING.
1645	HAZE SHALL BE NOT GREATER THAN 1645 PERCENT.
1646	REDUCTION IN REFLECTANCE SHALL BE NOT GREATER THAN 1646 PERCENT.
1648	ABRASION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1648.
1649	ABRASION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1093 OF FED-STD-406.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Abrasion (Cont)	
Test methods (Cont)	
Per MIL-M-21188.	1650
Per MIL-L-38169.	1651
Rubbing cycles (number)	1652
Rubbing length (select one)	
(inches)	1653
(centimeters)	1654
Eraser force (select one)	
(pounds)	1655
(kilograms)	1656
Acceleration	
Requirements (select one)	
Per base document except ____	6272
No evidence of physical damage.	6273
Remain within specified tolerance.	6277
Test methods (select one)	
Per base document except ____	6250

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1650	ABRASION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-21188.
1651	ABRASION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-38169.
1652	THERE SHALL BE 1652 RUBBING CYCLE(S).
1653	RUBBING LENGTH SHALL BE 1653 INCH(S).
1654	RUBBING LENGTH SHALL BE 1654 CENTIMETER(S).
1655	ERASER FORCE SHALL BE 1655 POUND(S).
1656	ERASER FORCE SHALL BE 1656 KILOGRAM(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6052.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Acceleration (Cont)	
Test methods (Cont)	
Per MIL-STD-810, Method 513.	6252
*A level (G's)	6275
*Vehicle category (select one)	
Airplane.	6240
Helicopter.	6241
Manned aerospace vehicle.	6242
Air launched missile.	6243
Ground launched missile.	6244
Procedure number (roman numeral)	6256
Test time (minutes)	6259
Boiling	
Requirements (select one)	
Per base document except ____	1661

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6252	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6275	LEVEL A SHALL BE 6275 G'S.
6240	THE VEHICLE CATEGORY SHALL BE AIRPLANE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6241	THE VEHICLE CATEGORY SHALL BE HELICOPTER IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6242	THE VEHICLE CATEGORY SHALL BE MANNED AEROSPACE VEHICLE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6243	THE VEHICLE CATEGORY SHALL BE AIR LAUNCHED MISSILE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6244	THE VEHICLE CATEGORY SHALL BE GROUND LAUNCHED MISSILE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6256	PROCEDURE NUMBER 6256 SHALL APPLY.
6259	DURATION OF TEST SHALL BE 6259 MINUTE(S) IN EACH DIRECTION.
1661	BOILING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1661.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Boiling (Cont)	
Requirements (Cont)	
As follows:	1662
No discoloration.	1663
No evidence of fracture.	1664
Maximum radium of curvature change (percent)	1665
Test methods (select one)	
Per base document except ____	1667
Per MIL-L-50064.	1668
Test duration (hours)	1669
Ambient temperature (degrees Celsius)	1670
Bonding Strength	
Requirements (select one)	
Per base document except ____	1676
As follows:	1677
Maximum total exposed binder (percent)	1678

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1662	BOILING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1663	THERE SHALL BE NO DISCOLORATION.
1664	THERE SHALL BE NO EVIDENCE OF FRACTURE.
1665	RADIUM OF CURVATURE CHANGE SHALL BE NOT GREATER THAN 1665 PERCENT.
1667	BOILING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1667.
1668	BOILING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-50064.
1669	DEVICE SHALL BE IMMERSED IN BOILING WATER FOR A PERIOD OF 1669 HOUR(S).
1670	AMBIENT TEMPERATURE SHALL BE 1670 DEGREE(S) CELSIUS.
1676	BONDING STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1676.
1677	BONDING STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1678	TOTAL EXPOSED BINDER SHALL BE NOT GREATER THAN 1678 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Bonding Strength (Cont)	
As follows: (Cont)	
No dislodgement.	1679
No discoloration, separation, or bubble.	1680
Maximum distance from edge for damage (select one)	
(inches)	1681
(millimeters)	1682
Maximum luminous transmittance change (percent)	1683
Test methods (select one)	
Per base document except ____	1685
Per document (doc des)	1686
Tape width (select one)	
(inches)	1687
(centimeters)	1688
Minimum tape contact length (select one)	
(inches)	1689
(centimeters)	1690

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1679	THERE SHALL BE NO DISLODGEMENT OF LENS OR COATING.
1680	THERE SHALL BE NO DISCOLORATION, SEPARATION OR BUBBLES.
1681	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE GREATER THAN 1681 INCH(S) FROM THE DEVICE EDGE.
1682	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE GREATER THAN 1682 MILLIMETER(S) FROM THE DEVICE EDGE.
1683	LUMINOUS TRANSMITTANCE CHANGE SHALL BE NOT GREATER THAN 1683 PERCENT.
1685	BONDING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1685.
1686	BONDING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1686.
1687	TAPE WIDTH SHALL BE 1687 INCH(S).
1688	TAPE WIDTH SHALL BE 1688 CENTIMETER(S).
1689	TAPE CONTACT LENGTH TO THE DEVICE SHALL BE NOT LESS THAN 1689 INCH(S).
1690	TAPE CONTACT LENGTH TO THE DEVICE SHALL BE NOT LESS THAN 1690 CENTIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Bonding Strength (Cont)	
Per document (Cont)	
Minimum tape adhesion value (select one)	
(pounds per square inches)	1691
(kilograms per square centimeter)	1692
Maximum test temperature (degrees Celsius)	1693
Minimum duration at high temperature (hours)	1694
Minimum test temperature (degrees Celsius)	1695
Minimum duration at low temperature (hours)	1696
Weight (select one)	
U.S.	
(Pounds)	1697
SI	
(Grams)	1698
Suspension duration (minutes)	1699
Chemical Resistance	
Requirements (select one)	
Per base document except ____	1706

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1691	TAPE ADHESION VALUE SHALL BE NOT LESS THAN 1691 POUND(S) PER SQUARE INCH.
1692	TAPE ADHESION VALUE SHALL BE NOT LESS THAN 1692 KILOGRAM(S) PER SQUARE CENTIMETER.
1693	TEST TEMPERATURE SHALL BE NOT GREATER THAN 1693 DEGREE(S) CELSIUS.
1694	DURATION AT HIGH TEMPERATURE SHALL BE NOT LESS THAN 1694 HOUR(S).
1695	TEST TEMPERATURE SHALL BE NOT LESS THAN 1695 DEGREE(S) CELSIUS.
1696	DURATION AT LOW TEMPERATURE SHALL BE NOT LESS THAN 1696 HOUR(S).
1697	SUSPENDED WEIGHT SHALL BE 1697 POUND(S).
1698	SUSPENDED WEIGHT SHALL BE 1698 GRAM(S).
1699	WEIGHT SHALL BE SUSPENDED FOR A DURATION OF 1699 MINUTE(S).
1706	CHEMICAL RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1706.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Chemical Resistance (Cont)	
Requirements (Cont)	
No evidence of physical damage.	1707
No discoloration.	1708
Test methods (select one)	
Per base document except ____	1713
Per MIL-L-50064.	1714
Liquid agent(s) ____	1715
Minimum contaimination duration (hours)	1716
Quantity of liquid agent (select one)	
(cubic inches)	1717
(cubic centimeters)	1718
Chromaticity	
Requirements (select one)	
Per base document except ____	1726
Per MIL-F-21241.	1741
Per MIL-C-25050.	1727

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1707	CHEMICAL RESISTANCE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1708	THERE SHALL BE NO DISCOLORATION.
1713	CHEMICAL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1713.
1714	CHEMICAL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-55064.
1715	LIQUID AGENT(S) SHALL BE 1715.
1716	CONTAMINATION DURATION SHALL BE NOT LESS THAN 1716 HOUR(S).
1717	QUANTITY OF LIQUID AGENT(S) SHALL BE 1717 CUBIC INCH(S).
1718	QUANTITY OF LIQUID AGENT(S) SHALL BE 1718 CUBIC CENTIMETER(S).
1726	CHROMATICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1726.
1741	CHROMATICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-F-21241.
1727	CHROMATICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-C-25050.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Chromaticity (Cont)	
Per MIL-C-25050. (Cont)	
Type	
I.	1728
II.	1729
Minimum transmission ratio (no.)	1730
Wavelength	
Dominant (nanometers)	1731
Minimum (nanometers)	1732
Maximum (nanometers)	1733
Color (select one)	
Aviation red.	1734
Aviation yellow.	1735
Aviation green.	1736
Aviation blue.	1737
Aviation white.	1738
Lunar white.	1739
Instrument and panel lighting red.	1740

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1728	TYPE I SHALL APPLY.
1729	TYPE II SHALL APPLY.
1730	TRANSMISSION RATIO SHALL BE NOT LESS THAN 1730.
1731	DOMINANT WAVELENGTH SHALL BE 1731 NANOMETER(S).
1732	WAVELENGTH SHALL BE NOT LESS THAN 1732 NANOMETER(S).
1733	WAVELENGTH SHALL BE NOT GREATER THAN 1733 NANOMETER(S).
1734	COLOR SHALL BE AVIATION RED.
1735	COLOR SHALL BE AVIATION YELLOW.
1736	COLOR SHALL BE AVIATION GREEN.
1737	COLOR SHALL BE AVIATION BLUE.
1738	COLOR SHALL BE AVIATION WHITE.
1739	COLOR SHALL BE LUNAR WHITE.
1740	COLOR SHALL BE INSTRUMENT AND PANEL LIGHTING RED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Chromaticity (Cont)	
Test methods (select one)	
Per base document except ___	1746
Per MIL-F-21241.	1753
Per MIL-C-25050.	1747
Test lamp color temperature (select one)	
(degrees kelvin)	1748
Range	
Minimum (degrees kelvin)	1749
Maximum (degrees kelvin)	1750
Test lamp voltage (volts)	1751
Test lamp current (amperes)	1752
Clarity of Vision	
Requirements (select one)	
Per base document except ___	1756
No obstruction or distortion.	1757

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1746	CHROMATICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1746.
1753	CHROMATICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-21241.
1747	CHROMATICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-25050.
1748	TEST LAMP COLOR TEMPERATURE SHALL BE 1748 DEGREES KELVIN.
1749	TEST LAMP COLOR TEMPERATURE SHALL BE NOT LESS THAN 1749 DEGREES KELVIN.
1750	TEST LAMP COLOR TEMPERATURE SHALL BE NOT GREATER THAN 1750 DEGREES KELVIN.
1751	TEST LAMP VOLTAGE SHALL BE 1751 VOLT(S).
1752	TEST LAMP CURRENT SHALL BE 1752 AMPERE(S).
1756	CLARITY OF VISION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1756.
1757	CLARITY OF VISION. THERE SHALL BE NO OBSTRUCTION OR DISTORTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Clarity of Vision (Cont)	
Test methods (select one)	
Per base document except ____	1761
Per MIL-M-18371.	1762
Cleanability	
Requirements (select one)	
Per base document except ____	1766
No coating damage or degradation of performance.	1767
Test methods (select one)	
Per base document except ____	1771
Per MIL-F-45289.	1772
Immersion duration (minutes)	1773
Cleaning (agents)	1774

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1761	CLARITY OF VISION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1761.
1762	CLARITY OF VISION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-18371.
1766	CLEANABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1766.
1767	CLEANABILITY. THERE SHALL BE NO COATING DAMAGE OR DEGRADATION OF PERFORMANCE.
1771	CLEANABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1771.
1772	CLEANABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-45289.
1773	DEVICE(S) SHALL BE IMMERSED FOR A DURATION OF 1773 MINUTE(S) IN EACH CLEANING AGENT.
1774	CLEANING AGENT(S) 1774 SHALL BE USED FOR THE TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Coating/Plating	
Requirements (select one)	
Per base document except ____	1781
Per DD-M-411.	1782
Minimum silver plating thickness (select one)	
(microinch)	1783
(micrometers)	1784
Minimum copper backing plating thickness (select one)	
(microinch)	1785
(micrometers)	1786
Test methods (select one)	
Per base document except ____	1791
Per DD-M-411.	1792
Paint (solvent)	1793

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1781	COATING/PLATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1781.
1782	COATING/PLATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH DD-M-411.
1783	SILVER PLATING THICKNESS SHALL BE NOT LESS THAN 1783 MICROINCH(S).
1784	SILVER PLATING THICKNESS SHALL BE NOT LESS THAN 1784 MICROMETER(S).
1785	COPPER BACKING PLATING THICKNESS SHALL BE NOT LESS THAN 1785 MICROINCH(S).
1786	COPPER BACKING PLATING THICKNESS SHALL BE NOT LESS THAN 1786 MICROMETER(S).
1791	COATING/PLATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1791.
1792	COATING/PLATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH DD-M-411.
1793	PAINT SOLVENT 1793 SHALL BE USED TO EXPOSE THE COPPER PLATING.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Colorfastness to Light	
Requirements (select one)	
Per base document except ____	1796
No evidence of peeling, warping, cracking, crazing, or optical defects.	1797
Minimum spectral transmittance (percent)	1798
Test methods (select one)	
Per base document except ____	1801
Per FED-STD-406, Method 6022.	1802
Distance between lens and lamp (select one)	
(inches)	1803
(centimeters)	1804
Lens Temperature	
Minimum (degrees Celsius)	1805
Maximum (degrees Celsius)	1806

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1796	COLORFASTNESS TO LIGHT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1796.
1797	COLORFASTNESS TO LIGHT. THERE SHALL BE NO EVIDENCE OF PEELING, WARPING, CRACKING, CRAZING, OPTICAL DISTORTION OF THE CRITICAL AREA, OR ANY OTHER OPTICAL DEFECTS.
1798	SPECTRAL TRANSMITTANCE SHALL BE NOT LESS THAN 1798 PERCENT.
1801	COLORFASTNESS TO LIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1801.
1802	COLORFASTNESS TO LIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6022 OF FED-STD-406.
1803	DISTANCE BETWEEN LENS AND LAMP SHALL BE 1803 INCH(S).
1804	DISTANCE BETWEEN LENS AND LAMP SHALL BE 1804 CENTIMETER(S).
1805	LENS TEMPERATURE SHALL BE NO LESS THAN 1805 DEGREE(S) CELSIUS.
1806	LENS TEMPERATURE SHALL BE NOT GREATER THAN 1806 DEGREE(S) CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Definition/Parallax/Resolution	
Requirements (select one)	
Per base document except ____	1811
As follows:	1812
No impairment of definition.	1813
No visible parallax.	1814
Minimum resolving power (lines per millimeter)	1815
No diffused or scattered light.	1816
Maximum limit of resolution (seconds of arc)	1817
Test methods (select one)	
Per base document except ____	1821
Per MIL-F-21241.	1822

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1811	DEFINITION/PARALLAX/RESOLUTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1811.
1812	DEFINITION/PARALLAX/RESOLUTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1813	THERE SHALL BE NO IMPAIRMENT OF DEFINITION.
1814	THERE SHALL BE NO VISIBLE PARALLAX.
1815	RESOLVING POWER SHALL BE NOT LESS THAN 1815 LINE(S) PER MILLIMETER.
1816	THERE SHALL BE NO DIFFUSED OR SCATTERED LIGHT.
1817	LIMIT OF RESOLUTION SHALL BE NOT GREATER THAN 1817 SECOND(S) OF ARC.
1821	DEFINITION/PARALLAX/RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1821.
1822	DEFINITION/PARALLAX/RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-21241.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Definition/Parallax/Resolution (Cont)	
Per MIL-F-21241. (Cont)	
Minimum aperture (select one)	
(inch)	1823
(millimeter)	1824
Maximum aperture (select one)	
(inch)	1825
(millimeter)	1826
Minimum distance from target (select one)	
(feet)	1827
(meters)	1828
Minimum test telescope magnification (no.)	1829
Deviation	
Requirements (select one)	
Per base document except ____	1836
Maximum deviation (minutes of arc)	1837
Per Deviation Table.	1838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1823	APERTURE SHALL BE NOT LESS THAN 1823 INCH(S).
1824	APERTURE SHALL BE NOT LESS THAN 1824 MILLIMETER(S).
1825	APERTURE SHALL BE NOT GREATER THAN 1825 INCH(S).
1826	APERTURE SHALL BE NOT GREATER THAN 1826 MILLIMETER(S).
1827	DISTANCE FROM TARGET SHALL BE NOT LESS THAN 1827 FEET.
1828	DISTANCE FROM TARGET SHALL BE NOT LESS THAN 1828 METER(S).
1829	TEST TELESCOPE MAGNIFICATION SHALL BE NOT LESS THAN 1829.
1836	DEVIATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1836.
1837	DEVIATION. THE DEVIATION SHALL BE NOT GREATER THAN 1837 MINUTE(S) OF ARC.
1838	DEVIATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE DEVIATION TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Deviation (Cont)	
Per Deviation Table. (Cont)	
Test methods (select one)	
Per base document except ____	1846
Per MIL-F-2763.	1847
Per MIL-F-9329.	1848
Per Deviation Table.	1849
Diffusion Enamel	
Requirements (select one)	
Per base document except ____	1856
No loosening, softening, or other dissolution of enamel.	1857
Test methods (select one)	
Per base document except ____	1861

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

DEVIATION TABLE

APERTURE DIAMETER		DEVIATION
INCHES	MILLIMETERS	MINUTES OF ARC
3000	3001	3002
3003	3004	3005
3006	3007	3008
3009	3010	3011
3012	3013	3014

1846 DEVIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1846.

1847 DEVIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-2763.

1848 DEVIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-9329.

1849 DEVIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE DEVIATION TABLE.

1856 DIFFUSION ENAMEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1856.

1857 DIFFUSION ENAMEL. THERE SHALL BE NO LOOSENING, SOFTENING, OR OTHER DISSOLUTION OF ENAMEL.

1861 DIFFUSION ENAMEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT 1861.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Diffusion Enamel (Cont)	
Test methods (Cont)	
Per MIL-F-8953.	1862
Minimum submersion duration (minutes)	1863
Distortion/Image Quality	
Requirements (select one)	
Per base document except ____	1866
As follows:	1867
No impairment of resolution or parallax.	1868
No tangential distortion.	1869
Maximum astigmatism difference (diopters)	1870
Maximum distortion (select one)	
(millimeters)	1871
(microns)	1872
(diopters)	1873
Maximum radial distortion (millimeters)	1874
Test methods (select one)	
Per base document except ____	1876

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1862	DIFFUSION ENAMEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-8953.
1863	SUBMERSION DURATION SHALL BE NOT LESS THAN 1863 MINUTE(S).
1866	DISTORTION/IMAGE QUALITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1866.
1867	DISTORTION/IMAGE QUALITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1868	THERE SHALL BE NO IMPAIRMENT OF RESOLUTION OR PARALLAX.
1869	THERE SHALL BE NO TANGENTIAL DISTORTION.
1870	ASTIGMATISM DIFFERENCE SHALL BE NOT GREATER THAN 1870 DIOPTER(S).
1871	DISTORTION SHALL BE NOT GREATER THAN 1871 MILLIMETER(S).
1872	DISTORTION SHALL BE NOT GREATER THAN 1872 MICRON(S).
1873	DISTORTION SHALL BE NOT GREATER THAN 1873 DIOPTER(S).
1874	RADIAL DISTORTION SHALL BE NOT GREATER THAN 1874 MILLIMETER(S).
1876	DISTORTION/IMAGE QUALITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1876.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Distortion/Image Quality (Cont)	
Test methods (Cont)	
Per document (doc des)	1877
Aperture diameter (select one)	
(inches)	1878
(millimeters)	1879
Telescope power (no.)	1880
Dioptometer Power (no.)	1881
Target Distance (select one)	
(feet)	1882
(meters)	1883
Exposure Cycle	
Requirements (select one)	
Per base document except ____	1886
As follows:	1887
No delamination, fogging, crazing, or corrosion.	1888
No obstruction or distortion of vision.	1889

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1877	DISTORTION/IMAGE QUALITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1877.
1878	APERTURE DIAMETER SHALL BE 1878 INCH(S).
1879	APERTURE DIAMETER SHALL BE 1879 MILLIMETER(S).
1880	TELESCOPE POWER SHALL BE 1880.
1881	DIOPTOMETER POWER SHALL BE 1881.
1882	DISTANCE TO TARGET SHALL BE 1882 FEET.
1883	DISTANCE TO TARGET SHALL BE 1883 METERS.
1886	EXPOSURE CYCLE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1886.
1887	EXPOSURE CYCLE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1888	THERE SHALL BE NO EVIDENCE OF DELAMINATION, FOGGING, CRAZING, OR CORROSION.
1889	THERE SHALL BE NO OBSTRUCTION OR DISTORTION OF VISION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Exposure Cycle (Cont)	
Test methods (select one)	
Per base document except ____	1891
Per MIL-M-18371.	1892
Per Exposure Cycle Table.	1893
Flatness	
Requirements (select one)	
Per base document except ____	1896
As follows:	1897
Maximum nonflatness (select one)	
(inches)	1898
(millimeters)	1899

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1891 EXPOSURE CYCLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1891.

1892 EXPOSURE CYCLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-18371.

1893 EXPOSURE CYCLE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE EXPOSURE CYCLE TABLE.

EXPOSURE CYCLE TABLE

TEMP DEG C	TOLERANCE +OR-DEG C	REL HUM PCT	TOLERANCE +OR- PCT	DURATION HR(S)	TOLERANCE +OR-HR(S)
3020	3021	3022	3023	3024	3025
3026	3027	3028	3029	3030	3031
3032	3033	3034	3035	3036	3037
3038	3039	3040	3041	3042	3043
3044	3045	3046	3047	3048	3049
3050	3051	3052	3053	4054	3055

1896 FLATNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1896.

1897 FLATNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1898 NONFLATNESS SHALL BE NOT GREATER THAN 1898 INCH(S).

1899 NONFLATNESS SHALL BE NOT GREATER THAN 1899 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flatness (Cont)	
Test methods (select one)	
Per base document except ____	1901
Per MIL-M-18371.	1902
Fungus	
Requirements (select one)	
Per base document except ____	4760
Fungus resistant by certification or by test.	4761
No evidence of fungus growth.	4762
Test methods (select one)	
Per base document except ____	4754
Per MIL-STD-810, Method 508.	4755
Test period (days)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1901	FLATNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1901.
1902	FLATNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-18371.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Hardness	
Requirements (select one)	
Per base document except ____	1906
As follows:	1907
Barcol hardness	
Minimum (no.)	1908
Maximum (no.)	1909
Rockwell hardness	
Minimum (no.)	1910
Maximum (no.)	1911
Hardness (name)	1912
Minimum (no.)	1913
Maximum (no.)	1914
Test methods (select one)	
Per base document except ____	1921
Per MIL-L-37184.	1922
Per ASTMD785.	1923
Per ASTMD2240.	1924

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1906	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1906.
1907	HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1908	BARCOL HARDNESS SHALL BE NOT LESS THAN 1908.
1909	BARCOL HARDNESS SHALL BE NOT GREATER THAN 1909.
1910	ROCKWELL HARDNESS SHALL BE NOT LESS THAN 1910.
1911	ROCKWELL HARDNESS SHALL BE NOT GREATER THAN 1911.
1912	1912 HARDNESS SHALL APPLY.
1913	HARDNESS SHALL BE NOT LESS THAN 1913.
1914	HARDNESS SHALL BE NOT GREATER THAN 1914.
1921	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1921.
1922	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-37184.
1923	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD785.
1924	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD2240.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Haze	
Requirements (select one)	
Per base document except ____	1931
As follows:	1932
Maximum haze (percent)	1933
Minimum light transmission (percent)	1934
Test methods (select one)	
Per base document except ____	1936
Per FED-STD-406, Method 3022.	1937
Homogeneity	
Requirements (select one)	
Per base document except ____	1941
As follows:	1942
No cracks, delamination, striations, or lack of homogeneity.	1943
Transmission shall be homogenous with no striations.	1944
Test methods (select one)	
Per base document except ____	1946

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1931	HAZE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1931.
1932	HAZE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1933	HAZE SHALL BE NOT GREATER THAN 1933 PERCENT.
1934	LIGHT TRANSMISSION SHALL BE NOT LESS THAN 1934 PERCENT.
1936	HAZE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1936.
1937	HAZE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3022 OF FED-STD-406.
1941	HOMOGENEITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1941.
1942	HOMOGENEITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1943	THERE SHALL BE NO EVIDENCE OF CRACKS, DELAMINATION, STRIATIONS, OR LACK OF HOMOGENEITY.
1944	LIGHT TRANSMISSION SHALL BE HOMOGENOUS WITH NO STRIATIONS.
1946	HOMOGENEITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1946.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Homogeneity (Cont)	
Test methods (Cont)	
Per MIL-STD-1278.	1947
Test Method IX.	1948
Test Method X.	1949
Humidity	
Requirements (select one)	
Per base document except ____	4798
No evidence of corrosion or physical damage.	4799
No degradation of performance.	4815
Remain within specified tolerance.	4791
Minimum reflectance (percent)	1968
No evidence of lamination separation.	1969
No evidence of corrosion or pitting.	1970
Test methods (select one)	
Per base document except ____	4788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1947	HOMOGENEITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-1278.
1948	TEST METHOD IX SHALL APPLY.
1949	TEST METHOD X SHALL APPLY.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1968	REFLECTANCE SHALL BE NOT LESS THAN 1968 PERCENT.
1969	THERE SHALL BE NO EVIDENCE OF LAMINATION SEPARATION.
1970	THERE SHALL BE NO EVIDENCE OF CORROSION OR PITTING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Humidity (Cont)	
Test methods (Cont)	
Per MIL-STD-202, Method 103.	4853
*Test condition (letter)	4890
Per MIL-STD-810, Method 507.	4871
*Procedure I.	4767
Device(s) exposed to extreme temperature prior to test.	4796
Maximum temperature (degrees Celsius)	4777
*Duration (hours)	4778
Test cycles (quantity)	4800
Duration of test (hours)	4816
Impact	
Requirements (select one)	
Per base document except ____	1976
No cracks, chips, or fractures.	1977

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4796	SPECIMEN(S) SHALL BE EXPOSED TO EXTREME HIGH TEMPERATURE BEFORE TESTING.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
4800	THERE SHALL BE 4800 TEST CYCLE(S).
4816	DURATION OF THE TEST SHALL BE 4816 HOUR(S).
1976	IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1976.
1977	IMPACT. THERE SHALL BE NO EVIDENCE OF CRACKS, CHIPS, OR FRACTURES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Impact (Cont)	
Test methods (select one)	
Per base document except ____	1981
Per MIL-L-10114.	1982
Per MIL-L-36824.	1983
Diameter of steel ball (select one)	
(inches)	1984
(centimeters)	1985
Height of drop. (select one)	
(inches)	1986
(centimeters)	1987
Rubber gasket thickness (select one)	
(inch)	1988
(centimeters)	1989
Weight of steel ball (select one)	
(ounces)	1990
(grams)	1991

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1981	IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1981.
1982	IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-10114.
1983	IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-36824.
1984	DIAMETER OF THE STEEL BALL SHALL BE 1984 INCH(S).
1985	DIAMETER OF THE STEEL BALL SHALL BE 1985 CENTIMETER(S).
1986	HEIGHT OF DROP SHALL BE 1986 INCH(S).
1987	HEIGHT OF DROP SHALL BE 1987 CENTIMETER(S).
1988	RUBBER GASKET THICKNESS SHALL BE 1988 INCH(S).
1989	RUBBER GASKET THICKNESS SHALL BE 1989 CEMETIMETER(S).
1990	WEIGHT OF STEEL BALL SHALL BE 1990 OUNCE(S).
1991	WEIGHT OF STEEL BALL SHALL BE 1991 GRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Impact (Cont)	
Per MIL-L-36824 (Cont)	
Test temperature	
Minimum (degrees Celsius)	1992
Maximum (degrees Celsius)	1993
Leakage	
Requirements (select one)	
Per base document except ____	1996
No evidence of leakage.	1997
Test methods (select one)	
Per base document except ____	2001
Per MIL-L-10114.	2002
Differential pressure (select one)	
(PSID)	2003
(pascals)	2004
Duration (minutes)	2005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1992	TEST TEMPERATURE SHALL BE NOT LESS THAN 1992 DEGREE(S) CELSIUS.
1993	TEST TEMPERATURE SHALL BE NOT GREATER THAN 1993 DEGREE(S) CELSIUS.
1996	LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1996.
1997	LEAKAGE. THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2001	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2001.
2002	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-10114.
2003	DIFFERENTIAL PRESSURE SHALL BE 2003 POUNDS PER SQUARE INCH DIFFERENTIAL.
2004	DIFFERENTIAL PRESSURE SHALL BE 2004 PASCAL(S).
2005	DURATION OF APPLIED PRESSURE SHALL BE 2005 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Life	
Requirements (select one)	
Per base document except ____	2011
As follows:	2012
No evidence of coating peeling, cracks, or fractures.	2013
Maximum transmission deviation prior to, and after test (percent)	2014
Test methods (select one)	
Per base document except ____	2016
Per MIL-F-45289.	2017
Test lamp color temperature (select one)	
(degrees kelvin)	2018
Range	
Minimum (degrees kelvin)	2019
Maximum (degrees kelvin)	2020
Test lamp voltage (volts)	2021

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2011	LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2011.
2012	LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2013	THERE SHALL BE NO EVIDENCE OF COATING PEELING, CRACKS, OR FRACTURES.
2014	TRANSMISSION DEVIATION FROM SPECTRAL TRANSMISSION TEST PERFORMED PRIOR TO TEST SHALL BE NOT GREATER THAN 2014 PERCENT AFTER TEST.
2016	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2016.
2017	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-45289.
2018	TEST LAMP COLOR TEMPERATURE SHALL BE 2018 DEGREES KELVIN.
2019	TEST LAMP COLOR TEMPERATURE SHALL BE NOT LESS THAN 2019 DEGREES KELVIN.
2020	TEST LAMP COLOR TEMPERATURE SHALL BE NOT GREATER THAN 2020 DEGREES KELVIN.
2021	TEST LAMP VOLTAGE SHALL BE 2021 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Life (Cont)	
Per MIL-F-45289 (Cont)	
Test lamp current (amperes)	2022
Test lamp per MIL-R-55344..	2023
Test cycle	
On (hours)	2024
Off (hours)	2025
Test duration (hours)	2026
Moisture	
Requirements (select one)	
Per base document except ____	2031
No evidence of condensation or moisture on the internal surfaces of the lens system or on the surfaces of the optical elements.	2032
Test methods (select one)	
Per base document except ____	2036
Per MIL-L-22257.	2037

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2022	TEST LAMP CURRENT SHALL BE 2022 AMPERE(S).
2023	TEST LAMP SHALL BE IN ACCORDANCE WITH MIL-R-55344.
2024	TEST LAMP SHALL BE ON FOR 2024 HOUR(S).
2025	TEST LAMP SHALL BE OFF FOR 2025 HOUR(S).
2026	TEST DURATION SHALL BE 2026 HOUR(S).
2031	MOISTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2031.
2032	MOISTURE. THERE SHALL BE NO EVIDENCE OF CONDENSATION OR MOISTURE ON THE INTERNAL SURFACES OF THE LENS SYSTEM OR ON THE SURFACES OF THE OPTICAL ELEMENTS.
2036	MOISTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2036.
2037	MOISTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-22257.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Moisture (Cont)	
Per MIL-L-22257. (Cont)	
Test pressure (select one)	
(psi)	2038
(kilopascals)	2039
Temperature 1 (degrees Celsius)	2040
Minimum duration (hours)	2041
Temperature 2 (degrees Celsius)	2042
Minimum duration (hours)	2043
Temperature 3 (degrees Celsius)	2044
Minimum duration (hours)	2045
Temperature 4 (degrees Celsius)	2046
Minimum duration (hours)	2047
Temperature 5 (degrees Celsius)	2048
Minimum duration (hours)	2049
Neutrality	
Requirements (select one)	
Per base document except ___	2051
As follows:	2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2038	TEST PRESSURE SHALL BE 2038 POUNDS PER SQUARE INCH.
2039	TEST PRESSURE SHALL BE 2039 KILOPASCAL(S).
2040	TEST TEMPERATURE ONE SHALL BE 2040 DEGREE(S) CELSIUS.
2041	DURATION SHALL BE NOT LESS THAN 2041 HOUR(S).
2042	TEST TEMPERATURE TWO SHALL BE 2042 DEGREE(S) CELSIUS.
2043	DURATION SHALL BE NOT LESS THAN 2043 HOUR(S).
2044	TEST TEMPERATURE THREE SHALL BE 2044 DEGREE(S) CELSIUS.
2045	DURATION SHALL BE NOT LESS THAN 2045 HOUR(S).
2046	TEST TEMPERATURE FOUR SHALL BE 2046 DEGREE(S) CELSIUS.
2047	DURATION SHALL BE NOT LESS THAN 2047 HOUR(S).
2048	TEST TEMPERATURE FIVE SHALL BE 2048 DEGREE(S) CELSIUS.
2049	DURATION SHALL BE NOT LESS THAN 2049 HOUR(S).
2051	NEUTRALITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2051.
2052	NEUTRALITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Neutrality (Cont)	
As follows: (Cont)	
No excessive color distortion.	2053
Maximum average deviation within spectral band(s) (percent)	2054
Test methods (select one)	
Per base document except ____	2055
Per MIL-L-38169.	2056
Pin Holing/Interference-Coating	
Requirements (select one)	
Per base document except ____	2060
As follows:	2061
No evidence of visible light.	2062
Minimum filter area (percent)	2063
Maximum masking area (percent)	2064

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2053	THERE SHALL BE NO EXCESSIVE COLOR DISTORTION.
2054	AVERAGE DEVIATION WITHIN SPECTRAL BAND(S) SHALL BE NOT GREATER THAN 2054 PERCENT.
2055	NEUTRALITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2055.
2056	NEUTRALITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-L-38169.
2060	PIN HOLING/INTERFERENCE-COATING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2060.
2061	PIN HOLING/INTERFERENCE-COATING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2062	THERE SHALL BE NO EVIDENCE OF VISIBLE LIGHT, UNCHANGED FROM THE SOURCE.
2063	FILTER AREA SHALL BE NOT LESS THAN 2063 PERCENT.
2064	MASKING AREA SHALL BE NOT GREATER THAN 2064 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Pin Holing/Interference-Coating (Cont)	
As follows: (Cont)	
Maximum pin hole size (select one)	
(square inch)	2065
(square centimeter)	2066
Test methods (select one)	
Per base document except ____	2068
Per MIL-F-55608.	2069
Per MIL-F-55614.	2070
Maximum edge concealment (select one)	
(inches)	2071
(centimeters)	2072
Minimum incandescent lamp power (watts)	2073

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2065	PIN HOLE SIZE SHALL BE NOT GREATER THAN 2065 SQUARE INCH(S).
2066	PIN HOLE SIZE SHALL BE NOT GREATER THAN 2066 SQUARE CENTIMETER(S).
2068	PIN HOLING/INTERFERENCE-COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2068.
2069	PIN HOLING/INTERFERENCE-COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-55608.
2070	PIN HOLING/INTERFERENCE-COATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-55614.
2071	EDGE CONCEALMENT SHALL BE NOT GREATER THAN 2071 INCH(S).
2072	EDGE CONCEALMENT SHALL BE NOT GREATER THAN 2072 CENTIMETER(S).
2073	INCANDESCENT LAMP POWER SHALL BE NOT LESS THAN 2073 WATT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Pin Holing/Interference-Coating (Cont)	
Per MIL-F-55614. (Cont)	
Minimum distance between lamp and unit (select one)	
(inches)	2074
(centimeters)	2075
Maximum distance between lamp and unit (select one)	
(inches)	2076
(centimeters)	2077
Maximum distance between observer and unit (select one)	
(feet)	2078
(meters)	2079
Polarizing	
Requirements (select one)	
Per base document except ____	2082
As follows:	2083
Minimum luminous transmittance for single units (percent)	2084

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2074	DISTANCE BETWEEN LAMP AND UNIT SHALL BE NOT LESS THAN 2074 INCH(S).
2075	DISTANCE BETWEEN LAMP AND UNIT SHALL BE NOT LESS THAN 2075 CENTIMETER(S).
2076	DISTANCE BETWEEN LAMP AND UNIT SHALL BE NOT GREATER THAN 2076 INCH(S).
2077	DISTANCE BETWEEN LAMP AND UNIT SHALL BE NOT GREATER THAN 2077 CENTIMETER(S).
2078	DISTANCE BETWEEN OBSERVER AND UNIT SHALL BE NOT GREATER THAN 2078 FEET.
2079	DISTANCE BETWEEN OBSERVER AND UNIT SHALL BE NOT GREATER THAN 2079 METER(S).
2082	POLARIZING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2083	POLARIZING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2084	LUMINOUS TRANSMITTANCE FOR SINGLE UNITS SHALL BE NOT LESS THAN 2084 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Polarizing (Cont)	
As follows: (Cont)	
Minimum luminous transmittance for two like units	
Axes parallel (percent)	2085
Maximum luminous transmittance for two like units	
Axes perpendicular (percent)	2086
Transmittance and polarization shall be uniform.	2087
Test methods (select one)	
Per base document except ____	2088
Per MIL-F-21424.	2089
Minimum nonpolarizing light source power (watts)	2090
Light source color temperature (degrees kelvin)	2091
Prismatic Effect	
Requirements (select one)	
Per base document except ____	2095
As follows:	2096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2085	LUMINOUS TRANSMITTANCE FOR TWO LIKE UNITS WITH THE AXES PARALLEL SHALL BE NOT LESS THAN 2085 PERCENT.
2086	LUMINOUS TRANSMITTANCE FOR TWO LIKE UNITS WITH THE AXES PERPENDICULAR SHALL BE NOT GREATER THAN 2086 PERCENT.
2087	THE TRANSMITTANCE AND DEGREE OF POLARIZATION SHALL BE UNIFORM OVER THE ENTIRE UNIT AREA.
2088	POLARIZING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2088.
2089	POLARIZING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-21424.
2090	NONPOLARIZING LIGHT SOURCE POWER SHALL BE NOT LESS THAN 2090 WATT(S).
2091	LIGHT SOURCE COLOR TEMPERATURE SHALL BE 2091 DEGREES KELVIN.
2095	PRISMATIC EFFECT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2095.
2096	PRISMATIC EFFECT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Prismatic Effect (Cont)	
As follows: (Cont)	
Maximum prismatic effect (diopters)	2097
Maximum vertical prismatic effect (diopters)	2098
Maximum horizontal prismatic effect	
Left eye (diopters)	2099
Right eye (diopters)	2100
Maximum luminous transmittance	
Left to right eye difference (percent)	2101
Test methods (select one)	
Per base document except ____	2103
Per document (doc des)	2104
Measurement area diameter (inches)	2105
(select one)	
Distance below center (inches)	2107

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2097	PRISMATIC EFFECT SHALL BE NOT GREATER THAN 2097 DIOPTER(S).
2098	VERTICAL PRISMATIC EFFECT SHALL BE NOT GREATER THAN 2098 DIOPTER(S).
2099	HORIZONTAL PRISMATIC EFFECT FOR LEFT EYE SHALL BE NOT GREATER THAN 2099 DIOPTER(S).
2100	HORIZONTAL PRISMATIC EFFECT FOR RIGHT EYE SHALL BE NOT GREATER THAN 2100 DIOPTER(S).
2101	LUMINOUS TRANSMITTANCE DIFFERENCE IN LEFT AND RIGHT EYE SHALL BE NOT GREATER THAN 2101 PERCENT.
2103	PRISMATIC EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2103.
2104	PRISMATIC EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2104.
2105	MEASUREMENTS SHALL BE PERFORMED FROM AN AREA 2105 INCH(S) IN DIAMETER.
2107	MEASUREMENT AREA SHALL BE 2107 INCH(S) BELOW THE DEVICE CENTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Prismatic Effect (Cont)	
Measurement area diameter (Cont)	
(centimeters)	2106
Distance below center (centimeters)	2108
Distance from surface (select one)	
(inches)	2109
(centimeters)	2110
Angle from centerline	
Angle to left (degrees)	2111
Angle to right (degrees)	2112
Angle up (degrees)	2113
Angle down (degrees)	2114
Reflection	
Requirements (select one)	
Per base document except ____	2120
As follows:	2121

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2106	MEASUREMENTS SHALL BE PERFORMED FROM AN AREA 2106 CENTIMETER(S) IN DIAMETER.
2108	MEASUREMENT AREA SHALL BE 2108 CENTIMETER(S) BELOW THE DEVICE CENTER.
2109	MEASUREMENTS SHALL BE PERFORMED 2109 INCH(S) FROM THE SURFACE OF THE DEVICE.
2110	MEASUREMENTS SHALL BE PERFORMED 2110 CENTIMETER(S) FROM THE SURFACE OF THE DEVICE.
2111	MEASUREMENTS SHALL BE PERFORMED 2111 DEGREE(S) TO THE LEFT OF DEVICE CENTERLINE.
2112	MEASUREMENTS SHALL BE PERFORMED 2112 DEGREE(S) TO THE RIGHT OF DEVICE CENTERLINE.
2113	MEASUREMENTS SHALL BE PERFORMED 2113 DEGREE(S) UP FROM DEVICE CENTERLINE.
2114	MEASUREMENTS SHALL BE PERFORMED 2114 DEGREE(S) DOWN FROM DEVICE CENTERLINE.
2120	REFLECTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.
2121	REFLECTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Reflection (Cont)	
As follows: (Cont)	
Reflection	
Minimum (percent)	2122
Maximum (percent)	2123
Test methods (select one)	
Per base document except ____	2124
Per document (doc des)	2125
Pretest conditioning duration (hours)	2126
Temperature (degrees Celsius)	2127
Tolerance	
Plus (degrees Celsius)	2128
Minus (degrees Celsius)	2129
Device oriented for maximum reflection.	2130
Angle of incidence (degrees)	2131
Light source color temperature (degrees kelvin)	2132

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2122	REFLECTION SHALL BE NOT LESS THAN 2122 PERCENT.
2123	REFLECTION SHALL BE NOT GREATER THAN 2123 PERCENT.
2124	REFLECTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2124.
2125	REFLECTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2125.
2126	PRETEST CONDITIONING DURATION SHALL BE 2126 HOUR(S).
2127	PRETEST CONDITIONING TEMPERATURE SHALL BE 2127 DEGREE(S) CELSIUS.
2128	PLUS TEMPERATURE TOLERANCE SHALL BE 2128 DEGREE(S) CELSIUS.
2129	MINUS TEMPERATURE TOLERANCE SHALL BE 2129 DEGREE(S) CELSIUS.
2130	DEVICE SHALL BE ORIENTED FOR MAXIMUM REFLECTION.
2131	ANGLE OF INCIDENCE SHALL BE 2131 DEGREE(S).
2132	LIGHT SOURCE COLOR TEMPERATURE SHALL BE 2132 DEGREES KELVIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Refraction	
Requirements (select one)	
Per base document except ____	2135
As follows:	2136
Maximum positive refractive power (diopters)	2137
Maximum negative refractive power (diopters)	2138
Maximum refractive power (diopters)	2139
Test methods (select one)	
Per base document except ____	2140
Per document (doc des)	2141
Test temperature (degrees Celsius)	2142
Measurement area diameter (select one)	
(inches)	2143
Distance below center (inches)	2145
(centimeters)	2144
Distance below center (centimeter)	2146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2135	REFRACTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2135.
2136	REFRACTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2137	POSITIVE REFRACTIVE POWER SHALL BE NOT GREATER THAN 2137 DIOPTER(S).
2138	NEGATIVE REFRACTIVE POWER SHALL BE NOT GREATER THAN 2138 DIOPTER(S).
2139	REFRACTIVE POWER SHALL BE NOT GREATER THAN 2139 DIOPTER(S).
2140	REFRACTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2140.
2141	REFRACTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2141.
2142	TEST TEMPERATURE SHALL BE 2142 DEGREE(S) CELSIUS.
2143	DIAMETER OF THE MEASUREMENT AREA SHALL BE 2143 INCH(S).
2145	MEASUREMENT AREA SHALL BE 2145 INCH(S) BELOW THE DEVICE CENTER.
2144	DIAMETER OF THE MEASUREMENT AREA SHALL BE 2144 CENTIMETER(S).
2146	MEASUREMENT AREA SHALL BE 2146 CENTIMETER(S) BELOW THE DEVICE CENTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Resolving Power/Resolution	
Requirements (select one)	
Per base document except ____	2150
As follows:	2151
Minimum resolving power (minutes)	2152
Minimum resolution elements (no.)	2153
Minimum AWAR (no.)	2154
Minimum lines per millimeter (no.)	2155
Maximum limit of resolution (seconds of arc)	2156
Test methods (select one)	
Per base document except ____	2157
Per document (doc des)	2158
Per MIL-STD-1278 (select one)	
Method VII.	2159
Method VIII.	2160

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2150	RESOLVING POWER/RESOLUTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2150.
2151	RESOLVING POWER/RESOLUTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2152	RESOLVING POWER SHALL BE NOT LESS THAN 2152 MINUTE(S).
2153	RESOLUTION ELEMENTS SHALL BE NOT LESS THAN 2153.
2154	AREA WEIGHTED AVERAGE RESOLUTION (AWAR) SHALL BE NOT LESS THAN 2154.
2155	LINE(S) PER MILLIMETER SHALL BE NOT LESS THAN 2155.
2156	LIMIT OF RESOLUTION SHALL BE NOT GREATER THAN 2156 SECOND(S) OF ARC.
2157	RESOLVING POWER/RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2157.
2158	RESOLVING POWER/RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2158.
2159	RESOLVING POWER/RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD VII OF MIL-STD-1278.
2160	RESOLVING POWER/RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD VIII OF MIL-STD-1278.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Resolving Power/Resolution (Cont)	
Test methods (Cont)	
Per MIL-STD-150, Method 10.	2161
Test magnification (no.)	2162
Field angle (degrees)	2163
Salt Spray/Fog	
Requirements (select one)	
Per base document except ____	6356
No evidence of corrosion, physical damage or degradation of performance.	6357
Test methods (select one)	
Per base document except ____	6353
Per ASTMB117.	6354
Exposure period (hours)	4783

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2161	RESOLVING POWER/RESOLUTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 10 OF MIL-STD-150.
2162	TEST MAGNIFICATION SHALL BE 2162.
2163	FIELD ANGLE SHALL BE 2163 DEGREE(S).
6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.
6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
6353	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353
6354	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Sand and Dust	
Requirements (select one)	
Per base document except ____	4958
No evidence of dust penetration.	4959
Test methods (select one)	
Per base document except ____	4952
Per MIL-STD-202, Method 110.	4960
Test specimen(s) shall be operated during test step(s) (no.)	4872
*Duration of operation (hours)	6299
Specimen orientation shall be changed during test.	1539
Second 6-hour test required immediately following temperature stabilization in step 2.	4956
Selectivity	
Requirements (select one)	
Per base document except ____	2165
As follows:	2166

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6 HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
2165	SELECTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2165.
2166	SELECTIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Selectivity (Cont)	
As follows: (Cont)	
Minimum transmission (percent)	2167
At wavelengths of	
Minimum (millimicrons)	2168
Maximum (millimicrons)	2169
Maximum transmission (percent)	2170
At wavelengths of	
Minimum (millimicrons)	2171
Maximum (millimicrons)	2172
Test methods (select one)	
Per base document except ____	2173
Per MIL-F-13455.	2174
Wavelength	
Minimum (millimicrons)	2175
Maximum (millimicrons)	2176

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2167	TRANSMISSION SHALL BE NOT LESS THAN 2167 PERCENT.
2168	MINIMUM TRANSMISSION SHALL BE APPLICABLE AT WAVELENGTHS OF NOT LESS THAN 2168 MILLIMICRON(S).
2169	MINIMUM TRANSMISSION SHALL BE APPLICABLE AT WAVELENGTHS OF NOT GREATER THAN 2169 MILLIMICRON(S).
2170	TRANSMISSION SHALL BE NOT GREATER THAN 2170 PERCENT.
2171	MAXIMUM TRANSMISSION SHALL BE APPLICABLE AT WAVELENGTHS OF NOT LESS THAN 2171 MILLIMICRON(S).
2172	MAXIMUM TRANSMISSION SHALL BE APPLICABLE AT WAVELENGTHS OF NOT GREATER THAN 2172 MILLIMICRON(S).
2173	SELECTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2173.
2174	SELECTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-13455.
2175	TEST WAVELENGTH SHALL BE NOT LESS THAN 2175 MILLIMICRON(S).
2176	TEST WAVELENGTH SHALL BE NOT GREATER THAN 2176 MILLIMICRON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Selectivity (Cont)	
Per MIL-F-13455. (Cont)	
Measurement intervals (millimicrons)	2177
Measurements (no.)	2178
Shatter Resistance	
Requirements (select one)	
Per base document except ____	2180
As follows:	2181
Maximum separated particle (select one)	
(square inches)	2182
(square millimeters)	2183
Test methods (select one)	
Per base document except ____	2184
Per MIL-M-21188.	2185
Minimum test specimen size (select one)	
(square inches)	2186
(square millimeters)	2187

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2177	MEASUREMENTS SHALL BE PERFORMED IN INTERVALS OF 2177 MILLIMICRON(S).
2178	THERE SHALL BE 2178 MEASUREMENT(S).
2180	SHATTER RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2180.
2181	SHATTER RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2182	SEPARATED PARTICLE SHALL BE NOT GREATER THAN 2182 SQUARE INCH(S).
2183	SEPARATED PARTICLE SHALL BE NOT GREATER THAN 2183 SQUARE MILLIMETER(S).
2184	SHATTER RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2184.
2185	SHATTER RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-21188.
2186	TEST SPECIMEN SIZE SHALL BE NOT LESS THAN 2186 SQUARE INCH(S).
2187	TEST SPECIMEN SIZE SHALL BE NOT LESS THAN 2187 SQUARE MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Shatter Resistance (Cont)	
Per MIL-M-21188. (Cont)	
Minimum breakage area (select one)	
(square inches)	2188
(square millimeters)	2189
Shock	
Requirements (select one)	
Per base document except ____	7315
No evidence of physical damage.	7316
Test methods (select one)	
Per base document excpet ____	7311
Per MIL-STD-810, Method 516.	7312
*Procedure	
Procedure I.	7313
*Figure (select one)	
Figure 516-1 applies.	7317
Figure 516-2 applies.	7318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2188	BREAKAGE AREA SHALL BE NOT LESS THAN 2188 SQUARE INCH(S).
2189	BREAKAGE AREA SHALL BE NOT LESS THAN 2189 SQUARE MILLIMETER(S).
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Shock (Cont)	
Procedure I. (Cont)	
*Amplitude, A or B (letter)	7305
*Duration, C or D (letter)	7306
Procedure II.	6327
Procedure III.	6338
*Figure (select one)	
Figure 516-1 applies.	6339
Figure 516-2 applies.	6340
*Amplitude A or B (letter)	6341
*Duration C or D (letter)	6342
Procedure IV.	6343
*Figure (select one)	
Figure 516-1 applies.	6344
Figure 516-2 applies.	6345

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 616 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Shock (Cont)	
Procedure IV. (Cont)	
*Amplitude, A or B (letter)	6346
*Duration, C or D (letter)	6347
Procedure V.	6348
Procedure VI.	6349
Test temperature (degrees Celsius)	7307
Temperature tolerance (degrees Celsius)	7308
Operation during test required.	7309
Stability to Actinic Radiation	
Requirements (select one)	
Per base document except	2210
As follows:	2211
Remain stable.	2212
Meet requirements of transmittance test before and after test.	2213
Test methods (select one)	
Per base document except ____	2214
Per MIL-STD-1278, Method XII.	2215

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE WITHIN 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
2210	STABILITY TO ACTINIC RADIATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.
2211	STABILITY TO ACTINIC RADIATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2212	DEVICE SHALL REMAIN STABLE.
2213	DEVICE SHALL MEET THE REQUIREMENTS OF TRANSMITTANCE TEST, BEFORE AND AFTER TEST.
2214	STABILITY TO ACTINIC RADIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2214.
2215	STABILITY TO ACTINIC RADIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD XII OF MIL-STD-1278.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Stability to Actinic Radiation (Cont)	
Per MIL-STD-1278, Method XII. (Cont)	
Lamp current (select one)	
DC	
Minimum (amperes)	2216
Maximum (amperes)	2217
AC	
Minimum (amperes)	2218
Maximum (amperes)	2219
Minimum distance from lamp to device (select one)	
(inches)	2220
(centimeters)	2221
Device rotation rate	
Minimum (rotations per minute)	2222
Maximum (rotations per minute)	2223
Test temperature (degrees Celsius)	2224
Temperature tolerance	
Plus (degrees Celsius)	2225
Minus (degrees Celsius)	2226
Test duration (hours)	2227

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2216	LAMP CURRENT SHALL BE NOT LESS THAN 2216 AMPERE(S) DC.
2217	LAMP CURRENT SHALL BE NOT GREATER THAN 2217 AMPERE(S) DC.
2218	LAMP CURRENT SHALL BE NOT LESS THAN 2218 AMPERE(S) AC.
2219	LAMP CURRENT SHALL BE NOT GREATER THAN 2219 AMPERE(S) AC.
2220	DISTANCE FROM LAMP TO THE DEVICE SHALL BE NOT LESS THAN 2220 INCH(S).
2221	DISTANCE FROM LAMP TO THE DEVICE SHALL BE NOT LESS THAN 2221 CENTIMETER(S).
2222	DEVICE ROTATION RATE SHALL BE NOT LESS THAN 2222 ROTATION(S) PER MINUTE.
2223	DEVICE ROTATION RATE SHALL BE NOT GREATER THAN 2223 ROTATION(S) PER MINUTE.
2224	TEST TEMPERATURE SHALL BE 2224 DEGREE(S) CELSIUS.
2225	PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2225 DEGREE(S) CELSIUS.
2226	MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2226 DEGREE(S) CELSIUS.
2227	TEST DURATION SHALL BE 2227 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Transmittance	
Requirements (select one)	
Per base document except ____	2192
Minimum transmittance (percent)	2194
Per Transmittance Table.	2193
Test methods (select one)	
Per base document except ____	2196
Per MIL-STD-1278.	2197
Method (no.)	2198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2192 TRANSMITTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2192.

2194 TRANSMITTANCE. TRANSMITTANCE SHALL BE NOT LESS THAN 2194 PERCENT.

2193 TRANSMITTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE TRANSMITTANCE TABLE.

TRANSMITTANCE TABLE

WV LNGTH MLLMCRNS	CLR TEMP DEG K	NO. OF ELMNTS	ROD VIS FACTOR	CONE VIS FACTOR	ANG FM NRML DEG	MIN TRNS PERCENT
3100	3101	3102	3103	3104	3105	3106
3107	3108	3109	3110	3111	3112	3113
3114	3115	3116	3117	3118	3119	3120
3121	3122	3123	3124	3125	3126	3127
3128	3129	3130	3131	3132	3133	3134
3135	3136	3137	3138	3139	3140	3141
3142	3143	3144	3145	3146	3147	3148
3149	3150	3151	3152	3153	3154	3155
3156	3157	3158	3159	3160	3161	3162
3163	3164	3165	3166	3167	3168	3169

2196 TRANSMITTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2196.

2197 TRANSMITTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-1278.

2198 METHOD 2198 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Transmittance (Cont)	
Test methods (Cont)	
Per MIL-STD-150.	2199
Method (no.)	2200
Per document (doc des)	2201
Light source power (watts)	2202
Test temperature	
Minimum (degrees Celsius)	2203
Maximum (degrees Celsius)	2204
Wavelength	
Minimum (millimicrons)	2205
Maximum (millimicrons)	2206
Focal length (millimeters)	2207
Vibration	
Requirements (select one)	
Per base document except ____	4681
No evidence of physical damage.	4682
Remain within specified tolerance.	1538

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2199	TRANSMITTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-150.
2200	METHOD 2200 SHALL APPLY.
2201	TRANSMITTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2201.
2202	LIGHT SOURCE POWER SHALL BE 2202 WATT(S).
2203	TEST TEMPERATURE SHALL BE NOT LESS THAN 2203 DEGREE(S) CELSIUS.
2204	TEST TEMPERATURE SHALL BE NOT GREATER THAN 2204 DEGREE(S) CELSIUS.
2205	WAVELENGTH SHALL BE NOT LESS THAN 2205 MILLIMICRON(S).
2206	WAVELENGTH SHALL BE NOT LESS THAN 2206 MILLIMICRON(S).
2207	TESTING SHALL BE PERFORMED AT A FOCAL LENGTH OF 2207 MILLIMETER(S).
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Vibration (cont)	
Test methods (select one)	
Per base document except ____	1505
Per MIL-STD-810, Method 514.	1514
*Procedure number (Roman numeral)	1518
Equipment (category)	1540
Curve (letters)	1525
Applicable table (no.)	1532
Applicable figure (no.)	1559
Operation not required.	1424
Temperature (degrees Celsius)	1542
Temperature tolerance (degrees Celsius)	1543
Duration at temperature (hour)	1544
Weathering	
Requirements (select one)	
Per base document except ____	2230

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES ARE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE DONE AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOURS.
2230	WEATHERING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Weathering (Cont)	
Requirements (Cont)	
As follows:	2231
Meet transmittance requirements after test.	2232
Maximum distance from edge for discoloration, separation, or bubbles (select one)	
(inches)	2233
(millimeters)	2234
Maximum transmittance change from original value (percent)	2235
No physical damage.	2236
Test methods (select one)	
Per base document except ____	2237
Per document (doc des)	2238

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2231	WEATHERING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2232	DEVICE SHALL MEET THE TRANSMITTANCE TEST REQUIREMENTS AFTER TEST.
2233	THERE SHALL BE NO DISCOLORATION, SEPARATION, OR BUBBLES GREATER THAN 2233 INCH(S) FROM THE DEVICE EDGE.
2234	THERE SHALL BE NO DISCOLORATION, SEPARATION, OR BUBBLES GREATER THAN 2234 MILLIMETER(S) FROM THE DEVICE EDGE.
2235	TRANSMITTANCE CHANGE FROM ORIGINAL VALUE SHALL BE NOT GREATER THAN 2235 PERCENT.
2236	THERE SHALL BE NO PHYSICAL DAMAGE.
2237	WEATHERING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2237.
2238	WEATHERING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2238.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Weathering (Cont)	
Per document (Cont)	
Distance from center of turntable rotation (select one)	
(inches)	2239
Tolerance, plus or minus (inches)	2240
(millimeters)	2241
Tolerance, plus or minus (millimeters)	2242
Duration of test (hours)	2243
Workmanship	
(doc des)	6870
Additional Requirements	
A___	7001
B___	7002
C___	7003
D___	7004
E___	7005
Part Marking (Select One)	
(doc des)	6372
MIL-STD-1285.	7630

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2239	DEVICE SHALL BE LOCATED 2239 INCH(S) FROM THE CENTER OF TURNTABLE ROTATION.
2240	TOLERANCE SHALL BE PLUS OR MINUS 2240 INCH(S).
2241	DEVICE SHALL BE LOCATED 2241 MILLIMETER(S) FROM THE CENTER OF THE TURNTABLE ROTATION.
2242	TOLERANCE SHALL BE PLUS OR MINUS 2242 MILLIMETER(S).
2243	TEST DURATION SHALL BE 2243 HOUR(S).
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Part Marking (Cont)	
MIL-STD-130.	7629
Additional Part Marking	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
Applicable Documents (See DOD-STD-35)	
Quality Assurance Provisions (See DOD-STD-35)	
Packaging (See DOD-STD-35)	
Notes (See DOD-STD-35)	
Nomenclature (See DOD-STD-35)	
Superseded Document (See DOD-STD-35)	
Part Number Cross-Reference (See DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A213)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




905-01-1

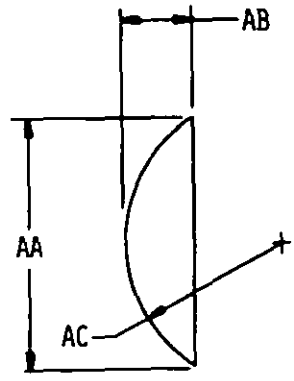


905-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

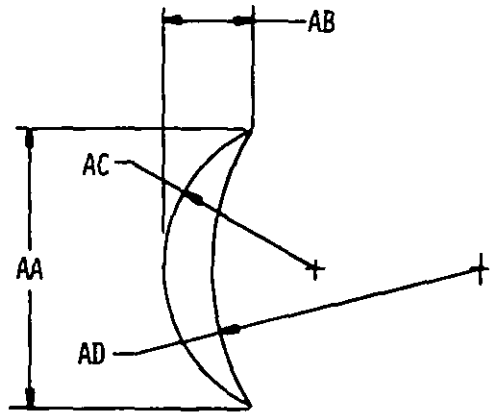


905-01-3

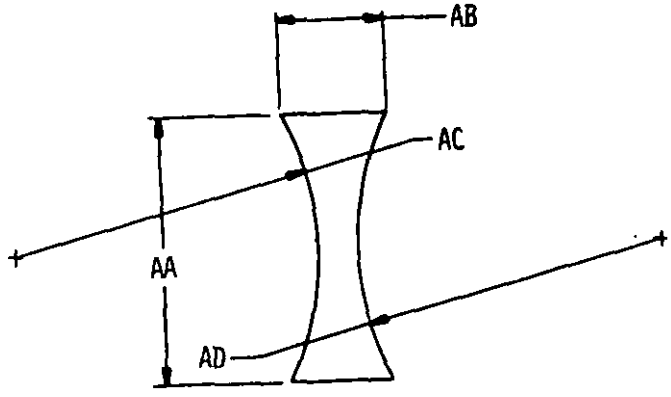


905-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

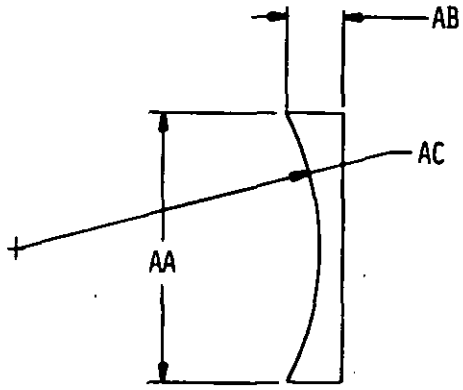


905-01-5

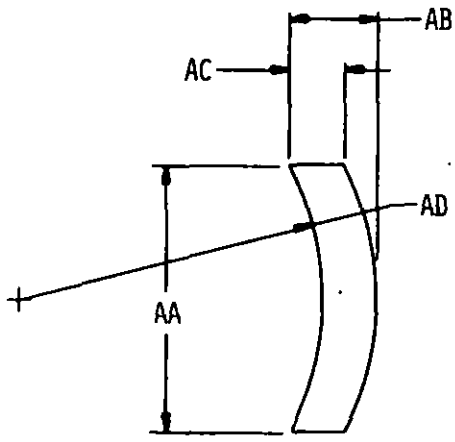

905-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

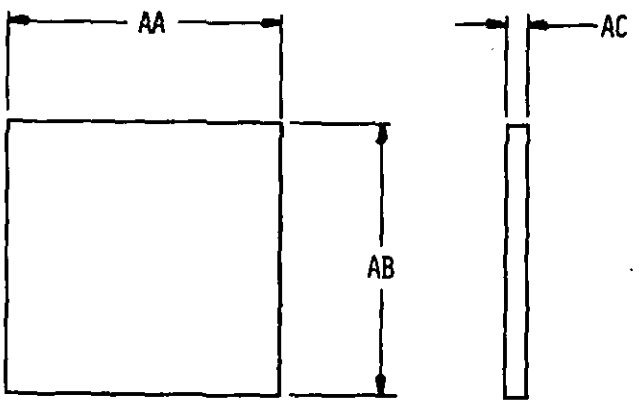

905-01-7

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1579	28	1619	34	1691	46
0102	16	1580	28	1620	34	1692	46
0103	16	1581	28	1621	34	1693	46
0104	16	1582	28	1641	36	1694	46
0105	16	1583	28	1642	36	1695	46
0107	18	1584	28	1643	36	1696	46
0108	18	1585	28	1644	36	1697	46
0700	16	1586	28	1646	36	1698	46
0800	16	1587	30	1648	36	1699	46
1003	16	1588	30	1649	36	1706	46
1004	16	1589	30	1650	38	1707	48
1005	16	1590	30	1651	38	1708	48
1006	16	1591	30	1652	38	1713	48
1008	16	1592	30	1653	38	1714	48
1009	24	1593	30	1654	38	1715	48
1424	130	1594	30	1655	38	1716	48
1505	130	1595	30	1656	38	1717	48
1514	130	1596	30	1661	40	1718	48
1518	130	1597	30	1662	42	1726	48
1525	130	1598	30	1663	42	1727	48
1532	130	1599	32	1664	42	1728	50
1538	128	1600	32	1665	42	1729	50
1539	112	1601	32	1667	42	1730	50
1540	130	1602	32	1668	42	1731	50
1542	130	1603	32	1669	42	1732	50
1543	130	1604	32	1670	42	1733	50
1544	130	1605	32	1676	42	1734	50
1559	130	1606	32	1677	42	1735	50
1562	20	1607	32	1678	42	1736	50
1563	20	1608	32	1679	44	1737	50
1564	20	1609	32	1680	44	1738	50
1565	20	1610	32	1681	44	1739	50
1566	20	1611	32	1682	44	1740	50
1567	20	1612	34	1683	44	1741	48
1568	20	1613	34	1685	44	1746	52
1570	20	1614	34	1686	44	1747	52
1575	28	1615	34	1687	44	1748	52
1576	28	1616	34	1688	44	1749	52
1577	28	1617	34	1689	44	1750	52
1578	28	1618	34	1690	44	1751	52

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1752	52	1824	62	1892	70	1981	82
1753	52	1825	62	1893	70	1982	82
1756	52	1826	62	1896	70	1983	82
1757	52	1827	62	1897	70	1984	82
1761	54	1828	62	1898	70	1985	82
1762	54	1829	62	1899	70	1986	82
1766	54	1836	62	1901	72	1987	82
1767	54	1837	62	1902	72	1988	82
1771	54	1838	62	1906	74	1989	82
1772	54	1846	64	1907	74	1990	82
1773	54	1847	64	1908	74	1991	82
1774	54	1848	64	1909	74	1992	84
1781	56	1849	64	1910	74	1993	84
1782	56	1856	64	1911	74	1996	84
1783	56	1857	64	1912	74	1997	84
1784	56	1861	64	1913	74	2001	84
1785	56	1862	66	1914	74	2002	84
1786	56	1863	66	1921	74	2003	84
1791	56	1866	66	1922	74	2004	84
1792	56	1867	66	1923	74	2005	84
1793	56	1868	66	1924	74	2011	86
1796	58	1869	66	1931	76	2012	86
1797	58	1870	66	1932	76	2013	86
1798	58	1871	66	1933	76	2014	86
1801	58	1872	66	1934	76	2016	86
1802	58	1873	66	1936	76	2017	86
1803	58	1874	66	1937	76	2018	86
1804	58	1876	66	1941	76	2019	86
1805	58	1877	68	1942	76	2020	86
1806	58	1878	66	1943	76	2021	86
1811	60	1879	68	1944	76	2022	88
1812	60	1880	68	1946	76	2023	88
1813	60	1881	68	1947	78	2024	88
1814	60	1882	68	1948	78	2025	88
1815	60	1883	68	1949	78	2026	88
1816	60	1886	68	1968	78	2031	88
1817	60	1887	68	1969	78	2032	88
1821	60	1888	68	1970	78	2036	88
1822	60	1889	68	1976	80	2037	88
1823	62	1891	70	1977	80	2038	90

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2039	90	2086	95	2137	106	2182	116
2040	90	2087	95	2138	106	2183	116
2041	90	2088	95	2139	106	2184	116
2042	90	2089	95	2140	106	2185	116
2043	90	2090	95	2141	106	2186	116
2044	90	2091	95	2142	106	2187	116
2045	90	2095	95	2143	106	2188	118
2046	90	2096	95	2144	106	2189	118
2047	90	2097	100	2145	106	2192	126
2048	90	2098	100	2146	106	2193	126
2049	90	2099	100	2150	108	2194	126
2051	90	2100	100	2151	108	2196	126
2052	90	2101	100	2152	108	2197	126
2053	92	2103	100	2153	108	2198	126
2054	92	2104	100	2154	108	2199	128
2055	92	2105	100	2155	108	2200	128
2056	92	2106	102	2156	108	2201	128
2060	92	2107	100	2157	108	2202	128
2061	92	2108	102	2158	108	2203	128
2062	92	2109	102	2159	108	2204	128
2063	92	2110	102	2160	108	2205	128
2064	92	2111	102	2161	110	2206	128
2065	94	2112	102	2162	110	2207	128
2066	94	2113	102	2163	110	2210	122
2068	94	2114	102	2165	112	2211	122
2069	94	2120	102	2166	112	2212	122
2070	94	2121	102	2167	114	2213	122
2071	94	2122	104	2168	114	2214	122
2072	94	2123	104	2169	114	2215	122
2073	94	2124	104	2170	114	2216	124
2074	96	2125	104	2171	114	2217	124
2075	96	2126	104	2172	114	2218	124
2076	96	2127	104	2173	114	2219	124
2077	96	2128	104	2174	114	2220	124
2078	96	2129	104	2175	114	2221	124
2079	96	2130	104	2176	114	2222	124
2082	96	2131	104	2177	116	2223	124
2083	96	2132	104	2178	116	2224	124
2084	96	2135	106	2180	116	2225	124
2085	95	2136	106	2181	116	2226	124

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2227	124	3030	71	3114	127	3154	127
2230	130	3031	71	3115	127	3155	127
2231	132	3032	71	3116	127	3156	127
2232	132	3033	71	3117	127	3157	127
2233	132	3034	71	3118	127	3158	127
2234	132	3035	71	3119	127	3159	127
2235	132	3036	71	3120	127	3160	127
2236	132	3037	71	3121	127	3161	127
2237	132	3038	71	3122	127	3162	127
2238	132	3039	71	3123	127	3163	127
2239	134	3040	71	3124	127	3164	127
2240	134	3041	71	3125	127	3165	127
2241	134	3042	71	3126	127	3166	127
2242	134	3043	71	3127	127	3167	127
2243	134	3044	71	3128	127	3168	127
3000	65	3045	71	3129	127	3169	127
3001	65	3046	71	3130	127	4681	128
3002	65	3047	71	3131	127	4682	128
3003	65	3048	71	3132	127	4754	72
3004	65	3049	71	3133	127	4755	72
3005	65	3050	71	3134	127	4756	72
3006	65	3051	71	3135	127	4760	72
3007	65	3052	71	3136	127	4761	72
3008	65	3053	71	3137	127	4762	72
3009	65	3054	71	3138	127	4767	80
3010	65	3055	71	3139	127	4777	80
3011	65	3100	127	3140	127	4778	80
3012	65	3101	127	3141	127	4783	110
3013	65	3102	127	3142	127	4788	78
3014	65	3103	127	3143	127	4791	78
3020	71	3104	127	3144	127	4796	80
3021	71	3105	127	3145	127	4798	78
3022	71	3106	127	3146	127	4799	78
3023	71	3107	127	3147	127	4800	80
3024	71	3108	127	3148	127	4815	78
3025	71	3109	127	3149	127	4816	80
3026	71	3110	127	3150	127	4853	80
3027	71	3111	127	3151	127	4871	80
3028	71	3112	127	3152	127	4872	112
3029	71	3113	127	3153	127	4890	80

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4950	26	6354	110	7573	24		
4952	112	6356	110	7574	24		
4956	112	6357	110	7576	24		
4958	112	6369	16	7577	24		
4959	112	6372	134	7578	24		
4960	112	6375	26	7629	136		
5060	22	6870	134	7630	134		
5061	22	6873	16				
5062	22	6874	18				
5063	22	6941	18				
5068	22	6942	18				
5069	22	6943	34				
6240	40	6945	34				
6241	40	6991	136				
6242	40	6992	136				
6243	40	6993	136				
6244	40	6994	136				
6250	38	6995	136				
6252	40	7001	134				
6256	40	7002	134				
6259	40	7003	134				
6272	38	7004	134				
6273	38	7005	134				
6275	40	7021	36				
6277	38	7022	36				
6299	112	7301	22				
6327	120	7302	22				
6338	120	7305	120				
6339	120	7306	120				
6340	120	7307	122				
6341	120	7308	122				
6342	120	7309	122				
6343	120	7311	118				
6344	120	7312	118				
6345	120	7313	118				
6346	122	7315	118				
6347	122	7316	118				
6348	122	7317	118				
6349	122	7318	118				
6353	110	7572	24				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Abrasion	36
Acceleration	38
Additional Part Marking	136
Additional Requirements	134
Altitude Rating	22
Aperture Cards Required	18
Applicable Documents	136
Base Document	16
Bifocal Addition Power	32
Boiling	40
Bonding Strength	42
Chemical Resistance	46
Chromaticity	48
City, State, Zip	16
Clarity of Vision	52
Class	20
Classification	20
Cleanability	54
Coating/Plating	56
Color	28
Colorfastness to Light	58
Company Name/Command	16
Composition	26
Configuration	24
Contract Number/Office Symbol	16
Control, Source	16
Control, Specification	18
Date	16
Definition/Parallax/Resolution	60
Design and Construction	28
Deviation	62
Diffusion Enamel	64
Distortion/Image Quality	66
Equivalent Focal Length	28
Exposure Cycle	68
Field of View Format	32
Finishes	26
Flange Focal Distance	30
Flatness	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Form	20
Format	16
Front Vertex Focal Distance	30
Fungus	72
Government Design Activity FSCM	16
Grade	20
Hardness	74
Haze	76
Homogeneity	76
Humidity	78
Illustrations	26
Impact	80
Index of Refraction	34
Leakage	84
Lens Power	34
Life	86
Materials	26
Maximum Distortion	32
Minimum Back Focal Distance	28
Minimum Relative Aperture	32
Minimum Relative Illumination	32
Minimum Transmittance	32
Moisture	88
Neutrality	90
Nomenclature	136
Notes	136
Packaging	136
Part Marking	134
Part Number	18
Part Number Cross-Reference	136
Phone Number	16
Pin Holing/Interference-Coating	92
Polarizing	96
Prismatic Effect	98
Quality Assurance Provisions	136

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Reflection	102
Refraction	106
Requester FSCM	16
Requester's Name	16
Resolving Power/Resolution	108
Revision of AEDPS Document (Number)	18
Salt Spray/Fog	110
Sand and Dust	112
Scope	18
Selectivity	112
Shatter Resistance	116
Shock	118
Source Table	18
Specific Gravity	34
Stability to Actinic Radiation	122
Street/Building	16
Superseded Document	136
System Application	16
Tabulated Characteristics	26
Temperature Rating	22
Transmittance	126
Type	20
Units of Measure	18, 24
Vibration	128
Weathering	130
Weight	34
Workmanship	134

☆U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/571

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80
*REQUESTER'S NAME		0 1 0 1		
*COMPANY NAME/COMMAND		0 1 0 2		
*STREET/BUILDING		0 1 0 3		
*CITY, STATE, ZIP		0 1 0 4		
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		0 1 0 5		
*DATE		1 0 0 3		
*REQUESTER FSCM		1 0 0 4		
*CONTRACT NO./OFFICE SYMBOL		1 0 0 5		
*BASE DOCUMENT		1 0 0 6		
*SYSTEM APPLICATION		1 0 0 8		
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9		
*FORMAT Six section document.		0 7 0 0		
One section document.		0 8 0 0		
Search only.		0 1 0 6		
APERTURE CARDS REQUIRED.		0 1 0 7		
REVISION OF AEDPS DOCUMENT NO.		0 1 0 8		
*CONTROL SOURCE.		6 8 7 3		
SPECIFICATION.		6 8 7 4		
*SOURCE TABLE		9 1 5 1		
UNIT OF MEASURE U.S.		6 9 4 1		
SI.		6 9 4 2		

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (0) WRITTEN WITHOUT VIRGULE (0)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:26Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

DOD-STD-35 140277

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

DOD-STD-35-120

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.