MILITARY STANDARD

SOCKETS, ELECTRICAL

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

NO DELIVERABLE DATA REQUIRED BY THIS DOCUMENT

AREA EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Sockets, Electrical
Automated Engineering
Document Preparation System

DOD-STD-35-123(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: DRSMI-RSDC, Redstone Arsenal, Alabama 35898, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-123(MI) is to provide instructions for the preparation of Specification Requirement Sheets (SRS) in order to produce Military Specification, Exceptions for electrical sockets.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	10
	5.5	Tabulation	13
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.6.1	Interrelationship of Codes	13
	5.6.2	Automatic MSE Data	13
	5.6.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Test matrix	10
	III.	Tabulation candidates	11

APPENDIX

Appendix	A.	Illustrations	109
	B.	Characteristics Code Index	141
		Index	145

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for electrical sockets.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see Table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on a SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for a MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SOCKET, CRYSTAL	070001	MIL-S-12883	TUBE, CRYSTAL, RELAY
		MS35093	CRYSTAL
SOCKET, ELECTRON TUBE	070002	MIL-S-12883	TUBE, CRYSTAL RELAY
		MS35090	SADDLE
SOCKET, LAMP STARTER	070003	MIL-L-970	FLUORESCENT STARTER
SOCKET, PLUG-IN ELECTRONIC COMPONENTS	070004	MIL-S-12883	TUBE, CRYSTAL, RELAY
		MIL-S-83734	DUAL-IN-LINE PACKAGE (DIP)
		MIL-S-83502	CIRCLE OR IN LINE PLUG-IN LEADS (TO CANS)
SOCKET, LEAD	070005	MIL-S-83505	SINGLE LEAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-12883	Sockets and Accessories for Plug-In Electronic Components
MIL-S-83502	Sockets, Plug-In Electronic Components, Round to Style, General Specification For
MIL-S-83734	Sockets, Plug-In Electronic Components, General Specification For

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors

(Copies of specification, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained form the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD116	Vitrified Ceramic Materials for Electrical Applications Testing
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Sockets, Electrical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Sockets, Electrical, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet(SRS). SRS requirements described in DOD-STD-35 are applicable to Sockets, Electrical.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Sockets, Electrical.

4.3.2 Illustrations. Illustrations applicable to Sockets, Electrical are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table II. Test matrix.

DOCUMENT	TEST CODE	1756 Contact Resistance	1876 Durability	1928 Insertion & Withdrawal Force
MIL-STD-1344		X	X	X
MIL-S-12883		X	X	X
MIL-S-83502		X	X	X
MIL-S-83734		X	X	X


5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for additional specific column headings which may be used for electrical sockets characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	TERMINAL TYPE	1566	CURRENT RATING AMPERE(S)	1568	VOLTAGE RATING SL VOLTS RMS
1678	MOUNTING THICKNESS INCH(S)	1680	MOUNTING THICKNESS MILIMTR(S)	7021	MAXIMUM WEIGHT GRAM(S)
7022	MAXIMUM WEIGHT OUNCE(S)	7023	MAXIMUM WEIGHT POUND(S)	7024	MAXIMUM WEIGHT KGRAM(S)
6996	NOMINAL WEIGHT OUNCE(S)	6997	NOMINAL WEIGHT POUND(S)	6998	NOMINAL WEIGHT GRAM(S)
6999	NOMINAL MASS KGRAM(S)	1578	CONTACTS QUANTITY		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

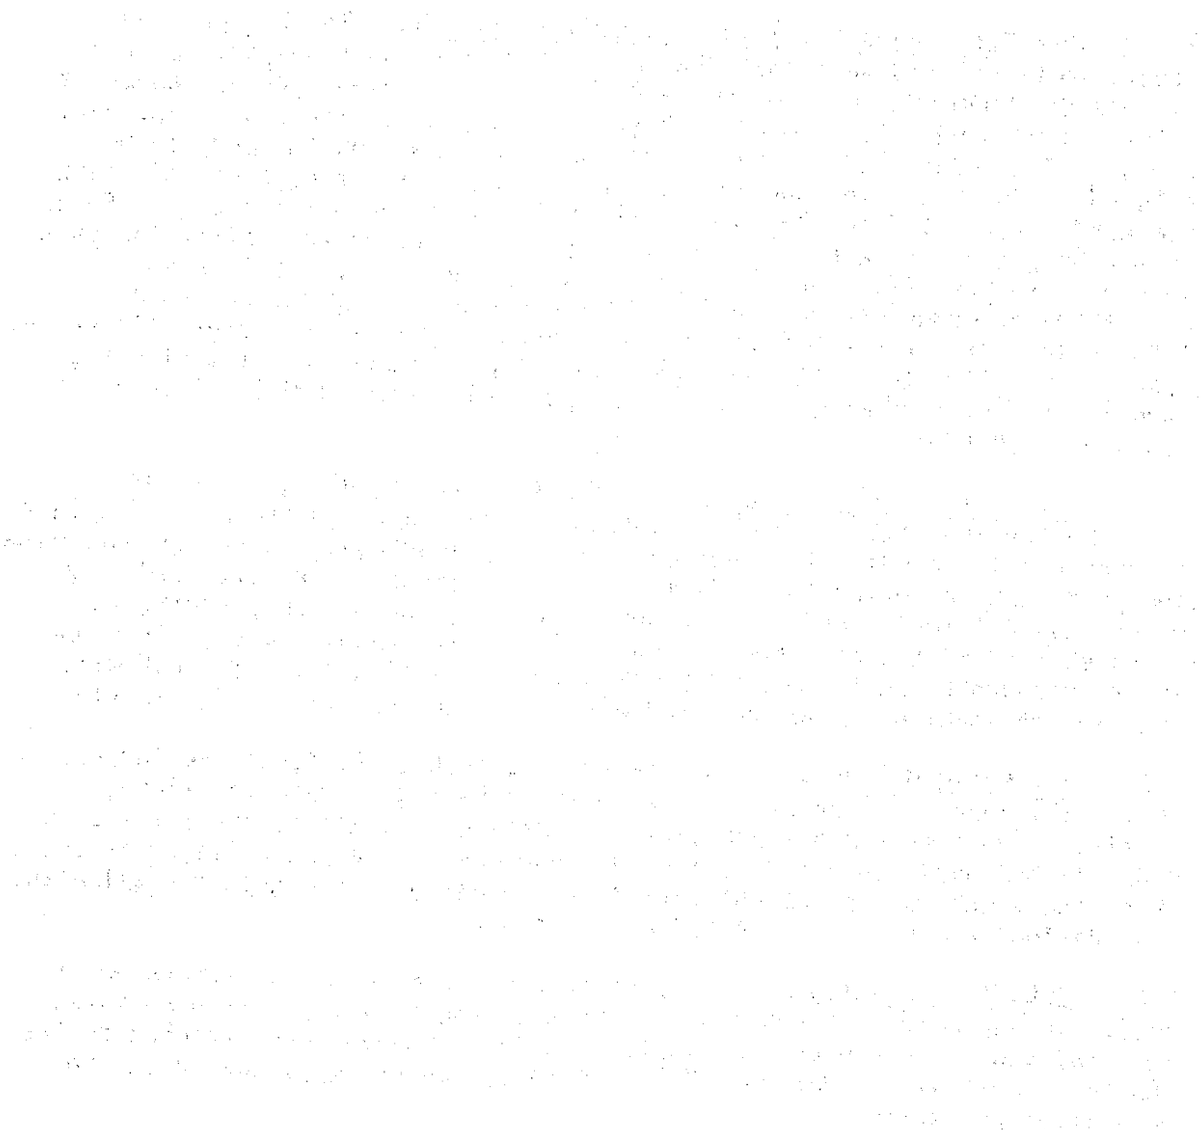

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to the Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER FSCM 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT NUMBER	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TERMINATION TYPE PER BASE DOCUMENT (ROMAN NUMERAL)	1562
PROFILE SERIES PER BASE DOCUMENT (NUMBER)	1564
RATINGS	
CURRENT RATING	
(AMPERES)	1566
VOLTAGE RATING	
SEA LEVEL (VOLTS RMS)	1568
ALTITUDE (SELECT ONE)	
(FEET)	1570
*(VOLTS RMS)	1572
(METERS)	1574
*(VOLTS RMS)	1576
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MINIMUM OPERATING (DEGREES CELSIUS)	5068

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1562	THE TERMINATION TYPE SHALL BE TYPE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT.
1564	THE PROFILE SERIES SHALL BE SERIES 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1566	THE CURRENT RATING SHALL BE 1566 AMPERE(S).
1568	THE VOLTAGE RATING AT SEA LEVEL SHALL BE 1568 VOLTS RMS.
1570 1572	THE VOLTAGE RATING AT AN ALTITUDE OF 1570 FEET SHALL BE 1572 VOLT(S) RMS.
1574 1576	THE VOLTAGE RATING AT AN ALTITUDE OF 1574 METERS SHALL BE 1576 VOLTS RMS.
5069	THE MAXIMUM OPERATING TEMPERATURE SHALL BE 5069 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE SHALL BE 5068 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER)	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLE VI, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VI IS USED.

FINISHES (SEE TABLE VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
MATING COMPONENT (PART NUMBER)	1600
(DOC DES)	1602
NUMBER OF PINS (QUANTITY)	1604
NUMBER OF LARGE PINS (QUANTITY)	1606
NUMBER OF SMALL PINS (QUANTITY)	1608
MINIMUM PIN THICKNESS (SELECT ONE)	
(INCH)	1610
(MILLIMETERS)	1612
CONTACT (QUANTITY)	1578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

1600 THE SOCKETS SHALL BE DESIGNED TO MATE WITH PART NUMBER 1600 COMPONENTS.

1602 THE MATING COMPONENT SHALL BE IN ACCORDANCE WITH 1602.

1604 THE MATING COMPONENT SHALL HAVE 1604 TOTAL PINS.

1606 THE MATING COMPONENT SHALL HAVE 1606 LARGE DIAMETER PINS.

1608 THE MATING COMPONENT SHALL HAVE 1608 SMALL DIAMETER PINS.

1610 SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1610 INCH IN THICKNESS.

1612 SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1612 MILLIMETER(S) IN THICKNESS.

1578 THE SOCKETS SHALL HAVE 1578 CONTACT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM PIN THICKNESS (SELECT ONE)	
(INCH)	1614
(MILLIMETERS)	1616
MINIMUM PIN WIDTH (SELECT ONE)	
(INCH)	1618
(MILLIMETERS)	1620
MAXIMUM PIN WIDTH (SELECT ONE)	
(INCH)	1622
(MILLIMETERS)	1624
MAXIMUM PIN LENGTH (SELECT ONE)	
(INCHES)	1626
(MILLIMETERS)	1628
MAXIMUM PIN LENGTH (SELECT ONE)	
(INCHES)	1630
(MILLIMETERS)	1632

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1614	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1614 INCH IN THICKNESS.
1616	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1616 MILLIMETER(S) IN THICKNESS.
1618	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1618 INCH IN WIDTH.
1620	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1620 MILLIMETER(S) IN WIDTH.
1622	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1622 INCH IN WIDTH.
1624	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1624 MILLIMETER(S) IN WIDTH.
1626	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1626 INCH(S) IN LENGTH.
1628	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1628 MILLIMETER(S) IN LENGTH.
1630	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1630 INCH(S) IN LENGTH.
1632	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1632 MILLIMETER(S) IN LENGTH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MINIMUM PIN DIAMETER	
LARGER OR ONE SIZE	
DIAMETER (SELECT ONE)	
(INCH)	1634
(MILLIMETERS)	1636
SMALLER SIZE	
DIAMETER (SELECT ONE)	
(INCH)	1638
(MILLIMETERS)	1640
MAXIMUM PIN DIAMETER	
LARGER OR ONE SIZE	
DIAMETER (SELECT ONE)	
(INCH)	1642
(MILLIMETERS)	1644

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1634	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1634 INCH IN DIAMETER.
1636	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT LESS THAN 1636 MILLIMETER(S) IN DIAMETER.
1638	SOCKETS SHALL BE DESIGNED ALSO TO ACCEPT SMALLER PINS NOT LESS THAN 1638 INCH IN DIAMETER IN OTHER POSITIONS.
1640	SOCKETS SHALL BE DESIGNED ALSO TO ACCEPT SMALLER PINS NOT LESS THAN 1640 MILLIMETER(S) IN DIAMETER IN OTHER POSITIONS.
1642	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1642 INCH IN DIAMETER.
1644	SOCKETS SHALL BE DESIGNED TO ACCEPT PINS NOT GREATER THAN 1644 MILLIMETER(S) IN DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM PIN DIAMETER (CONT)	
SMALLER SIZE	
DIAMETER (SELECT ONE)	
(INCH)	1646
(MILLIMETERS)	1648
CONTACT CAVITIES (SELECT ONE)	
CIRCULAR ONLY.	1650
D-SHAPED ONLY.	1652
CIRCULAR OR D-SAHPED.	1654
CRIMP CONTACTS REQUIRED.	1656
CRIMP CONTACTS (DOC DES)	1658
SIZE 12 SUPPLIED (QUANTITY)	1660
SIZE 16 SUPPLIED (QUANTITY)	1662
SIZE 20 SUPPLIED (QUANTITY)	1664
PIN TERMINATION POSITION (SELECT ONE)	
ON THICKEST DIMENSIONS.	1666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1646	SOCKETS SHALL BE DESIGNED ALSO TO ACCEPT SMALLER PINS NOT GREATER THAN 1646 INCH IN DIAMETER IN OTHER POSITIONS.
1648	SOCKETS SHALL BE DESIGNED ALSO TO ACCEPT SMALLER PINS NOT GREATER THAN 1648 MILLIMETER(S) IN DIAMETER IN OTHER POSITIONS.
1650	CONTACT CAVITIES SHALL BE CIRCULAR.
1652	CONTACT CAVITIES SHALL BE D-SHAPED.
1654	CONTACT CAVITIES SHALL BE CIRCULAR OR D-SHAPED.
1656	SOCKETS SHALL HAVE CRIMP CONTACT TERMINATION.
1658	CRIMP CONTACTS SHALL BE IN ACCORDANCE WITH 1658.
1660	THERE SHALL BE 1660 SIZE 12 CRIMP REMOVABLE SOCKET CONTACTS SUPPLIED WITH EACH SOCKET IN A SEPARATE PACKAGE
1662	THERE SHALL BE 1662 SIZE 16 CRIMP REMOVABLE SOCKET CONTACTS SUPPLIED WITH EACH SOCKET IN A SEPARATE PACKAGE.
1664	THERE SHALL BE 1664 SIZE 20 CRIMP REMOVABLE SOCKET CONTACTS SUPPLIED WITH EACH SOCKET IN A SEPARATE PACKAGE.
1666	MATING COMPONENT PINS SHALL BE TERMINATED BY CONTACT ON THE THICKEST DIMENSION OF THE PINS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PIN TERMINATION POSITION (CONT)	
ON ANY DIMENSION.	1668
AT LEAST FOUR POINTS.	1670
POLARIZATION (SELECT ONE)	
VISUAL.	1672
MECHANICAL.	1674
VISUAL AND MECHANICAL.	1676
MOUNTING, PANEL OR BOARD, THICKNESS (SELECT ONE)	
(INCH)	1678
(MILLIMETERS)	1680
MOUNTING HOLES	
(QUANTITY)	1682
SOCKET FACE RELIEVED FOR EASE OF COMPONENT REMOVAL.	1684
MINIMUM MOUNTING HOLE DIAMETER (SELECT ONE)	
(INCHES)	1686
(MILLIMETERS)	1688

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1668	MATING COMPONENT PINS SHALL BE TERMINATED BY CONTACT ON ANY DIMENSIONS OF THE PINS.
1670	MATING COMPONENT PINS SHALL BE TERMINATED BY CONTACT AT NO LESS THAN FOUR POINTS ON EACH PIN.
1672	A MEANS OF VISUAL POLARIZATION SHALL BE REQUIRED ADJACENT TO OR CLOCKWISE FROM THE NUMBER ONE CONTACT.
1674	THERE SHALL BE A MEANS OF MECHANICAL POLARIZATION PROVIDED.
1676	THERE SHALL BE A MEANS OF MECHANICAL AND VISUAL POLARIZATION PROVIDED.
1678	SOCKETS SHALL BE DESIGNED FOR MOUNTING ON A PANEL OR BOARD 1678 INCH THICK.
1680	SOCKETS SHALL BE DESIGNED FOR MOUNTING ON A PANEL OR BOARD 1680 MILLIMETER(S) THICK.
1682	THERE SHALL BE 1682 MOUNTING HOLES.
1684	SOCKET FACE SHALL BE RELIEVED FOR EASE OF COMPONENT REMOVAL.
1686	MOUNTING HOLE(S) SHALL BE NOT LESS THAN 1686 INCH(S) IN DIAMETER.
1688	MOUNTING HOLE(S) SHALL BE NOT LESS THAN 1688 MILLIMETER(S) IN DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1702
MAXIMUM CAPACITANCE (PICOFARADS)	1704
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1708
PER MIL-STD-202, METHOD 305.	1710
NUMBER OF READINGS (QUANTITY)	1712
MEASURE BETWEEN ADJACENT PINS.	1714
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1716
(KILOHERTZ)	1718
(MEGAHERTZ)	1720
MEASURE UNMOUNTED SPECIMEN.	1722
COLOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	CAPACITANCE. THE CAPACITANCE SHALL BE NOT GREATER THAN 1704 PICOFARADS.
1708	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1708.
1710	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 305 OF MIL-STD-202.
1712	THERE SHALL BE 1712 READINGS.
1714	MEASUREMENTS SHALL BE TAKEN BETWEEN ADJACENT PINS.
1716	THE TEST FREQUENCY SHALL BE 1716 HERTZ.
1718	THE TEST FREQUENCY SHALL BE 1718 KILOHERTZ.
1720	THE TEST FREQUENCY SHALL BE 1720 MEGAHERTZ.
1722	MEASUREMENTS SHALL BE TAKEN ON UNMOUNTED SPECIMEN.
1726	COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1726.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLOR (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1728
(NAME)	1730
DESIGNATION (DES)	1732
*PER DOCUMENT (DOC DES)	1734
CLASS (DES)	1736
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1740
PER COLOR DOCUMENT.	1742
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1746
MAXIMUM CONTACT RESISTANCE ANY CONTACT (MILLIOHMS)	1748
MAXIMUM AVERAGE CONTACT RESISTANCE (MILLIOHMS)	1750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1728	COLOR. THE COLOR SHALL BE AS FOLLOWS:
1730	THE COLOR SHALL BE 1730.
1732	THE COLOR DESIGNATION SHALL BE 1732.
1734	THE COLOR DESIGNATION SHALL BE IN ACCORDANCE WITH 1734.
1736	COLOR CLASS 1736 SHALL APPLY.
1740	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1740.
1742	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE SPECIFIED COLOR DOCUMENT.
1746	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH BASE DOCUMENT, EXCEPT 1746.
1748	CONTACT RESISTANCE. THE CONTACT RESISTANCE OF ANY CONTACT SHALL BE NOT GREATER THAN 1748 MILLIOHM(S).
1750	THE AVERAGE CONTACT RESISTANCE OF ANY SOCKET SHALL BE NOT GREATER THAN 1750 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1754
PER DOCUMENT (DOC DES)	1756
TEST CURRENT (SELECT ONE)	
(MILLIAMPERES)	1758
(AMPERES)	1760
HEADER OF MATING COMPONENT TO BE USED AS TEST GAGE.	1762
CONTACT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1766
NO EVIDENCE OF DAMAGE.	1768
NO LOOSENING OF CONTACTS.	1770
MAXIMUM AXIAL DISPLACEMENT (SELECT ONE)	
(INCH)	1772
(MILLIMETERS)	1774
GAGE RETAINED WITHOUT SLIDING.	1776

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1754	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1754.
1756	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1756.
1758	TEST CURRENT SHALL BE 1758 MILLIAMPERE(S).
1760	TEST CURRENT SHALL BE 1760 AMPERE(S).
1762	THE HEADER OF THE MATING COMPONENT SHALL BE USED AS A TEST GAGE.
1766	CONTACT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1766.
1768	CONTACT RETENTION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1770	THERE SHALL BE NO LOOSENING OF CONTACTS.
1772	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 1772 INCH.
1774	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 1774 MILLIMETER(S).
1776	THE TEST GAGE SHALL BE RETAINED IN THE SOCKET WITHOUT SLIDING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1780
PER MIL-STD-1344, METHOD 2007.	1782
AXIAL LOAD (SELECT ONE)	
(POUNDS)	1784
(NEWTONS)	1786
APPLY LOAD TO (SELECT ONE)	
COMPONENT SIDE.	1788
TERMINATION SIDE.	1790
BOTH SIDES.	1792
MEASURE DISPLACEMENT	
LOAD APPLIED.	1794
LOAD REMOVED.	1796
CORROSIVE ATMOSPHERE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1780	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1780.
1782	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2007 OF MIL-STD-1344.
1784	THE APPLIED AXIAL LOAD SHALL BE 1784 POUND(S).
1786	THE APPLIED AXIAL LOAD SHALL BE 1786 NEWTON(S).
1788	APPLY TEST LOAD TO COMPONENT SIDE OF CONTACT.
1790	APPLY TEST LOAD TO TERMINATION SIDE OF CONTACT.
1792	APPLY TEST LOAD TO BOTH THE COMPONENT AND TERMINATION SIDES OF THE CONTACT.
1794	MEASURE DISPLACEMENT WITH LOAD APPLIED.
1796	MEASURE DISPLACEMENT WITH LOAD REMOVED.
1802	CORROSIVE ATMOSPHERE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORROSIVE ATMOSPHERE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1804
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	1806
MAXIMUM INCREASE IN CONTACT RESISTANCE (MILLIOHMS)	1808
NO EXPOSED BASE METAL.	1810
NO EVIDENCE OF POROUS PLATING.	1812
NO DISCONTINUITY.	1814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1818
PER MIL-S-83734.	1820
NUMBER UNMONITORED TEST GAGE INSERTIONS (QUANTITY)	1822
MINIMUM AMMONIUM POLYSULFIDE IN SOLUTION (PPM)	1824
MAXIMUM AMMONIUM POLYSULFIDE IN SOLUTION (PPM)	1826

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1804	CORROSIVE ATMOSPHERE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1806	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1806 MILLIOHM(S).
1808	THE INCREASE IN CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1808 MILLIOHM(S).
1810	THERE SHALL BE NO EXPOSED BASE METAL.
1812	THERE SHALL BE NO EVIDENCE OF POROUS PLATING.
1814	THERE SHALL BE NO DISCONTINUITY.
1818	CORROSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1818.
1820	CORROSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-83734.
1822	THERE SHALL BE 1822 UNMONITORED INSERTIONS OF THE TEST GAGE.
1824	THERE SHALL BE NOT LESS THAN 1824 PARTS PER MILLION OF AMMONIUM POLYSULFIDE IN THE TEST SOLUTION.
1826	THERE SHALL BE NOT GREATER THAN 1826 PARTS PER MILLION OF AMMONIUM POLYSULFIDE IN THE TEST SOLUTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORROSIVE ATMOSPHERE (CONT)	
PER MIL-S-83734. (CONT)	
MINIMUM RELATIVE HUMIDITY (PERCENT)	1828
TEST TEMPERATURE (DEGREES CELSIUS)	1830
TEST DURATION (HOURS)	1832
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202, TEST CONDITION (LETTER)	4886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1828 THE RELATIVE HUMIDITY SHALL BE NOT LESS THAN 1828 PERCENT.

1830 THE TEST TEMPERATURE SHALL BE 1830 DEGREES CELSIUS.

1832 THE EXPOSURE DURATION SHALL BE 1832 HOUR(S).

4908 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.

4906 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4894 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERES.

4884 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

6300 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4886 ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN ALL ODD-NUMBERED CONTACTS CONNECTED TOGETHER AND ALL EVEN-NUMBERED CONTACTS AND ALL OTHER METALLIC PARTS CONNECTED TOGETHER.	1854
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
TEST UNMOUNTED WITH INSERTED MATING COMPONENT.	1856
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1854	BETWEEN ALL ODD-NUMBERED CONTACTS CONNECTED TOGETHER AND ALL EVEN-NUMBERED CONTACTS AND ALL OTHER METALLIC PARTS CONNECTED TOGETHER.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
1856	TEST UNMOUNTED WITH INSERTED MATING COMPONENT.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERES.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN ALL ODD-NUMBERED CONTACTS CONNECTED TOGETHER AND ALL EVEN-NUMBERED CONTACTS AND ALL OTHER METALLIC PARTS CONNECTED TOGETHER.	1850
TEST UNMOUNTED WITH INSERTED MATING COMPONENT.	1852
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1862
NO EVIDENCE OF CRACKING OR BREAKING.	1864
MAXIMUM INCREASE IN CONTACT RESISTANCE (MILLIOHMS)	1866
CONFORM TO CONTACT WITHDRAWAL REQUIREMENTS.	1868
CONFORM TO CONTACT RETENTION REQUIREMENTS.	1870

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1850	BETWEEN ALL ODD-NUMBERED CONTACTS CONNECTED TOGETHER AND ALL EVEN-NUMBERED CONTACTS AND ALL OTHER METALLIC PARTS CONNECTED TOGETHER.
1852	TEST UNMOUNTED WITH INSERTED MATING COMPONENT.
1862	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1864	DURABILITY. THERE SHALL BE NO EVIDENCE OF CRACKING OR BREAKING.
1866	THE INCREASE IN CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1866 MILLIOHM(S).
1868	ITEMS SHALL CONFORM TO CONTACT WITHDRAWAL REQUIREMENT(S) AFTER TEST.
1870	ITEMS SHALL CONFORM TO CONTACT RETENTION REQUIREMENT(S) AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1874
PER DOCUMENT (DOC DES)	1876
NUMBER OF MATING COMPONENT MATING AND UNMATING CYCLES (QUANTITY)	1878
FLOAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
CONTACT CAPABLE OF FLOAT WITHIN CONTACT CAVITY.	1884
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1888
PER MIL-S-12883.	1890
PIN DIAMETER (SELECT ONE)	
(INCH)	1892
(MILLIMETERS)	1894

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1874	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1874.
1876	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1876.
1878	THERE SHALL BE 1878 MATING AND UNMATING CYCLES.
1882	FLOAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	FLOAT. THE CONTACT SHALL BE CAPABLE OF FREE MOVEMENT (FLOAT) WITHIN THE CONTACT CAVITY.
1888	FLOAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1888.
1890	FLOAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-12883.
1892	THE TEST PIN SHALL BE A NOMINAL 1892 INCH IN DIAMETER.
1894	THE TEST PIN SHALL BE A NOMINAL 1894 MILLIMETER(S) IN DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOAT (CONT)	
PER MIL-S-12883. (CONT)	
MINIMUM PIN LENGTH (SELECT ONE)	
(INCH)	1896
(MILLIMETERS)	1898
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1896	THE TEST PIN SHALL BE NOT LESS THAN 1896 INCH IN LENGTH.
1898	THE TEST PIN SHALL BE NOT LESS THAN 1898 MILLIMETER(S) IN LENGTH.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAYS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION (MATING) AND WITHDRAWAL FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
AS FOLLOWS:	1904
MAXIMUM INSERTION FORCE PER CONTACT (SELECT ONE)	
(POUNDS)	1906
(NEWTONS)	1908
MAXIMUM INSERTION FORCE, TEST GAGE (SELECT ONE)	
(POUNDS)	1910
(NEWTONS)	1912
MINIMUM WITHDRAWAL FORCE (SELECT ONE)	
(POUNDS)	1914
(NEWTONS)	1916

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1902 INSERTION (MATING) AND WITHDRAWAL FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.

1904 INSERTION (MATING) AND WITHDRAWAL FORCE. THE INSERTION AND WITHDRAWAL FORCE(S) SHALL BE AS FOLLOWS:

1906 THE INSERTION FORCE PER CONTACT SHALL BE NOT GREATER THAN 1906 POUND(S).

1908 THE INSERTION FORCE PER CONTACT SHALL BE NOT GREATER THAN 1908 NEWTON(S).

1910 THE TOTAL INSERTION FORCE OF THE TEST GAGE SHALL BE NOT GREATER THAN 1910 POUND(S).

1912 THE TOTAL INSERTION FORCE OF THE TEST GAGE SHALL BE NOT GREATER THAN 1912 NEWTON(S).

1914 THE WITHDRAWAL FORCE SHALL BE NOT LESS THAN 1914 POUND(S).

1916 THE WITHDRAWAL FORCE SHALL BE NOT LESS THAN 1916 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION (MATING) AND WITHDRAWAL FORCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM WITHDRAWAL FORCE (SELECT ONE)	
(POUNDS)	1918
(NEWTONS)	1920
CONTACT SHALL RETAIN TEST PIN.	1922
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1926
PER DOCUMENT (DOC DES)	1928
NUMBER UNMONITORED TEST GAGE INSERTIONS (QUANTITY)	1930
INSERTION DEPTH (SELECT ONE)	
MINIMUM (INCH)	1932
MINIMUM (MILLIMETERS)	1934
FULLY INSERTED.	1936
MINIMUM TEST PIN WEIGHT (SELECT ONE)	
(OUNCES)	1938
(KILOGRAMS)	1940

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1918	THE WITHDRAWAL FORCE SHALL BE NOT GREATER THAN 1918 POUND(S).
1920	THE WITHDRAWAL FORCE SHALL BE NOT GREATER THAN 1920 NEWTON(S).
1922	EACH CONTACT SHALL RETAIN THE TEST PIN.
1926	INSERTION (MATING) AND WITHDRAWAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1926.
1928	INSERTION (MATING) AND WITHDRAWAL FORCE. TESTING SHALL BE IN ACCORDANCE WITH 1928.
1930	THERE SHALL BE 1930 UNMONITORED TEST GAGE INSERTIONS.
1932	TEST GAGE SHALL BE INSERTED NOT LESS THAN 1932 INCH.
1934	TEST GAGE SHALL BE INSERTED NOT LESS THAN 1934 MILLIMETER(S).
1936	TEST GAGE SHALL BE FULLY INSERTED.
1938	THE TEST PIN SHALL WEIGH NOT LESS THAN 1938 OUNCE(S).
1940	THE TEST PIN SHALL WEIGH NOT LESS THAN 1940 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION (MATING) AND WITHDRAWAL FORCE (CONT)	
PER DOCUMENT (CONT)	
TEST GAGE PIN DIAMETER	
SINGLE OR LARGER	
DIAMETER (SELECT ONE)	
(INCH)	1942
PLUS TOLERANCE (INCH)	1944
MINUS TOLERANCE (INCH)	1946
(MILLIMETERS)	1948
PLUS TOLERANCE (MILLIMETERS)	1950
MINUS TOLERANCE (MILLIMETERS)	1952
TEST GAGE PIN DIAMETER	
SMALLER SIZE	
DIAMETER (SELECT ONE)	
(INCH)	1954
PLUS TOLERANCE (INCH)	1956
MINUS TOLERANCE (INCH)	1958

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1942	THE TEST GAGE SHALL HAVE PINS 1942 INCH IN DIAMETER.
1944	THE TEST GAGE PIN PLUS TOLERANCE SHALL BE 1944 INCH.
1946	THE TEST GAGE PIN MINUS TOLERANCE SHALL BE 1946 INCH.
1948	THE TEST GAGE SHALL HAVE PINS 1948 MILLIMETER(S) IN DIAMETER.
1950	THE TEST GAGE PIN PLUS TOLERANCE SHALL BE 1950 MILLIMETER(S).
1952	THE TEST GAGE PIN MINUS TOLERANCE SHALL BE 1952 MILLIMETER(S).
1954	THE TEST GAGE ALSO SHALL HAVE SMALLER PINS 1954 INCH IN DIAMETER.
1956	THE TEST GAGE SMALLER PIN PLUS TOLERANCE SHALL BE 1956 INCH.
1958	THE TEST GAGE SMALLER PIN MINUS TOLERANCE SHALL BE 1958 INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION (MATING) AND WITHDRAWAL FORCE (CONT)	
DIAMETER (CONT)	
(MILLIMETERS)	1960
PLUS TOLERANCE (MILLIMETERS)	1962
MINUS TOLERANCE (MILLIMETERS)	1964
TEST PIN WIDTH (SELECT ONE)	
(INCH)	1966
PLUS TOLERANCE (INCH)	1968
MINUS TOLERANCE (INCH)	1970
(MILLIMETERS)	1972
PLUS TOLERANCE (MILLIMETERS)	1974
MINUS TOLERANCE (MILLIMETERS)	1976
TEST PIN THICKNESS (SLEECT ONE)	
(INCH)	1978
PLUS TOLERANCE (INCH)	1980
MINUS TOLERANCE (INCH)	1982

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1960	THE TEST GAGE ALSO SHALL HAVE SMALLER PINS 1960 MILLIMETER(S) IN DIAMETER.
1962	THE TEST GAGE SMALLER PIN PLUS TOLERANCE SHALL BE 1962 MILLIMETER(S).
1964	THE TEST GAGE SMALLER PIN MINUS TOLERANCE SHALL BE 1964 MILLIMETER(S).
1966	THE TEST PIN WIDTH SHALL BE 1966 INCH.
1968	THE TEST PIN WIDTH PLUS TOLERANCE SHALL BE 1968 INCH.
1970	THE TEST PIN WIDTH MINUS TOLERANCE SHALL BE 1970 INCH.
1972	THE TEST PIN WIDTH SHALL BE 1972 MILLIMETER(S).
1974	THE TEST PIN WIDTH PLUS TOLERANCE SHALL BE 1974 MILLIMETER(S).
1976	THE TEST PIN WIDTH MINUS TOLERANCE SHALL BE 1976 MILLIMETER(S).
1978	THE TEST PIN THICKNESS SHALL BE 1978 INCH.
1980	THE TEST PIN THICKNESS PLUS TOLERANCE SHALL BE 1980 INCH.
1982	THE TEST PIN THICKNESS MINUS TOLERANCE SHALL BE 1982 INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION (MATING) AND WITHDRAWAL FORCE (CONT)	
TEST PIN THICKNESS (CONT)	
(MILLIMETERS)	1984
PLUS TOLERANCE (MILLIMETERS)	1986
MINUS TOLERANCE (MILLIMETERS)	1988
TEST GAGE PER MATING COMPONENT CONFIGURATION.	1990
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST (MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1984 THE TEST PIN THICKNESS SHALL BE 1984 MILLIMETER(S).

1986 THE TEST PIN THICKNESS PLUS TOLERANCE SHALL BE 1986 MILLIMETER(S).

1988 THE TEST PIN THICKNESS MINUS TOLERANCE SHALL BE 1988 MILLIMETER(S).

1990 THE TEST GAGE SHALL BE OF THE SAME CONFIGURATION AS THE MATING COMPONENT.

1380 INSUALTION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

6359 INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1386 INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHMS.

1384 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHMS AT THE FIRST TEST TEMPERATURE.

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHMS AT THE SECOND TEST TEMPERATURE.

1371 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 3003.	1992
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
VOLTAGE TOLERANCE (PERCENT)	1994
ELECTRIFICATION TIME (SECONDS)	1376
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
TEST UNMOUNTED WITH MATING COMPONENT.	1996

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1992	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE METHOD 3003 OF MIL-STD-1344.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1994	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1994 PERCENT.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1996	TEST UNMOUNTED WITH A MATING COMPONENT INSERTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW LEVEL CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
CONFORM TO INITIAL CONTACT RESISTANCE REQUIREMENT.	2002
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2006
PER MIL-STD-1344, METHOD 3002.	2008
NUMBER OF READINGS (QUANTITY)	2010
CONDITIONING NOT REQUIRED.	2012
MEASURE FROM MATING COMPONENT LEAD TO SOCKET TERMINATION.	2014
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2000	LOW LEVEL CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.
2002	LOW LEVEL CIRCUIT. THE CONTACTS SHALL CONFORM TO INITIAL CONTACT RESISTANCE REQUIREMENT(S).
2006	LOW LEVEL CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2006.
2008	LOW LEVEL CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE METHOD 3002 OF MIL-STD-1344.
2010	THERE SHALL BE 2010 READINGS TAKEN ON EACH SOCKET.
2012	NO CONDITIONING OF THE SPECIMEN REQUIRED.
2014	MEASUREMENTS SHALL BE MADE FROM THE MATING COMPONENT LEAD TO THE SOCKET TERMINATION.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
POLARIZING VOLTAGE NOT APPLIED.	2016
LOADING VOLTAGE NOT APPLIED.	2018
MAXIMUM DRYING PERIOD (MINUTES)	2020
TEST UNMOUNTED WITH MATING COMPONENT.	2022

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHMS AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHMS AFTER DRYING.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2016	NO POLARIZING VOLTAGE SHALL BE APPLIED.
2018	NO LOADING VOLTAGE SHALL BE APPLIED.
2020	THE DRYING PERIOD SHALL BE NOT GREATER THAN 2020 MINUTES.
2022	TEST UNMOUNTED WITH A MATING COMPONENT INSERTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POROSITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2026
NO EVIDENCE OF DYE PENETRATION.	2028
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2032
PER ASTMD116 METHOD D.	2034
PER MIL-S-12883.	2036
APPLIED PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2038
(MEGAPASCALS)	2040
PRESSURE TOLERANCE (PERCENT)	2042
PRESSURE DURATION (HOURS)	2044
EVALUATION MAGNIFICATION (POWER)	2046
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2026	POROSITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2026.
2028	POROSITY. THERE SHALL BE NO EVIDENCE OF DYE PENETRATION.
2032	POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2032.
2034	POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD D OF ASTMD116.
2036	POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-12883.
2038	THE APPLIED PRESSURE SHALL BE 2038 POUNDS PER SQUARE INCH.
2040	THE APPLIED PRESSURE SHALL BE 2040 MEGAPASCAL(S).
2042	THE PRESSURE TOLERANCE SHALL BE 2042 PERCENT.
2044	THE APPLIED PRESSURE DURATION SHALL BE 2044 HOUR(S).
2046	SPECIMEN EVALUATION SHALL BE AT A MAGNIFICATION OF 2046 POWER.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
COOLING TIME (MINUTES)	4695
SPECIAL PREPARATION PERMITTED.	4989
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATIONS IN FLUX SHALL BE PERMITTED.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE. (CONT)	
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE DELETED (LETTER)	4835
SOLVENTS TO BE ADDED (NAME)	4838
BRUSH MARKING AREA.	4831
ENTIRE SPECIMEN TO BE BRUSHED.	6279
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENT(S) IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT 4835 SHALL NOT BE USED.
4838	IN ADDITION OT THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	2029
(MICROSECONDS)	2031

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2029	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2029 MILLISECOND(S).
2031	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2031 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4684
NORMAL MOUNTING MEANS.	4685
ANY SUITABLE METHOD.	4686
INSERT MATING COMPONENT WITH PINS SERIES CONNECTED FOR CONTINUITY MONITORING.	2033
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2033	INSERT MATING COMPONENT WITH PINS CONNECTED IN SERIES FOR MONITORING DISCONTINUITY DURATION.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
SPECIAL PREPARATION PERMITTED.	6205
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
STATIC LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2037
NO EVIDENCE OF PHYSICAL DAMAGE.	2039

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
2037	STATIC LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2037.
2039	STATIC LOAD. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STATIC LOAD (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2043
PER MIL-S-12883.	2045
MINIMUM APPLIED LOAD (SELECT ONE)	
(POUNDS)	2047
(NEWTONS)	2048
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2043	STATIC LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2043.
2045	STATIC LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-12883.
2047	THE APPLIED LOAD SHALL BE NOT LESS THAN 2047 POUND(S).
2048	THE APPLIED LOAD SHALL BE NOT LESS THAN 2048 NEWTON(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION B, BENDS (NO.)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
CONFORM TO POROSITY REQUIREMENTS.	2049

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK. (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK. (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2049	ITEM(S) SHALL CONFORM TO POROSITY REQUIREMENT(S) AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
PER MIL-S-12883.	2050
IMMERSION CYCLES (QUANTITY)	2052
IMMERSION DURATION, FIRST BATH (MINUTES)	2054
TEMPERATURE FIRST BATH (DEGREES CELSIUS)	2056
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2058
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2060
IMMERSION DURATION, SECOND BATH (MINUTES)	2062
TEMPERATURE, SECOND BATH (DEGREES CELSIUS)	2064
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2066

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4713	THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2050	THERMAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-12883.
2052	THERE SHALL BE 2052 IMMERSION CYCLES.
2054	ITEM(S) SHALL BE IMMERSED IN THE FIRST BATH FOR 2054 MINUTE(S).
2056	THE FIRST BATH TEMPERATURE SHALL BE 2056 DEGREES CELSIUS.
2058	THE FIRST BATH PLUS TEMPERATURE TOLERANCE SHALL BE 2058 DEGREES CELSIUS.
2060	THE FIRST BATH MINUS TEMPERATURE TOLERANCE SHALL BE 2060 DEGREES CELSIUS.
2062	ITEM(S) SHALL BE IMMERSED IN THE SECOND BATH FOR 2062 MINUTE(S).
2064	THE SECOND BATH TEMPERATURE SHALL BE 2064 DEGREES CELSIUS.
2066	THE SECOND BATH PLUS TEMPERATURE TOLERANCE SHALL BE 2066 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (CONT)	
TEMPERATURE, SECOND BATH (DEGREES CELSIUS) (CONT)	
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2068
TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
AS FOLLOWS:	2074
NO ROTATION OR LOOSENING OF BUSHINGS.	2076
NO STRIPPING OF THREADS.	2078
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2082
PER MIL-S-12883.	2084
APPLIED TORQUE (SELECT ONE)	
(POUND INCHES)	2086
(NEWTON METERS)	2088
STUD THREAD (DES)	2090
STUD LENGTH (SELECT ONE)	
(INCHES)	2092
(MILLIMETERS)	2094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2068	THE SECOND BATH MINUS TEMPERATURE TOLERANCE SHALL BE 2068 DEGREES CELSIUS.
2072	TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.
2074	TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2076	THERE SHALL BE NO ROTATION OR LOOSENING OF BUSHINGS.
2078	THERE SHALL BE NO STRIPPING OF THREADS.
2082	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2084	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-12883.
2086	THERE SHALL BE 2086 POUND-INCH(S) OF TORQUE APPLIED.
2088	THERE SHALL BE 2088 NEWTON METER(S) OF TORQUE APPLIED.
2090	THE STUD THREAD DESIGNATION SHALL BE 2090.
2092	THE STUD SHALL BE 2092 INCH(S) LONG.
2094	THE STUD SHALL BE 2094 MILLIMETER(S) LONG.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
PER MIL-S-12883. (CONT)	
MAXIMUM SHOULDER DIAMETER (SELECT ONE)	
(INCH)	2096
(MILLIMETERS)	2098
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1473
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	2100
(MICROSECONDS)	2102
MATING COMPONENT RETAINED.	2104
CONFORM TO CONTACT RESISTANCE REQUIREMENTS.	2106
CONFORM TO WITHDRAWAL FORCE REQUIREMENTS.	2108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2096	THE SHOULDER DIAMETER SHALL BE NOT GREATER THAN 2096 INCH.
2098	THE SHOULDER DIAMETER SHALL BE NOT GREATER THAN 2098 MILLIMETER(S).
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2100	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2100 MILLISECOND(S).
2102	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2102 MICROSECOND(S).
2104	THE MATING COMPONENT SHALL REMAIN IN THE SOCKET DURING VIBRATION AND BE FULLY ENGAGED AFTER TEST.
2106	SOCKET(S) SHALL CONFORM TO CONTACT RESISTANCE REQUIREMENT(S) AFTER TEST.
2108	SOCKET(S) SHALL CONFORM TO WITHDRAWAL FORCE REQUIREMENT(S) AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4707
NORMAL MOUNTING MEANS.	4708
ANY SUITABLE MOUNTING METHOD.	4709
INSERT MATING COMPONENT WITH PINS SERIES CONNECTED FOR CONTINUITY MONITORING.	2110
HORIZONTAL MOTION, PERPENDICULAR TO LONG AXIS.	2112
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BE MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2110	INSERT MATING COMPONENT WITH PINS CONNECTED IN SERIES FOR MONITORING DISCONTINUITY DURATION.
2112	HORIZONTAL MOTION, PERPENDICULAR TO LONG AXIS SHALL BE APPLIED.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	2114
(MICROSECONDS)	2116
MATING COMPONENT RETAINED.	2118
CONFORM TO CONTACT RESISTANCE REQUIREMENTS.	2120
CONFORM TO WITHDRAWAL FORCE REQUIREMENTS.	2122
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1476	VIBRATION, LOW FREQUNCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2114	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2114 MILLISECOND(S).
2116	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2116 MICROSECOND(S).
2118	THE MATING COMPONENT SHALL REMAIN IN THE SOCKET DURING VIBRATION AND BE FULLY ENGAGED AFTER TEST.
2120	SOCKETS SHALL CONFORM TO CONTACT RESISTANCE REQUIREMENT(S) AFTER TEST.
2122	SOCKETS SHALL CONFORM TO WITHDRAWAL FORCE REQUIREMENT(S) AFTER TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-201.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4729
NORMAL MOUNTING MEANS.	4730
ANY SUITABLE MOUNTING METHOD.	4731
INSERT MATING COMPONENT WITH PINS SERIES CONNECTED FOR CONTINUITY MONITORING.	2124
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	2126
(MICROSECONDS)	2128

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4731	MOUNTING SHALL BE ANY SUITABLE METHOD.
2124	INSERT MATING COMPONENT WITH PINS CONNECTED IN SERIES FOR MONITORING DISCONTINUITY DURATION.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2126	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2126 MILLISECOND(S).
2128	THE DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2128 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE (CONT)	
MATING COMPONENT RETAINED.	2130
CONFORM TO CONTACT RESISTANCE REQUIREMENTS.	2132
CONFORM TO WITHDRAWAL FORCE REQUIREMENTS.	2134
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(HOURS)	1431
(MINUTES)	1438
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2130	THE MATING COMPONENT SHALL REMAIN IN THE SOCKET DURING VIBRATION AND BE FULLY ENGAGED AFTER TEST.
2132	SOCKETS SHALL CONFORM TO CONTACT RESISTANCE REQUIREMENT(S) AFTER TEST.
2134	SOCKETS SHALL CONFORM TO WITHDRAWAL FORCE REQUIREMENT(S) AFTER TEST.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4975
NORMAL MOUNTING METHOD.	4976
ANY SUITABLE MOUNTING METHOD.	4977
INSERT MATING COMPONENT WITH PINS SERIES CONNECTED FOR CONTINUITY MONITORING.	2136
HORIZONTAL MOTION, PERPENDICULAR TO LONG AXIS.	2138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINTS.
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2136	INSERT MATING COMPONENT WITH PINS CONNECTED IN SERIES FOR MONITORING DISCONTINUITY DURATION.
2138	HORIZONTAL MOTION, PERPENDICULAR TO LONG AXIS SHALL BE APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-ER
Army-ME
Army-MR
Army-SG
Army-CR

User activity:
Army-AR

Preparing activity:
Army-MI

(Project EDS-A305)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

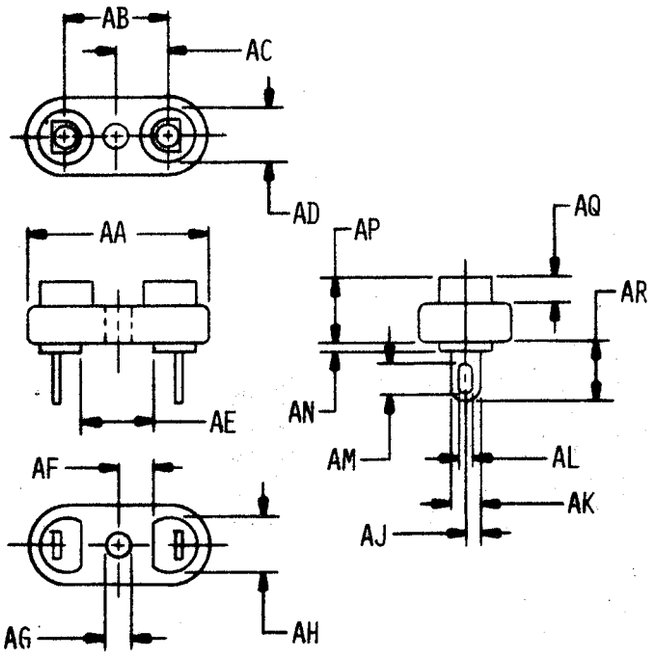


070-01-1

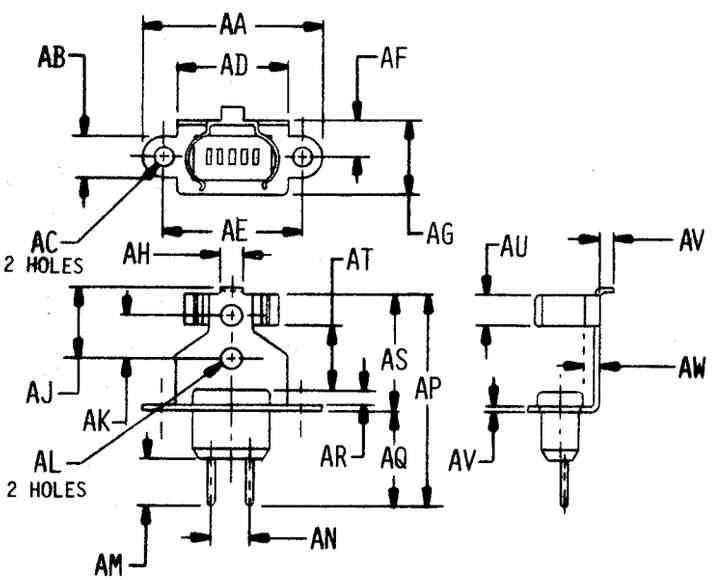


070-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

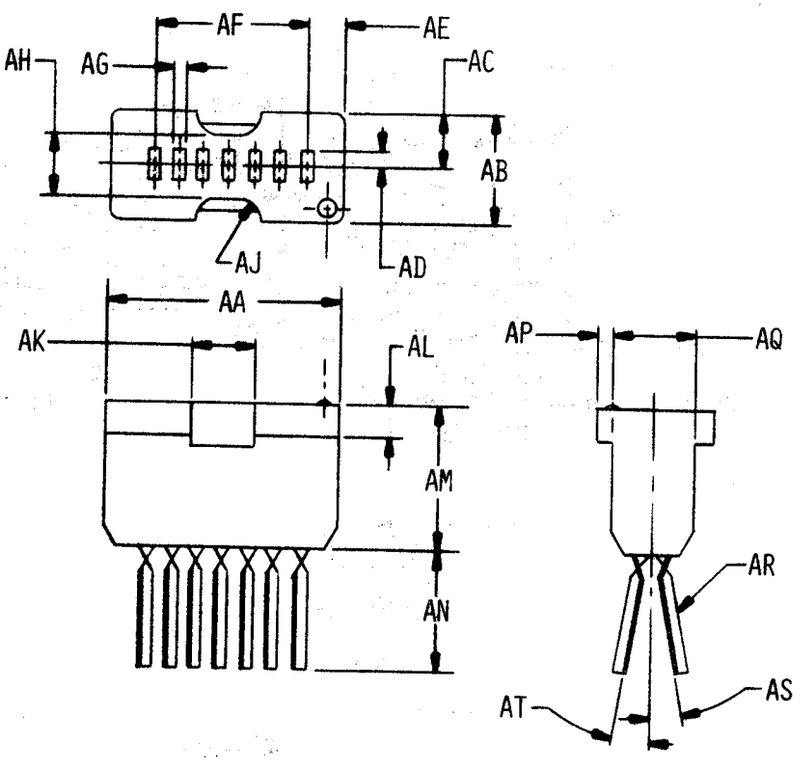


070-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

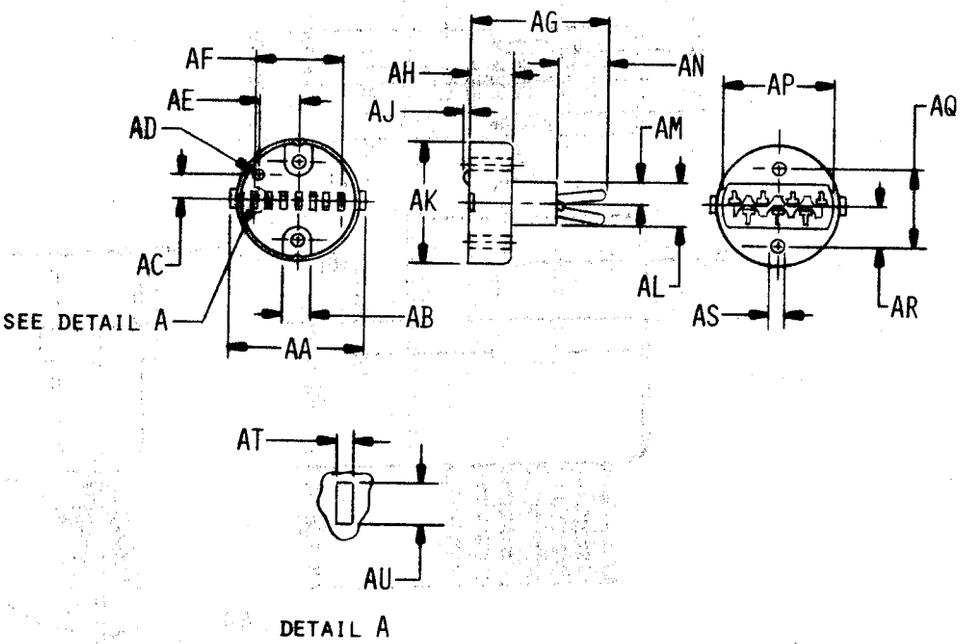


070-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

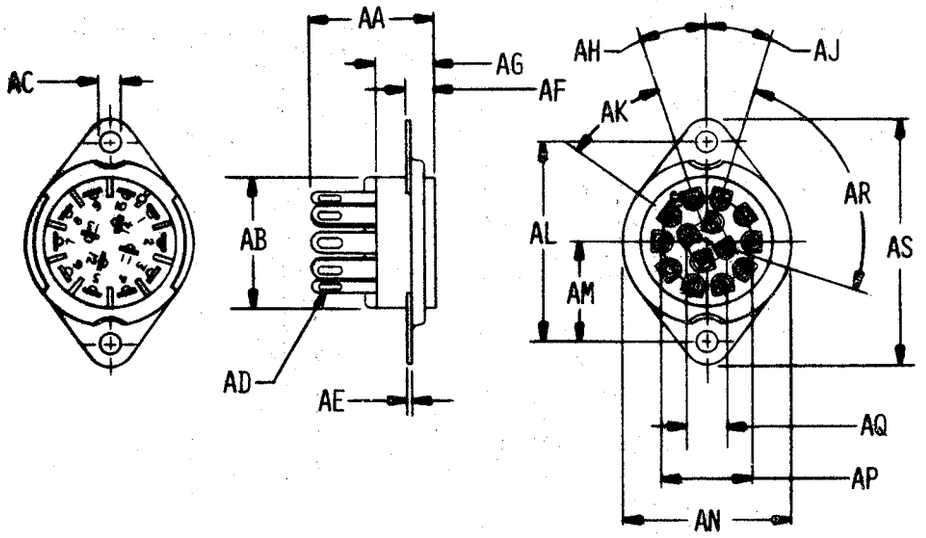


070-01-5

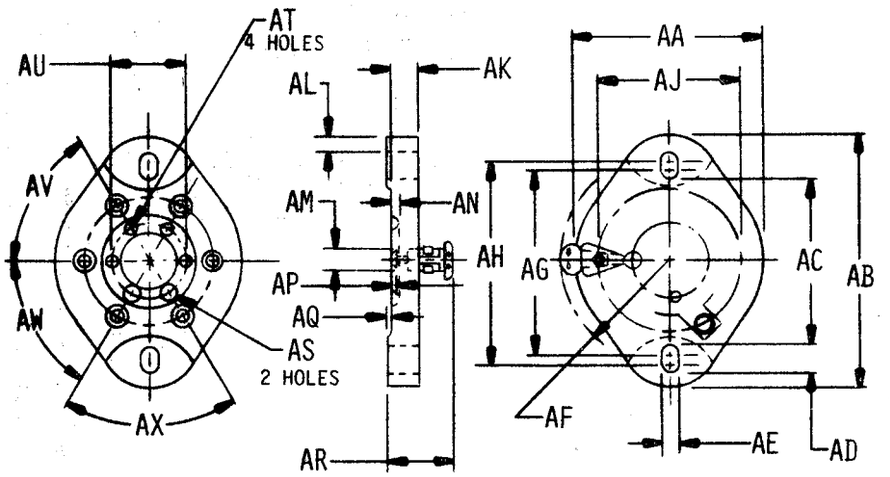


070-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

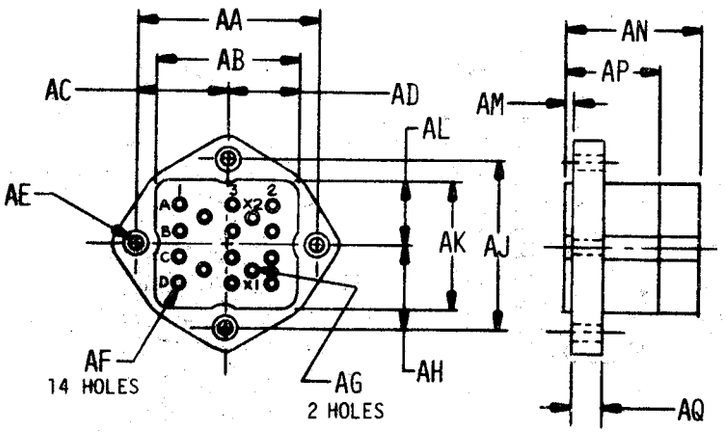


070-01-7

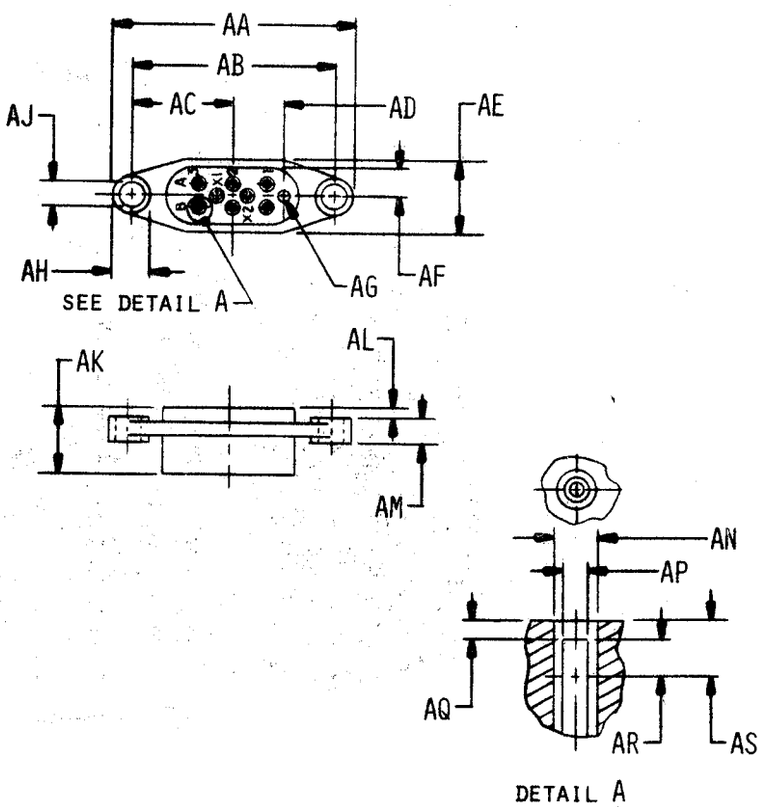


070-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

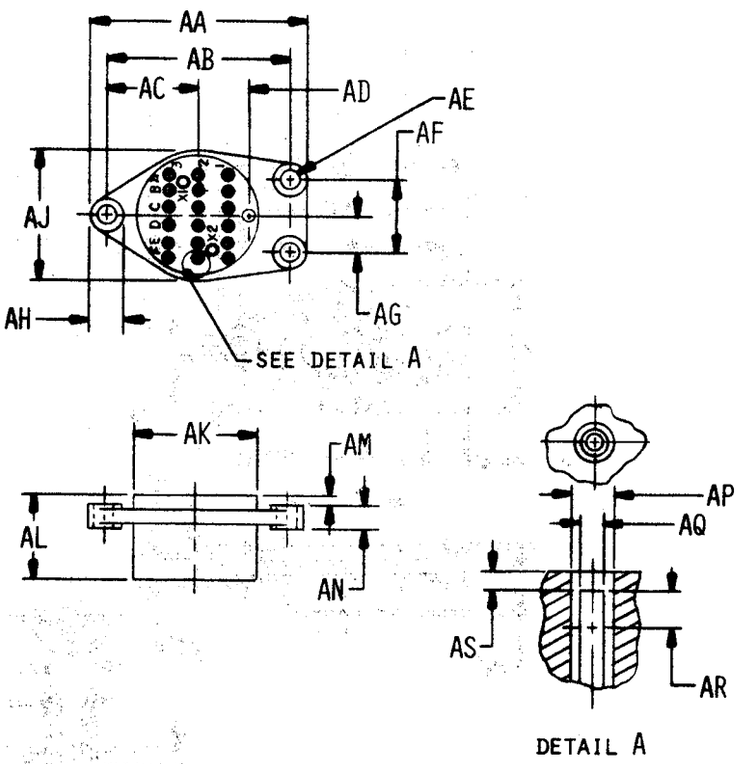


070-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

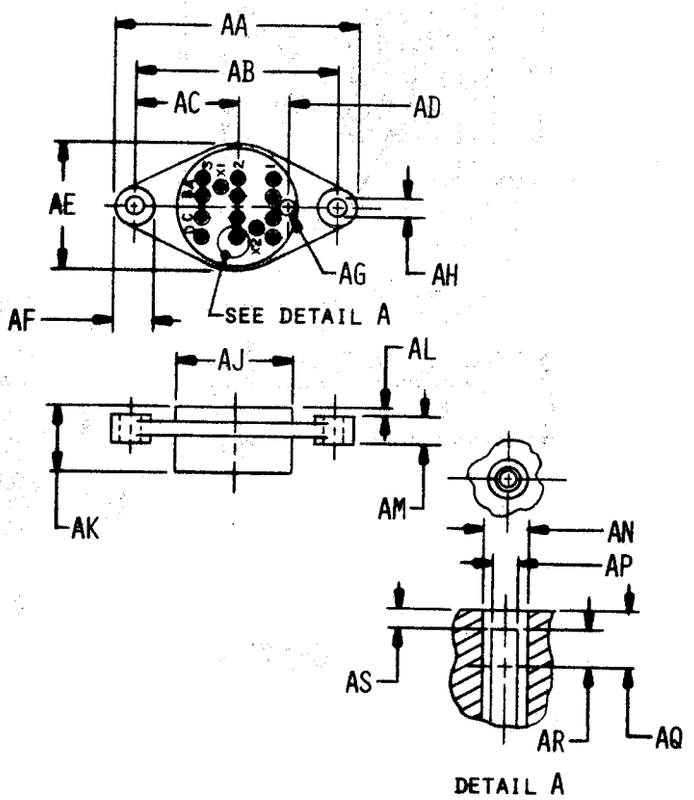


070-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

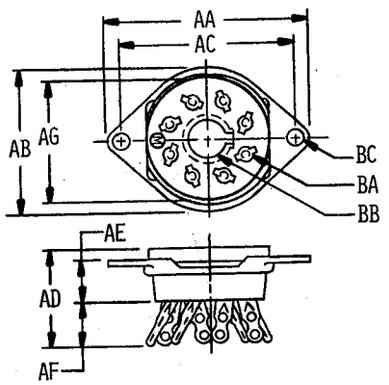


Ø7Ø-Ø1-11

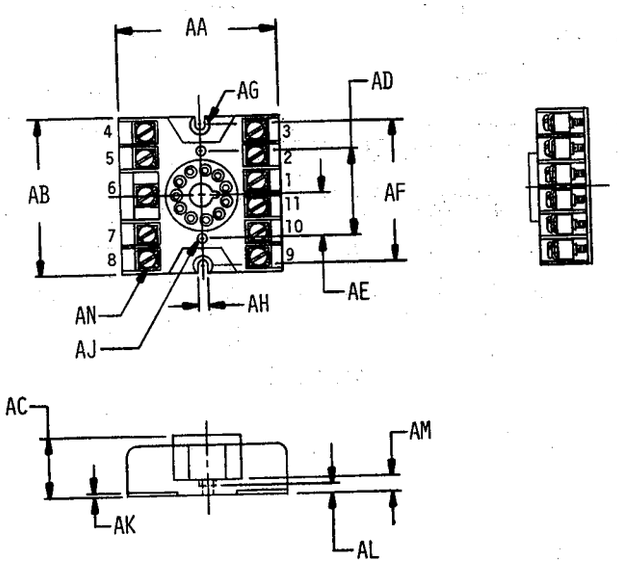


Ø7Ø-Ø1-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

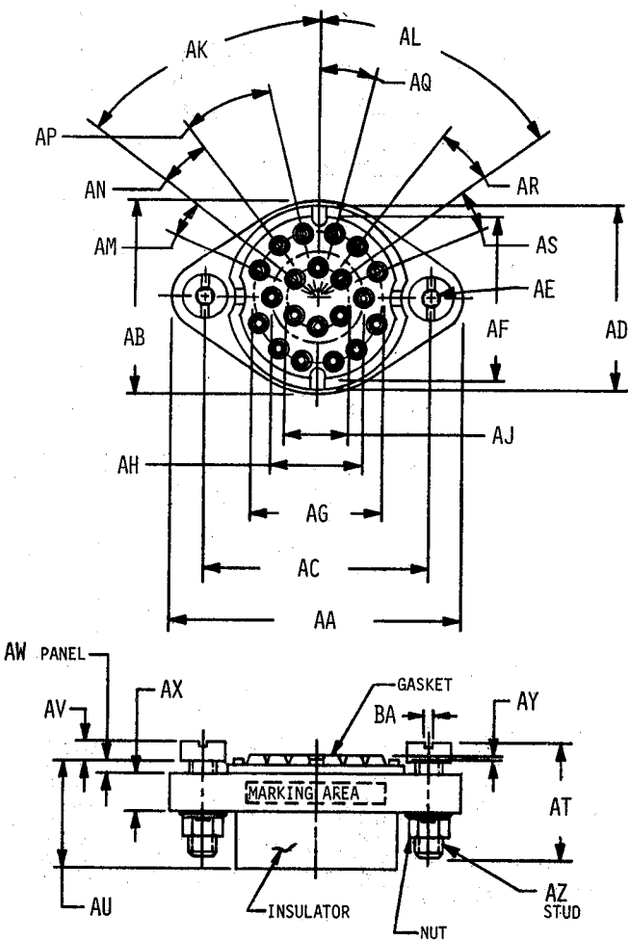


070-01-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

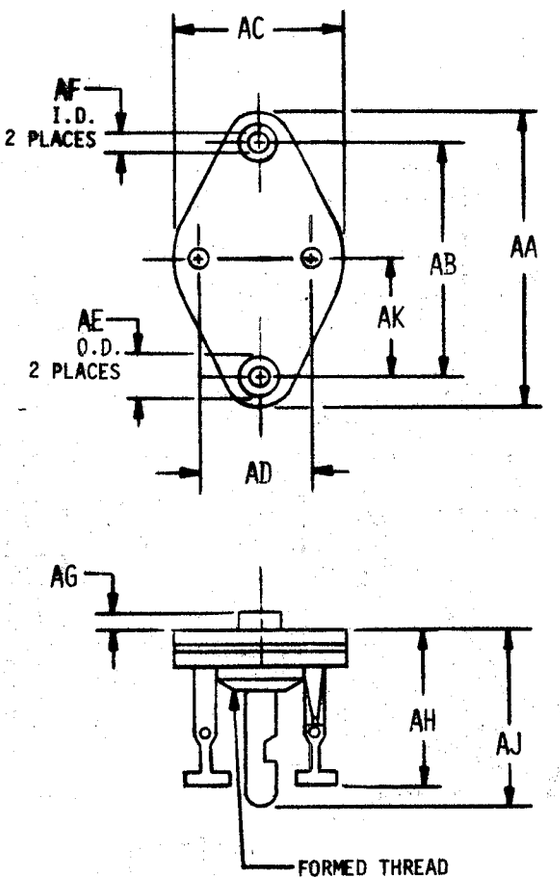


070-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

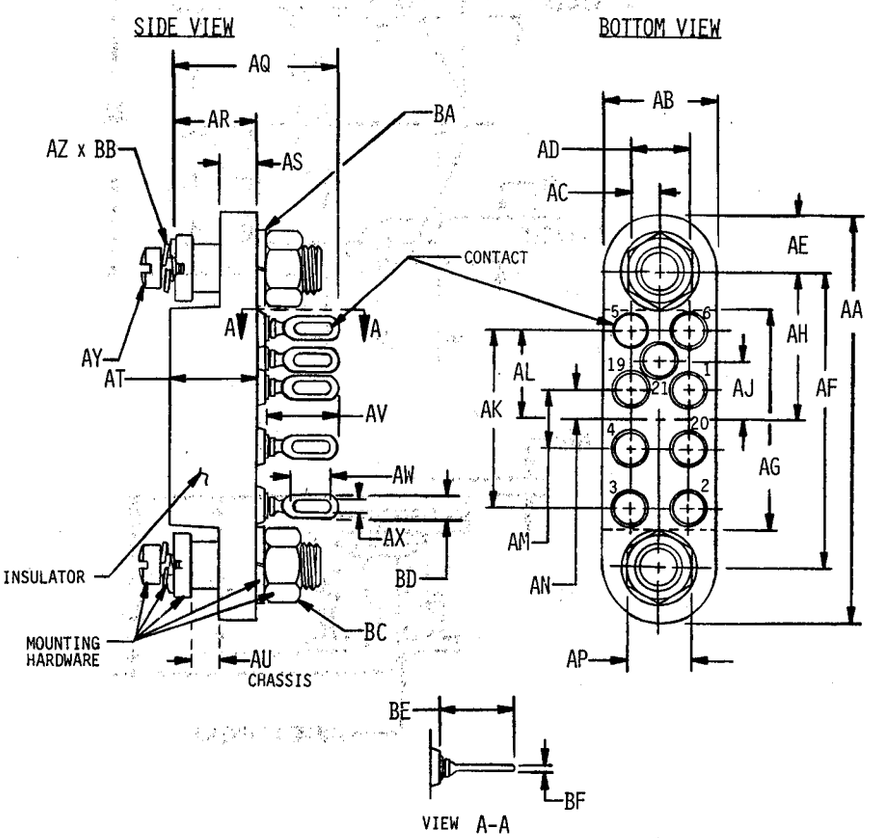


070-01-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

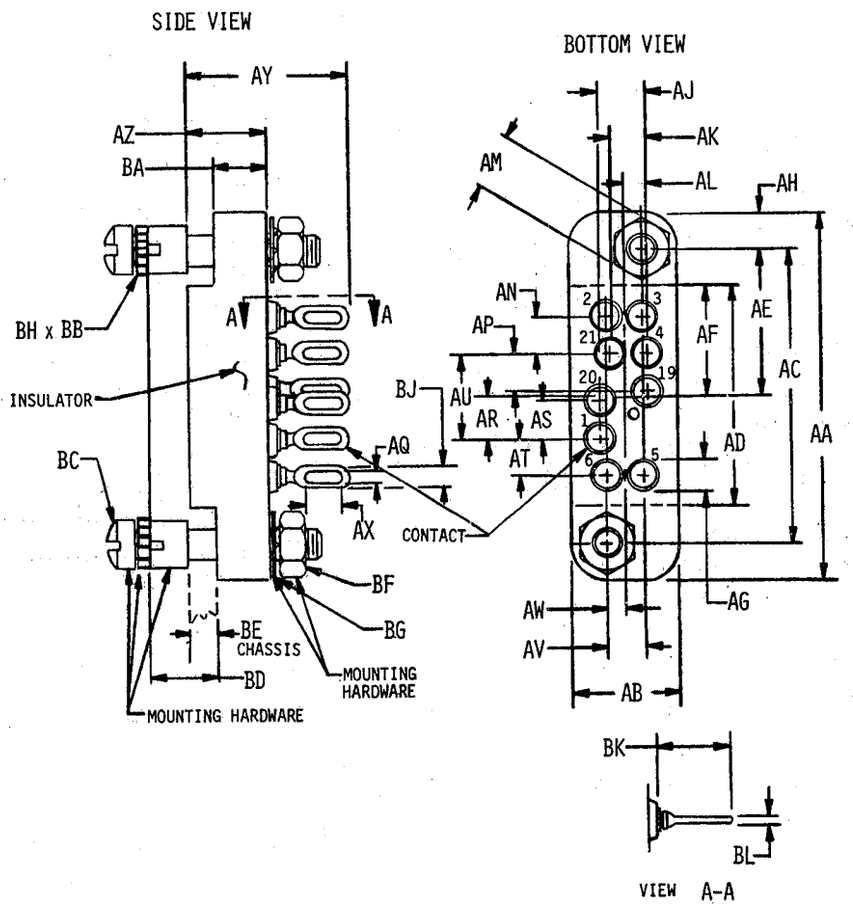


070-01-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

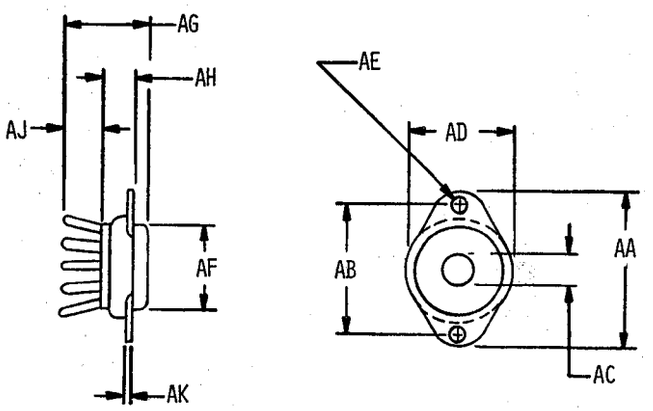


Ø7Ø-Ø1-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

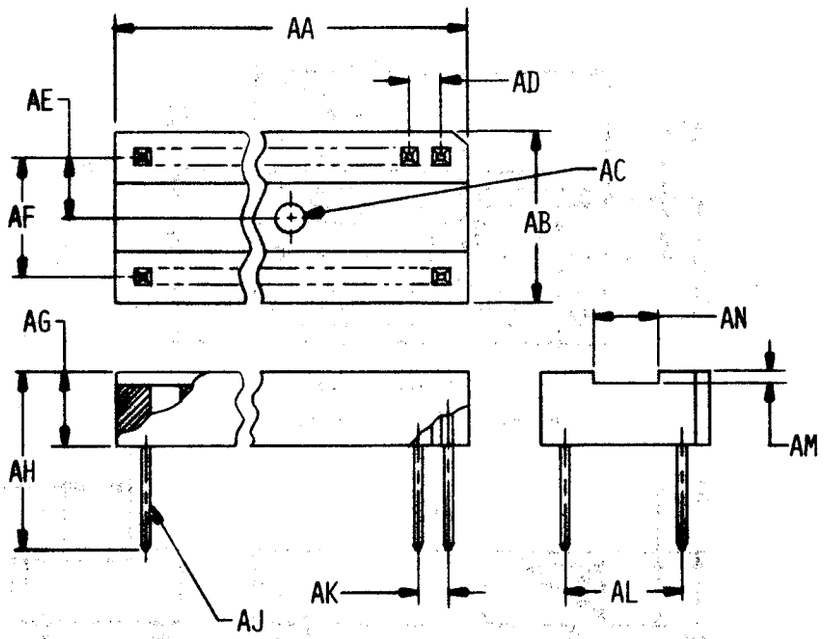


070-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

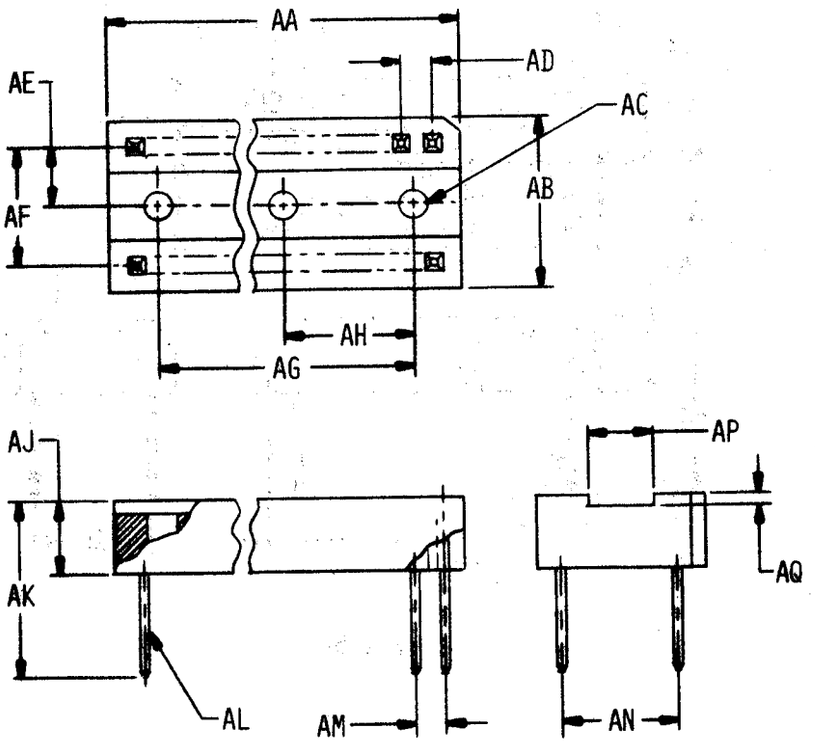


070-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

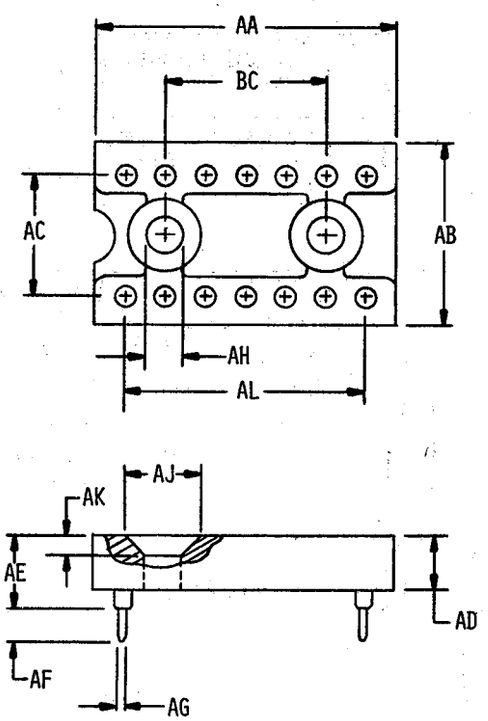


070-02-3

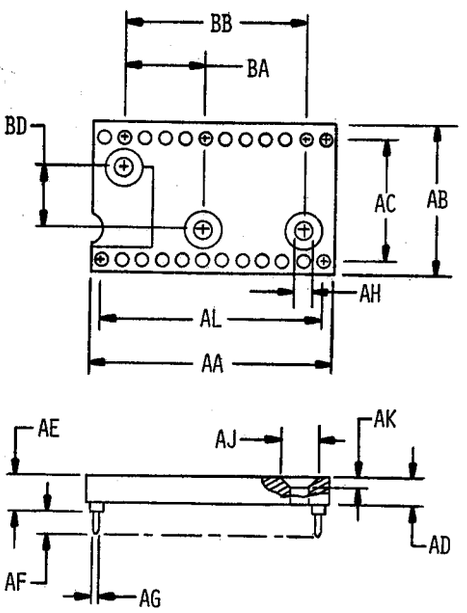


070-02-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

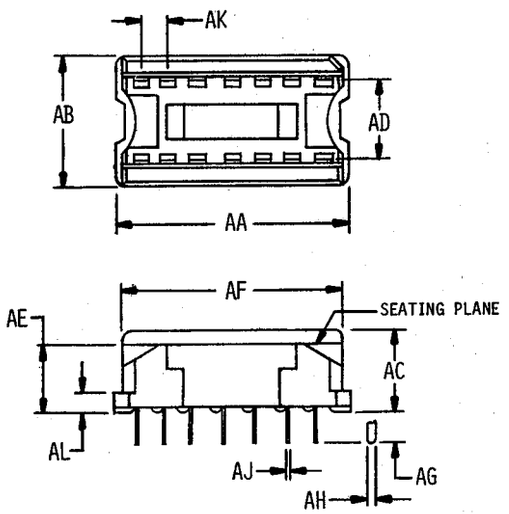

Ø70-Ø2-5

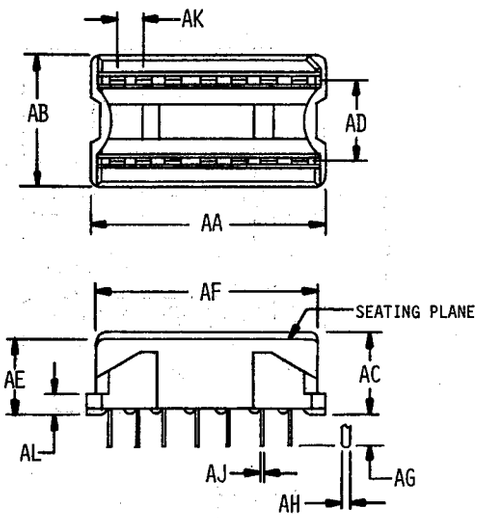


Ø70-Ø2-6

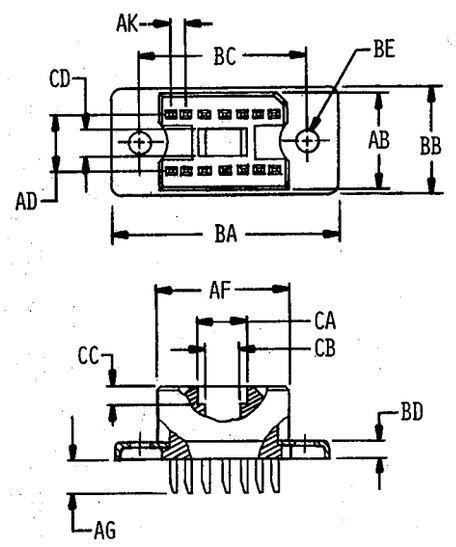


Ø70-Ø2-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

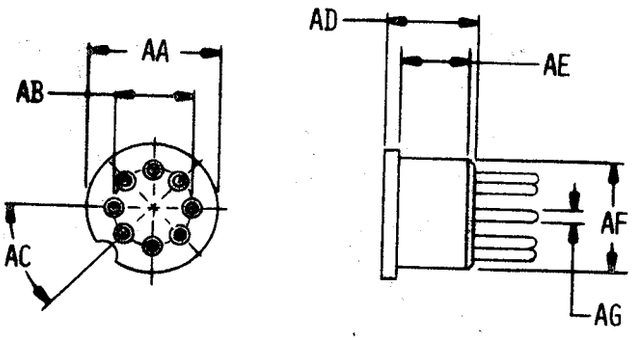


070-03-1

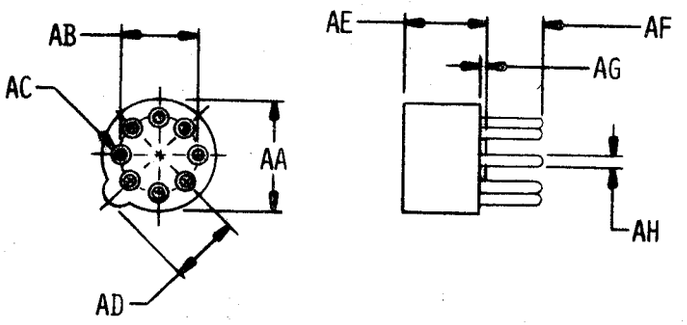


070-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

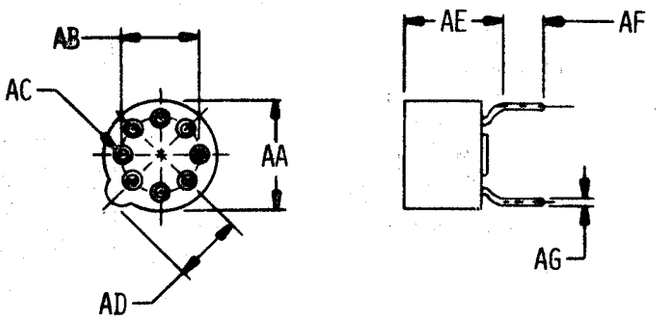


070-03-3

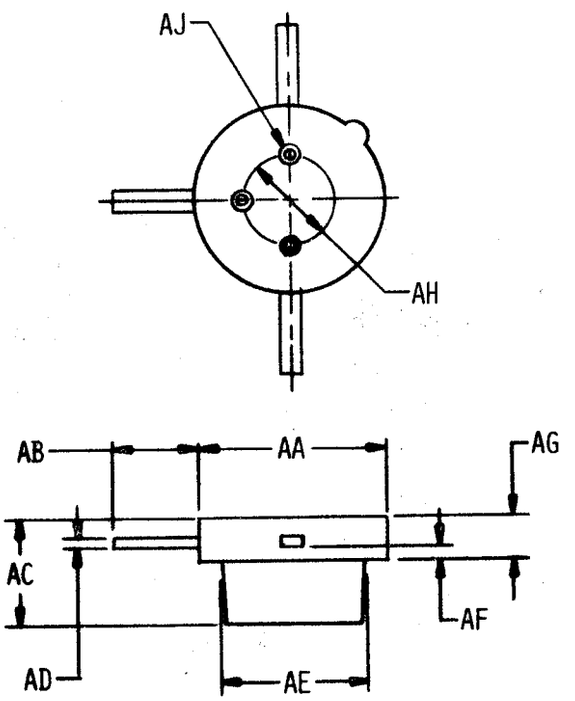


070-03-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

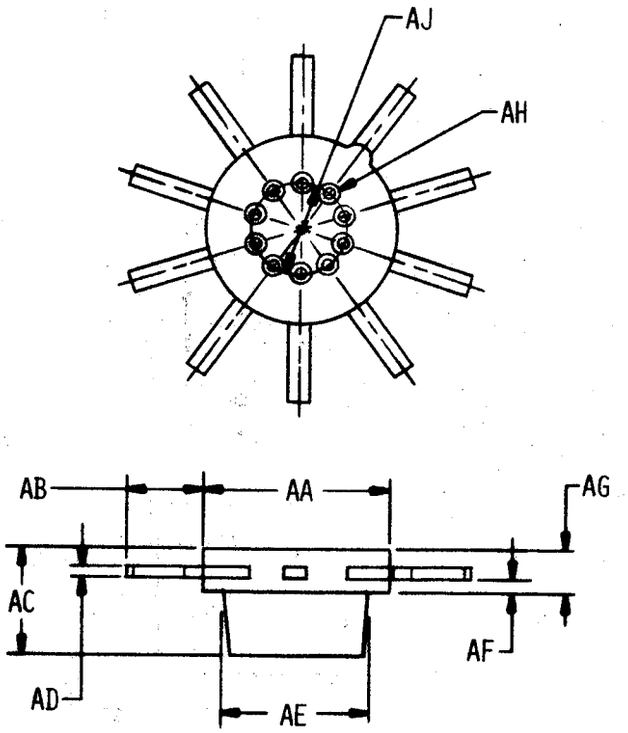


070-03-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

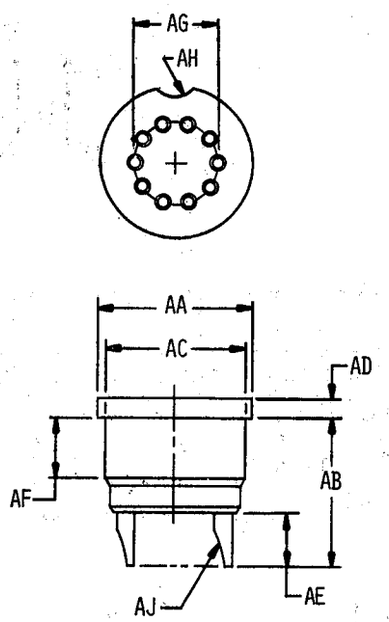

070-03-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

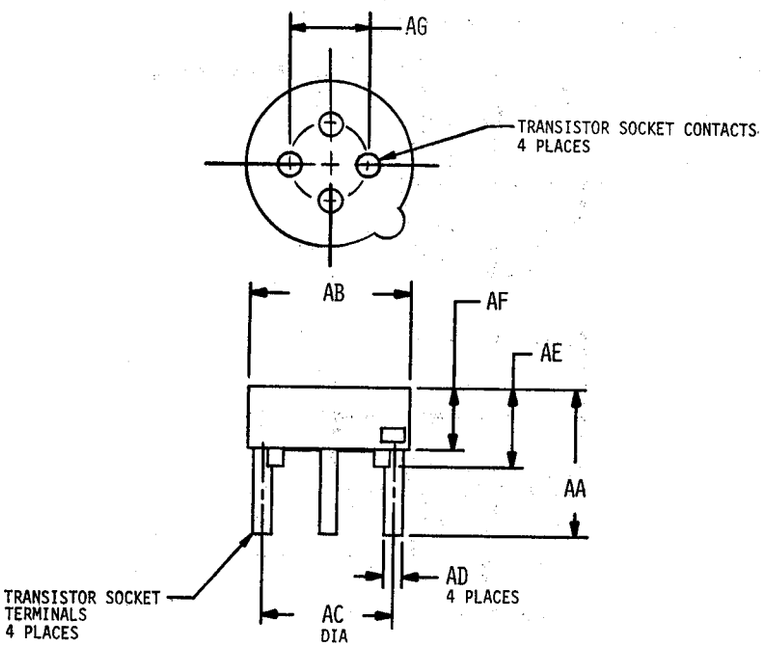

TO-46 TRANSISTOR SOCKET

070-03-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

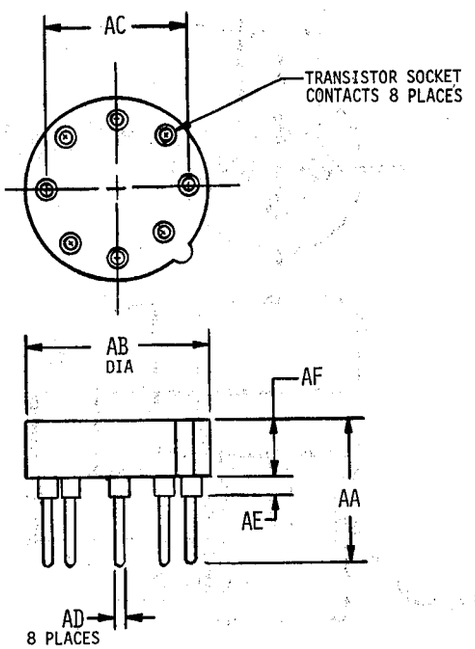

TO-5 TRANSISTOR SOCKET


070-03-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

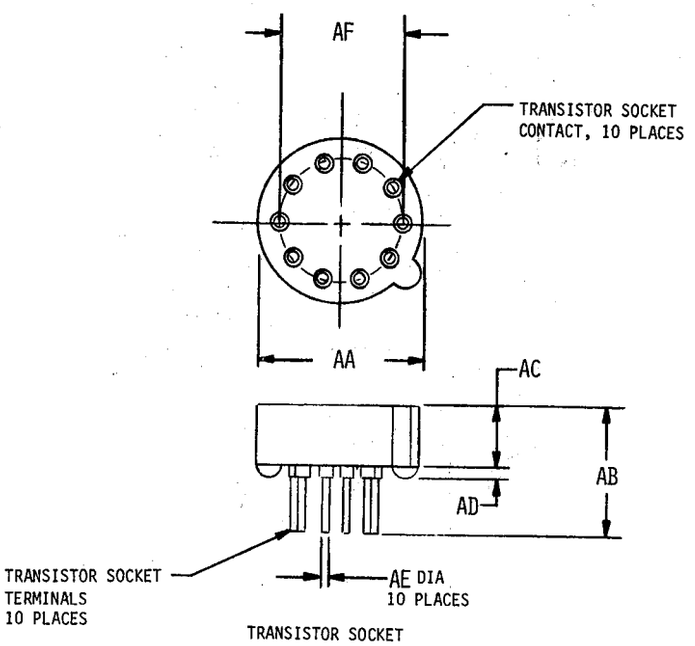

070-03-9.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

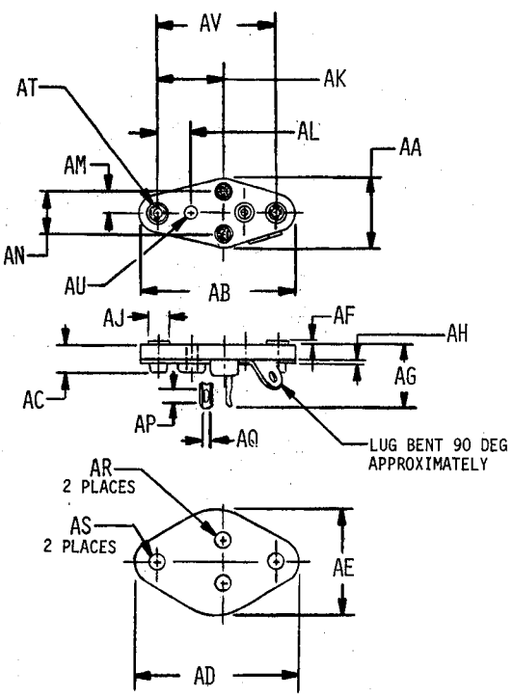

CHASSIS INSULATOR


070-03-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

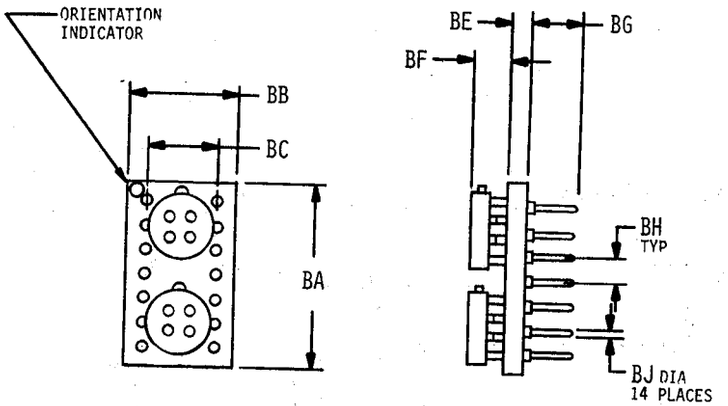

TO-46 ADAPTER
(2 PLACES)


070-04-1

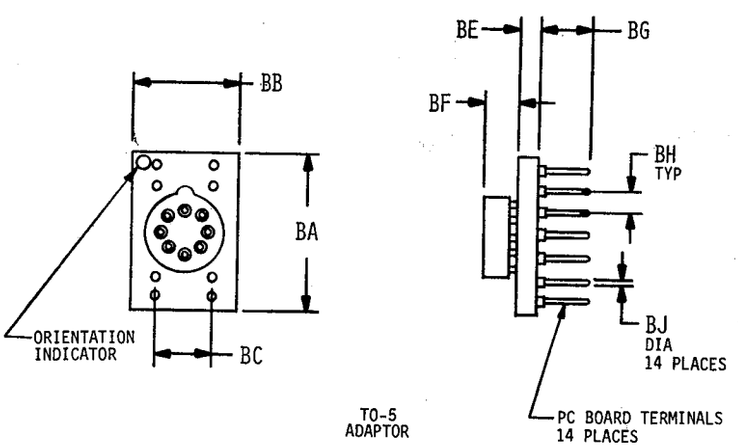

TO-5
ADAPTOR

070-04-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

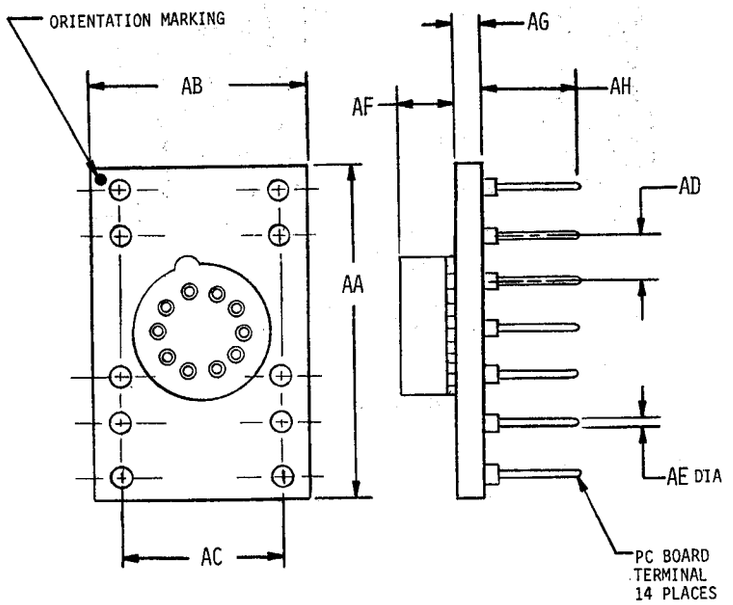

TO-100 ADAPTER


070-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.



TERMINAL CONNECTIONS OF SOCKET/PIN
CIRCUIT ROUTING ON BOTTOM OF PCB


070-05-1



TERMINAL CONNECTIONS OF SOCKET/PIN
CIRCUIT ROUTING ON BOTTOM OF PCB

070-05-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




TERMINAL CONNECTIONS OF SOCKET/PIN CIRCUIT ROUTING ON BOTTOM OF PCB

070-05-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

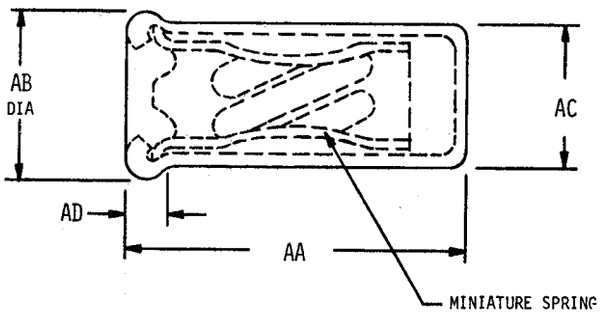

070-07-1

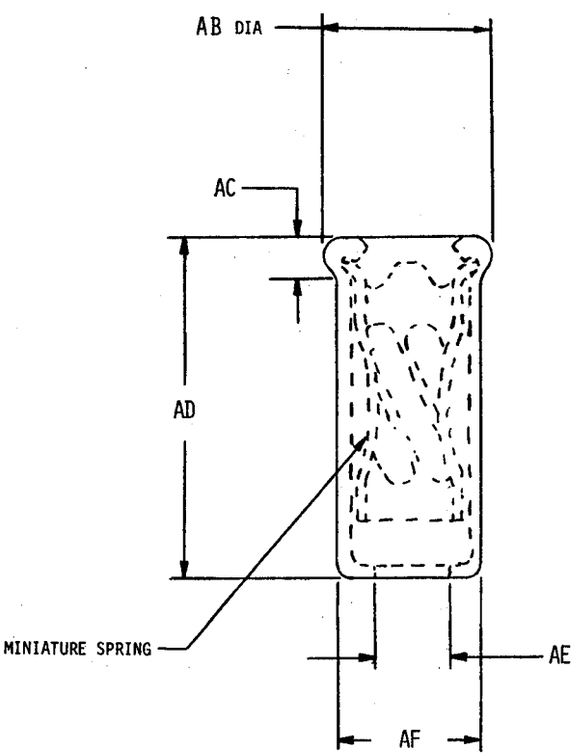

070-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1419	84	1533	94	1652	28
0102	14	1420	86	1534	94	1654	28
0103	14	1421	86	1535	96	1656	28
0104	14	1426	100	1536	98	1658	28
0105	14	1427	100	1537	98	1660	28
0107	16	1428	100	1562	18	1662	28
0108	16	1430	102	1564	18	1664	28
0700	14	1431	100	1566	18	1666	28
0800	14	1432	70	1568	18	1668	30
1004	14	1433	84	1570	18	1670	30
1005	14	1435	98	1572	18	1672	30
1006	14	1436	98	1574	18	1674	30
1008	14	1438	100	1576	18	1676	30
1009	20	1439	100	1578	22	1678	30
1371	64	1446	92	1600	22	1680	30
1372	66	1447	94	1602	22	1682	30
1373	66	1448	94	1604	22	1684	30
1374	98	1452	102	1606	22	1686	30
1375	84	1453	102	1608	22	1688	30
1376	66	1455	92	1610	22	1702	34
1378	66	1456	92	1612	22	1704	34
1380	64	1459	102	1614	24	1708	34
1381	66	1462	100	1616	24	1710	34
1383	66	1466	96	1618	24	1712	34
1384	64	1467	96	1620	24	1714	34
1386	64	1470	96	1622	24	1716	34
1387	64	1471	78	1624	24	1718	34
1391	70	1473	92	1626	24	1720	34
1394	68	1475	94	1628	24	1722	34
1396	68	1476	96	1630	24	1726	34
1397	70	1490	96	1632	24	1728	36
1400	68	1497	66	1634	26	1730	36
1406	70	1500	80	1636	26	1732	36
1410	84	1502	80	1638	26	1734	36
1411	84	1504	80	1640	26	1736	36
1412	86	1508	78	1642	26	1740	36
1413	86	1509	78	1644	26	1742	36
1414	86	1520	66	1646	28	1746	36
1416	86	1522	66	1648	28	1748	36
1418	84	1524	66	1650	28	1750	36

*U.S. GOVERNMENT PRINTING OFFICE: 1983-0-605-034/2075

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1754	38	1864	50	1954	60	2037	82
1756	38	1866	50	1956	60	2038	72
1758	38	1868	50	1958	60	2039	82
1760	38	1870	50	1960	62	2040	72
1762	38	1874	52	1962	62	2042	72
1766	38	1876	52	1964	62	2043	84
1768	38	1878	52	1966	62	2044	72
1770	38	1882	52	1968	62	2045	84
1772	38	1884	52	1970	62	2046	72
1774	38	1886	52	1972	62	2047	84
1776	38	1890	52	1974	62	2048	84
1780	40	1892	52	1976	62	2049	86
1782	40	1894	52	1978	62	2050	88
1784	40	1896	54	1980	62	2052	88
1786	40	1898	54	1982	62	2054	88
1788	40	1902	56	1984	64	2056	88
1790	40	1904	56	1986	64	2058	88
1792	40	1906	56	1988	64	2060	88
1794	40	1908	56	1990	64	2062	88
1796	40	1910	56	1992	66	2064	88
1802	40	1912	56	1994	66	2066	88
1804	42	1914	56	1996	66	2068	90
1806	42	1916	56	2000	68	2072	90
1808	42	1918	58	2002	68	2074	90
1810	42	1920	58	2006	68	2076	90
1812	42	1922	58	2008	68	2078	90
1814	42	1926	58	2010	68	2082	90
1818	42	1928	58	2014	68	2084	90
1820	42	1930	58	2016	70	2086	90
1822	42	1932	58	2018	70	2088	90
1824	42	1934	58	2020	70	2090	90
1826	42	1936	58	2022	70	2092	90
1828	44	1938	58	2026	72	2094	90
1830	44	1940	58	2028	72	2096	92
1832	44	1942	60	2029	78	2098	92
1850	50	1944	60	2031	78	2100	92
1852	50	1946	60	2032	72	2102	92
1854	46	1948	60	2033	80	2104	92
1856	46	1950	60	2034	72	2106	92
1862	50	1952	60	2036	72	2108	92

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2110	94	4709	94	4862	48	6995	106
2112	94	4713	88	4867	48	6996	32
2114	96	4714	88	4874	46	6997	32
2116	96	4715	88	4875	48	6998	32
2118	96	4718	74	4878	76	6999	32
2120	96	4719	88	4884	44	7001	104
2122	96	4722	86	4885	46	7002	104
2124	98	4723	86	4886	44	7003	104
2126	98	4729	98	4891	46	7004	104
2128	98	4730	98	4894	44	7005	104
2130	100	4731	98	4906	44	7021	32
2132	100	4754	54	4908	44	7022	32
2134	100	4755	54	4950	20	7023	32
2136	102	4756	54	4975	102	7024	32
2138	102	4760	54	4976	102	7572	20
4662	82	4761	54	4977	102	7577	20
4663	82	4762	54	4983	70	7580	22
4664	82	4765	78	4984	70	7629	104
4665	82	4766	78	4985	70	7630	104
4666	82	4770	76	4986	70		
4667	82	4771	78	4989	74		
4669	74	4772	78	5068	18		
4671	74	4773	78	5069	18		
4672	80	4782	76	6205	82		
4674	80	4829	76	6267	48		
4675	80	4830	74	6279	76		
4683	82	4831	76	6300	44		
4684	80	4834	74	6311	46		
4685	80	4835	76	6359	64		
4686	80	4836	76	6369	14		
4689	74	4838	76	6372	104		
4691	74	4839	76	6870	104		
4692	74	4842	50	6873	14		
4694	74	4849	46	6874	16		
4695	74	4850	48	6941	16		
4698	74	4854	48	6942	16		
4700	72	4855	48	6991	106		
4701	72	4856	48	6992	106		
4707	94	4859	46	6993	106		
4708	94	4861	48	6994	106		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	106
Additional Requirements	104
Aperture Cards Required	16
Applicable Documents	106
Base Document	14
Capacitance	34
City, State, Zip	14
Classification	18
Color	34
Company Name/Command	14
Configuration	20
Contact Resistance	36
Contact Retention	38
Contract Number/Office Symbol	14
Control	14
Corrosive Atmosphere	40
Design and Construction	22
Dielectric Withstanding Voltage at Reduced Barometric Pressure	44
Dielectric Withstanding Voltage at Sea Level	46
Durability	50
Finishes	20
Float	52
Format	14
Fungus	54
Government Design Acitivity FSCM	14
Illustrations	20
Insertion (Mating) and Withdrawal Force	56
Insulation Resistance	64
Low Level Circuit	68
Materials	20
Metals	22
Moisture Resistance	68
Mounting Hardware	104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Nomenclature-	106
Notes	106
Packaging	106
Part Marking	104
Part Number	16
Part Number Cross-Reference	106
Phone Number	14
Porosity-	72
Quality Assurance Provisions-	106
Ratings	18
Requester FSCM-	14
Requester's Name	14
Resistance to Soldering Heat-	72
Resistance to Solvents-	74
Revision of AEDPS Document Number	16
Salt Spray	76
Scope	16
Shock, Specified Pulse-	78
Solderability	80
Source Table-	16
System Application-	14
Static Load	82
Street Building	14
Superseded Document	106
Tabulated Characteristics	20
Temperature Rating	18
Terminal Strength	84
Thermal Shock	86
Torque-	90
Units of Measure	16
Vibration, High Frequency	92
Vibration, Low Frequency-	94
Vibration, Random	98
Weight/Mass	32
Workmanship	104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75	LINE NO. 79 80
*REQUESTER'S NAME		Ø 1 Ø 1		
*COMPANY NAME/COMMAND		Ø 1 Ø 2		
*STREET/BUILDING		Ø 1 Ø 3		
*CITY, STATE, ZIP		Ø 1 Ø 4		
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5		
*DATE		1 Ø Ø 3		
*REQUESTER FSCM		1 Ø Ø 4		
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5		
*BASE DOCUMENT		1 Ø Ø 6		
*SYSTEM APPLICATION		1 Ø Ø 8		
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9		
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø		
ONE SECTION DOCUMENT.		Ø 8 Ø Ø		
APERTURE CARDS REQUIRED.		Ø 1 Ø 7		
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8		
*CONTROL SOURCE.		6 8 7 3		
SPECIFICATION.		6 8 7 4		
*SOURCE TABLE		9 1 5 1		
UNIT OF MEASURE U.S.		6 9 4 1		
SI.		6 9 4 2		

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

*MANDATORY