DOD-STD-35- 127 (MI)
15 SEPTEMBER 1978

MILITARY STANDARD

SWITCHES, TRANSDUCER OR SOLID STATE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Transducer or Solid State
Automated Engineering
Document Preparation System

DOD-STD-35-127(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-127(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for solid state or transducer switches.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	137
	B.	Characteristic Code Index	143
		Index	151

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for solid state or transducer switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132, Selection and Use of Switches and Associated Hardware, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, SOLID STATE TRANSDUCER	086001	MIL-S-81619	GENERAL SPECIFICATION
SWITCH, SOLID STATE	086002	MIL-S-81619	SOLID STATE TRANSDUCER
SWITCH, PROXIMITY	086003	MIL-S-81619	SOLID STATE TRANSDUCER
		MIL-S-83395	INTEGRAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-81619	Switches, Solid State Transducer, General Specification For
MIL-S-83395	Switch, Integral, Proximity, Sealed General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement Of
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Solid State or Transducer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Switches, Solid State or Transducer, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Switches, Solid State or Transducer.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Switches, Solid State or Transducer.

4.3.2 Illustrations. Illustrations applicable to Switches, Solid State or Transducer are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for solid state transducer switch characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1914	MAX RISE TIME MICRO-SECONDS	1984	MIN OUTPUT CURRENT AMPERES	1574	SUPPLY VOLTAGE VOLTS, DC
1916	MAX RISE TIME NANO-SECONDS	1986	MIN OUTPUT CURRENT MILLIAMPS	1578	SUPPLY VOLTAGE VOLTS, AC
1918	MAX FALL TIME MICRO-SECONDS	1988	MAX OUTPUT CURRENT AMPERES		
1920	MAX FALL TIME NANO-SECONDS	1990	MAX OUTPUT CURRENT MILLIAMPS		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
ELECTRICAL RATINGS	
ABSOLUTE MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1562
(MILLIVOLTS, AC)	1564
(VOLTS, DC)	1566
(MILLIVOLTS, DC)	1568
ABSOLUTE MAXIMUM OUTPUT CURRENT (SELECT ONE)	
(AMPERES)	1570
(MILLIAMPERES)	1572

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7301 THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

4904 THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.

5052 THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.

5046 THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.

5048 THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

ELECTRICAL RATINGS.

1562 THE ABSOLUTE MAXIMUM LOAD VOLTAGE SHALL BE 1562 VOLT(S), AC.

1564 THE ABSOLUTE MAXIMUM LOAD VOLTAGE SHALL BE 1564 MILLIVOLT(S), AC.

1566 THE ABSOLUTE MAXIMUM LOAD VOLTAGE SHALL BE 1566 VOLT(S), DC.

1568 THE ABSOLUTE MAXIMUM LOAD VOLTAGE SHALL BE 1568 MILLIVOLT(S), DC.

1570 THE ABSOLUTE MAXIMUM OUTPUT CURRENT SHALL BE 1570 AMPERE(S).

1572 THE ABSOLUTE MAXIMUM OUTPUT CURRENT SHALL BE 1572 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS (CONT)	
SUPPLY VOLTAGE	
MINIMUM (SELECT ONE)	
(VOLTS, DC)	1574
(MILLIVOLTS, DC)	1576
(VOLTS, AC)	1578
(MILLIVOLTS, AC)	1580
NULL TEMPERATURE COEFFICIENT	
(PLUS OR MINUS PERCENT OF FULL SCALE PER DEGREE CELSIUS)	1582
SENSITIVITY TEMPERATURE COEFFICIENT	
(PLUS OR MINUS PERCENT OF FULL SCALE PER DEGREE CELSIUS)	1584
RESISTANCE MATCHING (PERCENT BETWEEN EACH PAIR OF ELEMENTS)	1586
LOAD IMPEDANCE	
(OHMS)	1600
TOLERANCE	
(PLUS OR MINUS OHMS)	1602
(PLUS OR MINUS PERCENT)	1604

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1574	THE SUPPLY VOLTAGE SHALL BE NOT LESS THAN 1574 VOLT(S), DC.
1576	THE SUPPLY VOLTAGE SHALL BE NOT LESS THAN 1576 MILLIVOLT(S), DC.
1578	THE SUPPLY VOLTAGE SHALL BE NOT LESS THAN 1578 VOLT(S), AC.
1580	THE SUPPLY VOLTAGE SHALL BE NOT LESS THAN 1580 MILLIVOLT(S), AC.
1582	THE NULL TEMPERATURE COEFFICIENT SHALL BE PLUS OR MINUS 1582 PERCENT OF FULL SCALE PER DEGREE CELSIUS.
1584	THE SENSITIVITY TEMPERATURE COEFFICIENT SHALL BE PLUS OR MINUS 1584 PERCENT OF FULL SCALE PER DEGREE CELSIUS.
1586	RESISTANCE MATCHING SHALL BE 1586 PERCENT BETWEEN EACH PAIR OF ELEMENTS.
1600	THE LOAD IMPEDANCE SHALL BE 1600 OHM(S).
1602	THE LOAD IMPEDANCE TOLERANCE SHALL BE PLUS OR MINUS 1602 OHM(S).
1604	THE LOAD IMPEDANCE TOLERANCE SHALL BE PLUS OR MINUS 1604 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENCLOSURE (SELECT ONE)	
UNSEALED.	1590
DUST TIGHT.	1592
WATERTIGHT.	1594
HERMETIC.	1596
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. INCHES.	7572
SI. (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1590	THE SWITCH ENCLOSURE SHALL BE UNSEALED.
1592	THE SWITCH ENCLOSURE SHALL BE DUST TIGHT.
1594	THE SWITCH ENCLOSURE SHALL BE WATERTIGHT.
1596	THE SWITCH ENCLOSURE SHALL BE HERMETIC.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ELECTRICAL RECEPTACLES	
DOCUMENTS (DOC DES)	1610
VENDOR IDENTIFICATIONS (FSCM)	1612
PART NUMBERS	1614
MATE WITH (PART NUMBER)	1616

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1610	ELECTRICAL RECEPTACLE(S) SHALL BE IN ACCORDANCE WITH 1610.
1612	THE ELECTRICAL RECEPTACLE(S) VENDOR FEDERAL SUPPLY CODE(S) FOR MANUFACTURER SHALL BE 1612.
1614	THE ELECTRICAL RECEPTACLE PART NUMBER(S) SHALL BE 1614.
1616	THE ELECTRICAL RECEPTACLE(S) SHALL MATE WITH 1616.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINAL IDENTIFICATION	
(SEE TERMINAL IDENTIFICATION TABLE)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TERMINAL IDENTIFICATION. TERMINAL IDENTIFICATION SHALL BE IN ACCORDANCE WITH THE TERMINAL IDENTIFICATION TABLE.

TERMINAL IDENTIFICATION TABLE

TERMINATION TYPE OR WIRE LEAD COLOR	IDENTIFICATION
2400	2401
2402	2403
2404	2405
2406	2407
2408	2409
2410	2411
2412	2413
2414	2415
2416	2417
2418	2419
2420	2421
2422	2423
2424	2425
2426	2427
2428	2429
2430	2431

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TRUTH TABLE	
(SEE TRUTH TABLE)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TRUTH TABLE. THE TRUTH TABLE SHALL BE AS FOLLOWS:

TRUTH TABLE

SWITCH POSITION	OUTPUT TERMINAL NUMBER										
	1	2	3	4	5	6	7	8	9	10	11
4000	4020	4040	4060	4080	4100	4120	4140	4160	4180	4200	4220
4001	4021	4041	4061	4081	4101	4121	4141	4161	4181	4201	4221
4002	4022	4042	4062	4082	4102	4122	4142	4162	4182	4202	4222
4003	4023	4043	4063	4083	4103	4123	4143	4163	4183	4203	4223
4004	4024	4044	4064	4084	4104	4124	4144	4164	4184	4204	4224
4005	4025	4045	4065	4085	4105	4125	4145	4165	4185	4205	4225
4006	4026	4046	4066	4086	4106	4126	4146	4166	4186	4206	4226
4007	4027	4047	4067	4087	4107	4127	4147	4167	4187	4207	4227
4008	4028	4048	4068	4088	4108	4128	4148	4168	4188	4208	4228
4009	4029	4049	4069	4089	4109	4129	4149	4169	4189	4209	4229
4010	4030	4050	4070	4090	4110	4130	4150	4170	4190	4210	4230
4011	4031	4051	4071	4091	4111	4131	4151	4171	4191	4211	4231
4012	4032	4052	4072	4092	4112	4132	4152	4172	4192	4212	4232

(A) NOTE. 4240.

(B) NOTE. 4241.

(C) NOTE. 4242.

(D) NOTE. 4243.

(E) NOTE. 4244.

(F) NOTE. 4245.

(G) NOTE. 4246.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
LOGIC STATE OF OUTPUT	
(SEE LOGIC STATE OF OUTPUT TABLE)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

LOGIC STATE OF OUTPUT. THE LOGIC STATE OF OUTPUT SHALL BE IN ACCORDANCE WITH THE LOGIC STATE OF OUTPUT SIGNALS TABLE.

LOGIC STATE OF OUTPUT SIGNALS TABLE

TOGGLE POSITION	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4	OUTPUT 5	OUTPUT 6	OUTPUT 7
OPPOSITE KEYWAY	3900	3903	3906	3909	3912	3915	3918
CENTER	3901	3904	3907	3910	3913	3916	3919
KEYWAY	3902	3905	3908	3911	3914	3917	3920

(A) NOTE. 3921.

(B) NOTE. 3922.

(C) NOTE. 3923.

(D) NOTE. 3924.

(E) NOTE. 3925.

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO EVIDENCE OF OSCILLATION.	1620
NO EVIDENCE OF ELECTRICAL OR MECHANICAL MALFUNCTION.	1622
NO EVIDENCE OF CHANGE OF STATE.	1624
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-810, METHOD 513.	6252
*A LEVEL (G'S)	6275
*VEHICLE CATEGORY (SELECT ONE)	
AIRPLANE.	6240
HELICOPTER.	6241
MANNED AEROSPACE VEHICLE.	6242

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1620	THERE SHALL BE NO EVIDENCE OF OSCILLATION.
1622	THERE SHALL BE NO EVIDENCE OF ELECTRICAL OR MECHANICAL MALFUNCTION.
1624	THERE SHALL BE NO CHANGE OF STATE.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6252	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6275	LEVEL A SHALL BE 6275 G'S.
6240	THE VEHICLE CATEGORY SHALL BE AIRPLANE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6241	THE VEHICLE CATEGORY SHALL BE HELICOPTER IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6242	THE VEHICLE CATEGORY SHALL BE MANNED AEROSPACE VEHICLE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
VEHICLE CATEGORY (CONT)	
AIR LAUNCHED MISSILE.	6243
GROUND LAUNCHED MISSILE.	6244
PROCEDURE NUMBER (ROMAN NUMERAL)	6256
TEST TIME IN EACH DIRECTION (MINUTES)	6259
TEST DURATION IN ACTUATED CONDITION (MINUTES)	1626
TEST DURATION IN UNACTUATED CONDITION (MINUTES)	1628
ACTUATOR OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1630
AS FOLLOWS:	1632
NO INDICATION OF MECHANICAL MALFUNCTION.	1634
NO EVIDENCE OF ELECTRICAL DISCONTINUITY.	1636
NO EVIDENCE OF OSCILLATION.	1638

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6243	THE VEHICLE CATEGORY SHALL BE AIR LAUNCHED MISSILE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6244	THE VEHICLE CATEGORY SHALL BE GROUND LAUNCHED MISSILE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6256	PROCEDURE NUMBER 6256 SHALL APPLY.
6259	DURATION OF TEST SHALL BE 6259 MINUTES IN EACH DIRECTION.
1626	THE TEST DURATION IN THE ACTUATED CONDITION SHALL BE 1626 MINUTES.
1628	THE TEST DURATION IN THE UNACTUATED CONDITION SHALL BE 1628 MINUTES.
1630	ACTUATOR OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1630.
1632	ACTUATOR OPERATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1634	THERE SHALL BE NO INDICATION OF MECHANICAL MALFUNCTION.
1636	THERE SHALL BE NO EVIDENCE OF ELECTRICAL DISCONTINUITY.
1638	THERE SHALL BE NO EVIDENCE OF OSCILLATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACTUATOR OPERATION (CONT)	
AS FOLLOWS: (CONT)	
RELEASE POINT	
MINIMUM (SELECT ONE)	
(INCHES)	1640
(MILLIMETERS)	1642
NOMINAL (SELECT ONE)	
(INCHES)	1644
(MILLIMETERS)	1646
TOTAL TRAVEL	
MAXIMUM (SELECT ONE)	
(INCHES)	1648
(MILLIMETERS)	1650
NOMINAL (SELECT ONE)	
(INCHES)	1652
(MILLIMETERS)	1654
NULL HYSTERESIS	
PLUS OR MINUS (PERCENT)	1656
*WITHIN TIME PERIOD AFTER RELEASE OF SHAFT (SECONDS)	1658

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1640	THE RELEASE POINT SHALL BE NOT LESS THAN 1640 INCH(S).
1642	THE RELEASE POINT SHALL BE NOT LESS THAN 1642 MILLIMETER(S).
1644	THE RELEASE POINT SHALL BE 1644 INCH(S).
1646	THE RELEASE POINT SHALL BE 1646 MILLIMETER(S).
1648	TOTAL TRAVEL SHALL BE NOT GREATER THAN 1648 INCH(S).
1650	TOTAL TRAVEL SHALL BE NOT GREATER THAN 1650 MILLIMETER(S).
1652	TOTAL TRAVEL SHALL BE 1652 INCH(S).
1654	TOTAL TRAVEL SHALL BE 1654 MILLIMETER(S).
1656 1658	NULL HYSTERESIS SHALL BE PLUS OR MINUS 1656 PERCENT FULL SCALE WITHIN 1658 SECOND(S) AFTER RELEASE OF THE SHAFT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACTUATOR OPERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
PER MIL-S-81619.	1662
CONDITIONING (BURN-IN)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1670
AS FOLLOWS:	1672
REMAIN WITHIN SPECIFIED TOLERANCE.	1674
ITEM(S) SHALL OPERATE SATISFACTORILY.	1676
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1680
PER MIL-STD-883, METHOD 1015.	
*TEST CONDITION (LETTER)	1684
MINIMUM TEST DURATION (HOURS)	1686
SPECIFIED ELECTRICAL PARAMETERS SHALL BE USED.	1688

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1660	ACTUATOR OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1662	ACTUATOR OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
1670	CONDITIONING (BURN-IN). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1670.
1672	CONDITIONING (BURN-IN). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1674	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.
1676	THE ITEM(S) SHALL OPERATE SATISFACTORILY.
1680	CONDITIONING (BURN-IN). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1680.
1684	CONDITIONING (BURN-IN). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1015 OF MIL-STD-883, TEST CONDITION 1684.
1686	THE TEST DURATION SHALL BE NOT LESS THAN 1686 HOUR(S).
1688	SPECIFIED ELECTRICAL PARAMETERS SHALL BE USED FOR TEST PURPOSES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONDITIONING (BURN-IN) (CONT)	
PER MIL-STD-883, METHOD 1015. (CONT)	
MINIMUM NUMBER OF TEST CYCLES AT MAXIMUM OPERATING TEMPERATURE (CYCLES)	1690
NUMBER OF TEST CYCLES AT ROOM AMBIENT TEMPERATURE (CYCLES)	1692
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1690	THERE SHALL BE NOT LESS THAN 1690 TEST CYCLES AT THE MAXIMUM OPERATING TEMPERATURE.
1692	THERE SHALL BE 1692 TEST CYCLES AT ROOM AMBIENT TEMPERATURE.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6300 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4886 ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.

4885 TEST VOLTAGE SHALL BE 4885 VOLTS, DC.

4849 TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

6311 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

6312 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

6292 BETWEEN MUTUALLY INSULATED PARTS.

6293 BETWEEN ALL INSULATED PARTS AND GROUND.

6294 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510
NO EVIDENCE OF DUST PENETRATION.	4801
NO EVIDENCE OF ELECTRICAL OR MECHANICAL MALFUNCTION.	1700
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
1700	THERE SHALL BE NO EVIDENCE OF ELECTRICAL OR MECHANICAL MALFUNCTION.
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 510.	4953
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBERS)	4872
SWITCH ACTUATION RATE (CYCLES PER MINUTE)	1702
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1710
PER MIL-STD-461 LIMITS.	1712
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	1714
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1720

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
1702	THE SWITCH ACTUATION RATE SHALL BE 1702 CYCLES PER MINUTE.
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.
1710	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1710.
1712	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS PER MIL-STD-461.
1714	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
1720	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1720.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-461, APPENDIX METHOD (DESIGNATION)	1722
PER MIL-STD-462.	1724
*TEST METHOD(S)	
CE (NUMBER)	1726
RE (NUMBER)	1728
CS (NUMBER)	1730
RS (NUMBER)	1732
CRE (NUMBER)	1734
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE APPLIED.	1477

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1722	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MIL-STD-461 APPENDIX. PROCEDURE 1722 SHALL APPLY.
1724	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING PROCEDURE(S) SHALL APPLY:
1726	PROCEDURE CE 1726.
1728	PROCEDURE RE 1728.
1730	PROCEDURE CS 1730.
1732	PROCEDURE RS 1732.
1734	PROCEDURE CRE 1734.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-810, METHOD 507.	4781
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4781	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INPUT POWER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1740
AS FOLLOWS:	1742
INPUT POWER, NOMINAL	
LOGIC 1 OUTPUT (SELECT ONE)	
(WATTS)	1744
(VOLT-AMPERES)	1746
LOGIC Ø OUTPUT (SELECT ONE)	
(WATTS)	1748
(VOLT-AMPERES)	1750
INPUT POWER, MAXIMUM	
LOGIC 1 OUTPUT (SELECT ONE)	
(WATTS)	1752
(VOLT-AMPERES)	1754

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1740	INPUT POWER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1740.
1742	INPUT POWER. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1744	THE NOMINAL INPUT POWER WITH A LOGIC 1 OUTPUT SHALL BE 1744 WATT(S).
1746	THE NOMINAL INPUT POWER WITH A LOGIC 1 OUTPUT SHALL BE 1746 VOLT-AMPERE(S).
1748	THE NOMINAL INPUT POWER WITH A LOGIC 0 OUTPUT SHALL BE 1748 WATT(S).
1750	THE NOMINAL INPUT POWER WITH A LOGIC 0 OUTPUT SHALL BE 1750 VOLT-AMPERE(S).
1752	THE INPUT POWER WITH A LOGIC 1 OUTPUT SHALL BE NOT GREATER THAN 1752 WATT(S).
1754	THE INPUT POWER WITH A LOGIC 1 OUTPUT SHALL BE NOT GREATER THAN 1754 VOLT-AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR. CODE
INPUT POWER (CONT)	
INPUT POWER, MAXIMUM (CONT)	
LOGIC Ø OUTPUT (SELECT ONE)	
(WATTS)	1756
(VOLT-AMPERES)	1758
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1760
PER MIL-S-81619.	1762
INPUT POWER MEASUREMENT CONDITIONS	
UNACTUATED (OFF).	1764
ACTUATED AND OUTPUT CONNECTED TO SPECIFIED LOAD IMPEDANCE.	1766
ACTUATED AND OUTPUT SHORTED TO GROUND.	1768
BETWEEN TERMINALS TIED TOGETHER AND ACTUATOR SHAFT.	1770
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1756	THE INPUT POWER WITH A LOGIC 0 OUTPUT SHALL BE NOT GREATER THAN 1756 WATT(S).
1758	THE INPUT POWER WITH A LOGIC 0 OUTPUT SHALL BE NOT GREATER THAN 1758 VOLT-AMPERES.
1760	INPUT POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1760.
1762	INPUT POWER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619. THE INPUT POWER SHALL BE MEASURED IN THE FOLLOWING CONDITIONS:
1764	UNACTUATED (OFF).
1766	ACTUATED AND OUTPUT CONNECTED TO SPECIFIED LOAD IMPEDANCE.
1768	ACTUATED AND OUTPUT SHORTED TO GROUND.
1770	BETWEEN TERMINALS TIED TOGETHER AND ACTUATOR SHAFT.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
BETWEEN TERMINALS TIED TOGETHER AND ACTUATOR SHAFT.	1770
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1770	BETWEEN TERMINALS TIED TOGETHER AND ACTUATOR SHAFT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1780
AS FOLLOWS:	1782
NO EVIDENCE OF PHYSICAL DAMAGE.	1784
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	1786
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1790
PER MIL-S-81619.	1792
SWITCH CYCLES (QUANTITY)	1794
SWITCH CYCLE RATE (CYCLES PER MINUTE)	
MINIMUM	1796
*MAXIMUM	1798
DUTY CYCLE (PERCENT)	1800
NUMBER OF CYCLES EVENLY DIVIDED AT THE SPECIFIED MINIMUM AND MAXIMUM TEMPERATURES (QUANTITY)	1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1780	LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1780.
1782	LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1784	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1786	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
1790	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1790.
1792	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
1794	THERE SHALL BE 1794 SWITCH CYCLES.
1796 1798	THE SWITCH CYCLE RATE SHALL BE FROM 1796 TO 1798 CYCLES PER MINUTE.
1800	THE DUTY CYCLE SHALL BE 1800 PERCENT.
1802	THERE SHALL BE 1802 CYCLES EVENLY DIVIDED AT THE SPECIFIED MINIMUM AND MAXIMUM TEMPERATURES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAGNETIC COMPATIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
AS FOLLOWS:	1812
NO EVIDENCE OF PHYSICAL DAMAGE.	1814
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	1816
NO OUTPUT CHANGE OF STATE.	1818
MAXIMUM COMPASS DEFLECTION (DEGREES)	1820
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1830
PER MIL-S-81619.	1832
MOVEMENT DIFFERENTIAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
AS FOLLOWS:	1842

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1810	MAGNETIC COMPATIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
1812	MAGNETIC COMPATIBILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1814	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1816	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
1818	THERE SHALL BE NO OUTPUT CHANGE OF STATE.
1820	THE COMPASS DEFLECTION SHALL BE NOT GREATER THAN 1820 DEGREE(S).
1830	MAGNETIC COMPATIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1830.
1832	MAGNETIC COMPATIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
1840	MOVEMENT DIFFERENTIAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.
1842	MOVEMENT DIFFERENTIAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOVEMENT DIFFERENTIAL (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM (SELECT ONE)	
(INCHES)	1844
(MILLIMETERS)	1846
NOMINAL (SELECT ONE)	
(INCHES)	1848
(MILLIMETERS)	1850
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1860
PER MIL-S-81619.	1862
OPERATING FORCES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1870
AS FOLLOWS:	1872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1844	THE MOVEMENT DIFFERENTIAL SHALL BE NOT GREATER THAN 1844 INCH(S).
1846	THE MOVEMENT DIFFERENTIAL SHALL BE NOT GREATER THAN 1846 MILLIMETER(S).
1848	THE MOVEMENT DIFFERENTIAL SHALL BE 1848 INCH(S).
1850	THE MOVEMENT DIFFERENTIAL SHALL BE 1850 MILLIMETER(S).
1860	MOVEMENT DIFFERENTIAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1860.
1862	MOVEMENT DIFFERENTIAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
1870	OPERATING FORCES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1870.
1872	OPERATING FORCES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING FORCES (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	1874
(POUNDS)	1876
(POUND-INCHES)	1878
SI (SELECT ONE)	
(GRAMS)	1880
(KILOGRAMS)	1882
(NEWTON METERS)	1884
NOMINAL (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	1886
(POUNDS)	1888
SI (SELECT ONE)	
(GRAMS)	1890
(KILOGRAMS)	1892

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1874	THE OPERATING FORCE SHALL BE NOT GREATER THAN 1874 OUNCE(S).
1876	THE OPERATING FORCE SHALL BE NOT GREATER THAN 1876 POUND(S).
1878	THE OPERATING FORCE SHALL BE NOT GREATER THAN 1878 POUND-INCH(S).
1880	THE OPERATING FORCE SHALL BE NOT GREATER THAN 1880 GRAM(S).
1882	THE OPERATING FORCE SHALL BE NOT GREATER THAN 1882 KILOGRAM(S).
1884	THE OPERATING FORCE SHALL BE NOT GREATER THAN 1884 NEWTON METER(S).
1886	THE OPERATING FORCE SHALL BE 1886 OUNCE(S).
1888	THE OPERATING FORCE SHALL BE 1888 POUND(S).
1890	THE OPERATING FORCE SHALL BE 1890 GRAM(S).
1892	THE OPERATING FORCE SHALL BE 1892 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING FORCES (CONT)	
AS FOLLOWS: (CONT)	
OUTPUT RELATIONSHIP PER POUND OF APPLIED FORCE (SENSITIVITY)	
OUTPUT (VOLTS)	1894
TOLERANCE (SELECT ONE)	
(VOLTS)	1896
(PERCENT)	1898
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
PER MIL-S-81619.	1902
OUTPUT RISE AND FALL TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1910
AS FOLLOWS:	1912

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1894	THE OUTPUT SHALL BE PROPORTIONAL TO FORCE AT A RATE OF 1894 VOLT(S) PER POUND OF FORCE.
1896	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1896 VOLT(S).
1898	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1898 PERCENT.
1900	OPERATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.
1902	OPERATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
1910	OUTPUT RISE AND FALL TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.
1912	OUTPUT RISE AND FALL TIME. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT RISE AND FALL TIME (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM RISE TIME (SELECT ONE)	
(MICROSECONDS)	1914
(NANOSECONDS)	1916
MAXIMUM FALL TIME (SELECT ONE)	
(MICROSECONDS)	1918
(NANOSECONDS)	1920
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930
PER MIL-S-81619.	1932
OUTPUT VOLTAGE AND CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1940
AS FOLLOWS:	1942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1914	THE RISE TIME SHALL BE NOT GREATER THAN 1914 MICROSECONDS.
1916	THE RISE TIME SHALL BE NOT GREATER THAN 1916 NANOSECONDS.
1918	THE FALL TIME SHALL BE NOT GREATER THAN 1918 MICROSECONDS.
1920	THE FALL TIME SHALL BE NOT GREATER THAN 1920 NANOSECONDS.
1930	OUTPUT RISE AND FALL TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.
1932	OUTPUT RISE AND FALL TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
1940	OUTPUT VOLTAGE AND CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1940.
1942	OUTPUT VOLTAGE AND CURRENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT VOLTAGE AND CURRENT (CONT)	
AS FOLLOWS: (CONT)	
OUTPUT VOLTAGE	
LOGIC 1	
MINIMUM (SELECT ONE)	
(VOLTS, DC)	1944
(MILLIVOLTS, DC)	1946
MAXIMUM (SELECT ONE)	
(VOLTS, DC)	1948
(MILLIVOLTS, DC)	1950
LOGIC Ø	
MINIMUM (SELECT ONE)	
(VOLTS, DC)	1952
(MILLIVOLTS, DC)	1954
MAXIMUM (SELECT ONE)	
(VOLTS, DC)	1956
(MILLIVOLTS, DC)	1958

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1944	THE OUTPUT VOLTAGE IN THE LOGIC 1 STATE SHALL BE NOT LESS THAN 1944 VOLT(S), DC.
1946	THE OUTPUT VOLTAGE IN THE LOGIC 1 STATE SHALL BE NOT LESS THAN 1946 MILLIVOLT(S), DC.
1948	THE OUTPUT VOLTAGE IN THE LOGIC 1 STATE SHALL BE NOT GREATER THAN 1948 VOLT(S), DC.
1950	THE OUTPUT VOLTAGE IN THE LOGIC 1 STATE SHALL BE NOT GREATER THAN 1950 MILLIVOLT(S), DC.
1952	THE OUTPUT VOLTAGE IN THE LOGIC 0 STATE SHALL BE NOT LESS THAN 1952 VOLT(S), DC.
1954	THE OUTPUT VOLTAGE IN THE LOGIC 0 STATE SHALL BE NOT LESS THAN 1954 MILLIVOLT(S), DC.
1956	THE OUTPUT VOLTAGE IN THE LOGIC 0 STATE SHALL BE NOT GREATER THAN 1956 VOLT(S), DC.
1958	THE OUTPUT VOLTAGE IN THE LOGIC 0 STATE SHALL BE NOT GREATER THAN 1958 MILLIVOLT(S), DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT VOLTAGE AND CURRENT (CONT)	
OUTPUT VOLTAGE (CONT)	
MAXIMUM (SELECT ONE)	
(VOLTS, DC)	1960
(MILLIVOLTS, DC)	1962
MINIMUM (SELECT ONE)	
(VOLTS, DC)	1964
(MILLIVOLTS, DC)	1966
OUTPUT CURRENT	
LOGIC 1	
MINIMUM (SELECT ONE)	
(AMPERES)	1968
(MILLIAMPERES)	1970
MAXIMUM (SELECT ONE)	
(AMPERES)	1972
(MILLIAMPERES)	1974

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1960	THE OUTPUT VOLTAGE SHALL BE NOT GREATER THAN 1960 VOLT(S), DC.
1962	THE OUTPUT VOLTAGE SHALL BE NOT GREATER THAN 1962 MILLIVOLT(S), DC.
1964	THE OUTPUT VOLTAGE SHALL BE NOT LESS THAN 1964 VOLT(S), DC.
1966	THE OUTPUT VOLTAGE SHALL BE NOT LESS THAN 1966 MILLIVOLT(S), DC.
1968	THE OUTPUT CURRENT IN THE LOGIC 1 STATE SHALL BE NOT LESS THAN 1968 AMPERE(S).
1970	THE OUTPUT CURRENT IN THE LOGIC 1 STATE SHALL BE NOT LESS THAN 1970 MILLIAMPERE(S).
1972	THE OUTPUT CURRENT IN THE LOGIC 1 STATE SHALL BE NOT GREATER THAN 1972 AMPERE(S).
1974	THE OUTPUT CURRENT IN THE LOGIC 1 STATE SHALL BE NOT GREATER THAN 1974 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT VOLTAGE AND CURRENT (CONT)	
OUTPUT CURRENT (CONT)	
LOGIC Ø	
MINIMUM (SELECT ONE)	
(AMPERES)	1976
(MILLIAMPERES)	1978
MAXIMUM (SELECT ONE)	
(AMPERES)	1980
(MILLIAMPERES)	1982
MINIMUM (SELECT ONE)	
(AMPERES)	1984
(MILLIAMPERES)	1986
MAXIMUM (SELECT ONE)	
(AMPERES)	1988
(MILLIAMPERES)	1990
MAXIMUM OUTPUT LEAKAGE CURRENT WITH SWITCH RELEASED (SELECT ONE)	
(AMPERES)	1992

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
1976	THE OUTPUT CURRENT IN THE LOGIC 0 STATE SHALL BE NOT LESS THAN 1976 AMPERE(S).
1978	THE OUTPUT CURRENT IN THE LOGIC 0 STATE SHALL BE NOT LESS THAN 1978 MILLIAMPERE(S).
1980	THE OUTPUT CURRENT IN THE LOGIC 0 STATE SHALL BE NOT GREATER THAN 1980 AMPERE(S).
1982	THE OUTPUT CURRENT IN THE LOGIC 0 STATE SHALL BE NOT GREATER THAN 1982 MILLIAMPERE(S).
1984	THE OUTPUT CURRENT SHALL BE NOT LESS THAN 1984 AMPERE(S).
1986	THE OUTPUT CURRENT SHALL BE NOT LESS THAN 1986 MILLIAMPERE(S).
1988	THE OUTPUT CURRENT SHALL BE NOT GREATER THAN 1988 AMPERE(S).
1990	THE OUTPUT CURRENT SHALL BE NOT GREATER THAN 1990 MILLIAMPERE(S).
1992	THE OUTPUT LEAKAGE CURRENT WITH THE SWITCH RELEASED SHALL BE NOT GREATER THAN 1992 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT VOLTAGE AND CURRENT (CONT)	
MAXIMUM OUTPUT LEAKAGE CURRENT WITH SWITCH RELEASED (CONT)	
(MILLIAMPERES)	1994
(MICROAMPERES)	1996
OUTPUT VOLTAGE PER POUND FORCE	
(VOLTS, DC)	1998
TOLERANCE (SELECT ONE)	
(PLUS OR MINUS VOLTS, DC)	2000
(PLUS OR MINUS PERCENT)	2002
(VOLTS, AC)	2004
TOLERANCE (SELECT ONE)	
(PLUS OR MINUS VOLTS, AC)	2006
(PLUS OR MINUS PERCENT)	2008
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2010
PER MIL-S-81619.	2012

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1994	THE OUTPUT LEAKAGE CURRENT WITH THE SWITCH RELEASED SHALL BE NOT GREATER THAN 1994 MILLIAMPERE(S).
1996	THE OUTPUT LEAKAGE CURRENT WITH THE SWITCH RELEASED SHALL BE NOT GREATER THAN 1996 MICROAMPERE(S).
1998	THE OUTPUT VOLTAGE PER POUND FORCE SHALL BE 1998 VOLT(S), DC.
2000	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 2000 VOLT(S), DC.
2002	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 2002 PERCENT.
2004	THE OUTPUT VOLTAGE PER POUND FORCE SHALL BE 2004 VOLT(S), AC.
2006	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 2006 VOLT(S), AC.
2008	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 2008 PERCENT.
2010	OUTPUT VOLTAGE AND CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2010.
2012	OUTPUT VOLTAGE AND CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT VOLTAGE WAVEFORM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2020
AS FOLLOWS:	2022
NO EVIDENCE OF OSCILLATIONS, RINGING, SPIKES, DISCONTINUITY, OR OVERSHOOT DURING STEADY STATE AND DURING TRANSITION BETWEEN STATES.	2024
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2030
PER MIL-S-81619.	2032
OVERTRAVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2040
AS FOLLOWS:	2042
MAXIMUM (SELECT ONE)	
(INCHES)	2044
(MILLIMETERS)	2046

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2020	OUTPUT VOLTAGE WAVEFORM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2020.
2022	OUTPUT VOLTAGE WAVEFORM. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2024	THERE SHALL BE NO EVIDENCE OF OSCILLATIONS, RINGING, SPIKES, DISCONTINUITY, OR OVERSHOOT DURING STEADY STATE AND DURING TRANSITION BETWEEN STATES.
2030	OUTPUT VOLTAGE WAVEFORM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2030.
2032	OUTPUT VOLTAGE WAVEFORM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
2040	OVERTRAVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2040.
2042	OVERTRAVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2044	OVERTRAVEL SHALL BE NOT GREATER THAN 2044 INCH(S).
2046	OVERTRAVEL SHALL BE NOT GREATER THAN 2046 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERTRAVEL (CONT)	
AS FOLLOWS: (CONT)	
NOMINAL (SELECT ONE)	
(INCHES)	2048
(MILLIMETERS)	2050
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2060
PER MIL-S-81619.	2062
PRETRAVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2070
AS FOLLOWS:	2072
MAXIMUM (SELECT ONE)	
(INCHES)	2074
(MILLIMETERS)	2076
NOMINAL (SELECT ONE)	
(INCHES)	2078
(MILLIMETERS)	2080

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2048	OVERTRAVEL SHALL BE 2048 INCH(S).
2050	OVERTRAVEL SHALL BE 2050 MILLIMETER(S).
2060	OVERTRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2060.
2062	OVERTRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
2070	PRETRAVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2070.
2072	PRETRAVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2074	PRETRAVEL SHALL BE NOT GREATER THAN 2074 INCH(S).
2076	PRETRAVEL SHALL BE NOT GREATER THAN 2076 MILLIMETER(S).
2078	PRETRAVEL SHALL BE 2078 INCH(S).
2080	PRETRAVEL SHALL BE 2080 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRETRAVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2090
PER MIL-S-81619.	2092
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2090	PRETRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2090.
2092	PRETRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
REVERSE POLARITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2100
AS FOLLOWS:	2102
SPECIFIED MAXIMUM SUPPLY CURRENT SHALL NOT BE EXCEEDED.	2104
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2110
PER MIL-S-81619.	2112
MINIMUM TEST DURATION FOR EACH VOLTAGE APPLICATION (SELECT ONE)	
(MINUTES)	2114
(SECONDS)	2116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4671	IMMERSION OF TERMINATIONS IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
2100	REVERSE POLARITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.
2102	REVERSE POLARITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2104	THE SPECIFIED MAXIMUM SUPPLY CURRENT SHALL NOT BE EXCEEDED.
2110	REVERSE POLARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2110.
2112	REVERSE POLARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
2114	EACH VOLTAGE APPLICATION DURATION SHALL BE NOT LESS THAN 2114 MINUTE(S).
2116	EACH VOLTAGE APPLICATION DURATION SHALL BE NOT LESS THAN 2116 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REVERSE POLARITY (CONT)	
PER MIL-S-81619. (CONT)	
TESTING SHALL BE PERFORMED IN THE FOLLOWING CONDITIONS:	
ACTUATED.	2118
DEACTUATED.	2120
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4998
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4779
PER MIL-STD-810, METHOD 509.	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TESTING SHALL BE PERFORMED IN THE FOLLOWING CONDITIONS:
2118	ACTUATED.
2120	DEACTUATED.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT FOG (CONT)	
PER MIL-STD-810, METHOD 509. (CONT)	
OPERATE (SELECT ONE)	
OPERATE ONLY AFTER DRYING.	6245
OPERATE ONLY AFTER EXPOSURE.	6246
OPERATE AFTER EXPOSURE AND AFTER DRYING.	6247
OPERATE AFTER 24 HOURS OF EXPOSURE.	6248
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6245	ITEM(S) SHALL BE OPERATED ONLY AFTER DRYING.
6246	ITEM(S) SHALL BE OPERATED ONLY AFTER EXPOSURE.
6247	ITEM(S) SHALL BE OPERATED AFTER EXPOSURE AND AFTER DRYING.
6248	ITEM(S) SHALL BE OPERATED AFTER 24 HOURS OF EXPOSURE.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
PER MIL-STD-202, METHOD 112. (CONT)	
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCAL(S).
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCAL(S).
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
NO EVIDENCE OF OSCILLATION.	2130
NO CHANGE OF STATE.	2132
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311
PER MIL-STD-810, METHOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2130	THERE SHALL BE NO EVIDENCE OF OSCILLATION.
2132	THERE SHALL BE NO CHANGE OF STATE.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE (CONT)	
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE, A OR B (LETTER)	6341
*DURATION, C OR D (LETTER)	6342
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH THE FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PER MIL-STD-810, METHOD 516. (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
ITEM(S) IN ACTUATED CONDITION FOR FIRST SHOCK PULSE.	2134
ITEM(S) IN UNACTUATED CONDITION FOR SECOND SHOCK PULSE.	2136
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2140
AS FOLLOWS:	2142
NO EVIDENCE OF DAMAGE.	2144
ITEM(S) SHALL REMAIN OPERATIONAL.	2146
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2150
PER MIL-S-81619.	2152

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.
2134	ITEM(S) SHALL BE IN THE ACTUATED CONDITION FOR THE FIRST SHOCK PULSE.
2136	ITEM(S) SHALL BE IN THE UNACTUATED CONDITION FOR THE SECOND SHOCK PULSE.
2140	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2140.
2142	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2144	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2146	ITEM(S) SHALL REMAIN OPERATIONAL.
2150	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2150.
2152	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT CIRCUIT (CONT)	
PER MIL-S-81619. (CONT)	
DURATION OF SWITCH OPERATION (SELECT ONE)	
(MINUTES)	2154
(SECONDS)	2156
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2154	THE DURATION OF SWITCH OPERATION SHALL BE 2154 MINUTE(S).
2156	THE DURATION OF SWITCH OPERATION SHALL BE 2156 SECOND(S).
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
STRENGTH OF ACTUATING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2160
AS FOLLOWS:	2162
NO EVIDENCE OF BENDING, BREAKING OR LOOSENING OF PARTS.	2164
REMAIN WITHIN SPECIFIED TOLERANCE.	2166

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
2160	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2162	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2164	THERE SHALL BE NO EVIDENCE OF BENDING, BREAKING OR LOOSENING OF PARTS.
2166	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF ACTUATING MEANS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2170
PER MIL-S-81619.	2172
LOAD DURATION (SELECT ONE)	
(SECONDS)	2174
(MINUTES)	2176
LOAD (SELECT ONE)	
(POUNDS)	2178
(KILOGRAMS)	2180
STRENGTH OF MOUNTING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200
AS FOLLOWS:	2202
NO EVIDENCE OF TWISTING, BREAKING OR LOOSENING OF PARTS.	2204
REMAIN WITHIN SPECIFIED TOLERANCE.	2206

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2170	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2170.
2172	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
2174	THE LOAD DURATION SHALL BE 2174 SECOND(S).
2176	THE LOAD DURATION SHALL BE 2176 MINUTE(S).
2178	THE LOAD SHALL BE 2178 POUND(S).
2180	THE LOAD SHALL BE 2180 KILOGRAM(S).
2200	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.
2202	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2204	THERE SHALL BE NO EVIDENCE OF TWISTING, BREAKING OR LOOSENING OF PARTS.
2206	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF MOUNTING MEANS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2210
PER MIL-S-81619.	2212
SINGLE HOLE	
NUT	
APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	2214
(NEWTON METERS)	2216
TORQUE DURATION (SELECT ONE)	
(SECONDS)	2218
(MINUTES)	2220
BRACKET	
APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	2222
(NEWTON METERS)	2224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2210 STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2210.

2212 STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.

SINGLE HOLE

2214 THE APPLIED TORQUE TO THE MOUNTING NUT SHALL BE 2214 POUND-INCH(S).

2216 THE APPLIED TORQUE TO THE MOUNTING NUT SHALL BE 2216 NEWTON METER(S).

2218 THE APPLIED TORQUE DURATION SHALL BE 2218 SECOND(S).

2220 THE APPLIED TORQUE DURATION SHALL BE 2220 MINUTE(S).

2222 THE APPLIED TORQUE TO THE SWITCH BRACKET SHALL BE 2222 POUND-INCH(S).

2224 THE APPLIED TORQUE TO THE SWITCH BRACKET SHALL BE 2224 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF MOUNTING MEANS (CONT)	
BRACKET (CONT)	
TORQUE DURATION (SELECT ONE)	
(SECONDS)	2226
(MINUTES)	2228
MULTIHOLE	
APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	2230
(NEWTON METERS)	2232
TORQUE DURATION (SELECT ONE)	
(SECONDS)	2234
(MINUTES)	2236
TEMPERATURE-ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2240
AS FOLLOWS:	2242
NO EVIDENCE OF PHYSICAL DAMAGE.	2244
NO ELECTRICAL OR MECHANICAL DAMAGE.	2246
REMAIN WITHIN SPECIFIED TOLERANCE.	2248

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2226	THE APPLIED TORQUE DURATION SHALL BE 2226 SECOND(S).
2228	THE APPLIED TORQUE DURATION SHALL BE 2228 MINUTE(S).
	MULTIHOLE
2230	THE APPLIED TORQUE SHALL BE 2230 POUND-INCH(S).
2232	THE APPLIED TORQUE SHALL BE 2232 NEWTON METER(S).
2234	THE APPLIED TORQUE DURATION SHALL BE 2234 SECOND(S).
2236	THE APPLIED TORQUE DURATION SHALL BE 2236 MINUTE(S).
2240	TEMPERATURE-ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2240.
2242	TEMPERATURE-ALTITUDE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2244	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2246	THERE SHALL BE NO ELECTRICAL OR MECHANICAL DAMAGE.
2248	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE-ALTITUDE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
PER MIL-STD-810, METHOD 504.	2252
EQUIPMENT CATEGORY (NUMBER)	2254
TEMPERATURE SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6214
NO EVIDENCE OF PHYSICAL DAMAGE.	6215
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6212
PER MIL-STD-810, METHOD 503.	4710
ITEM(S) SUSPENDED BY NONHEAT CONDUCTING MATERIAL.	2260
MINIMUM EXPOSURE DURATION IN STEPS 1, 3, AND 5 (HOURS)	2262

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2250	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 504 OF MIL-STD-810.
2254	EQUIPMENT CATEGORY 2254 SHALL APPLY.
6214	TEMPERATURE SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6214.
6215	TEMPERATURE SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
6212	TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6212.
4710	TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 503 OF MIL-STD-810.
2260	ITEM(S) SHALL BE SUSPENDED IN THE TEST CHAMBER BY NONHEAT CONDUCTING MATERIAL.
2262	THE CHAMBER TEMPERATURE, IN STEPS 1, 3 AND 5, SHALL BE MAINTAINED FOR NOT LESS THAN 2262 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
NO EVIDENCE OF OSCILLATION.	2264
NO CHANGE IN STATE.	2266
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.	1514

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METERS.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2264	THERE SHALL BE NO EVIDENCE OF OSCILLATION.
2266	THERE SHALL BE NO CHANGE IN STATE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-810, METHOD 514. (CONT)	
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
DURATION OF CYCLING IN ACTUATED CONDITION (MINUTES)	2268
DURATION OF CYCLING IN DEACTUATED CONDITION (MINUTES)	2270

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES ARE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).
2268	THE DURATION OF CYCLING IN THE ACTUATED CONDITION SHALL BE 2268 MINUTE(S).
2270	THE DURATION OF CYCLING IN THE DEACTUATED CONDITION SHALL BE 2270 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, ABSOLUTE MAXIMUM SUPPLY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
AS FOLLOWS:	2302
NO EVIDENCE OF DAMAGE.	2304
NO CHANGE OF STATE OF THE OUTPUT.	2306
ABSOLUTE MAXIMUM SUPPLY CURRENT (SELECT ONE)	
(AMPERES)	2308
(MILLIAMPERES)	2310
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2312
PER MIL-S-81619.	2314
TEST DURATION WITH SWITCH IN ACTUATED CONDITION (SELECT ONE)	
(MINUTES)	2316
(SECONDS)	2318

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2300	VOLTAGE, ABSOLUTE MAXIMUM SUPPLY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2302	VOLTAGE, ABSOLUTE MAXIMUM SUPPLY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2304	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2306	THERE SHALL BE NO CHANGE OF STATE OF THE OUTPUT.
2308	THE ABSOLUTE MAXIMUM SUPPLY CURRENT SHALL BE 2308 AMPERE(S).
2310	THE ABSOLUTE MAXIMUM SUPPLY CURRENT SHALL BE 2310 MILLIAMPERE(S).
2312	VOLTAGE, ABSOLUTE MAXIMUM SUPPLY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2312.
2314	VOLTAGE, ABSOLUTE MAXIMUM SUPPLY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
2316	THE TEST DURATION WITH THE SWITCH IN THE ACTUATED CONDITION SHALL BE 2316 MINUTE(S).
2318	THE TEST DURATION WITH THE SWITCH IN THE ACTUATED CONDITION SHALL BE 2318 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, ABSOLUTE MAXIMUM SUPPLY (CONT)	
PER MIL-S-81619. (CONT)	
TEST DURATION WITH SWITCH IN DEACTUATED CONDITION (SELECT ONE)	
(MINUTES)	2320
(SECONDS)	2322
ABSOLUTE MAXIMUM SUPPLY VOLTAGE (SELECT ONE)	
(VOLTS, AC)	2324
(VOLTS, DC)	2326
LOAD IMPEDANCE (OHMS)	2328
TOLERANCE (SELECT ONE)	
(PLUS OR MINUS OHMS)	2330
(PLUS OR MINUS PERCENT)	2332
VOLTAGE, TRANSIENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2340
AS FOLLOWS:	2342

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2320 THE TEST DURATION WITH THE SWITCH IN THE DEACTUATED CONDITION SHALL BE 2320 MINUTE(S).

2322 THE TEST DURATION WITH THE SWITCH IN THE DEACTUATED CONDITION SHALL BE 2322 SECOND(S).

2324 THE ABSOLUTE MAXIMUM SUPPLY VOLTAGE SHALL BE 2324 VOLT(S), AC.

2326 THE ABSOLUTE MAXIMUM SUPPLY VOLTAGE SHALL BE 2326 VOLT(S), DC.

2328 THE LOAD IMPEDANCE SHALL BE 2328 OHM(S).

2330 THE LOAD IMPEDANCE TOLERANCE SHALL BE PLUS OR MINUS 2330 OHM(S).

2332 THE LOAD IMPEDANCE TOLERANCE SHALL BE PLUS OR MINUS 2332 PERCENT.

2340 VOLTAGE, TRANSIENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2340.

2342 VOLTAGE, TRANSIENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, TRANSIENT (CONT)	
AS FOLLOWS: (CONT)	
NO CHANGE OF STATE.	2344
ITEM(S) SHALL REMAIN OPERATIONAL.	2346
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2348
PER MIL-S-81619.	2350
PULSE FREQUENCY (SELECT ONE)	
(HERTZ)	2352
(KILOHERTZ)	2354
(MEGAHERTZ)	2356
MAXIMUM PULSE AMPLITUDE (VOLTS)	2358
DURATION OF PULSE TRAIN (SELECT ONE)	
(SECONDS)	2360
(MILLISECONDS)	2362
(MICROSECONDS)	2364
TRANSIENT VOLTAGE SOURCE IMPEDANCE (OHMS)	2366

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2344	THERE SHALL BE NO CHANGE OF STATE.
2346	ITEM(S) SHALL REMAIN OPERATIONAL.
2348	VOLTAGE, TRANSIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2348.
2350	VOLTAGE, TRANSIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-81619.
2352	THE PULSE FREQUENCY SHALL BE 2352 HERTZ.
2354	THE PULSE FREQUENCY SHALL BE 2354 KILOHERTZ.
2356	THE PULSE FREQUENCY SHALL BE 2356 MEGAHERTZ.
2358	THE PULSE AMPLITUDE SHALL BE NOT GREATER THAN 2358 VOLT(S).
2360	THE DURATION OF THE PULSE TRAIN SHALL BE 2360 SECOND(S).
2362	THE DURATION OF THE PULSE TRAIN SHALL BE 2362 MILLISECOND(S).
2364	THE DURATION OF THE PULSE TRAIN SHALL BE 2364 MICROSECOND(S).
2366	THE TRANSIENT VOLTAGE SOURCE IMPEDANCE SHALL BE 2366 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE, TRANSIENT (CONT)	
PER MIL-S-81619. (CONT)	
PULSE TRAIN REPETITION	
(NUMBER)	2368
INTERVAL (SECONDS)	2370
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2368	THE PULSE TRAIN SHALL BE REPEATED 2368 TIME(S).
2370	THE PULSE TRAIN SHALL BE REPEATED AT 2370 SECOND INTERVALS.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (CONT)	
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1596 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.
	DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A232)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

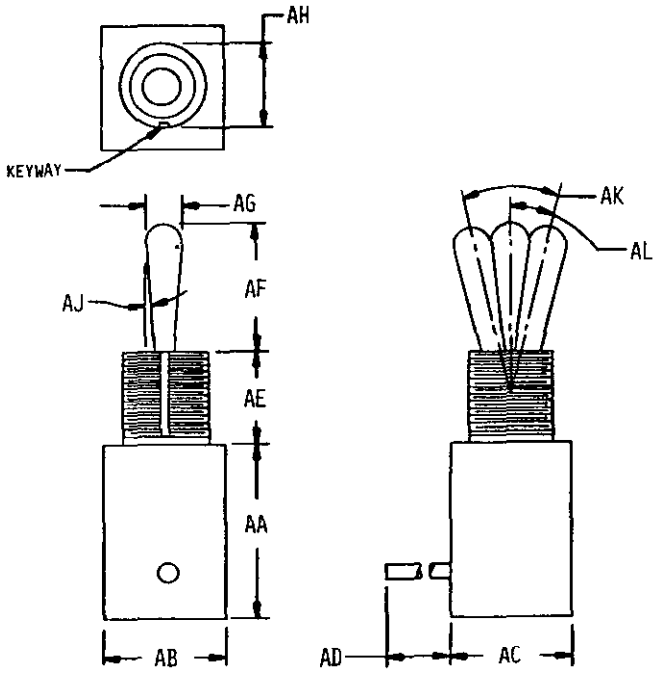


Ø86-Ø1-1

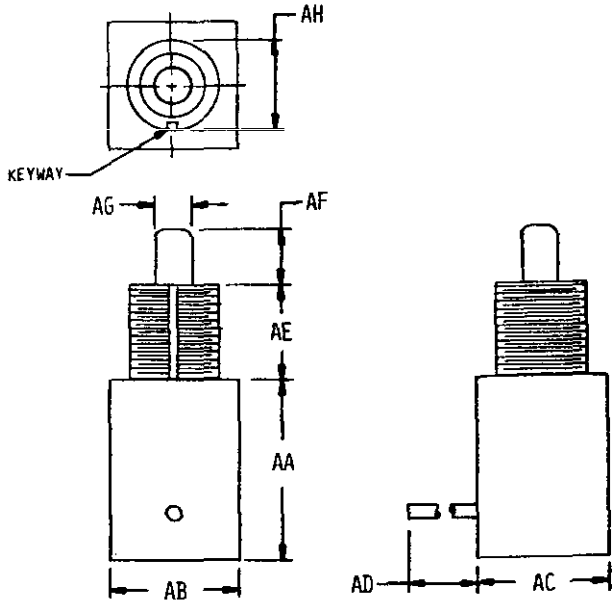


Ø86-Ø1-2


Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:25Z
Check the source to verify that this is the current version before use.

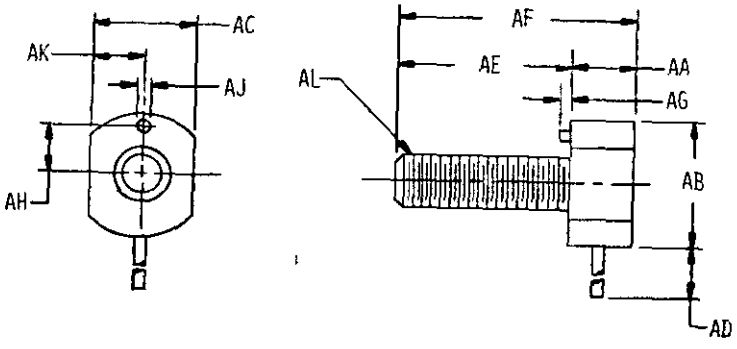

086-01-3

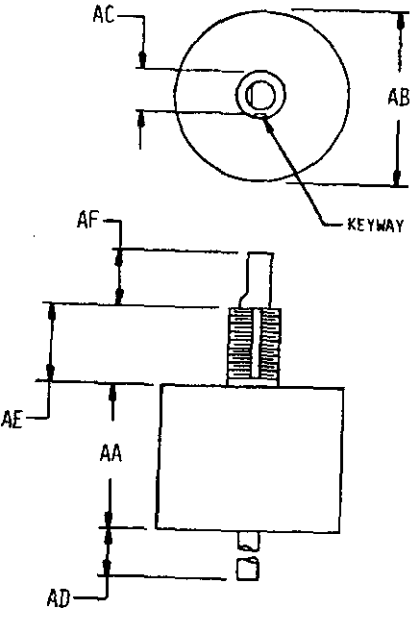


086-01-4

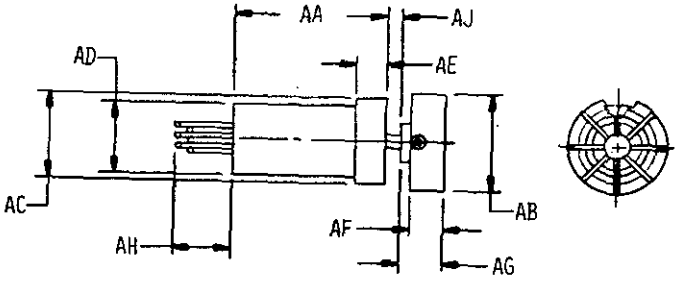


086-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

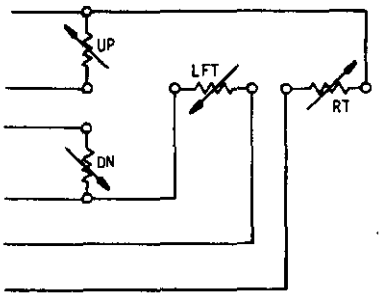

086-02-1



086-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1424	124	1600	20	1702	52
0102	12	1433	120	1602	20	1710	52
0103	12	1477	54	1604	20	1712	52
0104	12	1497	64	1610	24	1714	52
0105	12	1498	64	1612	24	1720	52
0107	14	1505	122	1614	24	1722	54
0108	14	1510	50	1616	24	1724	54
0700	12	1511	62	1620	34	1726	54
0800	12	1514	122	1622	34	1728	54
1003	12	1518	124	1624	34	1730	54
1004	12	1520	64	1626	36	1732	54
1005	12	1522	64	1628	36	1734	54
1006	12	1523	64	1630	36	1740	58
1008	12	1524	64	1632	36	1742	58
1009	22	1525	124	1634	36	1744	58
1371	62	1532	124	1636	36	1746	58
1372	64	1538	122	1638	36	1748	58
1373	62	1539	52	1640	38	1750	58
1375	120	1540	124	1642	38	1752	58
1376	64	1542	124	1644	38	1754	58
1377	64	1543	124	1646	38	1756	60
1378	62	1544	124	1648	38	1758	60
1380	60	1559	124	1650	38	1760	60
1381	64	1562	18	1652	38	1762	60
1383	64	1564	18	1654	38	1764	60
1384	62	1566	18	1656	38	1766	60
1386	62	1568	18	1658	38	1768	60
1387	62	1570	18	1660	40	1770	60
1388	62	1572	18	1662	40	1780	66
1407	62	1574	20	1670	40	1782	66
1410	120	1576	20	1672	40	1784	66
1411	120	1578	20	1674	40	1786	66
1412	120	1580	20	1676	40	1790	66
1413	120	1582	20	1680	40	1792	66
1414	122	1584	20	1684	40	1794	66
1416	122	1586	20	1686	40	1796	66
1418	120	1590	22	1688	40	1798	66
1419	120	1592	22	1690	42	1800	66
1420	120	1594	22	1692	42	1802	66
1421	122	1596	22	1700	50	1810	68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1812	68	1940	76	2030	86	2162	110
1814	68	1942	76	2032	86	2164	110
1816	68	1944	78	2040	86	2166	110
1818	68	1946	78	2042	86	2170	112
1820	68	1948	78	2044	86	2172	112
1830	68	1950	78	2046	86	2174	112
1832	68	1952	78	2048	88	2176	112
1840	68	1954	78	2050	88	2178	112
1842	68	1956	78	2060	88	2180	112
1844	70	1958	78	2062	88	2200	112
1846	70	1960	80	2070	88	2202	112
1848	70	1962	80	2072	88	2204	112
1850	70	1964	80	2074	88	2206	112
1860	70	1966	80	2076	88	2210	114
1862	70	1968	80	2078	88	2212	114
1870	70	1970	80	2080	88	2214	114
1872	70	1972	80	2090	90	2216	114
1874	72	1974	80	2092	90	2218	114
1876	72	1976	82	2100	92	2220	114
1878	72	1978	82	2102	92	2222	114
1880	72	1980	82	2104	92	2224	114
1882	72	1982	82	2110	92	2226	116
1884	72	1984	82	2112	92	2228	116
1886	72	1986	82	2114	92	2230	116
1888	72	1988	82	2116	92	2232	116
1890	72	1990	82	2118	94	2234	116
1892	72	1992	82	2120	94	2236	116
1894	74	1994	84	2130	102	2240	116
1896	74	1996	84	2132	102	2242	116
1898	74	1998	84	2134	106	2244	116
1900	74	2000	84	2136	106	2246	116
1902	74	2002	84	2140	106	2248	116
1910	74	2004	84	2142	106	2250	118
1912	74	2006	84	2144	106	2252	118
1914	76	2008	84	2146	106	2254	118
1916	76	2010	84	2150	106	2260	118
1918	76	2012	84	2152	106	2262	118
1920	76	2020	86	2154	108	2264	122
1930	76	2022	86	2156	108	2266	122
1932	76	2024	86	2160	110	2268	124

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2270	124	2406	27	3914	31	4042	29
2300	126	2407	27	3915	31	4043	29
2302	126	2408	27	3916	31	4044	29
2304	126	2409	27	3917	31	4045	29
2306	126	2410	27	3918	31	4046	29
2308	126	2411	27	3919	31	4047	29
2310	126	2412	27	3920	31	4048	29
2312	126	2413	27	3921	31	4049	29
2314	126	2414	27	3922	31	4050	29
2316	126	2415	27	3923	31	4051	29
2318	126	2416	27	3924	31	4052	29
2320	128	2417	27	3925	31	4060	29
2322	128	2418	27	4000	29	4061	29
2324	128	2419	27	4001	29	4062	29
2326	128	2420	27	4002	29	4063	29
2328	128	2421	27	4003	29	4064	29
2330	128	2422	27	4004	29	4065	29
2332	128	2423	27	4005	29	4066	29
2340	128	2424	27	4006	29	4067	29
2342	128	2425	27	4007	29	4068	29
2344	130	2426	27	4008	29	4069	29
2346	130	2427	27	4009	29	4070	29
2348	130	2428	27	4010	29	4071	29
2350	130	2429	27	4011	29	4072	29
2352	130	2430	27	4012	29	4080	29
2354	130	2431	27	4020	29	4081	29
2356	130	3900	31	4021	29	4082	29
2358	130	3901	31	4022	29	4083	29
2360	130	3902	31	4023	29	4084	29
2362	130	3903	31	4024	29	4085	29
2364	130	3904	31	4025	29	4086	29
2366	130	3905	31	4026	29	4087	29
2368	132	3906	31	4027	29	4088	29
2370	132	3907	31	4028	29	4089	29
2400	27	3908	31	4029	29	4090	29
2401	27	3909	31	4030	29	4091	29
2402	27	3910	31	4031	29	4092	29
2403	27	3911	31	4032	29	4100	29
2404	27	3912	31	4040	29	4101	29
2405	27	3913	31	4041	29	4102	29

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4103	29	4164	29	4225	29	4717	50
4104	29	4165	29	4226	29	4718	90
4105	29	4166	29	4227	29	4724	50
4106	29	4167	29	4228	29	4726	118
4107	29	4168	29	4229	29	4732	96
4108	29	4169	29	4230	29	4734	96
4109	29	4170	29	4231	29	4735	100
4110	29	4171	29	4232	29	4736	98
4111	29	4172	29	4240	29	4737	98
4112	29	4180	29	4241	29	4738	98
4120	29	4181	29	4242	29	4739	98
4121	29	4182	29	4243	29	4740	98
4122	29	4183	29	4244	29	4741	98
4123	29	4184	29	4245	29	4742	98
4124	29	4185	29	4246	29	4743	100
4125	29	4186	29	4662	108	4745	96
4126	29	4187	29	4663	110	4746	96
4127	29	4188	29	4664	110	4748	96
4128	29	4189	29	4665	110	4749	100
4129	29	4190	29	4666	108	4750	100
4130	29	4191	29	4667	110	4751	100
4131	29	4192	29	4669	90	4752	100
4132	29	4200	29	4671	92	4764	56
4140	29	4201	29	4672	108	4767	56
4141	29	4202	29	4674	108	4775	94
4142	29	4203	29	4675	108	4777	56
4143	29	4204	29	4677	108	4778	56
4144	29	4205	29	4681	122	4779	94
4145	29	4206	29	4682	122	4780	94
4146	29	4207	29	4683	108	4781	56
4147	29	4208	29	4689	90	4783	94
4148	29	4209	29	4691	90	4786	94
4149	29	4210	29	4692	90	4788	56
4150	29	4211	29	4694	90	4791	54
4151	29	4212	29	4695	92	4798	54
4152	29	4220	29	4698	90	4799	54
4160	29	4221	29	4700	90	4800	56
4161	29	4222	29	4701	90	4801	50
4162	29	4223	29	4710	118	4815	54
4163	29	4224	29	4716	56	4840	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4842	48	5048	18	6310	46	6941	14
4844	48	5052	18	6311	44	6942	14
4845	48	5054	16	6312	44	6991	134
4846	48	5060	16	6320	98	6992	134
4847	46	5061	16	6321	98	6993	134
4848	48	5062	16	6322	98	6994	134
4849	44	5063	16	6323	98	6995	134
4850	48	5068	16	6324	100	6996	32
4854	48	5069	16	6325	100	6997	32
4855	48	5070	16	6326	100	6998	32
4856	46	5071	16	6327	104	6999	32
4859	46	6205	110	6328	100	7001	132
4861	48	6212	118	6329	100	7002	132
4862	48	6214	118	6330	100	7003	132
4867	50	6215	118	6331	100	7004	132
4869	50	6240	34	6332	100	7005	132
4872	52	6241	34	6333	100	7021	32
4874	46	6242	34	6334	56	7022	30
4875	46	6243	36	6335	56	7023	30
4884	42	6244	36	6336	56	7024	32
4885	44	6245	96	6337	56	7301	16
4886	44	6246	96	6338	104	7302	16
4891	46	6247	96	6339	104	7305	102
4894	42	6248	96	6340	104	7306	102
4895	50	6250	34	6341	104	7307	106
4897	50	6252	34	6342	104	7308	106
4901	42	6256	36	6343	104	7311	102
4902	46	6259	36	6344	104	7312	102
4904	18	6267	50	6345	104	7313	102
4905	16	6272	32	6346	104	7315	102
4906	42	6273	34	6347	104	7316	102
4908	42	6275	34	6348	104	7317	102
4950	22	6277	34	6349	104	7318	102
4953	52	6280	46	6359	62	7572	22
4956	52	6292	44	6369	12	7576	22
4989	92	6293	44	6370	96	7577	22
4998	94	6294	44	6372	132	7580	24
4999	94	6296	120	6870	132	7629	134
5000	50	6300	44	6873	12	7630	134
5046	18	6308	46	6874	14		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	32
Actuator Operation	36
Additional Part Marking	134
Additional Requirements	132
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	134
Base Document	12
City, State, Zip	12
Company Name/Command	12
Conditioning (Burn-In)	40
Configuration	22
Contract Number/Office Symbol	12
Control	12
Date	12
Definition of Hermetic Sealing	134
Design and Construction	24
Dielectric Withstanding Voltage at Reduced Barometric Pressure	42
Dielectric Withstanding Voltage at Sea Level	46
Dust	50
Electrical Ratings	18
Electrical Receptacles	24
Electromagnetic Interference	52
Enclosure	22
Finishes	24
Format	12
Government Design Activity FSCM	12
Humidity	54
Illustrations	22
Input Power	58
Insulation Resistance	60
Life	66
Logic State of Output	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Magnetic Compatibility	68
Materials	24
Metals	24
Mounting Hardware	132
Movement Differential	68
Nomenclature	134
Notes	134
Operating Forces	70
Output Rise and Fall Time	74
Output Voltage and Current	76
Output Voltage Waveform	86
Overtravel	86
Packaging	134
Part Marking	132
Part Number	14
Part Number Cross-Reference	134
Phone Number	12
Pretravel	88
Quality Assurance Provisions	134
Requester FSCM	12
Requester's Name	12
Resistance to Soldering Heat	90
Reverse Polarity	92
Revision of AEDPS Document Number	14
Salt Fog	94
Scope	14
Seal	96
Shock	102
Short Circuit	106
Solderability	108
Source Table	14
Street/Building	12
Strength of Actuating Means	110
Strength of Mounting Means	112
Superseded Document	134
System Application	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Tabulated Characteristics	24
Temperature-Altitude	116
Temperature Rating	16
Temperature Shock	118
Terminal Identification	26
Terminal Strength	120
Truth Table	28
Units of Measure	14, 22
Vibration	122
Voltage, Absolute Maximum Supply	126
Voltage, Transient	128
Weight	30
Workmanship	132

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-127(MI), dated 15 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-127(MI), dated 15 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: DOD-STD-35-127

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.