DOD-STD-35-128 (MI)
24 SEPTEMBER 1978

MILITARY STANDARD

SWITCHES, REED

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U.S ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Reed
Automated Engineering
Document Preparation System

DOD-STD-35-128(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-128(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for reed switches.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation Candidates	10

APPENDICES

Appendix	A.	Illustrations	107
	B.	Characteristic Code Index	111
		Index	117

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for reed switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132, Selection and Use of Switches and Associated Hardware, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, REED	011001	MIL-S-55433	GENERAL SPECIFICATION

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-55433	Switches, Reed, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System, Basic
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-1285	Marking of Electrical and Electronic Parts

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Reed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Switches, Reed, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Switches, Reed.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Switches, Reed.

4.3.2 Illustrations. Illustrations applicable to Switches, Reed are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has a capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for reed switch characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
4210	RESISTIVE LOAD VOLTAGE VOLTS, DC	4211	INDUCTIVE LOAD VOLTAGE VOLTS, DC	1602	MAXIMUM INITIAL CONTACT RESISTANCE MILLIOHMS
4218	RESISTIVE SWITCHING CURRENT DC AMPERES	4219	INDUCTIVE SWITCHING CURRENT DC AMPERES	1654	OPERATE AMPERE-TURNS
4226	RESISTIVE CARRYING CURRENT DC AMPERES	4227	INDUCTIVE CARRYING CURRENT DC AMPERES	1658	OPERATE RANGE MINIMUM AMPERE-TURNS
4258	MAXIMUM RESISTIVE LOAD WATTS	4259	MAXIMUM INDUCTIVE LOAD WATTS	1660	OPERATE RANGE MAXIMUM AMPERE-TURNS
4266	MAXIMUM RESISTIVE LOAD VOLT-AMPS	4267	MAXIMUM INDUCTIVE LOAD VOLT-AMPS	1662	RELEASE AMPERE-TURNS
1666	RELEASE RANGE MINIMUM AMPERE-TURNS	1670	RELEASE RANGE MINIMUM PERCENT OF OPERATE	1612	MAX OPR AND RLSE TIME MILLI-SECONDS
1668	RELEASE RANGE MAXIMUM AMPERE-TURNS	1672	RELEASE RANGE MAXIMUM PERCENT OF OPERATE		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
RATED LOADS	
(SEE RATED LOADS TABLE)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7301 THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

4904 THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.

5052 THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.

5046 THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.

5048 THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

RATED LOADS. THE RATED LOADS OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOADS TABLE.

RATED LOADS TABLE

CHARACTERISTIC	MAXIMUM LOADS			
	RESISTIVE	INDUCTIVE	CAPACITIVE	LAMP
DC VOLTS	4210	4211	4212	4213
DC MILLIVOLTS	4214	4215	4216	4217
DC SWITCHING CURRENT-AMPS	4218	4219	4220	4221
DC SWITCHING CURRENT-MILLIA	4222	4223	4224	4225
DC CARRYING CURRENT-AMPS	4226	4227	4228	4229
DC CARRYING CURRENT-MILLIA	4230	4231	4232	4233
AC VOLTS	4234	4235	4236	4237
AC MILLIVOLTS	4238	4239	4240	4241
AC SWITCHING CURRENT-AMPS	4242	4243	4244	4245
AC SWITCHING CURRENT-MILLIA	4246	4247	4248	4249
AC CARRYING CURRENT-AMPS	4250	4251	4252	4253
AC CARRYING CURRENT-MILLIA	4254	4255	4256	4257
WATTS	4258	4259	4260	4261
MILLIWATTS	4262	4263	4264	4265
VOLT-AMPERES	4266	4267	4268	4269
4270	4271	4272	4273	4274
4275	4276	4277	4278	4279
4280	4281	4282	4283	4284
4285	4286	4287	4288	4289

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI. (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
DESIGN AND CONSTRUCTION	
CONTACT ARRANGEMENT (SELECT ONE)	
CIRCUIT (NUMBER)	1566
FORM (LETTER)	1568

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	DESIGN AND CONSTRUCTION.
1566	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE 1566 CIRCUIT.
1568	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE FORM 1568.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACT ARRANGEMENT (CONT)	
OTHER ARRANGEMENTS (SELECT ONE)	
SPST.	1570
SPDT.	1572
DPDT.	1574
POLE (NUMBER)	1576
*THROW (NUMBER)	1578
SWITCH TYPE (SELECT ONE)	
DRY REED.	1562
MERCURY WETTED.	1564
SELF-LATCHING.	1586
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1570	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE SINGLE POLE, SINGLE THROW.
1572	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE SINGLE POLE, DOUBLE THROW.
1574	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE DOUBLE POLE, DOUBLE THROW.
1576 1578	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE 1576 POLE, 1578 THROW.
1562	SWITCH TYPE. THE SWITCH SHALL BE DRY REED.
1564	SWITCH TYPE. THE SWITCH SHALL BE MERCURY WETTED.
1586	SELF-LATCHING. THE SWITCH SHALL BE SELF-LATCHING.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
AS FOLLOWS:	2002
MAXIMUM CONTACT CAPACITANCE (PICOFARADS)	1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
2000	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.
2002	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1650	CONTACT CAPACITANCE SHALL BE NOT GREATER THAN 1650 PICOFARADS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
AS FOLLOWS: (CONT)	
NOMINAL CONTACT CAPACITANCE (PICOFARADS)	1652
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2010
PER MIL-STD-202, METHOD 305.	2012
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	2014
(KILOHERTZ)	2016
(MEGAHERTZ)	2018
MAGNITUDE OF POLARIZING VOLTAGE (VOLTS, DC)	2020
PLUS VOLTAGE TOLERANCE (VOLTS, DC)	2022
MINUS VOLTAGE TOLERANCE (VOLTS, DC)	2024
CONTACT BOUNCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700
AS FOLLOWS:	1702

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1652	CONTACT CAPACITANCE SHALL BE 1652 PICOFARADS, NOMINAL.
2010	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2010.
2012	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 305.
2014	THE TEST FREQUENCY SHALL BE 2014 HERTZ.
2016	THE TEST FREQUENCY SHALL BE 2016 KILOHERTZ.
2018	THE TEST FREQUENCY SHALL BE 2018 MEGAHERTZ.
2020	THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 2020 VOLTS, DC.
2022	THE PLUS VOLTAGE TOLERANCE SHALL BE 2022 VOLTS, DC.
2024	THE MINUS VOLTAGE TOLERANCE SHALL BE 2024 VOLTS, DC.
1700	CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.
1702	CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT BOUNCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CONTACT BOUNCE	
NORMALLY OPEN CONTACTS (SELECT ONE)	
(MILLISECONDS)	1608
(MICROSECONDS)	1609
NORMALLY CLOSED CONTACTS (SELECT ONE)	
(MILLISECONDS)	1610
(MICROSECONDS)	1611
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1710
PER MIL-S-55433.	1712
CONTACT CURRENT (MILLIAMPERES)	1714
TOLERANCE (PLUS OR MINUS MILLIAMPERES)	1716
OPEN-CIRCUIT VOLTAGE (MILLIVOLTS, DC)	1718
TOLERANCE (PLUS OR MINUS MILLIVOLTS, DC)	1720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1608	THE NORMALLY OPEN CONTACT BOUNCE DURATION SHALL BE NOT GREATER THAN 1608 MILLISECOND(S).
1609	THE NORMALLY OPEN CONTACT BOUNCE DURATION SHALL BE NOT GREATER THAN 1609 MICROSECOND(S).
1610	THE NORMALLY CLOSED CONTACT BOUNCE DURATION SHALL BE NOT GREATER THAN 1610 MILLISECOND(S).
1611	THE NORMALLY CLOSED CONTACT BOUNCE DURATION SHALL BE NOT GREATER THAN 1611 MICROSECOND(S).
1710	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1710.
1712	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-55433.
1714	THE CONTACT CURRENT SHALL BE 1714 MILLIAMPERES.
1716	THE CONTACT CURRENT TOLERANCE SHALL BE PLUS OR MINUS 1716 MILLIAMPERES.
1718	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE 1718 MILLIVOLTS, DC.
1720	THE OPEN-CIRCUIT TEST VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1720 MILLIVOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT BOUNCE (CONT)	
PER MIL-S-55433. (CONT)	
MINIMUM SWITCH "OFF" TIME (MILLISECONDS)	1722
MAXIMUM CYCLING RATE (HERTZ)	1724
CONTACT NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1730
AS FOLLOWS:	1732
MAXIMUM PEAK-TO-PEAK VOLTAGE AFTER DECAY DURATION (SELECT ONE)	
(MILLIVOLTS)	1734
(MICROVOLTS)	1736
DECAY DURATION (SECONDS)	1738
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1740
PER MIL-S-55433.	1742
MAXIMUM TEST COIL PULSE RATE (HERTZ)	1744

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1722	SWITCH "OFF" TIME SHALL BE NOT LESS THAN 1722 MILLISECONDS.
1724	THE CYCLING RATE SHALL BE NOT GREATER THAN 1724 HERTZ.
1730	CONTACT NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.
1732	CONTACT NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1734	THE PEAK-TO-PEAK VOLTAGE AFTER DECAY DURATION SHALL BE NOT GREATER THAN 1734 MILLIVOLT(S).
1736	THE PEAK-TO-PEAK VOLTAGE AFTER DECAY DURATION SHALL BE NOT GREATER THAN 1736 MICROVOLT(S).
1738	THE DECAY DURATION SHALL BE 1738 SECOND(S).
1740	CONTACT NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1740.
1742	CONTACT NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-55433.
1744	THE TEST COIL PULSE RATE SHALL BE NOT GREATER THAN 1744 HERTZ.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1750
AS FOLLOWS:	1752
MAXIMUM INITIAL CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1600
(MILLIOHMS)	1602
MAXIMUM CONTACT RESISTANCE, AFTER LIFE (SELECT ONE)	
(OHMS)	1604
(MILLIOHMS)	1606
(PERCENT OF LOAD RESISTANCE)	1607
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1760
PER MIL-STD-202, METHOD 307.	1762

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1750	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1750.
1752	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1600	THE INITIAL CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1600 OHMS.
1602	THE INITIAL CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1602 MILLIOHMS.
1604	THE CONTACT RESISTANCE, AFTER LIFE, SHALL BE NOT GREATER THAN 1604 OHMS.
1606	THE CONTACT RESISTANCE, AFTER LIFE, SHALL BE NOT GREATER THAN 1606 MILLIOHMS.
1607	THE CONTACT RESISTANCE, AFTER LIFE, SHALL BE NOT GREATER THAN 1607 PERCENT OF THE LOAD RESISTANCE.
1760	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1760.
1762	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 307.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
TEST CURRENT (SELECT ONE)	
RATED CURRENT FOR CONTACTS.	1764
(AMPERES)	1766
(MILLIAMPERES)	1768
MAXIMUM OPEN-CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	1770
(MILLIVOLTS, DC)	1772
(VOLTS, AC)	1774
(MILLIVOLTS, AC)	1776
ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	1778
NUMBER OF TEST ACTIVATIONS (QUANTITY)	1780
METHOD OF CONNECTION (DOC DES)	1784
POINT(S) OF MEASUREMENT BETWEEN TERMINALS.	1786
NUMBER OR MEASUREMENTS PER ACTIVATION (QUANTITY)	1782

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1764	THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.
1766	THE TEST CURRENT SHALL BE 1766 AMPERE(S).
1768	THE TEST CURRENT SHALL BE 1768 MILLIAMPERE(S).
1770	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1770 VOLTS, DC.
1772	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1772 MILLIVOLTS, DC.
1774	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1774 VOLTS, AC.
1776	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1776 MILLIVOLTS, AC.
1778	THERE SHALL BE 1778 ACTIVATION(S) PRIOR TO MEASUREMENT.
1780	THERE SHALL BE 1780 TEST ACTIVATION(S).
1784	THE METHOD OF CONNECTION SHALL BE IN ACCORDANCE WITH 1784.
1786	THE POINTS OF MEASUREMENT SHALL BE BETWEEN TERMINALS.
1782	THERE SHALL BE 1782 MEASUREMENT(S) PER ACTIVATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT STICKING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802
MAXIMUM CONTACT RELEASE DURATION (SELECT ONE)	
(MILLISECONDS)	1803
(MICROSECONDS)	1804
MINIMUM DISTANCE FROM MAGNET THAT CONTACTS OPERATE (SELECT ONE)	
(INCHES)	1805
(CENTIMETERS)	1806
MAXIMUM DECREASE IN DROP-OUT (AMPERE-TURNS)	1808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
PER MIL-S-55433.	1812

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1800	CONTACT STICKING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	CONTACT STICKING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1803	THE CONTACT RELEASE DURATION SHALL BE NOT GREATER THAN 1803 MILLISECONDS.
1804	THE CONTACT RELEASE DURATION SHALL BE NOT GREATER THAN 1804 MICROSECONDS.
1805	THE DISTANCE FROM THE MAGNET AT WHICH THE CONTACTS OPERATE SHALL BE NOT LESS THAN 1805 INCH(S).
1806	THE DISTANCE FROM THE MAGNET AT WHICH THE CONTACTS OPERATE SHALL BE NOT LESS THAN 1806 CENTIMETERS.
1808	THE DECREASE IN DROP-OUT SHALL BE NOT GREATER THAN 1808 AMPERE-TURNS.
1810	CONTACT STICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
1812	CONTACT STICKING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-55433.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT STICKING (CONT)	
PER MIL-S-55433. (CONT)	
METHODS (SELECT ONE)	
A.	1814
B.	1816
C.	1818
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE CURRENT (SELECT ONE)	
(MILLIAMPERES)	4875
(MICROAMPERES)	4000
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1814	METHOD A SHALL APPLY.
1816	METHOD B SHALL APPLY.
1818	METHOD C SHALL APPLY.
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERES.
4000	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4000 MICROAMPERES.
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
SWITCH DE-ENERGIZED	
ACROSS NORMALLY OPEN CONTACTS.	4002
SWITCH ENERGIZED	
ACROSS NORMALLY CLOSED CONTACTS.	4004
ACROSS ADJACENT CONTACTS.	4006
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4002	WITH THE SWITCH DE-ENERGIZED, ACROSS NORMALLY OPEN CONTACTS.
4004	WITH THE SWITCH ENERGIZED, ACROSS NORMALLY CLOSED CONTACTS.
4006	ACROSS ADJACENT CONTACTS.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECONDS.
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION DOCUMENT (DOC DES)	6267
PRE-IONIZING RADIATION OF SUFFICIENT STRENGTH TO STABILIZE DIELECTRIC STRENGTH.	4008
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERES.
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERES.
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERES.
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
4008	PRE-IONIZING RADIATION SHALL BE OF SUFFICIENT STRENGTH TO STABILIZE THE DIELECTRIC STRENGTH.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHMS.
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHMS AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHMS AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
POINTS OF APPLICATION OF TEST VOLTAGE:	
SWITCH DE-ENERGIZED	
ACROSS NORMALLY OPEN CONTACTS.	4010
SWITCH ENERGIZED	
ACROSS NORMALLY CLOSED CONTACTS.	4012
ACROSS ADJACENT CONTACTS.	4014
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1830
AS FOLLOWS:	1832

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4010	WITH THE SWITCH DE-ENERGIZED, ACROSS NORMALLY OPEN CONTACTS.
4012	WITH THE SWITCH ENERGIZED, ACROSS NORMALLY CLOSED CONTACTS.
4014	ACROSS ADJACENT CONTACTS.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1830	LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1830.
1832	LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (CONT)	
AS FOLLOWS: (CONT)	
NO WELDING OR STICKING OF CONTACTS.	1834
REMAIN WITHIN SPECIFIED TOLERANCE.	1836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
PER MIL-S-55433.	1842
OPERATING TEMPERATURE (DEGREES CELSIUS)	1844
DUTY CYCLE (PERCENT)	1846
TEST COIL DRIVE VOLTAGE (PERCENT OF PULL-IN)	1848
PULSING RATE RANGE (HERTZ)	
*MINIMUM	1850
*MAXIMUM	1852
SWITCH MONITORING INTERVALS (OPERATIONS)	1854
(OPERATIONS)	1856
(OPERATIONS)	1858
(OPERATIONS)	1860
(OPERATIONS)	1862

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1834	THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.
1836	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1840	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.
1842	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-55433.
1844	THE OPERATING TEMPERATURE SHALL BE 1844 DEGREES CELSIUS.
1846	THE DUTY CYCLE SHALL BE 1846 PERCENT.
1848	THE TEST COIL DRIVE VOLTAGE SHALL BE 1848 PERCENT OF PULL-IN.
1850 1852	THE COIL DRIVE VOLTAGE SHALL BE 1850 HERTZ TO 1852 HERTZ.
	THE SWITCH MONITORING INTERVALS SHALL BE AS FOLLOWS:
1854	1854 OPERATIONS.
1856	1856 OPERATIONS.
1858	1858 OPERATIONS.
1860	1860 OPERATIONS.
1862	1862 OPERATIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (CONT)	
SWITCH MONITORING INTERVALS (CONT)	
(OPERATIONS)	1864
(OPERATIONS)	1866
(OPERATIONS)	1868
(OPERATIONS)	1870
CONTACT LOADS AND OPERATIONS	
OPERATE AND RELEASE AMPERE-TURNS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
AS FOLLOWS:	1902

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1864 1864 OPERATIONS.

1866 1866 OPERATIONS.

1868 1868 OPERATIONS.

1870 1870 OPERATIONS.

THE LOAD LIFE SHALL BE IN ACCORDANCE WITH THE LOAD LIFE TABLE.

LOAD LIFE TABLE

LOAD AMPERES	LOAD MILLIAMPERES	LOAD TYPE	VOLTAGE AND NATURE OF VOLTAGE	MILLIONS OF OPERATIONS
4100	4136	4101	4102	4103
4104	4137	4105	4106	4107
4108	4138	4109	4110	4111
4112	4139	4113	4114	4115
4116	4140	4117	4118	4119
4120	4141	4121	4122	4123
4124	4142	4125	4126	4127
4128	4143	4129	4130	4131
4132	4144	4133	4134	4135

1900 OPERATE AND RELEASE AMPERE-TURNS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.

1902 OPERATE AND RELEASE AMPERE-TURNS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE AMPERE-TURNS (CONT)	
AS FOLLOWS: (CONT)	
OPERATE AND RELEASE AMPERE-TURNS	
OPERATE (SELECT ONE)	
(AMPERE-TURNS)	1654
TOLERANCE (PLUS OR MINUS AMPERE-TURNS)	1656
RANGE (AMPERE-TURNS)	
*MINIMUM	1658
*MAXIMUM	1660
RELEASE (SELECT ONE)	
(AMPERE-TURNS)	1662
TOLERANCE (PLUS OR MINUS AMPERE-TURNS)	1664
RANGE (SELECT ONE)	
(AMPERE-TURNS)	
*MINIMUM	1666
*MAXIMUM	1668
(PERCENT OF OPERATE)	
*MINIMUM	1670
*MAXIMUM	1672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1654	THE ITEM(S) SHALL OPERATE AT 1654 AMPERE-TURNS.
1656	THE OPERATE TOLERANCE SHALL BE PLUS OR MINUS 1656 AMPERE-TURNS.
1658 1660	THE ITEM(S) OPERATE RANGE SHALL BE FROM 1658 TO 1660 AMPERE-TURNS.
1662	THE ITEM(S) SHALL RELEASE AT 1662 AMPERE-TURNS.
1664	THE RELEASE TOLERANCE SHALL BE PLUS OR MINUS 1664 AMPERE-TURNS.
1666 1668	THE ITEM(S) RELEASE RANGE SHALL BE FROM 1666 TO 1668 AMPERE-TURNS.
1670 1672	THE ITEM(S) RELEASE RANGE SHALL BE FROM 1670 TO 1672 PERCENT OF OPERATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE AMPERE-TURNS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1910
PER MIL-S-55433.	1912
OPEN-CIRCUIT TEST VOLTAGE (SELECT ONE)	
(MILLIVOLTS, DC)	1914
TOLERANCE (PLUS OR MINUS MILLIVOLTS, DC)	1916
(MILLIVOLTS, AC)	1918
TOLERANCE (PLUS OR MINUS MILLIVOLTS, AC)	1920
TEST CURRENT (MILLIAMPERES)	1922
TOLERANCE (PLUS OR MINUS MILLIAMPERES)	1924
OPERATE AND RELEASE TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1910	OPERATE AND RELEASE AMPERE-TURNS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.
1912	OPERATE AND RELEASE AMPERE-TURNS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-55433.
1914	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE 1914 MILLIVOLTS, DC.
1916	THE TEST VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1916 MILLIVOLTS, DC.
1918	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE 1918 MILLIVOLTS, AC.
1920	THE TEST VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1920 MILLIVOLTS, AC.
1922	THE TEST CURRENT SHALL BE 1922 MILLIAMPERES.
1924	THE TEST CURRENT TOLERANCE SHALL BE PLUS OR MINUS 1924 MILLIAMPERES.
1930	OPERATE AND RELEASE TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE TIME (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1932
MAXIMUM OPERATE AND RELEASE TIME (SELECT ONE)	
(MILLISECONDS)	1612
INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)	
INCLUDING CONTACT BOUNCE.	1614
NOT INCLUDING CONTACT BOUNCE.	1616
(MICROSECONDS)	1618
INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)	
INCLUDING CONTACT BOUNCE.	1620
NOT INCLUDING CONTACT BOUNCE.	1622

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1932 OPERATE AND RELEASE TIME. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1612 THE OPERATE AND RELEASE TIME SHALL BE NOT GREATER THAN 1612 MILLISECOND(S).

1614 THE OPERATE AND RELEASE TIME SHALL INCLUDE CONTACT BOUNCE.

1616 THE OPERATE AND RELEASE TIME SHALL NOT INCLUDE CONTACT BOUNCE.

1618 THE OPERATE AND RELEASE TIME SHALL BE NOT GREATER THAN 1618 MICROSECOND(S).

1620 THE OPERATE AND RELEASE TIME SHALL INCLUDE CONTACT BOUNCE.

1622 THE OPERATE AND RELEASE TIME SHALL NOT INCLUDE CONTACT BOUNCE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE TIME (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM OPERATE TIME (SELECT ONE)	
(MILLISECONDS)	1624
INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)	
INCLUDING CONTACT BOUNCE.	1626
NOT INCLUDING CONTACT BOUNCE.	1628
(MICROSECONDS)	1630
INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)	
INCLUDING CONTACT BOUNCE.	1632
NOT INCLUDING CONTACT BOUNCE.	1634
MAXIMUM RELEASE TIME (SELECT ONE)	
(MILLISECONDS)	1636
INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)	
INCLUDING CONTACT BOUNCE.	1638
NOT INCLUDING CONTACT BOUNCE.	1640

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1624	THE OPERATE TIME SHALL BE NOT GREATER THAN 1624 MILLISECOND(S).
1626	THE OPERATE TIME SHALL INCLUDE CONTACT BOUNCE.
1628	THE OPERATE TIME SHALL NOT INCLUDE CONTACT BOUNCE.
1630	THE OPERATE TIME SHALL BE NOT GREATER THAN 1630 MICROSECOND(S).
1632	THE OPERATE TIME SHALL INCLUDE CONTACT BOUNCE.
1634	THE OPERATE TIME SHALL NOT INCLUDE CONTACT BOUNCE.
1636	THE RELEASE TIME SHALL BE NOT GREATER THAN 1636 MILLISECOND(S).
1638	THE RELEASE TIME SHALL INCLUDE CONTACT BOUNCE.
1640	THE RELEASE TIME SHALL NOT INCLUDE CONTACT BOUNCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE TIME (CONT)	
MAXIMUM RELEASE TIME (CONT)	
(MICROSECONDS)	1642
INCLUSION OF CONTACT BOUNCE IN SPECIFIED TIME (SELECT ONE)	
INCLUDING CONTACT BOUNCE.	1644
NOT INCLUDING CONTACT BOUNCE.	1646
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1940
PER MIL-S-55433.	1942
OPEN-CIRCUIT TEST VOLTAGE (SELECT ONE)	
(MILLIVOLTS, AC)	1944
TOLERANCE (PLUS OR MINUS MILLIVOLTS, AC)	1946
(MILLIVOLTS, DC)	1948
TOLERANCE (PLUS OR MINUS MILLIVOLTS, DC)	1950

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1642	THE RELEASE TIME SHALL BE NOT GREATER THAN 1642 MICROSECOND(S).
1644	THE RELEASE TIME SHALL INCLUDE CONTACT BOUNCE.
1646	THE RELEASE TIME SHALL NOT INCLUDE CONTACT BOUNCE.
1940	OPERATE AND RELEASE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1940.
1942	OPERATE AND RELEASE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-55433.
1944	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE 1944 MILLIVOLT(S), AC.
1946	THE TEST VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1946 MILLIVOLT(S), AC.
1948	THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE 1948 MILLIVOLT(S), DC.
1950	THE TEST VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1950 MILLIVOLT(S), DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AND RELEASE TIME (CONT)	
PER MIL-S-55433. (CONT)	
TEST CURRENT (MILLIAMPERES)	1952
TOLERANCE (PLUS OR MINUS MILLIAMPERES)	1954
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1952	THE TEST CURRENT SHALL BE 1952 MILLIAMPERE(S).
1954	THE TEST CURRENT TOLERANCE SHALL BE PLUS OR MINUS 1954 MILLIAMPERE(S).
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
PER MIL-STD-202, METHOD 112. (CONT)	
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(PSI)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 PSI.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE II. (CONT)	
BACKFILL PRESSURE (SELECT ONE)	
(PSI)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6325	BACKFILL PRESSURE SHALL BE 6325 PSI.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (DIELECTRIC WITHSTANDING VOLTAGE METHOD)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1960
AS FOLLOWS:	1962
MAXIMUM LEAKAGE CURRENT (SELECT ONE)	
(MICROAMPERES)	1964
(MILLIAMPERES)	1966
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1970
PER MIL-S-55433.	1972
OPEN-CIRCUIT VOLTAGE (PERCENT OF STANDARD BREAKDOWN VOLTAGE)	1974
POINTS OF APPLICATION:	
ACROSS NORMALLY OPEN CONTACTS.	1976
ACROSS ADJACENT CONTACTS.	1978

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1960	SEAL (DIELECTRIC WITHSTANDING VOLTAGE METHOD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1960.
1962	SEAL (DIELECTRIC WITHSTANDING VOLTAGE METHOD). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1964	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 1964 MICROAMPERE(S).
1966	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 1966 MILLIAMPERE(S).
1970	SEAL (DIELECTRIC WITHSTANDING VOLTAGE METHOD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1970.
1972	SEAL (DIELECTRIC WITHSTANDING VOLTAGE METHOD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-55433.
1974	THE OPEN-CIRCUIT VOLTAGE SHALL BE 1974 PERCENT OF THE STANDARD BREAKDOWN VOLTAGE.
	THE POINTS OF APPLICATION SHALL BE AS FOLLOWS:
1976	ACROSS NORMALLY OPEN CONTACTS.
1978	ACROSS ADJACENT CONTACTS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	2357
(MICROSECONDS)	1897
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1550	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2357	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2357 MILLISECONDS.
1897	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1897 MICROSECONDS.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
COIL DRIVE FOR NORMALLY CLOSED CONTACTS (SELECT ONE)	
PERCENT OF PULL-IN (PERCENT)	4034
PULL-IN PLUS NUMBER OF AMPERE-TURNS (AMPERE-TURNS)	4036

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE PER FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE PER 1468.
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 FROM METHOD 310 OF MIL-STD-202 SHALL APPLY.
4034	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE 4034 PERCENT OF PULL-IN.
4036	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE PULL-IN PLUS 4036 AMPERE-TURNS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2354
(MILLISECONDS)	1896
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2354	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2354 MICROSECONDS.
1896	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1896 MILLISECONDS.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
PER MIL-STD-202, METHOD 213. (CONT)	
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4684
NORMAL MOUNTING MEANS.	4685
ANY SUITABLE METHOD.	4686
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
COIL DRIVE FOR NORMALLY CLOSED CONTACTS (SELECT ONE)	
(PERCENT OF PULL-IN)	4040
PULL-IN PLUS NUMBER OF AMPERE-TURNS (AMPERE-TURNS)	4042

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
4040	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE 4040 PERCENT OF PULL-IN.
4042	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE PULL-IN PLUS 4042 AMPERE-TURNS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
PER MIL-STD-202, METHOD 208. (CONT)	
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOS 211 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
PER MIL-STD-202, METHOD 211. (CONT)	
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
UNFORMED LEADS ONLY TO BE TESTED.	4020

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BENDS.
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4020	ONLY UNFORMED LEADS SHALL BE TESTED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
REMAIN WITHIN SPECIFIED TOLERANCE.	1469

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK. (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK. (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1473
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	1890
(MILLISECONDS)	1895
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552
RESONANT FREQUENCY/MECHANICAL RESONANCE	
MINIMUM (HERTZ)	1580
MAXIMUM (HERTZ)	1582
NOMINAL (HERTZ)	1584
TEST METHODS(SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1890	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1890 MICROSECONDS.
1895	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1895 MILLISECONDS.
1552	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1580	THE RESONANT FREQUENCY SHALL BE NOT LESS THAN 1580 HERTZ.
1582	THE RESONANT FREQUENCY SHALL BE NOT GREATER THAN 1582 HERTZ.
1584	THE RESONANT FREQUENCY SHALL BE 1584 HERTZ, NOMINAL.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
*TEST CONDITION (LETTER)	1448
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
COIL DRIVE FOR NORMALLY CLOSED CONTACTS (SELECT ONE)	
PERCENT OF PULL-IN (PERCENT)	4022
PULL-IN PLUS NUMBER OF AMPERE-TURNS (AMPERE-TURNS)	4024

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
4022	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE 4022 PERCENT OF PULL-IN.
4024	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE PULL-IN PLUS 4024 AMPERE-TURNS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4707
NORMAL MOUNTING MEANS.	4708
ANY SUITABLE MOUNTING METHOD.	4709
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	1891
(MILLISECONDS)	1894
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1891	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1891 MICROSECONDS.
1894	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1894 MILLISECONDS.
1553	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491
*TEST CONDITION (LETTER)	1492
DURATION OF VIBRATION PER AXIS (HOURS)	1470
DIRECTION OF MOTION	
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1491	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.
1492	TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 201. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4729
NORMAL MOUNTING MEANS.	4730
ANY SUITABLE MOUNTING METHOD.	4731
COIL DRIVE FOR NORMALLY CLOSED CONTACTS (SELECT ONE)	
PERCENT OF PULL-IN (PERCENT)	4030
PULL-IN PLUS NUMBER OF AMPERE-TURNS (AMPERE-TURNS)	4032
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1457
REMAIN WITHIN SPECIFIED TOLERANCE.	1538

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4030	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE 4030 PERCENT OF PULL-IN.
4032	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE PULL-IN PLUS 4032 AMPERE-TURNS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1457	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	1892
(MILLISECONDS)	1893
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(HOURS)	1431
(MINUTES)	1438

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1892	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1892 MICROSECONDS.
1893	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1893 MILLISECONDS.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINTS.
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
METHOD OF MOUNTING (SELECT ONE)	
MOUNT PER DOCUMENT (DOC DES)	4975
NORMAL MOUNTING METHOD.	4976
ANY SUITABLE MOUNTING METHOD.	4977
COIL DRIVE FOR NORMALLY CLOSED CONTACTS (SELECT ONE)	
PERCENT OF PULL-IN (PERCENT)	4026
PULL-IN PLUS NUMBER OF AMPERE-TURNS (AMPERE-TURNS)	4028
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4026	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE 4026 PERCENT OF PULL-IN.
4028	COIL DRIVE FOR NORMALLY CLOSED CONTACTS SHALL BE PULL-IN PLUS 4028 AMPERE-TURNS.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS (CONT)	
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A233)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

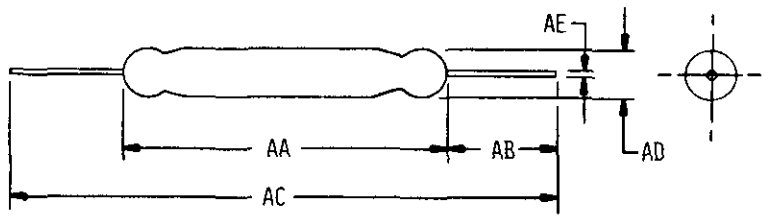

011-01-1

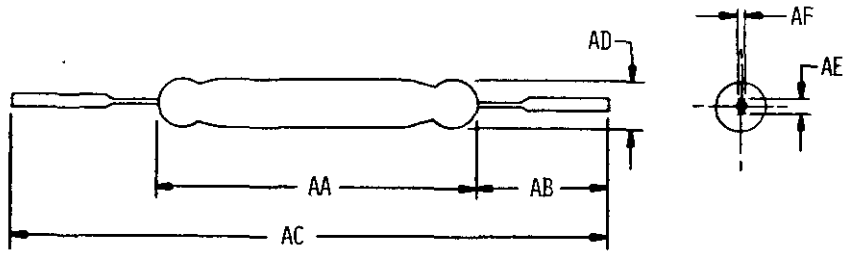


011-01-2

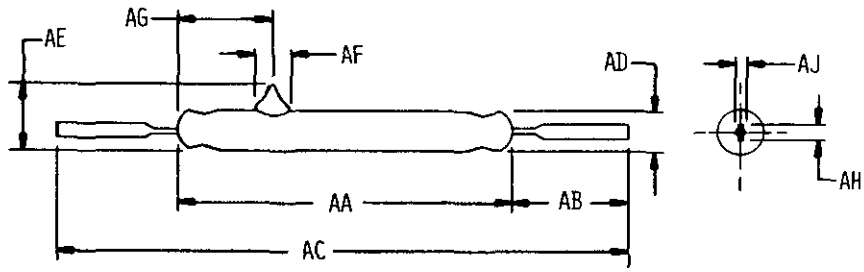


011-01-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

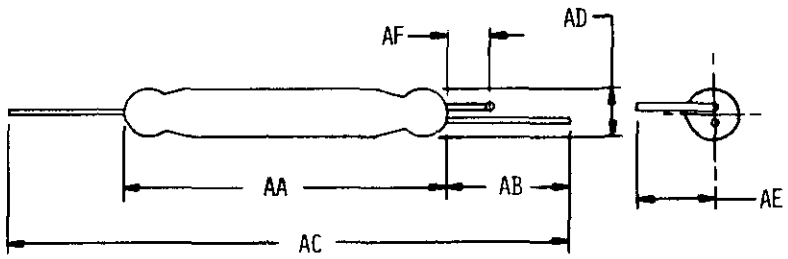

Ø11-Ø1-4

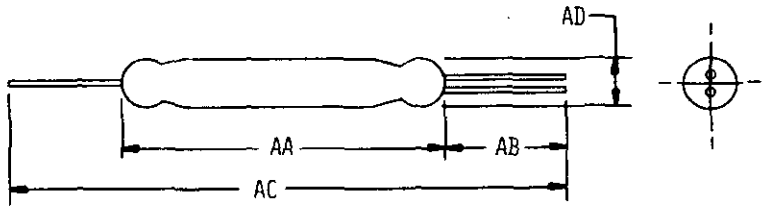


Ø11-Ø1-5

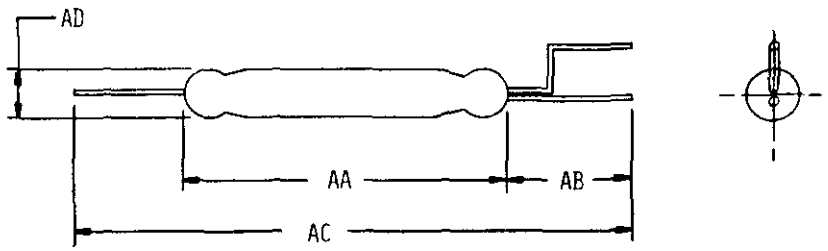

Ø11-Ø1-6


Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:25Z
Check the source to verify that this is the current version before use.



011-02-1



011-02-2



011-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1419	84	1486	72	1600	34
0102	12	1420	84	1487	74	1602	34
0103	12	1421	84	1488	74	1604	34
0104	12	1426	98	1490	92	1606	34
0105	12	1427	98	1491	94	1607	34
0107	14	1428	98	1492	94	1608	30
0108	14	1430	100	1494	72	1609	30
0700	12	1431	98	1495	72	1610	30
0800	12	1433	82	1499	78	1611	30
1003	12	1435	96	1500	76	1612	58
1004	12	1436	96	1502	76	1614	58
1005	12	1438	98	1503	78	1616	58
1006	12	1439	100	1504	78	1618	58
1008	12	1442	90	1508	76	1620	58
1009	20	1444	90	1509	76	1622	58
1371	46	1446	88	1511	46	1624	60
1372	48	1447	88	1520	48	1626	60
1373	46	1448	90	1533	90	1628	60
1374	98	1451	72	1534	90	1630	60
1375	82	1452	100	1535	94	1632	60
1376	46	1453	100	1536	94	1634	60
1377	46	1455	86	1537	94	1636	60
1378	46	1456	86	1538	96	1638	60
1380	44	1457	96	1550	72	1640	60
1381	48	1459	100	1551	76	1642	62
1382	100	1462	100	1552	88	1644	62
1383	48	1464	72	1553	92	1646	62
1384	46	1466	94	1562	24	1650	26
1386	46	1467	94	1564	24	1652	28
1387	46	1468	74	1566	22	1654	54
1388	46	1469	86	1568	22	1656	54
1402	100	1470	94	1570	24	1658	54
1407	46	1471	76	1572	24	1660	54
1410	82	1473	88	1574	24	1662	54
1411	84	1475	92	1576	24	1664	54
1412	84	1476	92	1578	24	1666	54
1413	84	1478	74	1580	88	1668	54
1414	84	1479	74	1582	88	1670	54
1416	84	1480	92	1584	88	1672	54
1418	82	1482	72	1586	24	1700	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1702	28	1810	38	1920	56	4012	48
1710	30	1812	38	1922	56	4014	48
1712	30	1814	40	1924	56	4020	84
1714	30	1816	40	1930	56	4022	90
1716	30	1818	40	1932	58	4024	90
1718	30	1830	48	1940	62	4026	102
1720	30	1832	48	1942	62	4028	102
1722	32	1834	50	1944	62	4030	96
1724	32	1836	50	1946	62	4032	96
1730	32	1840	50	1948	62	4034	74
1732	32	1842	50	1950	62	4036	74
1734	32	1844	50	1952	64	4040	78
1736	32	1846	50	1954	64	4042	78
1738	32	1848	50	1960	70	4100	53
1740	32	1850	50	1962	70	4101	53
1742	32	1852	50	1964	70	4102	53
1744	32	1854	50	1966	70	4103	53
1750	34	1856	50	1970	70	4104	53
1752	34	1858	50	1972	70	4105	53
1760	34	1860	50	1974	70	4106	53
1762	34	1862	50	1976	70	4107	53
1764	36	1864	52	1978	70	4108	53
1766	36	1866	52	2000	26	4109	53
1768	36	1868	52	2002	26	4110	53
1770	36	1870	52	2010	28	4111	53
1772	36	1890	88	2012	28	4112	53
1774	36	1891	92	2014	28	4113	53
1776	36	1892	98	2016	28	4114	53
1778	36	1893	98	2018	28	4115	53
1780	36	1894	92	2020	28	4116	53
1782	36	1895	88	2022	28	4117	53
1784	36	1896	76	2024	28	4118	53
1786	36	1897	72	2354	76	4119	53
1800	38	1900	52	2357	72	4120	53
1802	38	1902	52	4000	40	4121	53
1803	38	1910	56	4002	42	4122	53
1804	38	1912	56	4004	42	4123	53
1805	38	1914	56	4006	42	4124	53
1806	38	1916	56	4008	44	4125	53
1808	38	1918	56	4010	48	4126	53

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4127	53	4232	19	4273	19	4722	86
4128	53	4233	19	4274	19	4723	86
4129	53	4234	19	4275	19	4726	86
4130	53	4235	19	4276	19	4729	96
4131	53	4236	19	4277	19	4730	96
4132	53	4237	19	4278	19	4731	96
4133	53	4238	19	4279	19	4732	64
4134	53	4239	19	4280	19	4734	64
4135	53	4240	19	4281	19	4735	68
4136	53	4241	19	4282	19	4736	66
4137	53	4242	19	4283	19	4737	66
4138	53	4243	19	4284	19	4738	66
4139	53	4244	19	4285	19	4739	66
4140	53	4245	19	4286	19	4740	66
4141	53	4246	19	4287	19	4741	66
4142	53	4247	19	4288	19	4742	66
4143	53	4248	19	4289	19	4743	68
4144	53	4249	19	4662	80	4745	64
4210	19	4250	19	4663	80	4746	64
4211	19	4251	19	4664	82	4748	64
4212	19	4252	19	4665	82	4749	68
4213	19	4253	19	4666	80	4750	68
4214	19	4254	19	4667	80	4751	68
4215	19	4255	19	4672	80	4752	68
4216	19	4256	19	4674	80	4847	40
4217	19	4257	19	4675	80	4850	42
4218	19	4258	19	4677	80	4854	42
4219	19	4259	19	4683	80	4855	42
4220	19	4260	19	4684	78	4856	40
4221	19	4261	19	4685	78	4861	40
4222	19	4262	19	4686	78	4862	42
4223	19	4263	19	4703	76	4867	42
4224	19	4264	19	4707	92	4869	42
4225	19	4265	19	4708	92	4870	44
4226	19	4266	19	4709	92	4874	40
4227	19	4267	19	4713	86	4875	40
4228	19	4268	19	4714	86	4897	44
4229	19	4269	19	4715	86	4904	18
4230	19	4271	19	4717	44	4905	16
4231	19	4272	19	4719	86	4950	20

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4975	102	6874	14				
4976	102	6941	14				
4977	102	6942	14				
4978	94	6991	104				
4979	94	6992	104				
5000	42	6993	104				
5046	18	6994	104				
5048	18	6995	104				
5052	18	6996	26				
5054	16	6997	26				
5060	16	6998	26				
5061	16	6999	26				
5062	16	7001	102				
5063	16	7002	102				
5068	16	7003	104				
5069	16	7004	104				
5070	16	7005	104				
5071	16	7021	26				
6205	82	7022	24				
6267	44	7023	24				
6296	82	7024	26				
6320	66	7301	18				
6321	66	7302	16				
6322	66	7572	20				
6323	66	7576	20				
6324	66	7577	20				
6325	68	7629	104				
6326	68	7630	104				
6328	68						
6329	68						
6330	68						
6331	68						
6332	68						
6333	68						
6359	44						
6369	12						
6370	64						
6372	104						
6870	102						
6873	12						

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	104
Additional Requirements	102
Altitude Rating	16
Aperture Cards Required	14
Applicable Documents	104
Base Document	12
Capacitance	26
City, State, Zip	12
Company Name/Command	12
Configuration	20
Contact Arrangement	22
Contact Bounce	28
Contact Noise	32
Contact Resistance	34
Contact Sticking	38
Contract Number/Office Symbol	12
Control	12
Date	12
Design and Construction	22
Dielectric Withstanding Voltage at Sea Level	40
Finishes	22
Format	12
Government Design Activity FSCM	12
Illustrations	20
Insulation Resistance	44
Life	48
Materials	22
Mounting Hardware	102
Nomenclature	106
Notes	106
Operate and Release Ampere-Turns	52
Operate and Release Time	56

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Packaging	104
Part Marking	104
Part Number	14
Part Number Cross-Reference	106
Phone Number	12
Quality Assurance Provisions	104
Rated Loads	18
Requester FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
Scope	14
Seal	64
Seal (Dielectric Withstanding Voltage Method)	70
Self-Latching	24
Shock, High Impact	72
Shock, Specified Pulse	76
Solderability	80
Source Table	14
Street/Building	12
Superseded Document	106
Switch Type	24
System Application	12
Tabulated Characteristics	22
Temperature Rating	16
Terminal Strength	82
Thermal Shock	86
Units of Measure	14, 20
Vibration, High Frequency	86
Vibration, Low Frequency	92
Vibration, Random	96
Weight	24
Workmanship	102

Source: https://assist.dla.mil - Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-128 (MI), dated 24 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-128 (MI), dated 24 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

OLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.