DOD-STD-35-131(MI)
18 August 1978

MILITARY STANDARD

TIMERS, INTERVAL, SEQUENTIAL, STOP

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM



FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Timers, Interval, Sequential and Stop
Automated Engineering
Document Preparation System

DOD-STD-35-131(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-131(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Timers, Interval, Sequential and Stop.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	9
	5.5	Tabulation	10
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	15
	5.6.1	Interrelationship of Codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title Index	2
	II.	Test matrix	10
	III.	Tabulation candidates	11

APPENDICES

Appendix	A.	Illustrations	123
	B.	Characteristic Code Index	127
		Index	133

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Timers, Interval, Sequential and Stop.

1.2 Purpose. This military standard provides to the user the necessary information for the preparation of a Specification Requirement Sheet (SRS) which will result in the generation of an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this standard, the following list contains subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TIMER, INTERVAL	054001	GG-T-416	MANUALLY WOUND SPRING DRIVEN
		MIL-T-37213	115 VOLT, 60 HZ AC
		MIL-T-45137	TD-115/M DELAY TIMER 15 MIN
		MIL-T-45139	TD-224/M 5 MIN
		MIL-T-45603	TD-114/M
		MIL-T-46361	9154656, DELAY TIMER 5 MINUTE
		MIL-T-82535	MARK 11 MOD 2 ASSEMBLY
		MS17388	TD-236A/AJB-3
TIMER, SEQUENTIAL	054002	MIL-T-22012	BATTERY CONDITIONING TD-267/U
		MIL-T-48519	M16 AND M30 MECHANICAL
TIMER, STOP	054003	MIL-T-10571	AUTOMATIC ASTRONOMIC OBSERVATION
TIMER, ASSEMBLY	054004	MIL-T-82560	AFTERBODY TEST SET MK422 MOD 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

GG-T-416	Timer, Interval

MILITARY

MIL-S-901	Shock Tests, H.I. (High Impact) Shipboard Machinery, Equipment and Systems, Requirements for (Navy)
MIL-T-37213	Timer, Interval, 115 Volt, 60 Hz, AC
MIL-T-45137	Timer, Interval, TD-115/M
MIL-T-45139	Timer, Interval, TD-224/M
MIL-T-45603	Timer, Interval, TD-114/M
MIL-T-46361	Timer, Interval: 9154656
MIL-T-48519	Timer, Sequential: M16 and M30
MIL-T-82535	Timer, Interval Mark 11 Mod 2 (Assembly)
MIL-T-82560	Timing Assembly LD547035

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Property
MIL-STD-167/1	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II Internally Excited)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics Measurement of
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ANSIC73.11	Dimensions of Plugs and Receptacles 125 Volts, 15 Amperes, 2 Pole, 3 Wire Grounding Type, General Purpose

(Application for copies should be addressed to the American National Standard Institute, Inc., 1430 Broadway, New York, NY 10018.)

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

NFPA-70	National Fire Protection Association (NFPA) National Electrical Code No. 70.

(Application for copies should be addressed to National Fire Protection Association, 470 Atlantic Ave., Boston, MA 02210.)

UL-863	Electric Time-Indicating and Recording Appliances.

(Application for copies should be addressed to the Underwriter's Laboratories, Inc., Walt Whitman Road, Melville, NY 11749; 207 East Ohio St., Chicago, IL 60611; or 1655 Scott Boulevard, Santa Clara, CA 95050.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Timers, Internal Sequential, and Stop.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Timers, Internal, Sequential, and Stop, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Timers, Internal, Sequential, and Stop.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Timers, Internal, Sequential, and Stop.

4.3.2 Illustrations. Illustrations applicable to Timers, Internal, Sequential, and Stop are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	Accuracy 1922	Circuitry (Continuity) 2022	Motor Operation (Timing Mechanism) 2632	Start Relay 3122	Timer Intervals 3222
GG-T-41,6		X				
MIL-T-37213		X				
MIL-T-45137			X	X		X
MIL-T-45139				X	X	X
MIL-T-45603			X			X
MIL-T-46361				X	X	X
MIL-T-48519			X			
MIL-T-82560						X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for timer characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
5069	MAX OPER TEMP RTG DEG C	7302	MAX STOR TEMP RTG DEG C	5054	MAX AMB OPER TEMP RTG DEG C
5068	MIN OPER TEMP RTG DEG C	7301	MIN STOR TEMP RTG DEG C	5052	MIN AMB OPER TEMP RTG DEG C
5046	NOM OPER TEMP RTG DEG C	5048	NOM STOR TEMP RTG DEG C	7591	MIN CUR RTG AMP
7592	MIN CUR RTG MA	7594	MAX CUR RTG AMP	7595	MAX CUR RTG MA
7597	NOM CUR RTG AMP	7598	NOM CUR RTG MA	7631	MIN PWR RTG WATTS
7632	MIN PWR RTG KW	7633	MIN PWR RTG MW	7645	MIN PWR RTG VA
7634	MAX PWR RTG WATTS	7635	MAX PWR RTG KW	7636	MAX PWR RTG MW
7646	MAX PWR RTG VA	7637	NOM PWR RTG WATTS	7638	NOM PWR RTG KW
7639	NOM PWR RTG MW	7647	NOM PWR RTG VA	7600	MIN V RTG VOLTS AC
7601	MIN V RTG VOLTS DC	7602	MIN V RTG VOLTS RMS	7603	MIN V RTG MV AC
7604	MIN V RTG MV DC	7605	MIN V RTG MV RMS	7609	MAX V RTG VOLTS AC
7610	MAX V RTG VOLTS DC	7611	MAX V RTG VOLTS RMS	7612	MAX V RTG MV AC
7613	MAX V RTG MV DC	7614	MAX V RTG MV RMS	7618	NOM V RTG VOLTS AC
7619	NOM V RTG VOLTS DC	7620	NOM V RTG VOLTS RMS	7621	NOM V RTG MV AC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7622	NOM V RTG MV DC	7623	NOM V RTG MV RMS	7627	FREQ RTG HERTZ
7628	FREQ RTG MEGAHERTZ	7641	FREQ RTG KILOHERTZ	1624	CL V RTG MIN V AC
1626	MIN CLUTCH V RTG VOLTS DC	1628	MAX CLUTCH V RTG VOLTS AC	1630	MAX CLUTCH V RTG VOLTS DC
1632	NOM CLUTCH V RTG VOLTS AC	1634	NOM CLUTCH V RTG VOLTS DC	1636	CLUTCH V FREQ RTG HERTZ
1638	CLUTCH CUR RTG AMP	1640	MIN RESET V RTG VOLTS AC	1642	MIN RESET V RTG VOLTS DC
1644	MAX RESET V RTG VOLTS AC	1646	MAX RESET V RTG VOLTS DC	1648	NOM RESET V RTG VOLTS AC
1650	NOM RESET V RTG VOLTS DC	1652	RESET V FREQ RTG HERTZ	1654	RESET CUR RTG AMP
1656	SWITCH CONT V RTG VOLTS AC	1658	SWITCH CONT V RTG VOLTS DC	1660	SWITCH CONT FREQ RTG HERTZ
1662	SWITCH CONT CUR RTG AMP	1700	MAX OPER TIME MILLISEC	1702	MAX OPER TIME SECONDS
1704	MAX OPER TIME MINUTES	1706	MAX OPER TIME HOURS	1708	MAX OPER TIME DAYS
7022	MAX WEIGHT PER UNIT OUNCES	7023	MAX WEIGHT PER UNIT POUNDS	7021	MAX WEIGHT PER UNIT GRAMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7024	MAX WEIGHT PER UNIT KILOGRAMS	6996	NOM WEIGHT PER UNIT OUNCES	6997	NOM WEIGHT PER UNIT POUNDS
6998	NOM WEIGHT PER UNIT GRAMS	6999	NOM WEIGHT PER UNIT KILOGRAMS		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. REfer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS ~~NOT~~ TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	1600
CLASS (DESIGNATION)	1602
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM STORAGE (DEGREES CELSIUS)	7301

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1600	TYPE. TYPE 1600 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1602	CLASS. CLASS 1602 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
CURRENT RATING	
MINIMUM CURRENT (SELECT ONE)	
(AMPERES)	7591
(MILLIAMPERES)	7592
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPERES)	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
(MILLIAMPERES)	7598
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLT-AMPERE(S)•	7645

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
	CURRENT RATING.
7591	THE MINIMUM CURRENT RATING SHALL BE 7591 AMPERE(S).
7592	THE MINIMUM CURRENT RATING SHALL BE 7592 MILLIAMPERE(S).
7594	THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).
7595	THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).
7597	THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).
7598	THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLT-AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING (CONT)	
MAXIMUM POWER (SELECT ONE)	
(WATTS)	7634
(KILOWATTS)	7635
(MILLIWATTS)	7636
(VOLT-AMPERES)	7646
NOMINAL POWER (SELECT ONE)	
(WATTS)	7637
(KILOWATTS)	7638
(MILLIWATTS)	7639
(VOLT-AMPERES)	7647
VOLTAGE RATING	
MINIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7600
(VOLTS DC)	7601
(VOLTS RMS)	7602
MILLIVOLTS	
(MILLIVOLTS AC)	7603
(MILLIVOLTS DC)	7604
(MILLIVOLTS RMS)	7605

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7634	THE MAXIMUM POWER RATING SHALL BE 7634 WATT(S).
7635	THE MAXIMUM POWER RATING SHALL BE 7635 KILOWATT(S).
7636	THE MAXIMUM POWER RATING SHALL BE 7636 MILLIWATT(S).
7646	THE MAXIMUM POWER RATING SHALL BE 7646 VOLT-AMPERE(S).
7637	THE NOMINAL POWER RATING SHALL BE 7637 WATT(S).
7638	THE NOMINAL POWER RATING SHALL BE 7638 KILOWATT(S).
7639	THE NOMINAL POWER RATING SHALL BE 7639 MILLIWATT(S).
7647	THE NOMINAL POWER RATING SHALL BE 7647 VOLT-AMPERE(S).

VOLTAGE RATING.

7600	THE MINIMUM VOLTAGE RATING SHALL BE 7600 VOLT(S) AC.
7601	THE MINIMUM VOLTAGE RATING SHALL BE 7601 VOLT(S) DC.
7602	THE MINIMUM VOLTAGE RATING SHALL BE 7602 VOLT(S) RMS.
7603	THE MINIMUM VOLTAGE RATING SHALL BE 7603 MILLIVOLT(S) AC.
7604	THE MINIMUM VOLTAGE RATING SHALL BE 7604 MILLIVOLT(S) DC.
7605	THE MINIMUM VOLTAGE RATING SHALL BE 7605 MILLIVOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE RATING (CONT)	
MAXIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611
MILLIVOLTS	
(MILLIVOLTS AC)	7612
(MILLIVOLTS DC)	7613
(MILLIVOLTS RMS)	7614
NOMINAL VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7618
(VOLTS DC)	7619
(VOLTS RMS)	7620
MILLIVOLTS	
(MILLIVOLTS AC)	7621
(MILLIVOLTS DC)	7622
(MILLIVOLTS RMS)	7623
FREQUENCY RATING (SELECT ONE)	
(HERTZ)	7627

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7609 VOLT(S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE 7610 VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE 7611 VOLT(S) RMS.
7612	THE MAXIMUM VOLTAGE RATING SHALL BE 7612 MILLIVOLT(S) AC.
7613	THE MAXIMUM VOLTAGE RATING SHALL BE 7613 MILLIVOLT(S) DC.
7614	THE MAXIMUM VOLTAGE RATING SHALL BE 7614 MILLIVOLT(S) RMS.
7618	THE NOMINAL VOLTAGE RATING SHALL BE 7618 VOLT(S) AC.
7619	THE NOMINAL VOLTAGE RATING SHALL BE 7619 VOLT(S) DC.
7620	THE NOMINAL VOLTAGE RATING SHALL BE 7620 VOLT(S) RMS.
7621	THE NOMINAL VOLTAGE RATING SHALL BE 7621 MILLIVOLT(S) AC.
7622	THE NOMINAL VOLTAGE RATING SHALL BE 7622 MILLIVOLT(S) DC.
7623	THE NOMINAL VOLTAGE RATING SHALL BE 7623 MILLIVOLT(S) RMS.
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY RATING (CONT)	
(MEGAHERTZ)	7628
(KILOHERTZ)	7641
ACCURACY RATING	
MAXIMUM TIME ERROR AT FREQUENCY	
(SECONDS)	1612
*FREQUENCY (HERTZ)	1614
MAXIMUM ERROR OR TOTAL ELAPSED TIME (PERCENT)	1616
TOTAL ERROR AGAINST TIME STANDARD PLUS OR MINUS (SECONDS)	1618
MAXIMUM TIME STANDARD DURATION (SELECT ONE)	
(MINUTES)	1620
(HOURS)	1622
CLUTCH VOLTAGE RATING	
MINIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	1624
(VOLTS DC)	1626

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7628	THE FREQUENCY RATING SHALL BE 7628 MEGAHERTZ.
7641	THE FREQUENCY RATING SHALL BE 7641 KILOHERTZ.
	ACCURACY RATING.
1612 1614	THE TIMER ACCURACY SHALL BE RATED WITH A MAXIMUM ERROR OF 1612 SECONDS AT A FREQUENCY OF 1614 HERTZ.
1616	THE TIMER ACCURACY SHALL BE RATED WITH A MAXIMUM ERROR OF 1616 PERCENT OF TOTAL ELAPSED TIME.
1618	THE TIMER ACCURACY SHALL BE RATED WITH A TOTAL ERROR OF PLUS OR MINUS 1618 SECONDS AGAINST A TIME STANDARD.
1620	THE MAXIMUM TIME DURATION OF THE TIME STANDARD SHALL BE 1620 MINUTES.
1622	THE MAXIMUM TIME DURATION OF THE TIME STANDARD SHALL BE 1622 HOURS.
	CLUTCH VOLTAGE RATING.
1624	THE MINIMUM CLUTCH VOLTAGE RATING SHALL BE 1624 VOLTS AC.
1626	THE MINIMUM CLUTCH VOLTAGE RATING SHALL BE 1626 VOLTS DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLUTCH VOLTAGE RATING (CONT)	
MAXIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	1628
(VOLTS DC)	1630
NOMINAL VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	1632
(VOLTS DC)	1634
CLUTCH VOLTAGE FREQUENCY RATING	
(HERTZ)	1636
CLUTCH CURRENT RATING	
(AMPERES)	1638
RESET VOLTAGE RATING	
MINIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	1640
(VOLTS DC)	1642
MAXIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	1644
(VOLTS DC)	1646

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1628	THE MAXIMUM CLUTCH VOLTAGE RATING SHALL BE 1628 VOLTS AC.
1630	THE MAXIMUM CLUTCH VOLTAGE RATING SHALL BE 1630 VOLTS DC.
1632	THE NOMINAL CLUTCH VOLTAGE RATING SHALL BE 1632 VOLTS AC.
1634	THE NOMINAL CLUTCH VOLTAGE RATING SHALL BE 1634 VOLTS DC.
	CLUTCH VOLTAGE FREQUENCY RATING.
1636	THE CLUTCH VOLTAGE FREQUENCY RATING SHALL BE 1636 HERTZ.
	CLUTCH CURRENT RATING.
1638	THE CLUTCH CURRENT RATING SHALL BE 1638 AMPERES.
	RESET VOLTAGE RATING.
1640	THE MINIMUM RESET VOLTAGE RATING SHALL BE 1640 VOLTS AC.
1642	THE MINIMUM RESET VOLTAGE RATING SHALL BE 1642 VOLTS DC.
1644	THE MAXIMUM RESET VOLTAGE RATING SHALL BE 1644 VOLTS AC.
1646	THE MAXIMUM RESET VOLTAGE RATING SHALL BE 1646 VOLTS AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESET VOLTAGE RATING (CONT)	
NOMINAL VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	1648
(VOLTS DC)	1650
RESET VOLTAGE FREQUENCY RATING	
(HERTZ)	1652
RESET CURRENT RATING	
(AMPERES)	1654
SWITCH CONTACT RATING	
VOLTAGE (SELECT ONE)	
(VOLTS AC)	1656
(VOLTS DC)	1658
FREQUENCY (HERTZ)	1660
CURRENT (AMPERES)	1662
LOAD TYPE ____	1664

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1648	THE NOMINAL RESET VOLTAGE RATING SHALL BE 1648 VOLTS AC.
1650	THE NOMINAL RESET VOLTAGE RATING SHALL BE 1650 VOLTS DC.
	RESET VOLTAGE FREQUENCY RATING.
1652	THE RESET VOLTAGE FREQUENCY RATING SHALL BE 1652 HERTZ.
	RESET CURRENT RATING.
1654	THE RESET CURRENT RATING SHALL BE 1654 AMPERES.
	SWITCH CONTACT RATING.
1656	THE SWITCH CONTACT RATING VOLTAGE SHALL BE 1656 VOLTS AC.
1658	THE SWITCH CONTACT RATING VOLTAGE SHALL BE 1658 VOLTS DC.
1660	THE SWITCH CONTACT RATING FREQUENCY SHALL BE 1660 HERTZ.
1662	THE SWITCH CONTACT RATING CURRENT SHALL BE 1662 AMPERES.
1664	THE SWITCH CONTACT RATING LOAD TYPE SHALL BE 1664.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
YARDS.	7574
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
METERS.	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER)	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
MAXIMUM OPERATING TIME (SELECT ONE)	
(MILLISECONDS)	1700
(SECONDS)	1702

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
	MAXIMUM OPERATING TIME.
1700	THE TIMER OPERATING TIME SHALL BE NOT GREATER THAN 1700 MILLISECONDS.
1702	THE TIMER OPERATING TIME SHALL BE NOT GREATER THAN 1702 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM OPERATING TIME (CONT)	
(MINUTES)	1704
(HOURS)	1706
(DAYS)	1708
TIME RANGE ____	1710
TIMER ALARM (SELECT ONE)	
BELL.	1722
BUZZER.	1724
AUDIBLE DISTANCE OF ALARM (SELECT ONE)	
(FEET)	1726
(METERS)	1728
ALARM VOLUME CONTROL	
PROVIDED.	1730
MOUNTING LOCATION ____	1731
CLUTCH MANUAL DISENGAGING LEVER	
PROVIDED.	1732
MOUNTING LOCATION ____	1733

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

1704 THE TIMER OPERATING TIME SHALL BE NOT GREATER THAN 1704 MINUTES.

1706 THE TIMER OPERATING TIME SHALL BE NOT GREATER THAN 1706 HOURS.

1708 THE TIMER OPERATING TIME SHALL BE NOT GREATER THAN 1708 DAYS.

1710 THE TIMER SHALL HAVE A TIME RANGE OF 1710.

TIMER ALARM.

1722 A BELL ALARM SHALL BE PROVIDED WITH THE TIMER TO SIGNAL THE END OF A TIMING INTERVAL.

1724 A BUZZER ALARM SHALL BE PROVIDED WITH THE TIMER TO SIGNAL THE END OF A TIMING INTERVAL.

1726 THE AUDIBLE DISTANCE OF THE ALARM SHALL BE 1726 FEET.

1728 THE AUDIBLE DISTANCE OF THE ALARM SHALL BE 1728 METERS.

1730 ALARM VOLUME CONTROL. AN ALARM VOLUME CONTROL SHALL BE PROVIDED WITH THE TIMER.

1731 THE VOLUME CONTROL KNOW SHALL BE MOUNTED ON THE 1731 OF THE TIMER.

1732 CLUTCH MANUAL DISENGAGING LEVER. A CLUTCH DISENGAGING LEVER FOR RESETTING DIALS MANUALLY SHALL BE PROVIDED WITH THE TIMER.

1733 THE MOUNTING LOCATION SHALL BE 1733.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CORD AND PLUG ASSEMBLY	
ANSIC73.11.	1734
OTHER ____	1736
MAXIMUM CYCLE TIME	
(MINUTES)	1738
RESET PROVISIONS (SELECT ONE)	
MANUAL.	1740
AUTOMATIC.	1742
MANUAL AND AUTOMATIC.	1744
RESET CONTROL (SELECT ONE)	
LOCAL.	1746
REMOTE.	1748
LOCAL OR REMOTE.	1750
MAXIMUM RESET TIME (SELECT ONE)	
(MICROSECONDS)	1752
(MILLISECONDS)	1754
(SECONDS)	1756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CORD AND PLUG ASSEMBLY.

1734 A CORD AND PLUG ASSEMBLY SHALL BE PROVIDED WITH THE TIMER AND THE PLUG SHALL CONFORM TO ANSIC73.11.

1736 THE CORD AND PLUG ASSEMBLY SHALL BE 1736.

MAXIMUM CYCLE TIME.

1738 THE CYCLE TIME SHALL BE NOT GREATER THAN 1738.

RESET PROVISIONS.

1740 THE TIMER SHALL BE CAPABLE OF BEING RESET MANUALLY.

1742 THE TIMER SHALL BE CAPABLE OF BEING RESET AUTOMATICALLY.

1744 THE TIMER SHALL BE CAPABLE OF BEING RESET MANUALLY OR AUTOMATICALLY.

RESET CONTROL.

1746 A RESET CONTROL SHALL BE PROVIDED TO CONTROL THE TIMER LOCALLY.

1748 A RESET CONTROL SHALL BE PROVIDED TO CONTROL THE TIMER REMOTELY.

1750 A RESET CONTROL SHALL BE PROVIDED TO CONTROL THE TIMER LOCALLY OR REMOTELY.

MAXIMUM RESET TIME.

1752 THE RESET TIME SHALL BE NOT GREATER THAN 1752 MICROSECONDS.

1754 THE RESET TIME SHALL BE NOT GREATER THAN 1754 MILLISECONDS.

1756 THE RESET TIME SHALL BE NOT GREATER THAN 1756 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ENCLOSURE TYPE (SELECT ONE)	
OPEN.	1758
CLOSED.	1760
SEALED.	1762
HERMETICALLY SEALED.	1764
OTHER ____	1766
TIMING MECHANISM (SELECT ONE)	
ELECTRONIC.	1768
ELECTRO-MECHANICAL.	1770
SPRING.	1772
FIRE AND CASUALTY PROVISIONS (SELECT AS REQUIRED)	
PER UL-863.	1774
PER NFPA-70.	1776
OTHER ____	1778
ELECTRICAL CONNECTORS	
(TYPE)	1780
INDICATOR LIGHT	
END OF TIMING CYCLE.	1782
MAXIMUM KNOB/POINTER TRAVEL	
(DEGREES)	1784

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ENCLOSURE TYPE.
1758	THE ENCLOSURE SHALL BE AN OPEN TYPE.
1760	THE ENCLOSURE SHALL BE A CLOSED TYPE.
1762	THE ENCLOSURE SHALL BE A SEALED TYPE.
1764	THE ENCLOSURE SHALL BE A HERMETICALLY SEALED TYPE.
1766	THE ENCLOSURE SHALL BE 1766.
	TIMING MECHANISM.
1768	THE TIMING MECHANISM SHALL BE ELECTRONICALLY ACTUATED.
1770	THE TIMING MECHANISM SHALL BE ELECTRO-MECHANICALLY ACTUATED.
1772	THE TIMING MECHANISM SHALL BE SPRING ACTUATED.
	FIRE AND CASUALTY PROVISIONS.
1774	TIMERS SHALL CONFORM TO THE REQUIREMENTS OF UL-863.
1776	TIMERS SHALL CONFORM TO THE REQUIREMENTS OF NFPA-70.
1778	TIMERS SHALL CONFORM TO THE REQUIREMENTS OF 1778.
	ELECTRICAL CONNECTORS.
1780	THE TIMER SHALL BE PROVIDED WITH 1780 ELECTRICAL CONNECTORS.
	INDICATOR LIGHT.
1782	A LIGHT SHALL BE PROVIDED ON THE TIMER TO INDICATE THE END OF A TIMING CYCLE.
	MAXIMUM KNOB/POINTER TRAVEL.
1784	THE KNOB/POINTER TRAVEL FROM START TO FINISH TIME SHALL SUBTEND AN ARC NOT GREATER THAN 1784 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM LOAD CIRCUITS	
(QUANTITY)	1786
DIAL PROVISIONS	
NUMBER OF WHEELS, DIGITAL (QUANTITY)	1788
MANUAL PRESET TIME	
MINIMUM (MINUTES)	1790
MAXIMUM (MINUTES)	1792
OTHER ____	1793
MOTOR DUTY CYCLES (SELECT ONE)	
CONTINUOUS.	1794
INTERMITTANT.	1796
MAXIMUM POWER DISSIPATION	
(WATTS)	1798
ON-OFF POWER SWITCH	
REQUIRED.	1800
TYPE ____	1801
TOTAL REGISTRATION (SELECT ONE)	
(MINUTES)	1802
(HOURS)	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MAXIMUM LOAD CIRCUITS.
1786	THE QUANTITY OF TIMER LOAD CIRCUITS SHALL BE NOT GREATER THAN 1786.
	DIAL PROVISIONS.
1788	THE TIMER SHALL BE PROVIDED WITH 1788 DIGITAL WHEELS.
1790	THE MANUAL PRESET TIME SHALL BE NOT LESS THAN 1790 MINUTES.
1792	THE MANUAL PRESET TIME SHALL BE NOT GREATER THAN 1792 MINUTES.
1793	THE TIMER DIAL SHALL BE 1793.
	MOTOR DUTY CYCLES.
1794	TIMER MOTOR DUTY CYCLES SHALL BE CONTINUOUS.
1796	TIMER MOTOR DUTY CYCLES SHALL BE INTERMITTANT.
	MAXIMUM POWER DISSIPATION.
1798	THE POWER DISSIPATION SHALL BE NOT GREATER THAN 1798 WATTS.
	ON-OFF POWER SWITCH.
1800	THE TIMER SHALL BE PROVIDED WITH AN ON-OFF SWITCH.
1801	THE TYPE OF ON-OFF SWITCH SHALL BE 1801.
	TOTAL REGISTRATION.
1802	THE TIMER REGISTER SHALL BE CAPABLE OF RECORDING A TOTAL OF 1802 MINUTES.
1804	THE TIMER REGISTER SHALL BE CAPABLE OF RECORDING A TOTAL OF 1804 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
REPEATABILITY	
(MICROSECONDS)	1806
(MILLISECONDS)	1808
(SECONDS)	1810
(PERCENT OF FULL SCALE)	1812
REGULATOR/TIMER RATE ADJUSTMENT	
PROVIDED.	1814
MAXIMUM ERROR (SECONDS)	1816
*CONTINUOUS OPERATING PERIOD (MINUTES)	1818
SERVICE LIFE	
(HOURS)	1820
INTERCHANGEABILITY	
LIKE ASSEMBLIES, SUBASSEMBLIES, AND REPLACEABLE PARTS FOR TIMERS SHALL BE ELECTRICALLY, MECHANICALLY, AND FUNCTIONALLY INTERCHANGEABLE.	1822

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

REPEATABILITY.

1806 THE TIMER REPEATABILITY IN ALL MODES SHALL BE 1806 MICROSECONDS.

1808 THE TIMER REPEATABILITY IN ALL MODES SHALL BE 1808 MILLISECONDS.

1810 THE TIMER REPEATABILITY IN ALL MODES SHALL BE 1810 SECONDS.

1812 THE TIMER REPEATABILITY IN ALL MODES SHALL BE 1812 PERCENT OF FULL SCALE.

REGULATOR/TIMER RATE ADJUSTMENT.

1814 THE TIMER SHALL BE PROVIDED WITH A TIME RATE ADJUSTMENT DEVICE WHICH SHALL BE MARKED FAST AND SLOW TO INDICATE THE DIRECTION OF THE CHANGE RATE.

1816 THE REGULATOR SHALL BE CAPABLE OF ADJUSTING AN ERROR SO
1818 THAT THE ERROR SHALL BE NOT GREATER THAN 1816 SECONDS IN A CONTINUOUS OPERATING PERIOD OF 1818 MINUTES.

SERVICE LIFE.

1820 THE TIMER SHALL HAVE A SERVICE LIFE OF 1820 HOURS.

INTERCHANGEABILITY.

1822 LIKE ASSEMBLIES, SUB-ASSEMBLIES, AND REPLACEABLE PARTS FOR TIMERS SHALL BE ELECTRICALLY, MECHANICALLY, AND FUNCTIONALLY INTERCHANGEABLE REGARDLESS OF MANUFACTURER OR SUPPLIER. PARTS SHALL BE INTERCHANGEABLE WITHOUT PHYSICAL OR ELECTRICAL MODIFICATIONS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029
ELECTRICAL STRESS (SELECT ONE)	
VOLTAGE (PERCENT OF RATED)	7030
LOAD (PERCENT OF RATED)	7027
POWER (PERCENT OF RATED)	7028
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCE)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:
7025	THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.
7026	THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.
7029	THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.
7030	THE DESIGN RELIABILITY APPLIED VOLTAGE SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.
7027	THE DESIGN RELIABILITY APPLIED LOAD SHALL BE AT 7027 PERCENT OF THE RATED LOAD.
7028	THE DESIGN RELIABILITY APPLIED POWER SHALL BE AT 7028 PERCENT OF THE RATED POWER.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1547	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-202, METHOD 212. (CONT)	
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-202, METHOD 212. (CONT)	
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDITION (LETTER)	1549
ACCURACY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
AS FOLLOWS:	1902
CONFORM WITH TIME STANDARD.	1904
ACCURACY, PLUS OR MINUS (SELECT ONE)	
(MILLISECONDS)	1906
(SECONDS)	1908
(MINUTES)	1910
MAXIMUM ERROR TOTAL TIME (PERCENT)	1912
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
1900	ACCURACY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.
1902	ACCURACY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1904	THE TIMER(S) SHALL CONFORM TO AN APPROVED TIME STANDARD.
1906	THE TIMER(S) ACCURACY SHALL BE PLUS OR MINUS 1906 MILLISECONDS.
1908	THE TIMER(S) ACCURACY SHALL BE PLUS OR MINUS 1908 SECONDS.
1910	THE TIMER(S) ACCURACY SHALL BE PLUS OR MINUS 1910 MINUTES.
1912	THE TIMER(S) ERROR SHALL BE NOT GREATER THAN 1912 PERCENT OF TOTAL OPERATING TIME.
1920	ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1920.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCURACY (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1922
MAXIMUM STANDARD TEST TIME (SELECT ONE)	
(MINUTES)	1924
(HOURS)	1926
CIRCUITRY (CONTINUITY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
AS FOLLOWS:	2002
CONFORM TO CIRCUITRY SPECIFIED.	2004
REMAIN WITHIN SPECIFIED TOLERANCE.	2006
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2020
PER DOCUMENT (DOC DES)	2022
TEST WITH STANDARD MEASURING EQUIPMENT.	2024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1922	ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1922.
1924	THE STANDARD TEST TIME SHALL BE NOT GREATER THAN 1924 MINUTES.
1926	THE STANDARD TEST TIME SHALL BE NOT GREATER THAN 1926 HOURS.
2000	CIRCUITRY (CONTINUITY). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.
2002	CIRCUITRY (CONTINUITY). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2004	THE CONTINUITY OF THE CIRCUITRY SHALL CONFORM TO THE CIRCUITRY SPECIFIED.
2006	THE CONTINUITY OF THE CIRCUITRY SHALL REMAIN WITHIN THE SPECIFIED TOLERANCE.
2020	CIRCUITRY (CONTINUITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2020.
2022	CIRCUITRY (CONTINUITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2022.
2024	STANDARD MEASURING EQUIPMENT SHALL BE USED FOR TESTING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2100
PER CIRCUIT RESISTANCE TABLE.	2104
NOTE: THIS TABLE IS USED FOR SPECIFYING RESISTANCES AT VARIOUS TEST POINTS AND PINS.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2120
PER MIL-T-82560.	2122
MEASURE CIRCUIT RESISTANCES WITH APPROVED MEASURING EQUIPMENT.	2124

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2100 CIRCUIT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.

2104 CIRCUIT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE CIRCUIT RESISTANCE TABLE.

CIRCUIT RESISTANCE TABLE

FROM TEST POINT/PIN	TO TEST POINT/PIN	RESISTANCE (OHMS)
2130	2131	2132
2133	2134	2135
2136	2137	2138
2139	2140	2141
2142	2143	2144
2145	2146	2147
2148	2149	2150
2151	2152	2153
2154	2155	2156
2157	2158	2159

NOTE A 2180.
NOTE B 2181.
NOTE C 2182.
NOTE D 2183.
NOTE E 2184.
NOTE F 2185.
NOTE G 2186.
NOTE H 2187.
NOTE I 2188.
NOTE J 2189.

2120 CIRCUIT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.

2122 CIRCUIT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-82560.

2124 MEASURE CIRCUIT RESISTANCE WITH APPROVED MEASURING EQUIPMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
OTHER ____	3500
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
3500	BETWEEN 3500.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINT OF VOLTAGE APPLICATION:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
POINTS OF VOLTAGE APPLICATION (CONT)	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
OTHER ____	3502
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
3502	BETWEEN 3502.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200
PER MIL-STD-461 LIMITS.	2202
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	2204
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2220
PER MIL-STD-461, APPENDIX METHOD (DES)	2222
PER MIL-STD-462	2224
*TEST METHOD(S)	
CE (NUMBER)	2226
RE (NUMBER)	2228
CS (NUMBER)	2230
RS (NUMBER)	2232
CRE (NUMBER)	2234
ENERGY OUTPUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2200	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.
2202	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS PER MIL-STD-461.
2204	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
2220	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2220.
2222	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE IN ACCORDANCE WITH THE MIL-STD-461 APPENDIX. PROCEDURE 2222 SHALL APPLY.
2224	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING PROCEDURE(S) SHALL APPLY:
2226	PROCEDURE CE 2226.
2228	PROCEDURE RE 2228.
2230	PROCEDURE CS 2230.
2232	PROCEDURE RS 2232.
2234	PROCEDURE CRE 2234.
2300	ENERGY OUTPUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENERGY OUTPUT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2302
REMAIN WITHIN SPECIFIED TOLERANCE.	2304
MINIMUM ENERGY OUTPUT FIRST PULSE (SELECT ONE)	
(ERGS)	2306
(JOULES)	2308
MINIMUM ENERGY OUTPUT SECOND PULSE (SELECT ONE)	
(ERGS)	2310
(JOULES)	2312
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320
PER MIL-T-82535.	2322
MINIMUM OUTPUT CIRCUIT RESISTANCE (OHMS)	2324
MINIMUM PEAK AMPLITUDE (VOLTS DC)	2326

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2302	ENERGY OUTPUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2306	THE FIRST PULSE ENERGY OUTPUT SHALL BE NOT LESS THAN 2306 ERGS.
2308	THE FIRST PULSE ENERGY OUTPUT SHALL BE NOT LESS THAN 2308 JOULES.
2310	THE SECOND PULSE ENERGY OUTPUT SHALL BE NOT LESS THAN 2310 ERGS.
2312	THE SECOND PULSE ENERGY OUTPUT SHALL BE NOT LESS THAN 2312 JOULES.
2320	ENERGY OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	ENERGY OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-82535.
2324	THE OUTPUT CIRCUIT RESISTANCE SHALL BE NOT LESS THAN 2324 OHMS.
2326	THE PEAK AMPLITUDE SHALL BE NOT LESS THAN 2326 VOLTS DC.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-810, METHOD 507.	4781
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4781	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PROCEDURE NUMBER (CONT)	
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764
OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLES (NUMBER)	4916
INSULATION RESISTANCE CYCLES (NUMBER)	4919
DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER)	4920
OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLES (NUMBER)	1554
INSULATION RESISTANCE CYCLES (NUMBER)	1555
DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER)	1556

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.
4916	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916.
4919	INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 4919, AT HIGH TEMPERATURE.
4920	DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 4920, AT HIGH TEMPERATURE.
1554	OPERATION AND MEASUREMENT SHALL BE PERFORMED AT LOW TEMPERATURE, DURING CYCLE(S) 1554.
1555	INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 1555, AT LOW TEMPERATURE.
1556	DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 1556, AT LOW TEMPERATURE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S)
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSUALTED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
LEAKAGE CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1376 ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

1377 THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:

1497 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

1498 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

1522 BETWEEN MUTUALLY INSULATED PARTS.

1523 BETWEEN ALL INSULATED PARTS AND GROUND.

1524 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

1520 SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.

1372 FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.

1381 SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.

1383 TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

2400 LEAKAGE CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LEAKAGE CURRENT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2402
MAXIMUM LEAKAGE, PRIOR TO PULSE (SELECT ONE)	
SINGLE TEST	
(MILLIAMPERES)	2404
MULTIPLE TEST	
*FIRST TEST (MILLIAMPERES)	2406
*SECOND TEST (MILLIAMPERES)	2408
MAXIMUM OUTPUT VOLTAGE (SELECT ONE)	
SINGLE TEST (MILLIVOLTS)	2410
MULTIPLE TEST	
*FIRST TEST (MILLIVOLTS)	2412
*SECOND TEST (MILLIVOLTS)	2414
REMAIN WITHIN SPECIFIED TOLERANCE.	2416
NO EVIDENCE OF PHYSICAL DAMAGE.	2418
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2420

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2402	LEAKAGE CURRENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2404	THE LEAKAGE CURRENT PRIOR TO PULSE FOR A SINGLE TEST SHALL BE NOT GREATER THAN 2404 MILLIAMPERES.
2406	THE LEAKAGE CURRENT PRIOR TO PULSE FOR THE FIRST TEST SHALL BE NOT GREATER THAN 2406 MILLIAMPERES.
2408	THE LEAKAGE CURRENT PRIOR TO PULSE FOR THE SECOND TEST SHALL BE NOT GREATER THAN 2408 MILLIAMPERES.
2410	THE OUTPUT VOLTAGE FOR A SINGLE TEST SHALL BE NOT GREATER THAN 2410 MILLIVOLTS.
2412	THE OUTPUT VOLTAGE FOR THE FIRST TEST SHALL BE NOT GREATER THAN 2412 MILLIVOLTS.
2414	THE OUTPUT VOLTAGE FOR THE SECOND TEST SHALL BE NOT GREATER THAN 2414 MILLIVOLTS.
2416	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2418	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2420	LEAKAGE CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LEAKAGE CURRENT (CONT)	
TEST METHODS (CONT)	
PER MIL-T-82535.	2422
TIMER INTERVALS (SELECT ONE)	
(SECONDS)	2424
(MINUTES)	2426
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	2428
(VOLTS DC)	2430
LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
AS FOLLOWS:	2502
MINIMUM OPERATIONAL LIFE (HOURS)	2504
PERCENT OF TOTAL REGISTRATION (PERCENT)	2506
REMAIN WITHIN SPECIFIED TOLERANCE.	2508
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2520
PER MIL-E-16400.	2522

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2422	LEAKAGE CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-82535.
2424	THE TIMER INTERVAL(S) SHALL BE 2424 SECONDS.
2426	THE TIMER INTERVAL(S) SHALL BE 2426 MINUTES.
2428	THE TEST VOLTAGE SHALL BE 2428 VOLTS AC.
2430	THE TEST VOLTAGE SHALL BE 2430 VOLTS DC.
2500	LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 2500.
2502	LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2504	THE OPERATIONAL LIFE SHALL BE NOT LESS THAN 2504 HOURS.
2506	THE TIMER LIFE SHALL BE 2506 PERCENT OF TOTAL REGISTRATION.
2508	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2520	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2520.
2522	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-16400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (CONT)	
PER MIL-E-1600. (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	2524
TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2526
TEST DURATION (HOURS)	2528
MOTOR OPERATION (TIMING MECHANISM)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2600
AS FOLLOWS:	2602
REMAIN WITHIN SPECIFIED TOLERANCE.	2604
DELAY TIME AFTER START RELAY CLOSES (MINUTES)	2606
DELAY TIME TOLERANCE (SECONDS)	2608
RECURRENT DELAY AFTER START RELAY OPENS (MINUTES)	2610
TIME TOLERANCE (SECONDS)	2612
INTERRUPTION TIME, POWER SUPPLY SWITCH OPEN (MINUTES)	2614
INTERRUPTION TIME TOLERANCE (SECONDS)	2616

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2524	THE TEST TEMPERATURE SHALL BE 2524 DEGREES CELSIUS.
2526	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2526 DEGREES CELSIUS.
2528	THE TEST DURATION SHALL BE 2528 HOURS.
2600	MOTOR OPERATION (TIMING MECHANISM). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2600.
2602	MOTOR OPERATION (TIMING MECHANISM). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2604	THE MECHANISM SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2606	THE TIMING MECHANISM SHALL BE CAPABLE OF PROVIDING A DELAY TIME OF 2606 MINUTES AFTER THE START RELAY IS ACTIVATED OR CLOSED.
2608	THE TIMING MECHANISM DELAY TOLERANCE SHALL BE 2608 SECONDS.
2610	THE MOTOR TIME DELAY CONTROL SHALL BE CAPABLE OF PROVIDING A RECURRENT DELAY TIME OF 2610 MINUTES.
2612	THE RECURRENT DELAY TOLERANCE SHALL BE 2612 SECONDS.
2614	THE INTERRUPTION TIME (POWER SUPPLY SWITCH OPEN) SHALL BE 2614 MINUTES.
2616	THE INTERRUPTION TIME TOLERANCE SHALL BE 2616 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
MOTOR OPERATION (TIMING MECHANISM) (CONT)	
AS FOLLOWS: (CONT)	
RECURRENT DELAY AFTER INTERRUPT (MINUTES)	2618
RECURRENT DELAY TOLERANCE (SECONDS)	2620
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2630
PER DOCUMENT (DOC DES)	2632
TEST POWER SUPPLY VOLTAGE (SELECT ONE)	
(VOLTS AC)	2634
(VOLTS DC)	2636
MEASURE TIME USING STOPWATCH.	2638
PREMATURE OUTPUT PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2700
AS FOLLOWS:	2702
REMAIN WITHIN SPECIFIED TOLERANCE.	2704
MAXIMUM OUTPUT PULSE VOLTAGE (VOLTS DC)	2706
NO PULSE DURING ELAPSED PERIODS (SECONDS)	2708

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2618	THE MOTOR TIME DELAY CONTROL SHALL BE CAPABLE OF PROVIDING A RECURRENT DELAY TIME OF 2618 MINUTES AFTER THE END OF INTERRUPT TIME.
2620	THE RECURRENT DELAY TIME TOLERANCE AFTER INTERRUPT TIME SHALL BE 2620 SECONDS.
2630	MOTOR OPERATION TIMING MECHANISM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2630.
2632	MOTOR OPERATION TIMING MECHANISM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2632.
2634	THE TEST POWER SUPPLY VOLTAGE SHALL BE 2634 VOLTS AC.
2636	THE TEST POWER SUPPLY VOLTAGE SHALL BE 2636 VOLTS DC.
2638	THE TEST TIME SHALL BE MEASURED WITH AN APPROVED STOPWATCH.
2700	PREMATURE OUTPUT PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2700.
2702	PREMATURE OUTPUT PULSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2704	ITEM(S) SHALL REMAIN WITHIN THE SPECIFIED TOLERANCE.
2706	THE OUTPUT PULSE VOLTAGE SHALL BE NOT GREATER HAN 2706 VOLTS DC.
2708	THERE SHALL BE NO OUTPUT PULSE DURING ELAPSED TIME PERIOD(S) OF 2708 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PREMATURE OUTPUT PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2720
PER MIL-T-82535.	2722
MAXIMUM POTENTIAL (VOLTS DC)	2724
INPUT TIME INTERVALS (SECONDS)	2726
REOPENING INTERVAL (SWITCH CONTACTS)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2800
AS FOLLOWS:	2802
MOTOR SWITCH CONTACTS SHALL OPEN.	2804
REMAIN WITHIN SPECIFIED TOLERANCE.	2806
OPENING TIME AFTER POWER SUPPLY INTERRUPTION (SECONDS)	2808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2820
PER MIL-T-46361.	2822

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2720	PREMATURE OUTPUT PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2720.
2722	PREMATURE OUTPUT PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-82535.
2724	THE APPLIED POTENTIAL SHALL BE NOT GREATER THAN 2724 VOLTS DC.
2726	THE INPUT TIME INTERVAL(S) SHALL BE 2726 SECONDS.
2800	REOPENING INTERVAL (SWITCH CONTACTS). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2800.
2802	REOPENING INTERVAL (SWITCH CONTACTS). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2804	THE MOTOR SWITCH CONTACTS SHALL OPEN.
2806	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2808	THE MOTOR SWITCH CONTACTS SHALL BE CAPABLE OF OPENING 2808 SECONDS AFTER INTERRUPTION OF THE 120 VOLT POWER SUPPLY.
2820	REOPENING INTERVAL (SWITCH CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2820.
2822	REOPENING INTERVAL (SWITCH CONTACTS). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-46361.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE IV. (CONT)	
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SETTING TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2900
AS FOLLOWS:	2902
MAXIMUM TORQUE TO SET TIMER (SELECT ONE)	
(POUND-INCHES)	2904
(NEWTON METERS)	2906
TIMER SET POSITION	
MINIMUM (SECONDS)	2908
MAXIMUM (SECONDS)	2910
NO DIAL MOVEMENT.	2912

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2900	SETTING TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2900.
2902	SETTING TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2904	THE TORQUE TO SET TIMER SHALL BE NOT GREATER THAN 2904 POUND-INCHES.
2906	THE TORQUE TO SET TIMER SHALL BE NOT GREATER THAN 2906 NEWTON METERS.
2908	THE TIMER SET POSITION TIME SHALL BE NOT LESS THAN 2908 SECONDS.
2910	THE TIMER SET POSITION TIME SHALL BE NOT GREATER THAN 2910 SECONDS.
2912	THERE SHALL BE NO DIAL MOVEMENT AFTER REMOVAL OF SETTING TORQUE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SETTING TORQUE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2920
PER MIL-T-48519.	2922
MEASURE TORQUE WITH TORQUE WRENCH.	2924
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311
PER MIL-STD-810, METHOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2920	SETTING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2920.
2922	SETTING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-T-48519.
2924	MEASURE TORQUE WITH AN APPROVED TORQUE WRENCH.
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE I. (CONT)	
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C OR D (LETTER)	6342
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH THE FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PER MIL-STD-810, METHOD 516 (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
PERCENT RATED LOAD APPLIED (PERCENT)	6204
MONITOR PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PER MIL-S-901	3000
EQUIPMENT GRADE (LETTER)	3002
EQUIPMENT CLASSIFICATION (SELECT ONE)	
HULL MOUNTED.	3004
DECK MOUNTED.	3006
SHELL MOUNTED.	3008
PRINCIPAL UNIT.	3010
SUBSIDIARY COMPONENT.	3012
SUBASSEMBLIES.	3014
EQUIPMENT CLASS (NUMERAL)	3016

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
3000	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-901.
3002	THE EQUIPMENT GRADE SHALL BE 3002.
3004	THE EQUIPMENT CLASSIFICATION SHALL BE HULL MOUNTED.
3006	THE EQUIPMENT CLASSIFICATION SHALL BE DECK MOUNTED.
3008	THE EQUIPMENT CLASSIFICATION SHALL BE SHELL MOUNTED.
3010	THE EQUIPMENT CLASSIFICATION SHALL BE PRINCIPAL UNIT.
3012	THE EQUIPMENT CLASSIFICATION SHALL BE SUBSIDIARY COMPONENT.
3014	THE EQUIPMENT CLASSIFICATION SHALL BE SUBASSEMBLIES.
3016	THE EQUIPMENT CLASS SHALL BE 3016.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PER MIL-S-901 (CONT)	
TEST CLASSIFICATION (SELECT ONE)	
LIGHTWEIGHT.	3020
MEDIUMWEIGHT.	3022
HEAVYWEIGHT.	3024
TEST TYPE (LETTER)	3026
METHOD OF MOUNTING (FIXTURE)	3028
START RELAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3100
AS FOLLOWS:	3102
REMAIN WITHIN SPECIFIED TOLERANCE.	3104
START RELAY (DESIGNATION)	3106
MAXIMUM START RELAY VOLTAGE (SELECT ONE)	
(VOLTS AC)	3108
(VOLTS DC)	3110
START RELAY CURRENT (AMPERES)	3112
START RELAY VOLTAGE FREQUENCY (HERTZ)	3114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3020	THE TEST CLASSIFICATION SHALL BE LIGHTWEIGHT.
3022	THE TEST CLASSIFICATION SHALL BE MEDIUMWEIGHT.
3024	THE TEST CLASSIFICATION SHALL BE HEAVYWEIGHT.
3026	THE TEST TYPE SHALL BE 3026.
3028	THE METHOD OF MOUNTING SHALL BE IN ACCORDANCE WITH FIXTURE 3028.
3100	START RELAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3100.
3102	START RELAY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3104	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3106	THE START RELAY DESIGNATED SHALL BE 3106.
3108	THE START RELAY OPERATING VOLTAGE SHALL BE NOT GREATER THAN 3108 VOLTS AC.
3110	THE START RELAY OPERATING VOLTAGE SHALL BE NOT GREATER THAN 3110 VOLTS DC.
3112	THE START RELAY OPERATING CURRENT SHALL BE 3112 AMPERES.
3114	THE START RELAY OPERATING VOLTAGE FREQUENCY SHALL BE 3114 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
START RELAY (CONT)	
AS FOLLOWS: (CONT)	
START RELAY OPERATES AT ZERO OHMMETER INDICATION.	3116
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3120
PER DOCUMENT (DOC DES)	3122
MEASURE VALUES WITH APPROVED INSTRUMENTS.	3124
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER MIL-STD-810, METHOD 501.	6218
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3116	THE START RELAY SHALL OPERATE WHEN AN OHMMETER READING OF ZERO IS INDICATED.
3120	START RELAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3120.
3122	START RELAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3122.
3124	MEASURE ELECTRICAL VALUES WITH APPROVED INSTRUMENTS.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER MIL-STD-810, METHOD 501. (CONT)	
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER MIL-STD-810, METHOD 502. (CONT)	
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TIMER INTERVALS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3200
PER TIMING INTERVAL TABLE.	3202

NOTE: THIS TABLE IS USED FOR SPECIFYING VARIOUS ON-OFF TIME PARAMETERS ASSOCIATED WITH PARTICULAR CIRCUITRY AND OUTPUTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6315 OPERATING TIME SHALL BE 6315 MINUTE(S).

6316 OPERATING TIME SHALL BE 6316 HOUR(S).

3200 TIMER INTERVALS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3200.

3202 TIMER INTERVALS. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE TIMING INTERVAL TABLE.

TIMING INTERVAL TABLE

OUTPUT-PIN/WIRE OR LOAD CIRCUIT	ON-OFF TIME PARAMETERS
3230	3231
3232	3233
3234	3235
3236	3237
3238	3239
3240	3241
3242	3243
3244	3245
3246	3247
3248	3249
3250	3251
3252	3253
3254	3255
3256	3257
3258	3259
3260	3261
3262	3263
3264	3265

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TIMER INTERVALS (CONT)	
PER TIMING INTERVAL TABLE. (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3220
PER DOCUMENT (DOC DES)	3222

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TIMING INTERVAL TABLE (CONT)

OUTPUT-PIN/WIRE OR LOAD CIRCUIT	ON-OFF TIME PARAMETERS
3266	3267
3268	3269
3270	3271
3272	3273
3274	3275
3276	3277
3278	3279

NOTE A 3300.
NOTE B 3301.
NOTE C 3302.
NOTE D 3303.
NOTE E 3304.
NOTE F 3305.
NOTE G 3306.
NOTE H 3307.
NOTE I 3308.
NOTE J 3309.
NOTE K 3310.
NOTE L 3311.
NOTE M 3312.
NOTE N 3313.
NOTE O 3314.
NOTE P 3315.
NOTE Q 3316.

3220 TIMER INTERVALS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3220.

3222 TIMER INTERVALS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3222.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4482
REMAIN WITH SPECIFIED TOLERANCE.	1538
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
* MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1457
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514	1514
*PROCEDURE NUMBER (ROMAN NUMBERAL)	1518
EQUIPMENT CATEGORY (LETTER)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4482	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECONDS.
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECONDS.
1457	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCAE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES ARE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-810, METHOD 514. (CONT)	
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
PERCENT RATED LOAD APPLIED (PERCENT)	4678
PER MIL-STD-167-1.	3400
TYPES OF VIBRATION REQUIRED (ROMAN NUMERAL)	3402
STORAGE CONDITIONS	
(YEARS)	1529
(CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE DONE AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
3400	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-167-1.
3402	TESTING SHALL BE PERFORMED PER TYPE 3402 CLASSIFICATION.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE XII IS USED.	
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1764 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A236)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

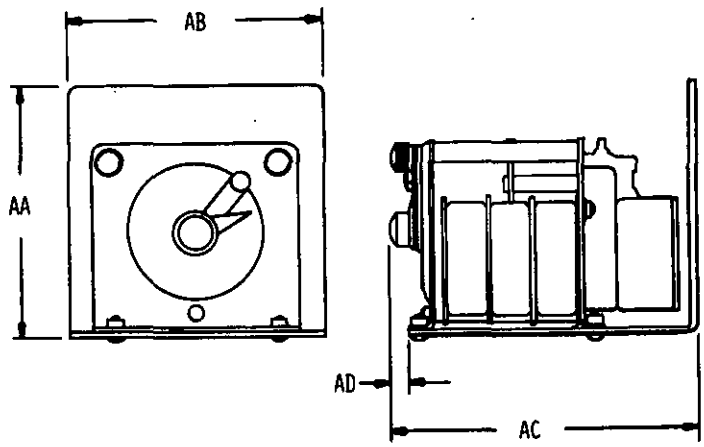

054-01-1

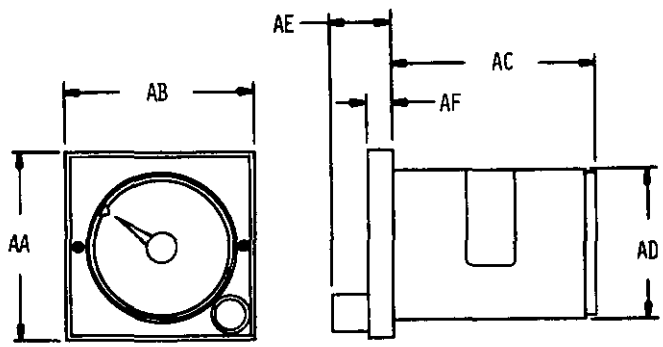

054-02-1

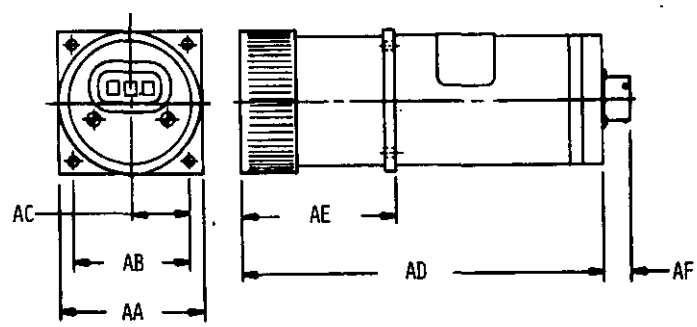

054-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1518	114	1638	30	1758	42
0102	16	1520	80	1640	30	1760	42
0103	16	1522	80	1642	30	1762	42
0104	16	1523	80	1644	30	1764	42
0105	16	1524	80	1646	30	1766	42
0107	18	1525	114	1648	32	1768	42
0108	18	1529	116	1650	32	1770	42
0700	16	1532	114	1652	32	1772	42
0800	16	1538	114	1654	32	1774	42
1003	16	1540	114	1656	32	1776	42
1004	16	1542	116	1658	32	1778	42
1005	16	1543	116	1660	32	1780	42
1006	16	1544	116	1662	32	1782	42
1008	16	1545	114	1664	32	1784	42
1009	34	1546	114	1700	36	1786	44
1371	78	1547	50	1702	36	1788	44
1372	80	1548	54	1704	38	1790	44
1373	78	1549	54	1706	38	1792	44
1374	114	1551	98	1708	38	1793	44
1376	80	1554	76	1710	38	1794	44
1377	80	1555	76	1722	38	1796	44
1378	78	1556	76	1724	38	1798	44
1380	78	1557	52	1726	38	1800	44
1381	80	1558	52	1728	38	1801	44
1383	80	1559	114	1730	38	1802	44
1384	78	1600	20	1731	38	1804	44
1386	78	1602	20	1732	38	1806	46
1387	78	1612	28	1733	38	1808	46
1388	78	1614	28	1734	40	1810	46
1407	78	1616	28	1736	40	1812	46
1424	116	1618	28	1738	40	1814	46
1457	114	1620	28	1740	40	1816	46
1477	74	1622	28	1742	40	1818	46
1497	80	1624	28	1744	40	1820	46
1498	80	1626	28	1746	40	1822	46
1499	102	1628	30	1748	40	1900	54
1503	102	1630	30	1750	40	1902	54
1505	114	1632	30	1752	40	1904	54
1511	78	1634	30	1754	40	1906	54
1514	114	1636	30	1756	40	1908	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1910	54	2400	80	2636	88	3026	104
1912	54	2402	82	2638	88	3028	104
1920	54	2404	82	2700	88	3100	104
1922	56	2406	82	2702	88	3102	104
1924	56	2408	82	2704	88	3104	104
1926	56	2410	82	2706	88	3106	104
2000	56	2412	82	2708	88	3108	104
2002	56	2414	82	2720	90	3110	104
2004	56	2416	82	2722	90	3112	104
2006	56	2418	82	2724	90	3114	104
2020	56	2420	82	2726	90	3116	106
2022	56	2422	84	2800	90	3120	106
2024	56	2424	84	2802	90	3122	106
2100	58	2426	84	2804	90	3124	106
2104	58	2428	84	2806	90	3200	110
2120	58	2430	84	2808	90	3202	110
2122	58	2500	84	2820	90	3220	112
2124	58	2502	84	2822	90	3222	112
2200	68	2504	84	2900	96	3230	111
2202	68	2506	84	2902	96	3231	111
2204	68	2508	84	2904	96	3232	111
2220	68	2520	84	2906	96	3233	111
2222	68	2522	84	2908	96	3234	111
2224	68	2524	86	2910	96	3235	111
2226	68	2526	86	2912	96	3236	111
2228	68	2528	86	2920	98	3237	111
2230	68	2600	86	2922	98	3238	111
2232	68	2602	86	2924	98	3239	111
2234	58	2604	86	3000	102	3240	111
2300	68	2606	86	3002	102	3241	111
2302	70	2608	86	3004	102	3242	111
2304	70	2610	86	3006	102	3243	111
2306	70	2612	86	3008	102	3244	111
2308	70	2614	86	3010	102	3245	111
2310	70	2616	86	3012	102	3246	111
2312	70	2618	88	3014	102	3247	111
2320	70	2620	88	3016	102	3248	111
2322	70	2630	88	3020	104	3249	111
2324	70	2632	88	3022	104	3250	111
2326	70	2634	88	3024	104	3251	111

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3252	111	3312	113	4777	74	4893	52
3253	111	3313	113	4778	74	4894	64
3254	111	3314	113	4781	74	4897	62
3255	111	3315	113	4788	74	4900	66
3256	111	3316	113	4791	72	4901	64
3257	111	3400	116	4795	74	4902	66
3258	111	3402	116	4798	72	4906	64
3259	111	3500	62	4799	72	4908	64
3260	111	3502	66	4800	76	4916	76
3261	111	4482	114	4803	74	4919	76
3262	111	4678	116	4805	74	4920	76
3263	111	4681	114	4813	74	4942	116
3264	111	4716	76	4815	72	4943	116
3265	111	4717	62	4842	60	4944	116
3266	113	4732	92	4844	62	4950	36
3267	113	4734	92	4845	62	5000	62
3268	113	4735	94	4846	62	5046	22
3269	113	4736	94	4847	60	5048	22
3270	113	4737	92	4848	60	5052	22
3271	113	4738	92	4849	64	5054	20
3272	113	4739	92	4850	62	5060	20
3273	113	4740	94	4854	60	5061	20
3274	113	4741	94	4855	60	5062	20
3275	113	4742	94	4856	60	5063	20
3276	113	4743	96	4859	66	5068	20
3277	113	4745	92	4861	60	5069	20
3278	113	4746	92	4862	60	5209	116
3279	113	4748	92	4863	52	6204	102
3300	113	4749	94	4864	52	6210	54
3301	113	4750	94	4865	52	6217	106
3302	113	4751	94	4867	62	6218	106
3303	113	4752	94	4868	52	6219	106
3304	113	4754	72	4869	62	6220	106
3305	113	4755	72	4870	62	6221	106
3306	113	4756	72	4874	60	6222	108
3307	113	4760	72	4884	64	6224	108
3308	113	4761	72	4885	64	6225	108
3309	113	4762	72	4886	64	6226	52
3310	113	4764	76	4891	66	6228	106
3311	113	4767	74	4892	52	6229	106

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6231	108	6329	94	7002	118	7597	22
6232	108	6330	96	7003	118	7598	22
6233	52	6331	96	7004	118	7600	24
6234	108	6332	96	7005	118	7601	24
6235	108	6333	96	7021	48	7602	24
6236	108	6334	76	7022	48	7603	24
6237	108	6335	76	7023	48	7604	24
6238	108	6336	76	7024	48	7605	24
6239	52	6337	76	7025	48	7609	26
6250	50	6338	100	7026	48	7610	26
6251	50	6339	100	7027	48	7611	26
6263	52	6340	100	7028	48	7612	26
6264	52	6341	100	7029	48	7613	26
6265	52	6342	100	7030	48	7614	26
6267	52	6343	100	7301	20	7618	26
6272	50	6344	100	7302	20	7619	26
6273	50	6345	100	7305	100	7620	26
6277	50	6346	100	7306	100	7621	26
6280	66	6347	100	7307	102	7622	26
6292	66	6348	100	7308	102	7623	26
6293	66	6349	100	7309	102	7627	26
6294	66	6359	78	7311	98	7628	28
6300	64	6369	16	7312	98	7629	118
6308	66	6370	92	7313	98	7631	22
6310	66	6372	118	7315	98	7632	22
6311	66	6870	118	7316	98	7633	22
6312	66	6873	16	7317	98	7634	24
6315	110	6874	18	7318	98	7635	24
6316	110	6941	18	7345	50	7636	24
6318	108	6942	18	7572	34	7637	24
6319	108	6991	120	7573	34	7638	24
6320	92	6992	120	7574	34	7639	24
6321	92	6993	120	7576	34	7641	28
6322	92	6994	120	7577	34	7645	22
6323	92	6995	120	7578	34	7646	24
6324	94	6996	50	7580	36	7647	24
6325	94	6997	50	7591	22	7875	60
6326	94	6998	50	7592	22		
6327	100	6999	50	7594	22		
6328	94	7001	118	7595	22		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	50
Accuracy	54
Accuracy Rating-	28
Additional Part Marking-	120
Additional Requirements-	118
Alarm Volume Control	38
Altitude Rating-	20
Aperture Cards Required-	18
Applicable Documents	120
Audible Distance of Alarm-	38
Base Document-	16
Circuitry (Continuity)	56
Circuit Resistance	58
City, State, Zip	16
Classification	20
Clutch Manual Disengaging Lever-	38
Clutch Current Rating-	30
Clutch Voltage Frequency Rating-	30
Clutch Voltage Rating-	28
Company Name/Command	16
Configuration-	34
Contract Number/Office Symbol-	16
Control-	16
Cord and Plug Assembly	40
Current Rating	22
Date	16
Definition of Hermetic Sealing	120
Design and Construction-	36
Design Reliability	48
Dial Provisions-	44
Dielectric Withstanding Voltage at Reduced Barometric Pressure	64
Dielectric Withstanding Voltage at Sea Level	60
Electrical Connectors-	42
Electromagnetic Interference	68
Enclosure Type	42
Energy Output-	68
Finishes	36
Fire and Casualty Provisions	42
Format	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Frequency Rating	26
Fungus	72
Government Design Activity FSCM	16
Humidity	72
Illustrations	36
Indicator Light	42
Insulation Resistance	78
Interchangeability	46
Leakage Current	80
Life	84
Materials	36
Metals	36
Maximum Cycle Time	40
Maximum Knob/Pointer Travel	42
Maximum Load Circuits	44
Maximum Operating Time	36
Maximum Power Dissipation	44
Maximum Reset Time	40
Motor Duty Cycles	44
Motor Operation (Timing Mechanism)	86
Mounting Hardware	118
Nomenclature	120
Notes	120
On-Off Power Switch	44
Packaging	120
Part Marking	118
Part Number	18
Part Number Cross-Reference	120
Performance Characteristics	118
Phone Number	16
Power Rating	22
Premature Output Pulse	88
Quality Assurance Provisions	120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Regulator/Timer Rate Adjustment	46
Reopening Interval (Switch Contacts)	90
Repeatability	46
Requester FSCM	16
Requester's Name	16
Reset Control	40
Reset Current Rating	32
Reset Provisions	40
Reset Voltage Frequency Rating	32
Reset Voltage Rating	30
Revision of AEDPS Document (Number)	18
Scope	18
Seal	92
Service Life	46
Setting Torque	96
Shock	98
Source Table	18
Start Relay	104
Street/Building	16
Storage Conditions	116
Superseded Document	120
Switch Contact Rating	32
System Application	16
Tabulated Characteristics	36
Temperature, High	106
Temperature, Low	108
Temperature Rating	20
Timer Alarm	38
Timer Intervals	110
Timing Mechanism	42
Total Registration	44
Units of Measure	18
Vibration	114
Voltage Rating	24
Weight	48
Workmanship	118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-131(MI), dated 18 Aug 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-131(MI), dated 18 Aug 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-0-26107:252
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.