DOD-STD-35-132(MI)
28 JULY 1978

MILITARY STANDARD

DELAY LINES, ELECTRONIC AND NETWORK PULSE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Delay Lines
Electronic and Network Pulse
Automated Engineering
Document Preparation System

DOD-STD-35-132(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-132(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for delay lines.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicity in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automated MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	111
	B.	Characteristic Code Index	121
		Index	127

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for delay lines.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
DELAY LINE, FIXED	067001	MIL-D-23859	ELECTROMAGNETIC TAPPED, UNTAPPED, SECTIONALIZED
DELAY LINE, VARIABLE	067002	MIL-D-28986	VARIABLE DELAY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-D-23859	Delay Lines, Pulse, Electromagnetic, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-883	Test Methods and Procedures for Microelectronics
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTM E380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Delay Lines.

Figure of merit. A measure of the minimum inherent delay to rise time ratio that shall be expected of the delay line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Delay Lines, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Delay Lines.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Delay Lines.

4.3.2 Illustrations. Illustrations applicable to Delay Lines are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Section 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for delay line characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1600	NOM TERMN IMPEDANCE OHMS	1602	NOM TERMN IMPEDANCE TOL OHMS	1630	FIGURE OF MERIT NUMBER
1730	MAXIMUM V LEVEL VOLTS DC	1802	MAX ATTEN AT MAX DLY PT DECIBEL	1842	DELAY TIME VAR WITH TEMP PCT
1844	DELAY TIME VAR WITH TEMP PPM PER DEG C	2102	RISE TIME AT MAX DELAY PT MICROSEC	2110	RISE TIME AT MAX DELAY PT NANOSEC
2501	TOT DELAY TIME MICROSEC	2502	TOT DELAY TIME NANOSEC	2506	TOT DELAY TIME TOL MICROSEC
2507	TOT DELAY TIME TOL NANOSEC	2508	TOT DELAY TIME TOL PERCENT	7021	MAXIMUM WEIGHT GRAMS
7022	MAXIMUM WEIGHT OUNCES	7023	MAXIMUM WEIGHT POUNDS	7024	MAXIMUM WEIGHT KILOGRAMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
(STYLE)	1578
LUMPED CONSTANT.	1579
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1578	STYLE 1578 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1579	THE ITEM(S) SHALL BE CLASSED AS LUMPED CONSTANT.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, (DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
CASE (SELECT ONE)	
ENCAPSULATED.	1562
UNENCAPSULATED.	1564
HERMETIC SEAL.	1580

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

6790 OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.

6791 OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.

6792 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.

6793 NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.

1562 CASE. THE ITEM(S) SHALL BE ENCAPSULATED.

1564 CASE. THE ITEM(S) SHALL BE UNENCAPSULATED.

1580 CASE. THE ITEM(S) SHALL BE HERMETICALLY SEALED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026
RATING TEMPERATURE (DEGREES CELSIUS)	7029
ELECTRICAL STRESS VOLTAGE (PERCENT OF RATED)	7030
TERMINATING IMPEDANCE	
NOMINAL (OHMS)	1600
TOLERANCE (PERCENT)	1602
FIGURE OF MERIT	
DELAY TO RISE TIME RATIO (NUMBER)	1630

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:

7025 THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.

7026 THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.

7029 THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.

7030 THE DESIGN RELIABILITY SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.

1600 TERMINATING IMPEDANCE. THE NOMINAL TERMINATING IMPEDANCE SHALL BE 1600 OHM(S).

1602 THE TERMINATING IMPEDANCE TOLERANCE SHALL BE 1602 PERCENT.

1630 FIGURE OF MERIT. THE FIGURE OF MERIT SHALL HAVE A DELAY TO RISE TIME RATIO OF 1630.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
INPUT PULSE CHARACTERISTICS	
PULSE WIDTH (SELECT ONE)	
(MICROSECONDS)	1640
(NANOSECONDS)	1641
GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY TIME.	1642
REPETITION RATE (PULSES PER SECOND)	1644
RISE TIME (SELECT ONE)	
(MICROSECONDS)	1646
(NANOSECONDS)	1647
AMPLITUDE (VOLTS)	1648
FALL TIME (SELECT ONE)	
(MICROSECONDS)	1650
(NANOSECONDS)	1651
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM STORAGE (DEGREES CELSIUS)	6796

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	INPUT PULSE CHARACTERISTICS.
1640	THE PULSE WIDTH SHALL BE 1640 MICROSECOND(S).
1641	THE PULSE WIDTH SHALL BE 1641 NANOSECOND(S).
1642	THE PULSE WIDTH SHALL BE GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY TIME.
1644	THE REPETITION RATE SHALL BE 1644 PULSES PER SECOND.
1646	THE RISE TIME SHALL BE 1646 MICROSECOND(S).
1647	THE RISE TIME SHALL BE 1647 NANOSECOND(S).
1648	THE AMPLITUDE SHALL BE 1648 VOLT(S).
1650	THE FALL TIME SHALL BE 1650 MICROSECOND(S).
1651	THE FALL TIME SHALL BE 1651 NANOSECOND(S).
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE (CONT)	
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
TERMINALS	
ILLUSTRATION 067-06-1 STYLE (LETTER)	1700
MINIMUM SPACING (SELECT ONE)	
(INCHES)	1702
(MILLIMETERS)	1704
VOLTAGE	
MAXIMUM LEVEL (VOLTS, DC)	1730

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
	TERMINALS.
1700	THE TERMINALS SHALL BE IN ACCORDANCE WITH STYLE 1700 OF ILLUSTRATION 067-06-1.
1702	THE TERMINAL SPACING SHALL BE NOT LESS THAN 1702 INCH(S).
1704	THE TERMINAL SPACING SHALL BE NOT LESS THAN 1704 MILLIMETER(S).
1730	VOLTAGE. THE VOLTAGE LEVEL SHALL BE NOT GREATER THAN 1730 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
ATTENUATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
MAXIMUM ATTENUATION AT THE POINT OF MAXIMUM DELAY (DECIBELS)	1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
1800	ATTENUATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	ATTENUATION. ATTENUATION AT THE POINT OF MAXIMUM DELAY SHALL BE NOT GREATER THAN 1802 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION (CONT)	
MAXIMUM ATTENUATION AT THE POINT OF MAXIMUM DELAY (CONT)	
MAXIMUM ATTENUATION (SELECT ONE)	
AT THE TAPS (DECIBELS)	1804
AT THE SECTIONS (DECIBELS)	1806
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE ATTENUATION AS REQUIRED.	1812
DELAY TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1820

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1804	ATTENUATION AT THE TAPS SHALL BE NOT GREATER THAN 1804 DECIBEL(S).
1806	ATTENUATION AT THE SECTIONS SHALL BE NOT GREATER THAN 1806 DECIBEL(S).
1810	ATTENUATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
1812	ATTENUATION. APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE ATTENUATION AS REQUIRED.
1820	DELAY TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1820.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DELAY TIME (CONT)	
REQUIREMENTS (CONT)	
DELAY TIME PER DELAY TIME TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DELAY TIME. THE DELAY TIME SHALL BE AS SPECIFIED IN THE DELAY TIME TABLE.

DELAY TIME TABLE

TOTAL DELAY		TAPS	DELAY BETWEEN TAPS		DELAY TOLERANCE		
MICRO-SECONDS	NANO-SECONDS	NUMBERS	MICRO-SECONDS	NANO-SECONDS	MICRO-SECONDS	NANO-SECONDS	PCT
2501	2502	2503	2504	2505	2506	2507	2508
2509	2510	2511	2512	2513	2514	2515	2516
2517	2518	2519	2520	2521	2522	2523	2524
2525	2526	2527	2528	2529	2530	2531	2532
2533	2534	2535	2536	2537	2538	2539	2540
2541	2542	2543	2544	2545	2546	2547	2548
2549	2550	2551	2552	2553	2554	2555	2556
2557	2558	2559	2560	2561	2562	2563	2564
2565	2566	2567	2568	2569	2570	2571	2572
2573	2574	2575	2576	2577	2578	2579	2580
2581	2582	2583	2584	2585	2586	2587	2588
2589	2590	2591	2592	2593	2594	2595	2596
2597	2598	2599	2600	2601	2602	2603	2604
2605	2606	2607	2608	2609	2610	2611	2612
2613	2614	2615	2616	2617	2618	2619	2620
2621	2622	2623	2624	2625	2626	2627	2628
2629	2630	2631	2632	2633	2634	2635	2636
2637	2638	2639	2640	2641	2642	2643	2644
2645	2646	2647	2648	2649	2650	2651	2652
2653	2654	2655	2656	2657	2658	2659	2660
2661	2662	2663	2664	2665	2666	2667	2668
2669	2670	2671	2672	2673	2674	2675	2676
2677	2678	2679	2680	2681	2682	2683	2684
2685	2686	2687	2688	2689	2690	2691	2692
2693	2694	2695	2696	2697	2698	2699	2700
2701	2702	2703	2704	2705	2706	2707	2708

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DELAY TIME (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1830
APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE DELAY TIME AS REQUIRED.	1832
DELAY TIME VARIANT WITH TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
DELAY TIME VARIANT (PERCENT)	1842
DELAY TIME VARIANT (PARTS PER MILLION PER DEGREES CELSIUS)	1844
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1850
PER MIL-D-23859.	1852

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1830	DELAY TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1830.
1832	DELAY TIME. APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE DELAY TIME AS REQUIRED.
1840	DELAY TIME VARIANT WITH TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.
1842	DELAY TIME VARIANT WITH TEMPERATURE. THE DELAY TIME VARIANT SHALL BE 1842 PERCENT.
1844	DELAY TIME VARIANT WITH TEMPERATURE. THE DELAY TIME VARIANT SHALL BE 1844 PARTS PER MILLION PER DEGREE CELSIUS.
1850	DELAY TIME VARIANT WITH TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1850.
1852	DELAY TIME VARIANT WITH TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-D-23859.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DELAY TIME VARIANT WITH TEMPERATURE (CONT)	
PER MIL-D-23859. (CONT)	
LOW TEMPERATURE (DEGREES CELSIUS)	1854
HIGH TEMPERATURE (DEGREES CELSIUS)	1856
STABILIZED MEASUREMENT TEMPERATURES (DEGREES CELSIUS)	1858
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1854	THE LOW TEMPERATURE SHALL BE 1854 DEGREES CELSIUS.
1856	THE HIGH TEMPERATURE SHALL BE 1856 DEGREES CELSIUS.
1858	THE STABILIZED MEASUREMENT TEMPERATURE(S) SHALL BE 1858 DEGREES CELSIUS.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
REGULATION OF TEST VOLTAGE (PERCENT)	4869

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
DISTORTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
MAXIMUM ALL ENCOMPASSING DISTORTION AT THE POINT OF MAXIMUM DELAY (PERCENT)	1902
MAXIMUM DISTORTION (SELECT ONE)	
AT THE TAPS (PERCENT)	1904
AT THE SECTIONS (PERCENT)	1906
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1910
APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE DISTORTION AS REQUIRED.	1912

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

1900 DISTORTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.

1902 DISTORTION. ALL ENCOMPASSING DISTORTION AT THE POINT OF MAXIMUM DELAY SHALL BE NOT GREATER THAN 1902 PERCENT.

1904 DISTORTION AT THE TAPS SHALL BE NOT GREATER THAN 1904 PERCENT.

1906 DISTORTION AT THE SECTIONS SHALL BE NOT GREATER THAN 1906 PERCENT.

1910 DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.

1912 DISTORTION. APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE DISTORTION AS REQUIRED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930
AS FOLLOWS:	1932
NO EVIDENCE OF VIOLENT BURNING.	1934
SELF-EXTINGUISHING.	1936
MAXIMUM DURATION OF VISIBLE FLAME (SECONDS)	1938
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1946
PER MIL-STD-202, METHOD 111.	1948
DURATION OF FLAME APPLICATION (SECONDS)	1950
POINT OF IMPINGEMENT OF APPLIED FLAME ____	1952
DIRECTION OF AXIS OF FLAME ____	1954
MEASUREMENTS AFTER TEST ____	1956

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1930	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.
1932	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1934	THERE SHALL BE NO EVIDENCE OF VIOLENT BURNING.
1936	THE ITEM(S) SUBJECTED TO THE FLAME SHALL BE SELF-EXTINGUISHING.
1938	DURATION OF VISIBLE FLAME SHALL BE NOT GREATER THAN 1938 SECOND(S).
1946	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1946.
1948	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 111 OF MIL-STD-202.
1950	THE FLAME SHALL BE APPLIED FOR 1950 SECOND(S).
1952	THE POINT OF IMPINGEMENT OF THE APPLIED FLAME SHALL BE 1952.
1954	THE DIRECTION OF THE AXIS OF THE FLAME SHALL BE 1954.
1956	THE MEASUREMENT(S) AFTER TEST SHALL BE 1956.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
NO EVIDENCE OF CONTINUOUS AIR BUBBLE FLOW OR COMPOUND LEAKAGE.	1978
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1978	THERE SHALL BE NO EVIDENCE OF CONTINUOUS AIR BUBBLE FLOW OR COMPOUND LEAKAGE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNITL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
REQUIREMENTS (CONT)	
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRENT ALIGNMENT, DEFECTS	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6371 RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).

4857 NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.

4858 NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.

6282 RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.

4843 RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.

6286 THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).

6285 THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCHES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PER MIL-STD-202, METHOD 209. (CONT)	
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283
(MILLIMETERS)	5297
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.
6697	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.
6698	TEST CONDITION LETTER 6698 SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
PER MIL-STD-202, METHOD 215. (CONT)	
SOLVENT(S) TO BE ADDED (NAME)	4838
SOLVENT(S) TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
RISE TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2100
MAXIMUM RISE TIME AT THE POINT OF MAXIMUM DELAY (MICROSECONDS)	2102
MAXIMUM RISE TIME (SELECT ONE)	
AT THE TAPS (MICROSECONDS)	2104
AT THE SECTIONS (MICROSECONDS)	2106

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4838 IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.

4835 BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.

4831 THE MARKING AREA SHALL BE BRUSHED.

6279 THE ENTIRE SURFACE SHALL BE BRUSHED.

2100 RISE TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2100.

2102 RISE TIME. RISE TIME AT THE POINT OF MAXIMUM DELAY SHALL BE NOT GREATER THAN 2102 MICROSECOND(S).

2104 RISE TIME AT THE TAPS SHALL BE NOT GREATER THAN 2104 MICROSECOND(S).

2106 RISE TIME AT THE SECTIONS SHALL BE NOT GREATER THAN 2106 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RISE TIME (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM RISE TIME AT THE POINT OF MAXIMUM DELAY (NANOSECONDS)	2110
MAXIMUM RISE TIME (SELECT ONE)	
AT THE TAPS (NANOSECONDS)	2112
AT THE SECTIONS (NANOSECONDS)	2114
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2120
APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE RISE TIME AS SPECIFIED.	2122
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2110	RISE TIME. RISE TIME AT THE POINT OF MAXIMUM DELAY SHALL BE NOT GREATER THAN 2110 NANOSECOND(S).
2112	RISE TIME AT THE TAPS SHALL BE NOT GREATER THAN 2112 NANOSECOND(S).
2114	RISE TIME AT THE SECTIONS SHALL BE NOT GREATER THAN 2114 NANOSECOND(S).
2120	RISE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2120.
2122	RISE TIME. APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE RISE TIME AS REQUIRED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732

Source: https://assist.dla.mil - Downloaded: 2026l0-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
PER MIL-STD-202, METHOD 112. (CONT)	
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
NO DISCONTINUITY DURING TEST.	1451
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 501.	6218
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER MIL-STD-810, METHOD 502. (CONT)	
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
BENDING ARC (DEGREES)	2200
TOLERANCE (DEGREES)	2202
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
2200	THE BENDING ARC SHALL BE 2200 DEGREES.
2202	THE BENDING ARC TOLERANCE SHALL BE 2202 DEGREES.
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL-AGE STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
AS FOLLOWS:	2252
MAXIMUM DELAY TIME CHANGE (PERCENT)	2254
MAXIMUM RISE TIME CHANGE (PERCENT)	2256
MAXIMUM ATTENUATION CHANGE (PERCENT)	2258
MAXIMUM DISTORTION CHANGE (PERCENT)	2260
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2268

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
2250	THERMAL-AGE STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	THERMAL-AGE STABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2254	DELAY TIME CHANGE SHALL BE NOT GREATER THAN 2254 PERCENT.
2256	RISE TIME CHANGE SHALL BE NOT GREATER THAN 2256 PERCENT.
2258	ATTENUATION CHANGE SHALL BE NOT GREATER THAN 2258 PERCENT.
2260	DISTORTION CHANGE SHALL BE NOT GREATER THAN 2260 PERCENT.
2268	THERMAL-AGE STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2268.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL-AGE STABILITY (CONT)	
TEST METHODS (CONT)	
APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE AS REQUIRED.	2270
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
NO ELECTRICAL DISCONTINUITY.	2280
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
PER MIL-STD-883, METHOD 1011.	2282
*TEST CONDITION (LETTER)	2284
TEST CYCLES (NUMBER)	2286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2270	THERMAL-AGE STABILITY. APPLY SPECIFIED INPUT PULSE WAVEFORM AND MEASURE AS REQUIRED.
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2280	THERE SHALL BE NO ELECTRICAL DISCONTINUITY.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
2282	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1011 OF MIL-STD-883.
2284	TEST CONDITION LETTER 2284 SHALL APPLY.
2286	THERE SHALL BE 2286 TEST CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING MEANS.	4708
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
NO DISCONTINUITY DURING TEST.	1490
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 210.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING MEANS.	4730
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
WINDING CONTINUITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2350
ELECTRICALLY CONTINUOUS.	2352
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2358
TEST FOR ELECTRICAL CONTINUITY BY ANY SUITABLE MEANS.	2360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
2350	WINDING CONTINUITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.
2352	WINDING CONTINUITY. THE WINDING SHALL BE ELECTRICALLY CONTINUOUS.
2358	WINDING CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2358.
2360	WINDING CONTINUITY. TEST FOR ELECTRICAL CONTINUITY BY ANY SUITABLE MEANS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE XII IS USED.	
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	

NOTE: AUTOMATIC WHEN CODE 1580 IS USED TO REQUIRE HERMETIC SEALING.

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A237)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

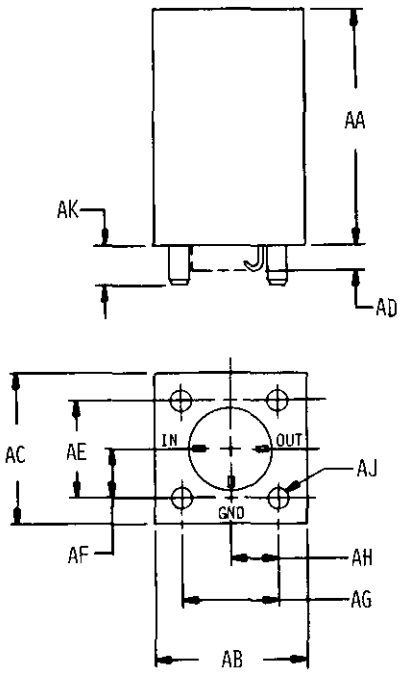

067-01-1

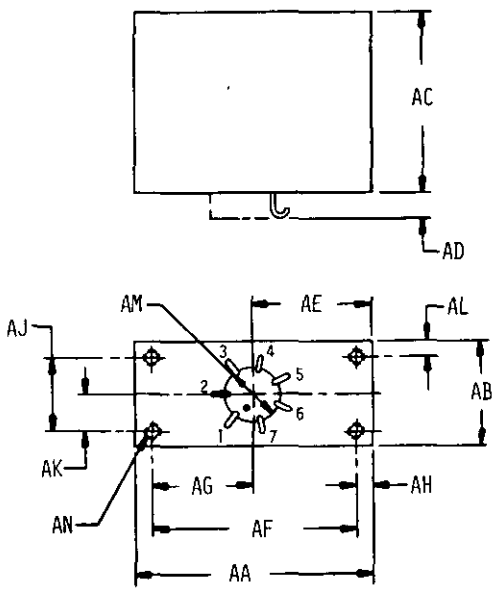


067-01-2

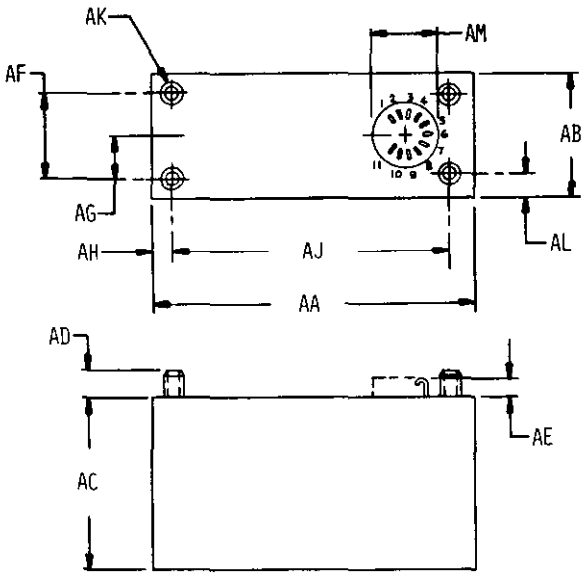


067-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

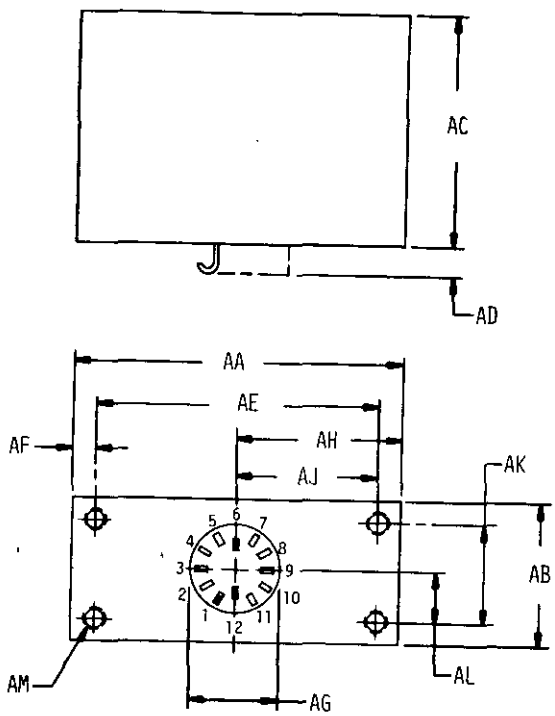


067-01-4

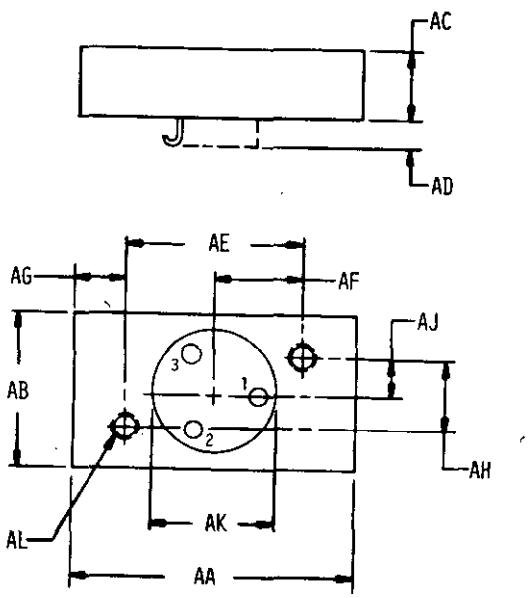


067-01-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

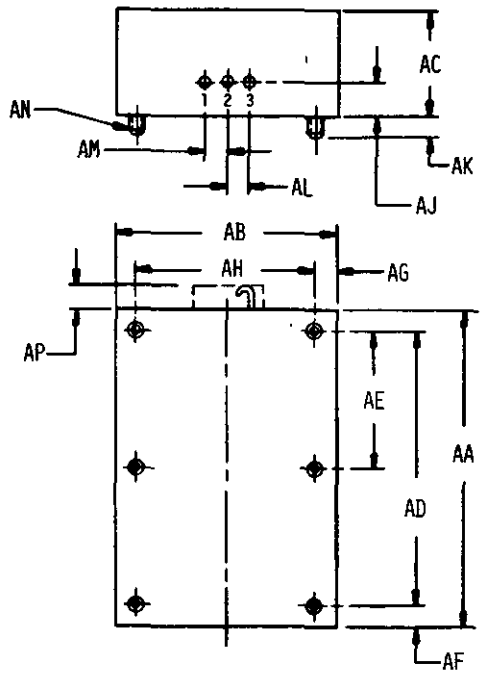

067-01-6

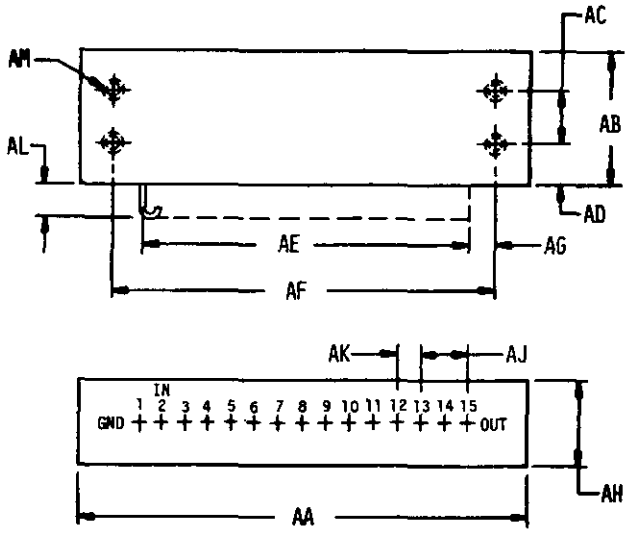


067-01-7

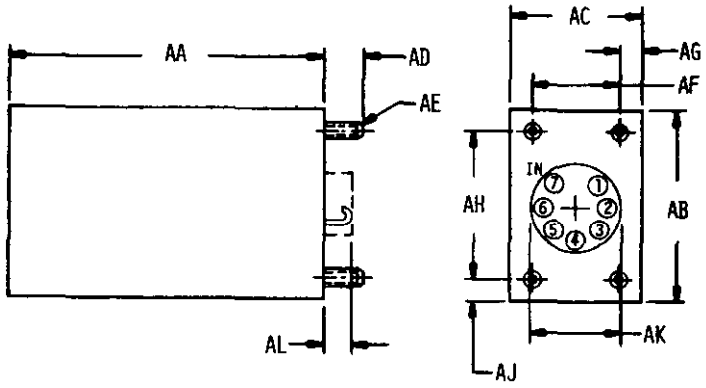


067-01-8


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

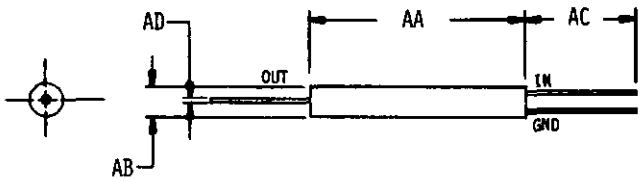

067-02-1

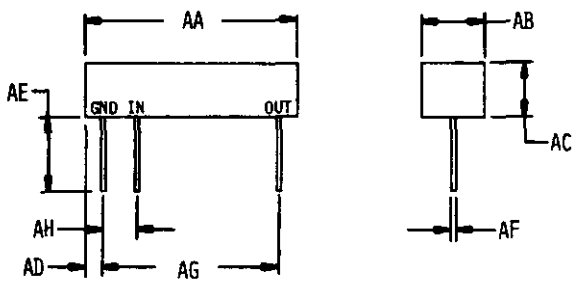


067-03-1

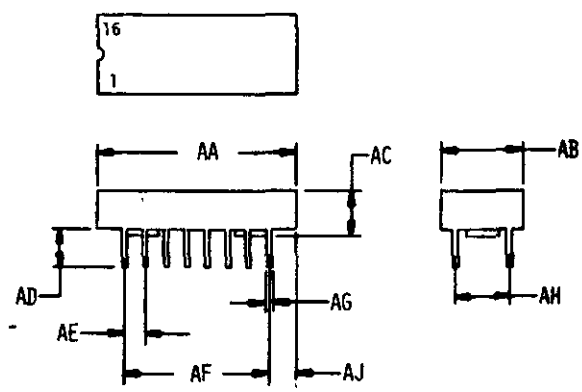


067-03-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

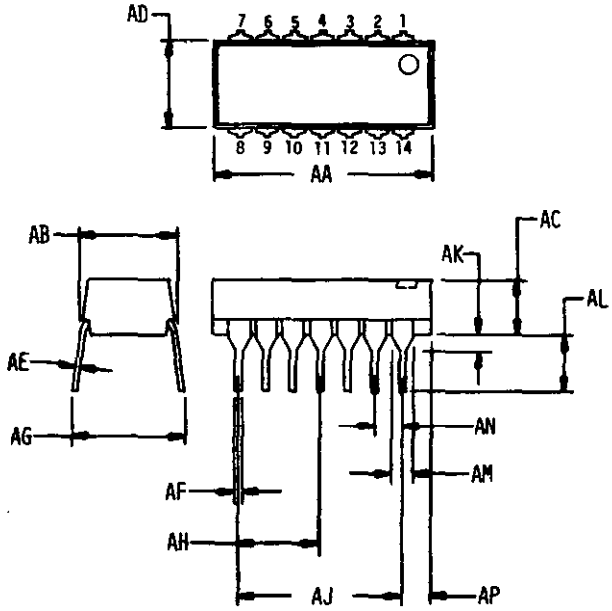

067-03-3

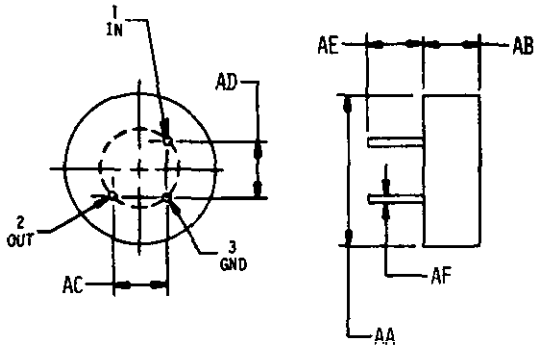


067-03-4

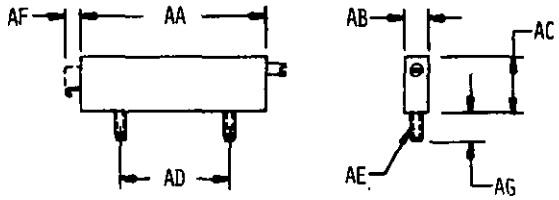


067-04-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




067-05-1

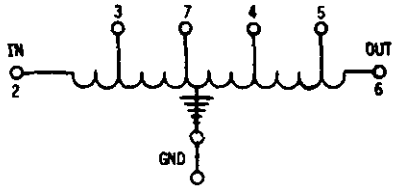


067-05-2

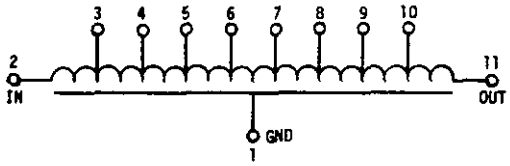


067-05-3



067-05-4




067-05-5




067-05-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

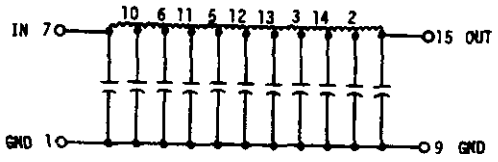


067-05-7



067-05-8



067-05-9

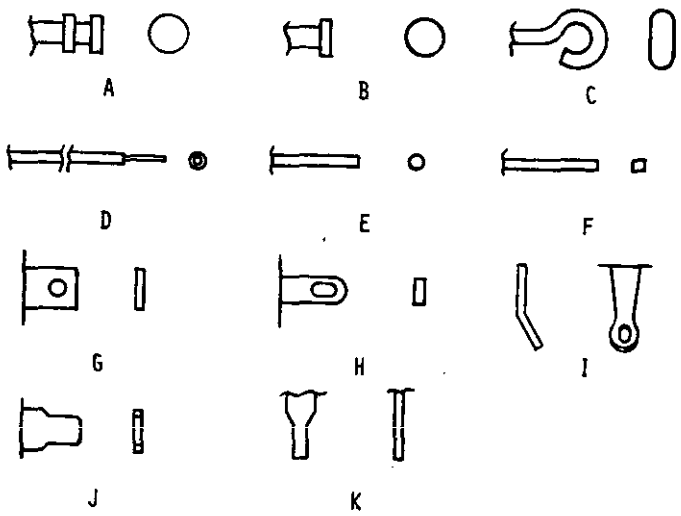

067-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1413	90	1490	98	1704	26
0102	12	1414	90	1494	80	1730	26
0103	12	1416	92	1495	80	1800	28
0104	12	1418	88	1497	54	1802	28
0105	12	1419	90	1498	54	1804	30
0107	14	1420	90	1500	82	1806	30
0108	14	1421	92	1502	82	1810	30
0700	12	1426	100	1504	82	1812	30
0800	12	1427	102	1508	80	1820	30
1003	12	1428	102	1509	80	1830	34
1004	12	1429	56	1511	52	1832	34
1005	12	1430	102	1522	54	1840	34
1006	12	1431	102	1523	54	1842	34
1008	12	1432	56	1524	54	1844	34
1009	16	1433	88	1533	96	1850	34
1371	52	1435	100	1534	96	1852	34
1372	54	1436	100	1535	98	1854	36
1373	52	1438	102	1536	98	1856	36
1374	100	1439	104	1537	100	1858	36
1375	90	1446	96	1545	100	1900	44
1376	52	1447	96	1546	100	1902	44
1377	54	1448	96	1562	20	1904	44
1378	52	1451	80	1564	20	1906	44
1380	50	1452	102	1578	16	1910	44
1381	54	1453	102	1579	16	1912	44
1383	54	1455	96	1580	20	1930	46
1384	52	1456	96	1600	22	1932	46
1386	52	1459	102	1602	22	1934	46
1387	52	1462	104	1630	22	1936	46
1391	56	1466	98	1640	24	1938	46
1394	56	1467	98	1641	24	1946	46
1395	58	1470	98	1642	24	1948	46
1396	56	1471	80	1644	24	1950	46
1397	56	1473	96	1646	24	1952	46
1400	54	1475	98	1647	24	1954	46
1404	56	1476	98	1648	24	1956	46
1406	56	1478	80	1650	24	1978	50
1410	88	1482	80	1651	24	2100	70
1411	90	1486	80	1700	26	2102	70
1412	90	1488	80	1702	26	2104	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2106	70	2517	33	2557	33	2597	33
2110	72	2518	33	2558	33	2598	33
2112	72	2519	33	2559	33	2599	33
2114	72	2520	33	2560	33	2600	33
2120	72	2521	33	2561	33	2601	33
2122	72	2522	33	2562	33	2602	33
2200	90	2523	33	2563	33	2603	33
2202	90	2524	33	2564	33	2604	33
2250	92	2525	33	2565	33	2605	33
2252	92	2526	33	2566	33	2606	33
2254	92	2527	33	2567	33	2607	33
2256	92	2528	33	2568	33	2608	33
2258	92	2529	33	2569	33	2609	33
2260	92	2530	33	2570	33	2610	33
2268	92	2531	33	2571	33	2611	33
2270	94	2532	33	2572	33	2612	33
2280	94	2533	33	2573	33	2613	33
2282	94	2534	33	2574	33	2614	33
2284	94	2535	33	2575	33	2615	33
2286	94	2536	33	2576	33	2616	33
2350	104	2537	33	2577	33	2617	33
2352	104	2538	33	2578	33	2618	33
2358	104	2539	33	2579	33	2619	33
2360	104	2540	33	2580	33	2620	33
2501	33	2541	33	2581	33	2621	33
2502	33	2542	33	2582	33	2622	33
2503	33	2543	33	2583	33	2623	33
2504	33	2544	33	2584	33	2624	33
2505	33	2545	33	2585	33	2625	33
2506	33	2546	33	2586	33	2626	33
2507	33	2547	33	2587	33	2627	33
2508	33	2548	33	2588	33	2628	33
2509	33	2549	33	2589	33	2629	33
2510	33	2550	33	2590	33	2630	33
2511	33	2551	33	2591	33	2631	33
2512	33	2552	33	2592	33	2632	33
2513	33	2553	33	2593	33	2633	33
2514	33	2554	33	2594	33	2634	33
2515	33	2555	33	2595	33	2635	33
2516	33	2556	33	2596	33	2636	33

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2637	33	2677	33	4671	68	4749	78
2638	33	2678	33	4672	82	4750	78
2639	33	2679	33	4674	82	4751	78
2640	33	2680	33	4675	82	4752	78
2641	33	2681	33	4678	104	4754	48
2642	33	2682	33	4683	84	4755	48
2643	33	2683	33	4685	82	4756	48
2644	33	2684	33	4686	82	4760	48
2645	33	2685	33	4689	66	4761	48
2646	33	2686	33	4691	68	4762	48
2647	33	2687	33	4692	68	4765	74
2648	33	2688	33	4694	68	4766	74
2649	33	2689	33	4695	68	4770	72
2650	33	2690	33	4698	66	4771	74
2651	33	2691	33	4700	66	4772	74
2652	33	2692	33	4701	66	4782	72
2653	33	2693	33	4708	96	4809	50
2654	33	2694	33	4709	96	4810	50
2655	33	2695	33	4713	94	4811	50
2656	33	2696	33	4714	94	4812	50
2657	33	2697	33	4715	94	4814	50
2658	33	2698	33	4717	44	4819	48
2659	33	2699	33	4722	94	4820	50
2660	33	2700	33	4723	94	4825	50
2661	33	2701	33	4730	98	4829	68
2662	33	2702	33	4731	98	4830	68
2663	33	2703	33	4732	74	4831	70
2664	33	2704	33	4734	74	4834	68
2665	33	2705	33	4735	78	4835	70
2666	33	2706	33	4736	76	4836	68
2667	33	2707	33	4737	76	4838	70
2668	33	2708	33	4738	76	4839	68
2669	33	3701	64	4739	76	4842	42
2670	33	4662	82	4740	76	4843	60
2671	33	4663	84	4741	76	4844	42
2672	33	4664	84	4742	76	4845	42
2673	33	4665	84	4743	78	4846	42
2674	33	4666	84	4745	74	4848	42
2675	33	4667	84	4746	74	4849	38
2676	33	4669	68	4748	74	4854	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4855	42	6222	86	6326	78	6942	14
4856	40	6224	86	6328	78	6991	108
4857	60	6225	86	6329	78	6992	108
4858	60	6228	84	6330	78	6993	108
4861	42	6229	84	6331	78	6994	108
4862	42	6231	86	6332	78	6995	108
4867	42	6232	86	6333	78	7001	106
4869	42	6234	88	6359	52	7002	106
4874	40	6235	88	6369	12	7003	106
4875	40	6236	88	6370	74	7004	106
4878	72	6237	88	6371	60	7005	106
4884	36	6238	88	6372	106	7021	28
4885	38	6279	70	6696	64	7022	28
4886	38	6282	60	6697	64	7023	28
4891	40	6283	62	6698	64	7024	28
4894	36	6284	62	6699	64	7025	22
4897	44	6285	60	6700	64	7026	22
4902	40	6286	60	6706	66	7029	22
4906	36	6287	62	6707	66	7030	22
4908	36	6288	62	6710	64	7572	16
4950	18	6289	62	6713	64	7573	16
4976	104	6291	58	6790	20	7574	16
4977	104	6292	38	6791	20	7576	16
4978	100	6293	38	6792	20	7577	16
4979	98	6294	38	6793	20	7578	16
4980	58	6300	38	6794	24	7580	20
4981	58	6308	40	6796	24	7629	106
4983	58	6310	40	6799	26	7630	106
4984	58	6311	38	6801	26		
4985	58	6312	38	6870	106		
4986	58	6315	88	6873	12		
4989	68	6316	88	6874	14		
4991	58	6318	86	6920	66		
5297	62	6319	86	6921	66		
6205	84	6320	76	6922	66		
6217	84	6321	76	6923	64		
6218	86	6322	76	6929	62		
6219	86	6323	76	6930	64		
6220	86	6324	78	6939	66		
6221	86	6325	78	6941	14		

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	108
Additional Requirements	106
Altitude	20
Aperture Cards Required	14
Applicable Documents	108
Attenuation	28
Base Document	12
Case	20
City, State, Zip	12
Classification	16
Company Name/Command	12
Configuration	16
Contract Number/Office Symbol	12
Control	12
Date	12
Definition of Hermetic Sealing	108
Delay Time	30
Delay Time Variant with Temperature	34
Design and Construction	20
Design Reliability	22
Dielectric Withstanding Voltage at Reduced Barometric Pressure	36
Dielectric Withstanding Voltage at Sea Level	40
Distortion	44
Figure of Merit	22
Finishes	18
Flammability	46
Format	12
Fungus	48
Government Design Activity FSCM	12
Illustrations	18
Immersion	48
Input Pulse Characteristics	24
Insulation Resistance	50
Materials	18
Metals	20
Moisture Resistance	54
Mounting Hardware	106

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Nomenclature	108
Notes	108
Packaging	108
Part Marking	106
Part Number	14
Part Number Cross-Reference	108
Performance Characteristics	106
Phone Number	12
Quality Assurance Provisions	108
Radiographic	58
Reliability Screening	62
Requester FSCM	12
Requester's Name	12
Resistance to Soldering Heat	66
Resistance to Solvents	68
Revision of AEDPS Document (Number)	14
Rise Time	70
Salt Spray	72
Scope	14
Seal	74
Shock, High Impact	80
Shock, Specified Pulse	80
Solderability	82
Source Table	14
Street/Building	12
Superseded Document	108
System Application	12
Tabulated Characteristics	18
Temperature	24
Temperature, High	84
Temperature, Low	86
Terminals	26
Terminal Strength	88
Terminating Impedance	22
Thermal-Age Stability	92
Thermal Shock	94
Units of Measure	14

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Vibration, High Frequency	96
Vibration, Low Frequency	98
Vibration, Random	100
Voltage	26
Weight	28
Winding Continuity	104
Workmanship	106

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-132(MI), dated 28 Jul 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-132(MI), dated 28 Jul 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DoD-STD-35-131	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.