DOD-STD-35-135(MI)
15 January 1979
SUPERSEDING
SECTION 3
MIL-STD-35-66(MI)
1 DECEMBER 1974

MILITARY STANDARD

CONNECTORS, ELECTRICAL, POWER

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Connectors, Electrical, Power
Automated Engineering
Document Preparation System

DOD-STD-35-135(MI)

1. This Miliatry Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-135(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Miliatry Specification Exceptions for electrical, power connectors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	6
	4.1	Introduction	6
	4.2	Specification Requirement Sheet (SRS)	6
	4.3	Configuration	6
	4.3.1	Dimensions	6
	4.3.2	Illustrations	6
	4.4	Units of measure	6
	5.	DETAILED REQUIREMENTS	7
	5.1	Introduction	7
	5.2	MSE Formats	7
	5.3	Referenced documents	7
	5.4	Tabulation	7
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	9
	5.5.1	Interrelationship of Codes	9
	5.5.2	Automatic MSE Data	9
	5.5.3	DOD-STD-35 Tables	9

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	8

APPENDICES

Appendix	A.	Illustrations	104
	B.	Characteristic Code Index	115
		Index	119

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for electrical power connectors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1353, Selection and Use of Electrical Connectors be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERED
CONNECTOR, ELECTRICAL, POWER	075003	W-C-596	120-600 VOLTS TO 60 AMPERES
		MIL-R-2726	TO 250 VDC, 600 VAC, SHIPS
		MIL-C-7974	EXTERNAL POWER AIRCRAFT
		MS25486	115/200 VOLT, 400 HERTZ PLUG
		MS25487	28 VOLT DC PLUG
		MS25488	28 VOLT DC PLUG
		MIL-C-24368	HEAVY DUTY
		MIL-C-38159	RAMP POWER 416/240 VOLTS
		MS27265	PLUG
		MS27285	PLUG
		MIL-C-81790	EXTERNAL POWER AIRCRAFT
		MS3506	RECEPTACLE 28V
		MS25018	RECEPTACLE 28V

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-19622	Stuffing Tube, Nylon, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-108	Definition of and Basic Requirements for Enclosure for Electric and Electronic Equipment
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electric and Electronic Parts
MIL-STD-1344	Test Methods for Electrical Connectors
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

UL498 Attachement Plugs and Receptacles

(Application for copies should be addressed to Underwriter Laboratories, Inc., 161 Sixth Ave., New York, NY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Connectors, Electrical, Power.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Connectors, Electrical, Power, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Connectors, Electrical, Power.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Connectors, Electrical, Power.

4.3.2 Illustrations. Illustrations applicable to Connectors, Electrical, Power are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Connectors, Electrical, Power characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2011	CURRENT RATING AMPERES	1582	VOLTAGE RATING VOLTS	2012	POLES
2014	NUMBER WIRES	2042	CORD DIA INCH	2044	CORD DIA MM
2062	ENCLOSURE TYPE PER MILSTD-108	2202	MATING CONN P/N	2013	FREQUENCY RATING HERTZ

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OF OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
STYLE (DESIGNATION)	2128
SERIES (DESIGNATION)	2122
TYPE (DESIGNATION)	2120
SYMBOL (DESIGNATION)	2126
COMPONENT (DESIGNATION)	2130
RATINGS	
(AMPERES)	2000
*(VOLTS)	2002
(AMPERES)	2008
*(VOLTS AC)	2010
(VOLTS)	1582
(AMPERES)	2011
(HERTZ)	2013

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
2128	STYLE 2128 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2122	SERIES 2122 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2120	TYPE 2120 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2126	SYMBOL 2126 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
2130	COMPONENT DESIGNATION 2130 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
2000 2002	CONNECTOR SHALL BE RATED 2000 AMPERE(S) AT 2002 VOLTS.
2008 2010	CONNECTOR SHALL BE RATED FOR 2008 AMPERE(S) AT 2010 VOLTS 50/60 HERTZ ONLY.
1582	CONNECTOR SHALL BE RATED FOR 1582 VOLTS.
2011	CONNECTOR SHALL BE RATED FOR 2011 AMPERES.
2013	CONNECTOR SHALL BE RATED FOR 2013 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN	
POLE (QUANTITY)	2012
WIRES (QUANTITY)	2014
GROUNDING PROVISION.	2016
CABLE OUTLET.	2018
PLUG.	2020
RECEPTACLE.	2022
ANSIC73 FIGURE (NUMBER)	2024
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
MILLIMETERS.	7577

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN.
2012	CONNECTOR SHALL BE 2012 POLE.
2014	CONNECTOR SHALL BE 2014 WIRE.
2016	CONNECTOR SHALL HAVE GROUNDING PROVISION.
2018	ITEM SHALL BE A CABLE OUTLET.
2020	ITEM SHALL BE A PLUG.
2022	ITEM SHALL BE A RECEPTACLE.
2024	ANSIC73 FIGURE NUMBER 2024 SHALL APPLY.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
OUTLETS	
(SPECIFY)	2030
TERMINALS	
(SPECIFY)	1563
POLARIZATION	
POLARIZED.	2032
METHOD ____	2034
NONPOLARIZED.	2036
DESIGN	
(SPECIFY)	2038
SPECIAL REQUIREMENTS	
(SPECIFY)	2040
CORD	
DIAMETER (SELECT ONE)	
(INCH)	2042
(MILLIMETERS)	2044
TYPE ____	2046
(DOC DES)	2048
TEST CORD ____	2050
(DOC DES)	2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	OUTLETS.
2030	OUTLET(S) SHALL BE 2030.
	TERMINALS.
1563	TERMINAL(S) SHALL BE 1563.
	POLARIZATION.
2032	CONNECTOR SHALL BE POLARIZED.
2034	POLARIZATION METHOD SHALL BE 2034.
2036	CONNECTOR SHALL BE NONPOLARIZED.
	DESIGN.
2038	DESIGN SHALL BE 2038.
	SPECIAL REQUIREMENTS.
2040	SPECIAL REQUIREMENT(S) SHALL BE 2040.
	CORD.
2042	APPLICABLE CORD DIAMETER SHALL BE 2042 INCH.
2044	APPLICABLE CORD DIAMETER SHALL BE 2044 MILLIMETERS.
2046	CORD TYPE SHALL BE 2046.
2048	CORD SHALL BE IN ACCORDANCE WITH 2048.
2050	TEST CORD SHALL BE 2050.
2052	TEST CORD SHALL BE IN ACCORDANCE WITH 2052.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATION (SELECT ONE)	
SCREW TERMINAL.	1570
SPRING CONTACT.	2054
SWITCH	
(PART NUMBER)	2058
(DOC DES)	2060
ENCLOSURE	
MIL-STD-108 (TYPE)	2062
MIL-S-19622 PACKING CAP (PART NUMBER)	2064
MIL-S-19622 PACKING ASSEMBLY (PART NUMBER)	2066
COLOR	
(NAME)	2068
(DOC DES)	2070

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TERMINATION.
1570	WIRE TERMINATION SHALL BE TO SCREW TERMINAL(S).
2054	WIRE TERMINATION SHALL BE TO SPRING CONTACT SCREWLESS TERMINAL(S).
	SWITCH.
2058	CONNECTOR SHALL CONTAIN A SWITCH, PART NUMBER 2058.
2060	SWITCH SHALL BE IN ACCORDANCE WITH 2060.
	ENCLOSURE.
2062	ENCLOSURE SHALL BE 2062 IN ACCORDANCE WITH MIL-STD-108.
2064	CONNECTOR ASSEMBLY SHALL INCLUDE A PACKING CAP, PART NUMBER 2064 IN ACCORDANCE WITH MIL-S-19622.
2066	CONNECTOR ASSEMBLY SHALL INCLUDE A PACKING ASSEMBLY, PART NUMBER 2066 IN ACCORDANCE WITH MIL-S-19622.
	COLOR.
2068	COLOR OF THE CONNECTOR SHALL BE 2068.
2070	COLOR SHALL BE IN ACCORDANCE WITH 2070.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MATING CONNECTOR	
(DOC DES)	2200
(PART NUMBER)	2202
(VENDOR FSCM)	2204
ALTITUDE	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6790
SEA LEVEL TO (METERS)	6791
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	6792
SEA LEVEL TO (METERS)	6793
TEMPERATURE	
MAXIMUM OPERATING (DEGREES CELSIUS)	6794
MAXIMUM NONOPERATING (DEGREES CELSIUS)	6795
MAXIMUM STORAGE (DEGREES CELSIUS)	6796

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATING CONNECTOR.
2200	THE MATING CONNECTOR SHALL BE IN ACCORDANCE WITH 2200.
2202	THE MATING CONNECTOR PART NUMBER SHALL BE 2202.
2204	THE MATING CONNECTOR VENDOR FSCM SHALL BE 2204.
6790	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6790 FEET.
6791	OPERATING ALTITUDE. THE OPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6791 METERS.
6792	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6792 FEET.
6793	NONOPERATING ALTITUDE. THE NONOPERATING ALTITUDE SHALL BE FROM SEA LEVEL TO 6793 METERS.
6794	MAXIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6794 DEGREES CELSIUS.
6795	MAXIMUM NONOPERATING TEMPERATURE. THE NONOPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6795 DEGREES CELSIUS.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TEMPERATURE (CONT)	
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6798
MINIMUM OPERATING (DEGREES CELSIUS)	6799
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	6803
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6798	MAXIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT GREATER THAN 6798 DEGREES CELSIUS.
6799	MINIMUM OPERATING TEMPERATURE. THE OPERATING TEMPERATURE SHALL BE NOT LESS THAN 6799 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6803	MINIMUM AMBIENT OPERATING TEMPERATURE. THE AMBIENT OPERATING TEMPERATURE SHALL BE NOT LESS THEN 6803 DEGREES CELSIUS.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTICS NAME	CHAR CODE
AIR LEAKAGE (SEAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2240
NO BUBBLES INDICATIVE OF LEAKAGE.	2242
MAXIMUM LEAKAGE RATE (STANDARD ATM CC/SEC)	2244
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2246
PER MIL-STD-1344, METHOD 1008.	2248
PRESSURE DIFFERENTIAL (STANDARD ATMOSPHERES)	2250
ORIENTATION (SELECT ONE)	
REAR FACE, LOW PRESSURE SIDE.	2252
FRONT FACE, LOW PRESSURE SIDE.	2254
REVERSE TESTING REQUIRED.	2256

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2240	AIR LEAKAGE (SEAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2240.
2242	AIR LEAKAGE (SEAL). THERE SHALL BE NO VISIBLE BUBBLES INDICATIVE OF LEAKAGE.
2244	AIR LEAKAGE (SEAL). THE LEAKAGE RATE SHALL BE NOT GREATER THAN 2244 STANDARD ATM CC/SEC.
2246	AIR LEAKAGE (SEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2246.
2248	AIR LEAKAGE (SEAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1008 OF MIL-STD-1344.
2250	THE PRESSURE DIFFERENTIAL SHALL BE NOT LESS THAN 2250 STANDARD ATMOSPHERE(S).
2252	THE REAR FACE OF THE CONNECTOR SHALL EXTEND INTO THE LOW PRESSURE SIDE OF THE CHAMBER.
2254	THE FRONT FACE OF THE CONNECTOR SHALL EXTEND INTO THE LOW PRESSURE SIDE OF THE CHAMBER.
2256	REVERSE TESTING SHALL BE REQUIRED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE PULL-OUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
NO EVIDENCE OF PHYSICAL DAMAGE.	1744
NO DISCONTINUITY.	3136
MAXIMUM LINEAR MOTION (SELECT ONE)	
(INCHES)	2074
(MILLIMETERS)	2258
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1736
PER MIL-STD-1344, METHOD 2009.	2260
*TEST CONDITION (LETTER)	2262
CABLE (DESIGNATION)	2264

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1742	CABLE PULL-OUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1744	CABLE PULL-OUT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3136	THERE SHALL BE NO DISCONTINUITY.
2074	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 2074 INCH(S).
2258	THE LINEAR MOTION OF THE CABLE WITH RESPECT TO THE CLAMP SHALL BE NOT GREATER THAN 2258 MILLIMETER(S).
1736	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.
2260	CABLE PULL-OUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2009 OF MIL-STD-1344.
2262	TEST CONDITION LETTER 2262 SHALL APPLY.
2264	THE CABLE TO BE USED SHALL BE 2264.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1864
NO EVIDENCE OF SEAL DAMAGE.	1866
NO EVIDENCE OF DIELECTRIC BREAKDOWN.	2270
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2272
NO SHORTING.	2274
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	2276
MAXIMUM (MICROSECONDS)	2278
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1858
PER MIL-STD-1344, METHOD 2017.	1860
PROCEDURE I.	2284
MINIMUM ROLLER DIAMETER (SELECT ONE)	
(INCHES)	2286
(MILLIMETERS)	2288

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1864	CABLE SEAL FLEXING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1864.
1866	CABLE SEAL FLEXING. THERE SHALL BE NO EVIDENCE OF DAMAGE WHICH COULD ALLOW UNDESIRED SUBSTANCES TO ENTER THE INSULATION AND TO CAUSE DETERIORATION OF ELECTRICAL PERFORMANCE.
2270	THERE SHALL BE NO EVIDENCE OF DIELECTRIC BREAKDOWN.
2272	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2272 MEGOHM(S).
2274	THERE SHALL BE NO EVIDENCE OF SHORTING BETWEEN CONDUCTORS.
2276	THERE SHALL BE NO EVIDENCE OF DISCONTINUITY.
2278	DISCONTINUITY SHALL BE NOT GREATER THAN 2278 MICROSECOND(S).
1858	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1858.
1860	CABLE SEAL FLEXING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2017 OF MIL-STD-1344.
2284	TEST PROCEDURE I SHALL APPLY.
2286	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2286 INCH(S).
2288	THE ROLLER DIAMETER SHALL BE NOT LESS THAN 2288 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CABLE SEAL FLEXING (CONT)	
PROCEDURE I (CONT)	
MINIMUM DIMENSION X (SELECT ONE)	
(INCHES)	2290
(MILLIMETERS)	2292
CYCLE RATE (CYCLES PER MINUTE)	2294
NUMBER OF CYCLES (QUANTITY)	2296
CABLE (DESIGNATION)	2298
CONTACT INSERTION AND REMOVAL FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2078
AS FOLLOWS:	2364
MAXIMUM INSERTION FORCE (SELECT ONE)	
(POUNDS)	2080
(NEWTONS)	2366

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2290 DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2290 INCH(S).

2292 DIMENSION X BETWEEN THE NEAREST END OF INTERNAL CABLE CLAMP AND ROLLER CENTERLINE SHALL BE NOT LESS THAN 2292 MILLIMETER(S).

2294 CYCLING RATE SHALL BE APPROXIMATELY 2294 CYCLES PER MINUTE.

2296 THERE SHALL BE 2296 CYCLES PERFORMED.

2298 THE CABLE TO BE USED SHALL BE 2298.

2078 CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2078.

2364 CONTACT INSERTION AND REMOVAL FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2080 THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 2080 POUND(S).

2366 THE FORCE REQUIRED TO INSERT A CONTACT SHALL BE NOT GREATER THAN 2366 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	2082
(NEWTONS)	2368
MINIMUM REMOVAL FORCE (SELECT ONE)	
(POUNDS)	2084
(NEWTONS)	2370
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2086
PER MIL-STD-1344, METHOD 2012.	2372
QUANTITY OF CONTACTS MEASURED (PERCENT)	2088
WIRE TYPE (DESIGNATION)	2374
WIRE DOCUMENT (DOC DES)	2376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2082	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 2082 POUND(S).
2368	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT GREATER THAN 2368 NEWTON(S).
2084	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT LESS THAN 2084 POUND(S).
2370	THE FORCE REQUIRED TO REMOVE A CONTACT SHALL BE NOT LESS THAN 2370 NEWTON(S).
2086	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2086.
2372	CONTACT INSERTION AND REMOVAL FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2012 OF MIL-STD-1344.
2088	THE CONNECTOR SHALL HAVE 2088 PERCENT OF THE CONTACTS MEASURED.
2374	WIRE TYPE 2374 SHALL BE USED.
2376	WIRE SHALL BE IN ACCORDANCE WITH 2376.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT INSERTION AND REMOVAL FORCE (CONT)	
PER MIL-STD-1344, METHOD 2012. (CONT)	
CONDUCTOR SIZE (DESIGNATION)	2378
INSERTIONS AND WITHDRAWALS (QUANTITY)	2380
INSERTION TOOL (PART NUMBER)	2382
EXTRACTION TOOL (PART NUMBER)	2384
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1638
MAXIMUM CONTACT RESISTANCE (OHMS)	1640
MAXIMUM CONTACT RESISTANCE AT ELEVATED TEMPERATURE (OHMS)	2373
MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	2114
MAXIMUM CONTACT RESISTANCE AT ELEVATED TEMPERATURE (MILLIVOLTS)	2375
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1622

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2378	CONDUCTOR SIZE 2378 SHALL BE USED.
2380	THERE SHALL BE 2380 INSERTIONS AND WITHDRAWALS WITH MEASUREMENTS TAKEN ON THE FIRST AND LAST CYCLES.
2382	INSERTION TOOL PART NUMBER SHALL BE 2382.
2384	EXTRACTION TOOL PART NUMBER SHALL BE 2384.
1638	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1638.
1640	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1640 OHM(S).
2373	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 2373 OHM(S).
2114	CONTACT RESISTANCE. CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2114 MILLIVOLT(S) DROP.
2375	CONTACT RESISTANCE AT ELEVATED TEMPERATURE SHALL BE NOT GREATER THAN 2375 MILLIVOLT(S) DROP.
1622	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1622.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 3004.	2377
TEST CURRENT (SELECT ONE)	
(AMPERES)	1632
(MILLIAMPERES)	2379
HIGH TEMPERATURE TEST (DEGREES CELSIUS)	1994
CONTACT RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1684
NO EVIDENCE OF PHYSICAL DAMAGE.	2381
MAXIMUM DISPLACEMENT WITH FORCE APPLIED (SELECT ONE)	
(INCH)	1686
(MILLIMETERS)	2383
MAXIMUM DISPLACEMENT AFTER FORCE REMOVAL (SELECT ONE)	
(INCH)	1688
(MILLIMETERS)	2385

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2377	CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3004 OF MIL-STD-1344.
1632	THE TEST CURRENT SHALL BE 1632 AMPERE(S).
2379	THE TEST CURRENT SHALL BE 2379 MILLIAMPERE(S).
1994	IN ADDITION TO MEASUREMENT AT AMBIENT TEMPERATURE, PERFORM MEASUREMENT AT 1994 DEGREES CELSIUS.
1684	CONTACT RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1684.
2381	CONTACT RETENTION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1686	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 1686 INCH DURING APPLICATION OF AXIAL FORCE.
2383	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2383 MILLIMETER(S) DURING APPLICATION OF AXIAL FORCE.
1688	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 1688 INCH AFTER REMOVAL OF AXIAL FORCE.
2385	THE AXIAL DISPLACEMENT SHALL BE NOT GREATER THAN 2385 MILLIMETER(S) AFTER REMOVAL OF AXIAL FORCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1670
PER MIL-STD-1344, METHOD 2007.	2388
APPLIED LOAD (SELECT ONE)	
(POUNDS)	1672
PLUS TOLERANCE (POUNDS)	2390
MINUS TOLERANCE (POUNDS)	2392
(NEWTONS)	2394
PLUS TOLERANCE (NEWTONS)	2396
MINUS TOLERANCE (NEWTONS)	2398
LOAD DIRECTION (SELECT ONE)	
WIRE SIDE.	1674
FRONT SIDE.	2402
WIRE AND FRONT SIDE.	2099
QUANTITY CONTACTS TESTED (PERCENT)	2404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1670	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1670.
2388	CONTACT RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2007 OF MIL-STD-1344.
1672	THE APPLIED AXIAL LOAD SHALL BE 1672 POUND(S).
2390	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 2390 POUND(S).
2392	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 2392 POUND(S).
2394	THE APPLIED AXIAL LOAD SHALL BE 2394 NEWTON(S).
2396	THE APPLIED AXIAL LOAD PLUS TOLERANCE SHALL BE 2396 NEWTON(S).
2398	THE APPLIED AXIAL LOAD MINUS TOLERANCE SHALL BE 2398 NEWTON(S).
1674	LOAD SHALL BE APPLIED TO THE WIRE SIDE OF THE CONTACT.
2402	LOAD SHALL BE APPLIED TO THE FRONT SIDE OF THE CONTACT.
2099	LOAD SHALL BE APPLIED TO BOTH THE WIRE SIDE AND THE FRONT SIDE OF THE CONTACT.
2404	THE CONNECTOR SHALL HAVE 2404 PERCENT OF THE CONTACTS TESTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RETENTION (CONT)	
PER MIL-STD-1344, METHOD 2007. (CONT)	
CONTACT WIRING (SELECT ONE)	
CUT OFF WIRES.	1678
UNWIRED CONTACTS.	2406
CRUSH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1816
NO EVIDENCE OF PHYSICAL DAMAGE OR ELECTRICAL FAILURE.	1818
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
PER MIL-STD-1344, METHOD 2008.	2420
SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	2422
UNMATED CONNECTOR.	2424

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1678	WIRES SHALL BE CUT OFF FLUSH WITH THE CONTACTS.
2406	UNWIRED CONTACTS SHALL BE USED.
1816	CRUSH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1818	CRUSH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR ELECTRICAL FAILURE.
1810	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
2420	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2008 OF MIL-STD-1344.
2422	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2424	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR[1].

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CRUSH (CONT)	
PER MIL-STD-1344, METHOD 2008. (CONT)	
TEST LOAD (SELECT ONE)	
(POUNDS)	1812
(KILOGRAMS)	2428
LOAD APPLICATIONS (QUANTITY)	2430
CURRENT OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1730
NO EVIDENCE OF ELECTRICAL OR MECHANICAL FAILURE.	1732
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1718
PER UL-STD-498.	2090
APPLIED CURRENT (SELECT ONE)	
RATED CURRENT (PERCENT)	2092
AMPERES	1720

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1812	TEST LOAD SHALL BE 1812 POUND(S).
2428	TEST LOAD SHALL BE 2428 KILOGRAM(S).
2430	THERE SHALL BE 2430 LOAD APPLICATION(S).
1730	CURRENT OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.
1732	CURRENT OVERLOAD. THERE SHALL BE NO EVIDENCE OF ELECTRICAL OR MECHANICAL FAILURE.
1718	CURRENT OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1718.
2090	CURRENT OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH UNDERWRITERS LABORATORY STANDARD 498.
2092	CURRENT SHALL BE 2092 PERCENT OF RATED CURRENT.
1720	CURRENT SHALL BE 1720 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT OVERLOAD (CONT)	
PER UL-STD-498. (CONT)	
DURATION (SELECT ONE)	
(MINUTES)	1726
(SECONDS)	2094
CYCLES OF CURRENT APPLICATION (QUANTITY)	2096
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I.	2452

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1726 CURRENT SHALL BE APPLIED FOR 1726 MINUTE(S).

2094 CURRENT SHALL BE APPLIED FOR 2094 SECOND(S).

2096 THERE SHALL BE 2096 CYCLES OF CURRENT APPLICATION.

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

2452 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3001 OF MIL-STD-1344. TEST CONDITION I SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-1344, METHOD 3001, TEST CONDITION I. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
TEST SPECIMEN (SELECT ONE)	
MATED PLUG AND RECEPTACLE.	2454
UNMATED CONNECTOR.	2456

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
2454	TEST SPECIMEN SHALL CONSIST OF A MATED PLUG AND RECEPTACLE.
2456	TEST SPECIMEN SHALL CONSIST OF AN UNMATED CONNECTOR.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1616
NO EVIDENCE OF CONTACT OR INSERT DAMAGE.	1618
MAXIMUM CONTACT RESISTANCE (MILLIVOLTS)	2458
MINIMUM CONTACT SEPARATION FORCE (SELECT ONE)	
(POUNDS)	2460
(NEWTONS)	2462
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1608
PER MIL-STD-1344, METHOD 2016.	2464
CYCLES (QUANTITY)	1610
CYCLING RATE (CYCLES PER HOUR)	1612

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1616	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1616.
1618	DURABILITY. THERE SHALL BE NO EVIDENCE OF UNEVEN WEAR ON ENGAGING HARDWARE, CONTACTS, OR GUIDE HARDWARE NOR EXCESSIVE REMOVAL OF PLATING ON CONTACTS. CONTACTS SHALL BE NOT DISPLACED, BROKEN OR BENT. INSERTS SHALL SHOW NO EVIDENCE OF PIERCING, BREAKING OR CHIPPING.
2458	THE CONTACT RESISTANCE MILLIVOLT DROP SHALL BE NOT GREATER THAN 2458 MILLIVOLT(S).
2460	THE INDIVIDUAL CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 2460 POUND(S).
2462	THE INDIVIDUAL CONTACT SEPARATION FORCE AFTER TEST SHALL BE NOT LESS THAN 2462 NEWTON(S).
1608	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1608.
2464	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2016 OF MIL-STD-1344.
1610	THERE SHALL BE 1610 MATING AND UNMATING CYCLES.
1612	THE CYCLING RATE SHALL BE 1612 CYCLES PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
NO EVIDENCE OF PHYSICAL DAMAGE.	1902
MEET MATING AND UNMATING FORCE REQUIREMENTS.	1903
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1894
PER MIL-STD-1344, METHOD 1016.	1896
FLUIDS DELETED (LETERS)	2522
FLUIDS ADDED (NAME)	1895
IMMERSION DURATION (SELECT ONE)	
(MINUTES)	1897
(HOURS)	2526
DRAIN DURATION (HOURS)	2528
OVEN CURE TEMPERATURE (DEGREES CELSIUS)	2097
CYCLES OF IMMERSION (QUANTITY)	2530

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1900	FLUID IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.
1902	FLUID IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE, BUT DISCOLORATION SHALL NOT BE CONSIDERED DETRIMENTAL.
1903	CONNECTORS SHALL MEET MATING AND UNMATING FORCE REQUIREMENT(S) AFTER TEST.
1894	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1894.
1896	FLUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1016 OF MIL-STD-1344.
2522	FLUID(S) AS REFERENCED IN METHOD 1016 OF MIL-STD-1344 WHICH SHALL NOT BE USED SHALL BE LETTER(S) 2522.
1895	FLUID(S) TO BE ADDED SHALL BE 1895.
1897	ADDED FLUID(S) IMMERSION DURATION SHALL BE 1897 MINUTE(S).
2526	ADDED FLUID(S) IMMERSION DURATION SHALL BE 2526 HOUR(S).
2528	ADDED FLUID(S) DRAIN DURATION SHALL BE 2528 HOUR(S).
2097	ADDED FLUID(S) 6-HOUR OVEN CURE TEMPERATURE SHALL BE 2097 DEGREES CELSIUS.
2530	THERE SHALL BE 2530 CYCLE(S) OF IMMERSION IN THE ADDED FLUID(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLUID IMMERSION (CONT)	
PER MIL-STD-1344, METHOD 1016. (CONT)	
IMMERSION DURATION IN METHOD 1016 FLUIDS (HOURS)	2098
SPECIMEN (SELECT ONE)	
UNMATED CONNECTOR WITHOUT CONTACTS.	2532
MATED WIRED PAIR.	2534
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
REQUIREMENT 4 OF MIL-STD-454.	2536

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2098	IMMERSION DURATION FOR FLUIDS REFERENCED IN METHOD 1016 OF MIL-STD-1344 SHALL BE 2098 HOUR(S).
2532	ONE UNMATED CONNECTOR WITHOUT CONTACTS SHALL BE IMMERSED IN EACH SPECIFIED FLUID.
2534	A MATED PAIR OF WIRED CONNECTORS SHALL BE IMMERSED IN EACH FLUID.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2536	FUNGUS. MATERIALS OF CONSTRUCTION FOR THE CONNECTOR SHALL BE NONNUTRIENT FOR FUNGUS AS SPECIFIED IN REQUIREMENT 4 OF MIL-STD-454. CERTIFICATION OF THIS REQUIREMENT SHALL BE PROVIDED BY THE MANUFACTURER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-1344, METHOD 1002.	2550
PROCEDURE TYPE (SELECT ONE)	
TYPE I.	2552
DURATION OF POLARIZING VOLTAGE (HOURS)	4790
TYPE II.	2554
STEP 7A NOT REQUIRED.	2556
TYPE III.	2558
STEP 7A NOT REQUIRED.	2560
POLARIZING VOLTAGE (VOLTS DC)	4793

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
2550	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1002 OF MIL-STD-1344.
2552	PROCEDURE TYPE I SHALL APPLY.
4790	POLARIZING VOLTAGE SHALL BE APPLIED FOR 4790 HOUR(S).
2554	PROCEDURE TYPE II SHALL APPLY.
2556	STEP 7A SHALL NOT APPLY.
2558	PROCEDURE TYPE III SHALL APPLY.
2560	STEP 7A SHALL NOT APPLY.
4793	POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-1344, METHOD 1002. (CONT)	
POLARIZING VOLTAGE BETWEEN ALTERNATE CONTACTS CONNECTED ELECTRICALLY AND OTHER CONTACTS AND SHELL CONNECTED ELECTRICALLY.	2562
SPECIMEN (SELECT ONE)	
MATED, WIRED CONNECTORS.	2564
INDIVIDUAL, WIRED CONNECTORS.	2566
WIRE (SIZE)	2570
WIRE (TYPE)	2572
DIELECTRIC WITHSTANDING VOLTAGE (SELECT ONE)	
(VOLTS AC)	2574
(VOLTS DC)	2576
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	2578
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER REMOVAL FROM CHAMBER.	2580
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2562	POLARIZING VOLTAGE SHALL BE APPLIED BETWEEN ALTERNATE CONTACTS CONNECTED TOGETHER ELECTRICALLY AND THE REMAINING CONTACTS AND SHELL CONNECTED ELECTRICALLY.
2564	MATED, WIRED CONNECTORS SHALL BE TESTED.
2566	INDIVIDUAL, WIRED CONNECTORS SHALL BE TESTED.
2570	CONTACTS SHALL BE WIRED WITH SIZE 2570 WIRE.
2572	WIRE TYPE SHALL BE 2572.
2574	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2574 VOLTS AC.
2576	THE DIELECTRIC WITHSTANDING VOLTAGE SHALL BE 2576 VOLTS DC.
2578	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AT HIGH HUMIDITY.
2580	PERFORM DIELECTRIC WITHSTANDING VOLTAGE AFTER REMOVAL FROM THE CHAMBER.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-1344, METHOD 3003.	2590
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2590	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3003 OF MIL-STD-1344.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-1344, METHOD 3003. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
TEST SPECIMEN (SELECT ONE)	
CONNECTOR MATED PAIR.	2592
UNMATED CONNECTOR.	2594
SPECIAL PREPARATIONS ____	2596
MATING AND UNMATING FORCES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1650
AS FOLLOWS:	2636

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2592	TEST SPECIMEN SHALL BE A CONNECTOR MATED PAIR.
2594	TEST SPECIMEN SHALL BE AN UNMATED CONNECTOR.
2596	SPECIAL PREPARATIONS SHALL BE 2596.
1650	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1650.
2636	MATING AND UNMATING FORCES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM MATING FORCE (SELECT ONE)	
(POUNDS)	1652
(NEWTONS)	2638
MAXIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	1654
(NEWTONS)	2640
MINIMUM UNMATING FORCE (SELECT ONE)	
(POUNDS)	2100
(NEWTONS)	2642
MAXIMUM MATING OR UNMATING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2644
(POUND-INCHES)	2102
(NEWTON METERS)	2646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1652	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 1652 POUND(S).
2638	THE FORCE REQUIRED TO MATE CONNECTORS SHALL BE NOT GREATER THAN 2638 NEWTON(S).
1654	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 1654 POUND(S).
2640	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2640 NEWTON(S).
2100	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 2100 POUND(S).
2642	THE FORCE REQUIRED TO UNMATE CONNECTORS SHALL BE NOT LESS THAN 2642 NEWTON(S).
2644	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2644 OUNCE-INCH(S).
2102	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2102 POUND-INCH(S).
2646	THE TORQUE REQUIRED TO MATE AND UNMATE CONNECTORS SHALL BE NOT GREATER THAN 2646 NEWTON METER(S).

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATING AND UNMATING FORCES (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1644
PER MIL-STD-1344, METHOD 2013.	2648
MATING RATE (SELECT ONE)	
GRADUAL.	2650
(INCHES PER MINUTE)	2652
(MILLIMETERS PER MINUTE)	2654
PREMEASUREMENT MATING AND UNMATING CYCLES (QUANTITY)	2656
OZONE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1664
NO CRACKING OF DIELECTRIC OR PERFORMANCE DEGRADATION.	1666

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1644	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1644.
2648	MATING AND UNMATING FORCES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2013 OF MIL-STD-1344.
2650	CONNECTORS SHALL BE GRADUALLY MATED AND UNMATED.
2652	CONNECTOR SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 2652 INCH(S) PER MINUTE.
2654	CONNECTOR SHALL BE MATED AND UNMATED AT A RATE NOT GREATER THAN 2654 MILLIMETER(S) PER MINUTE.
2656	PRIOR TO MEASUREMENTS CONNECTORS SHALL BE MATED AND UNMATED 2656 TIMES.
1664	OZONE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1664.
1666	OZONE EXPOSURE. THE CONNECTOR SHALL SHOW NO EVIDENCE OF CRACKING OF DIELECTRIC MATERIAL OR OTHER DAMAGE DUE TO OZONE EXPOSURE THAT WILL ADVERSELY AFFECT PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE EXPOSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1658
PER MIL-STD-1344, METHOD 1007.	2694
OZONE CONCENTRATION BY VOLUME	
MINIMUM (PARTS PER MILLION)	2696
MAXIMUM (PARTS PER MILLION)	2698
EXPOSURE DURATION (HOURS)	1660
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2700
TOLERANCE (DEGREES CELSIUS)	2702
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1658	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1658.
2694	OZONE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1007 OF MIL-STD-1344.
2696	OZONE CONCENTRATION SHALL BE NOT LESS THAN 2696 PARTS PER MILLION BY VOLUME.
2698	OZONE CONCENTRATION SHALL BE NOT GREATER THAN 2698 PARTS PER MILLION BY VOLUME.
1660	EXPOSURE DURATION SHALL BE 1660 HOUR(S).
2700	CHAMBER TEMPERATURE SHALL BE 2700 DEGREES CELSIUS.
2702	CHAMBER TEMPERATURE TOLERANCE SHALL BE 2702 DEGREES CELSIUS.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF EXCESSIVE CORROSION, WARPING OR CRACKING.	2772
NO INCREASE IN FORCE TO ENGAGE AND DISENGAGE.	2774
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-1344, METHOD 1001.	2776
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2772	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF EXCESSIVE CORROSION. EXCESSIVE CORROSION IS DEFINED AS THAT WHICH INTERFERES WITH THE ELECTRICAL OR MECHANICAL PERFORMANCE, OR, IN THE CASE OF PLATED METAL, CORROSION WHICH HAS PASSED THROUGH THE PLATING AND ATTACKED THE BASE METAL. THERE SHALL BE NO WARPING, CRACKING OR OTHER DAMAGE.
2774	THERE SHALL BE NO INCREASE IN FORCE REQUIRED TO ENGAGE AND DISENGAGE MATING CONNECTORS.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
2776	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, MECHANICAL/DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2104
NO EVIDENCE OF PHYSICAL DAMAGE.	2106
NO EVIDENCE OF DIELECTRIC DAMAGE.	2108
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2110
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2112
AS FOLLOWS:	2115
DROPS (QUANTITY)	2116
DROP HEIGHT (SELECT ONE)	
(FEET)	2118
(METERS)	2121
CORD LENGTH (SELECT ONE)	
(FEET)	2123
(METERS)	2125

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2104	SHOCK, MECHANICAL/DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2104.
2106	SHOCK, MECHANICAL/DROP. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE WHICH WOULD INTERFERE WITH SAFE AND NORMAL USAGE OF THE DEVICE.
2108	THERE SHALL BE NO EVIDENCE OF ARCING OR DIELECTRIC BREAKDOWN WHEN DIELECTRIC STRENGTH IS TESTED.
2110	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2110 MEGOHMS.
2112	SHOCK, MECHANICAL/DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2112.
2115	SHOCK, MECHANICAL/DROP. TESTING SHALL BE PERFORMED AS FOLLOWS:
2116	THERE SHALL BE 2116 DROPS.
2118	DROP HEIGHT SHALL BE 2118 FEET.
2121	DROP HEIGHT SHALL BE 2121 METER(S).
2123	CONNECTOR SHALL BE ATTACHED TO A CORD 2123 FEET IN LENGTH.
2125	CONNECTOR SHALL BE ATTACHED TO A CORD 2125 METER(S) IN LENGTH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, MECHANICAL/DROP (CONT)	
AS FOLLOWS: (CONT)	
CORD DESCRIPTION ____	2127
DOCUMENT (DOC DES)	2129
IMPACT SURFACE ____	2131
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM (MILLISECONDS)	2844
MAXIMUM (MICROSECONDS)	2846
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2127	CORD SHALL BE 2127.
2129	CORD SHALL BE IN ACCORDANCE WITH 2129.
2131	IMPACT SURFACE SHALL BE 2131.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2844	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2844 MILLISECOND(S).
2846	DISCONTINUITY DURING TEST SHALL BE NOT GREATER THAN 2846 MICROSECOND(S).
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-1344, METHOD 2004.	2850
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2852
WIRED, UNMATED CONNECTOR.	2854
MAXIMUM LOAD (MILLIAMPERES)	2856
TEMPERATURE CYCLING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2858
NO EVIDENCE OF CRACKING OR OTHER DAMAGE.	2860

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2850	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2004 OF MIL-STD-1344.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2852	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2854	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2856	ELECTRICAL LOAD SHALL BE A CURRENT NOT GREATER THAN 2856 MILLIAMPERE(S).
2858	TEMPERATURE CYCLING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2858.
2860	TEMPERATURE CYCLING. THERE SHALL BE NO EVIDENCE OF DAMAGE DETRIMENTAL TO THE OPERATION OF THE CONNECTOR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
NO EVIDENCE OF CRACKING OR OTHER DAMAGE. (CONT)	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2862
(MILLIVOLTS)	2864
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2866
PER MIL-STD-1344, METHOD 1003.	2868
*TEST CONDITION (LETTER)	4715
NUMBER OF CYCLES (QUANTITY)	2870
STEP 1 TEMPERATURE (DEGREES CELSIUS)	2872
PLUS TOLERANCE (DEGREES CELSIUS)	2874
MINUS TOLERANCE (DEGREES CELSIUS)	2876
STEP 3 TEMPERATURE (DEGREES CELSIUS)	2878
PLUS TOLERANCE (DEGREES CELSIUS)	2880
MINUS TOLERANCE (DEGREES CELSIUS)	2882

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2862	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2862 OHM(S).
2864	THE CONTACT RESISTANCE AFTER TEST SHALL BE NOT GREATER THAN 2864 MILLIVOLT(S) DROP.
2866	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2866.
2868	TEMPERATURE CYCLING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 1003 OF MIL-STD-1344.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
2870	THE NUMBER OF CYCLES SHALL BE 2870.
2872	THE STEP 1 TEMPERATURE SHALL BE 2872 DEGREES CELSIUS.
2874	THE STEP 1 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2874 DEGREES CELSIUS.
2876	THE STEP 1 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2876 DEGREES CELSIUS.
2878	THE STEP 3 TEMPERATURE SHALL BE 2878 DEGREES CELSIUS.
2880	THE STEP 3 POSITIVE TEMPERATURE TOLERANCE SHALL BE 2880 DEGREES CELSIUS.
2882	THE STEP 3 NEGATIVE TEMPERATURE TOLERANCE SHALL BE 2882 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE CYCLING (CONT)	
PER MIL-STD-1344, METHOD 1003. (CONT)	
MINIMUM EXPOSURE DURATIONS (SELECT ONE)	
(HOURS)	2884
(MINUTES)	2886
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2888
WIRED, UNMATED CONNECTOR.	2890
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1754
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	3102
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1748
PER UL-STD-498.	1750
TEST CURRENT (AMPERES)	3104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2884	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2884 HOUR(S).
2886	THE STEPS 1 AND 3 EXPOSURE DURATIONS SHALL BE NOT LESS THAN 2886 MINUTE(S).
2888	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2890	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
1754	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1754.
3102	TEMPERATURE RISE. THE RISE IN TEMPERATURE OF ANY DEVICE TERMINAL SHALL BE NOT GREATER THAN 3102 DEGREES CELSIUS.
1748	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1748.
1750	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE UNDERWRITERS LABORATORY STANDARD 498.
3104	TEST CURRENT SHALL BE 3104 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
NO LOOSENING OF HARDWARE.	2916
NO UNMATING.	2918

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1374	*THERE SHALL BE NO DISCONTINUITY DURING TEST.*
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
2916	THERE SHALL BE NO LOOSENING OF HARDWARE.
2918	THERE SHALL BE NO UNINTENDED UNMATING OF CONNECTORS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-1344, METHOD 2005.	2920
TEST CONDITION NUMBER I.	2922
DURATION EACH DIRECTION (HOURS)	2924
TEST CONDITION NUMBER II.	2926
TEST CONDITION NUMBER III.	2928
TEST CONDITION NUMBER IV.	2930
TEST CONDITION NUMBER V.	2932
TEST CONDITION (LETTER)	2934
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2936
PER DOCUMENT (DOC DES)	2938
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	2940
15 MINUTES.	2942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
2920	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344.
2922	TEST CONDITION NUMBER I SHALL APPLY.
2924	DURATION OF VIBRATION IN EACH DIRECTION SHALL BE 2924 HOUR(S).
2926	TEST CONDITION NUMBER II SHALL APPLY.
2928	TEST CONDITION NUMBER III SHALL APPLY.
2930	TEST CONDITION NUMBER IV SHALL APPLY.
2932	TEST CONDITION NUMBER V SHALL APPLY.
2934	TEST CONDITION LETTER 2934 SHALL APPLY.
2936	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2938	MOUNTING SHALL BE IN ACCORDANCE WITH 2938.
2940	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2942	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
DURATION PER AXIS (CONT)	
1.5 HOURS.	2944
8 HOURS.	2946
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	2948
THREE MUTUALLY PERPENDICULAR.	2950
NUMBER OF TEST POINTS (QUANTITY)	2952
TEST POINTS ____	2954
TEST CONDITION NUMBER VI.	2956
TEST CONDITION (LETTER)	2958
MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	2960
PER DOCUMENT (DOC DES)	2962
DURATION PER AXIS (SELECT ONE)	
3 MINUTES.	2964
15 MINUTES.	2966

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2944	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2946	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
2948	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2950	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
2952	THERE SHALL BE 2952 TEST POINT(S).
2954	TEST POINT(S) SHALL BE 2954.
2956	TEST CONDITION NUMBER VI SHALL APPLY.
2958	TEST CONDITION LETTER 2958 SHALL APPLY.
2960	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2962	MOUNTING SHALL BE IN ACCORDANCE WITH 2962.
2964	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 3 MINUTES.
2966	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 15 MINUTES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
DURATION PER AXIS (CONT)	
1.5 HOURS.	2968
8 HOURS.	2970
DIRECTION OF MOTION (SELECT ONE)	
PERPENDICULAR TO MATING PLANE.	2972
THREE MUTUALLY PERPENDICULAR.	2974
NUMBER OR TEST POINTS (QUANTITY)	2976
TEST POINTS ____	2978
SPECIMEN (SELECT ONE)	
WIRED, MATED PAIR.	2980
WIRED, UNMATED CONNECTOR.	2982
ELECTRICAL LOAD (MILLIAMPERES)	2984
MONITOR FOR DISCONTINUITIES.	2986
METHOD FOR DETERMINING RESONANCE ____	2988

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2968	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 1.5 HOURS.
2970	DURATION OF VIBRATION PER AXIS SHALL BE NOT LESS THAN 8 HOURS.
2972	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE MATING PLANE OF THE CONNECTOR(S) IN NORMAL MOUNTING POSITION.
2974	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR PLANES.
2976	THERE SHALL BE 2976 TEST POINT(S).
2978	TEST POINT(S) SHALL BE 2978.
2980	TEST SPECIMEN SHALL BE A WIRED CONNECTOR MATED PAIR.
2982	TEST SPECIMEN SHALL BE A WIRED UNMATED CONNECTOR.
2984	THE ELECTRICAL LOAD, ALL CONTACTS, SHALL BE NOT GREATER THAN 2984 MILLIAMPERE(S).
2986	CONNECTORS SHALL BE MONITORED FOR DISCONTINUITIES.
2988	THE METHOD FOR DETERMINING RESONANCE SHALL BE 2988.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATER PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1804
NO EVIDENCE OF WATER LEAKAGE.	1806
MINIMUM INSULATION RESISTANCE (MEGOHMS)	1805
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1798
PER DOCUMENT (DOC DES)	1800
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1804	WATER PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1804.
1806	WATER PRESSURE. THE CONNECTOR SHALL SHOW NO EVIDENCE OF WATER LEAKAGE.
1805	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1805 MEGOHM(S).
1798	WATER PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1798.
1800	WATER PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1800.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity
Army-MU

Preparing activity:
Army-MI


(Project EDS-A255)'

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

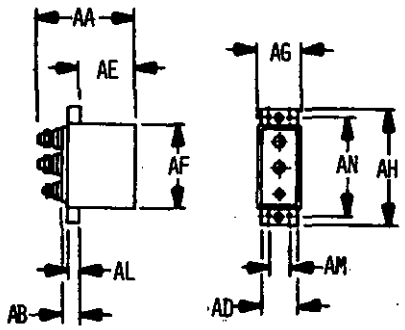


075-01-1

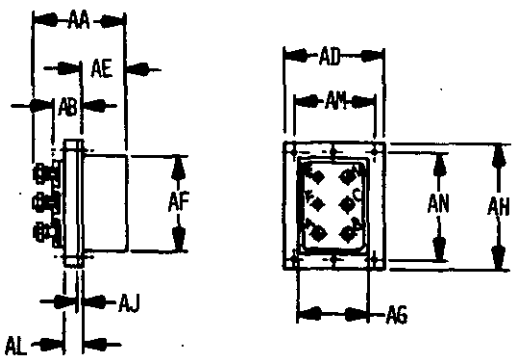



075-01-2

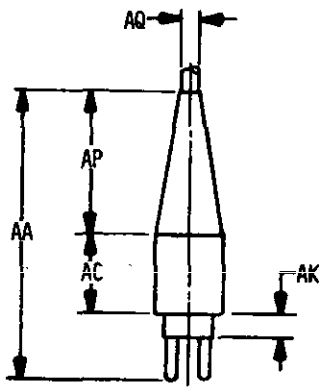




075-01-3

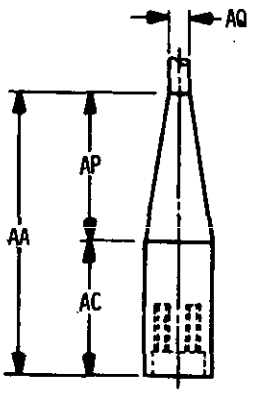




075-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

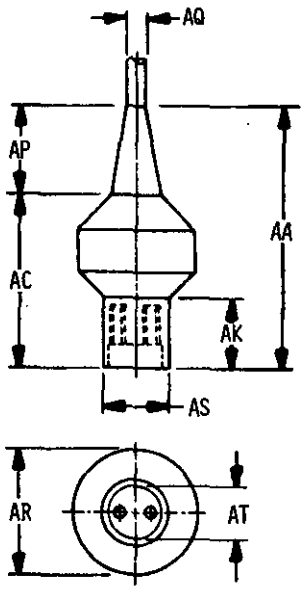



075-01-5

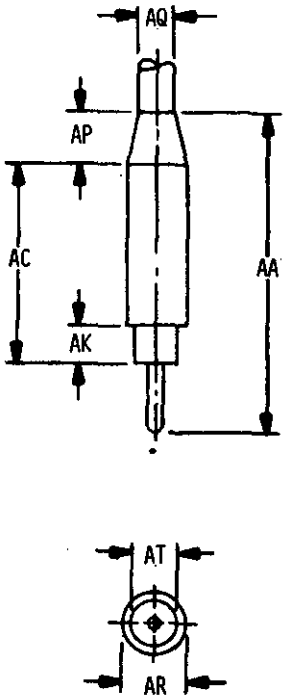


075-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

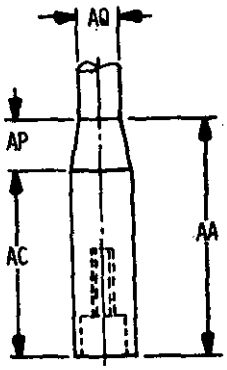





075-01-7

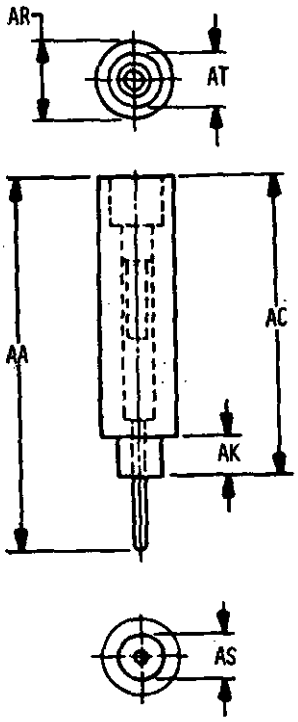

075-01-8

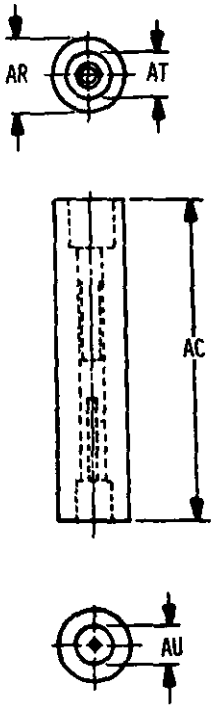


075-01-9

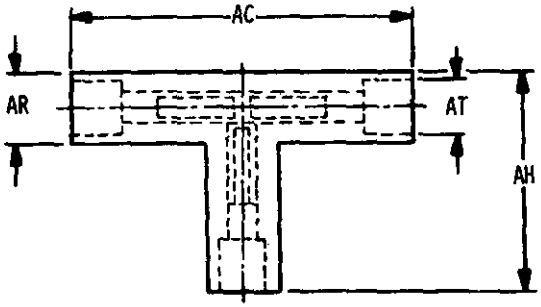


075-01-10


Source: https://assist.dla.mil/ Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

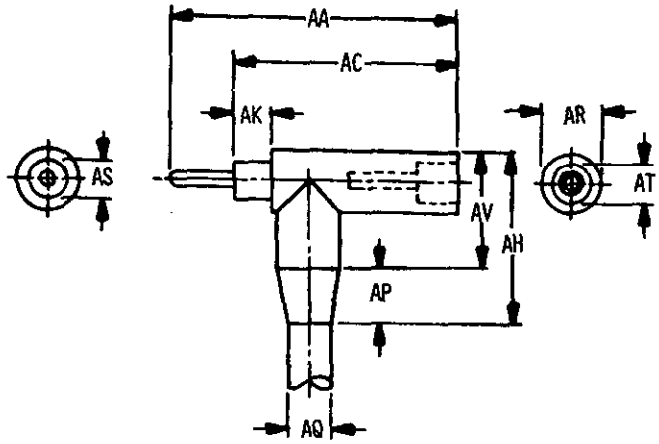

075-01-11

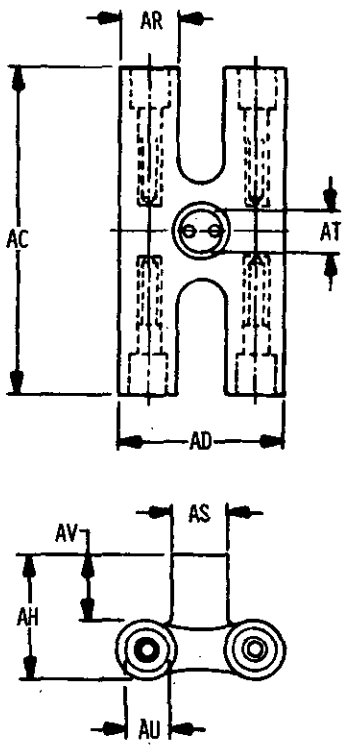


075-01-12

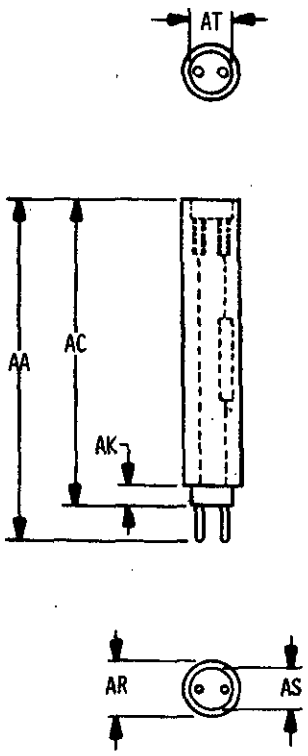


075-01-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

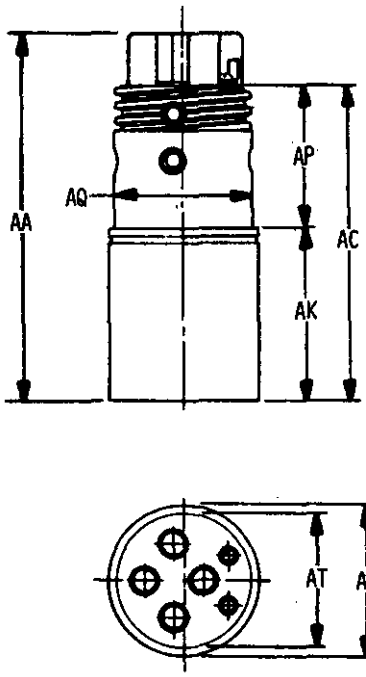



075-01-14

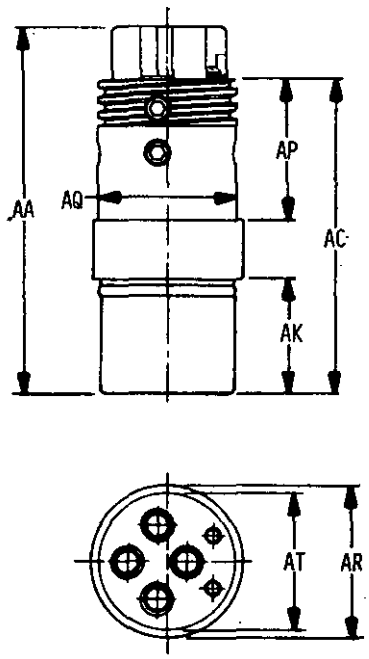


075-01-15


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

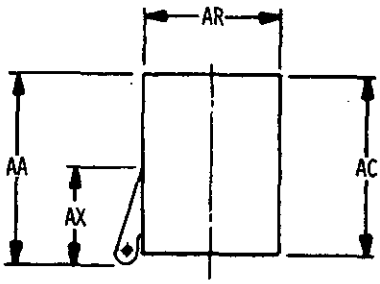




075-01-16

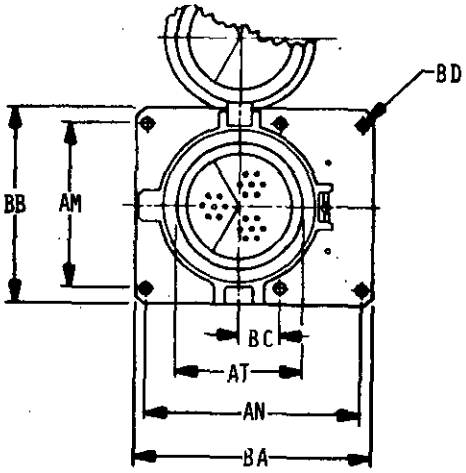

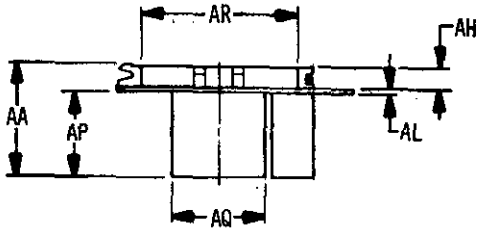


075-01-17


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

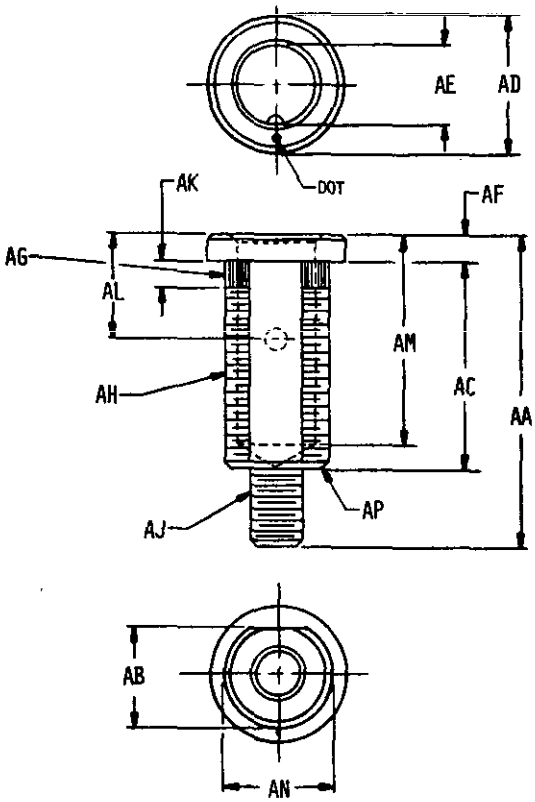

Ø75-Ø1-27

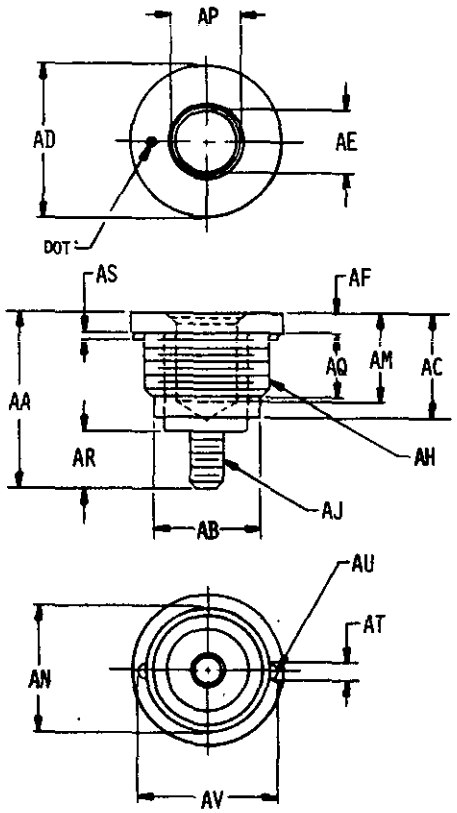


Ø75-Ø1-28

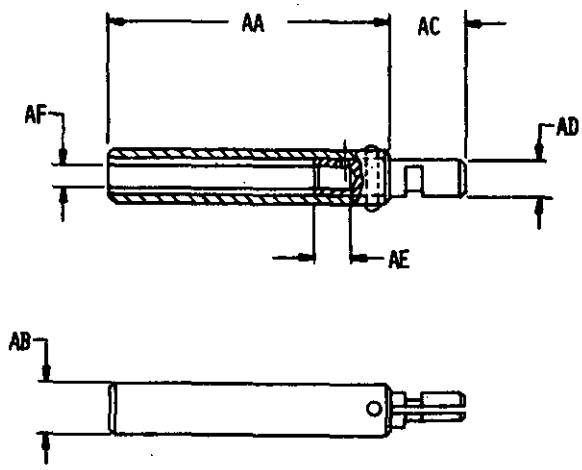


Ø75-Ø1-29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

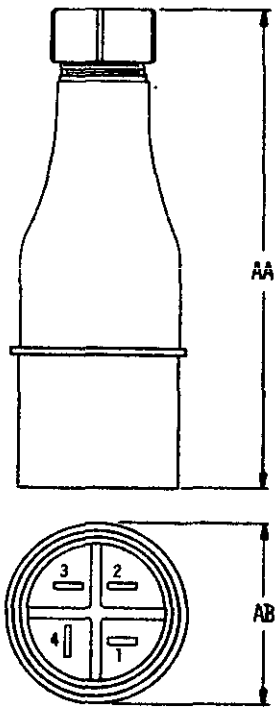


075-01-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

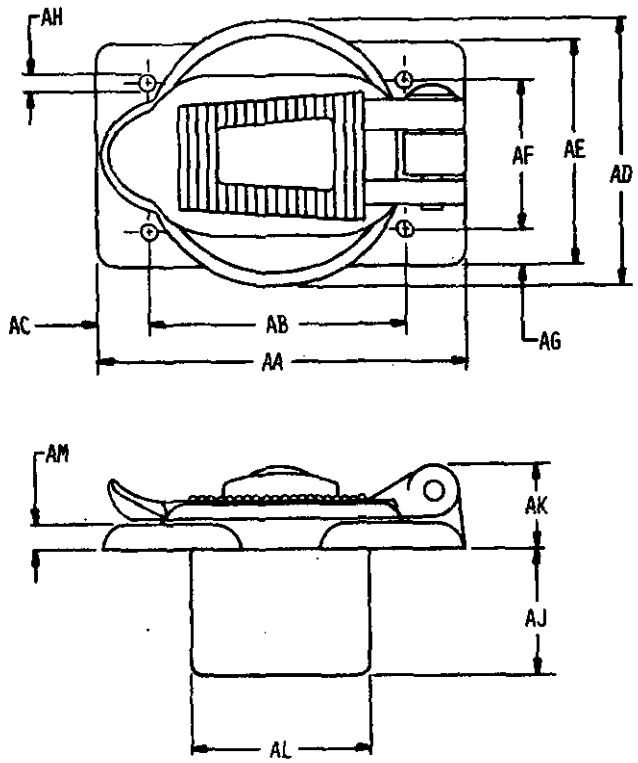


075-01-32


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

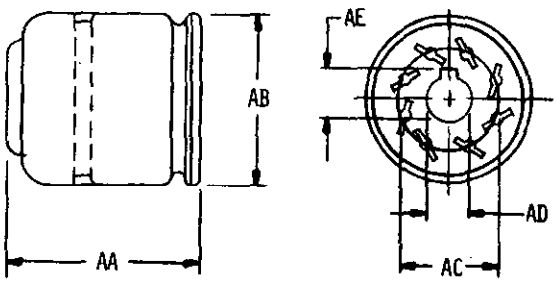

075-01-39

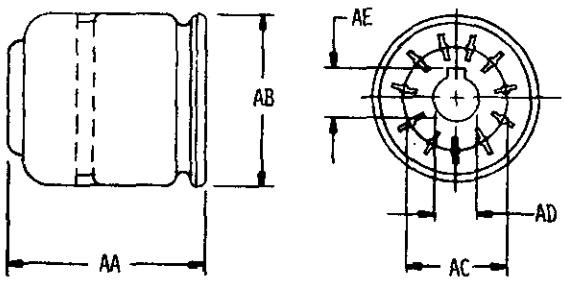

075-01-40

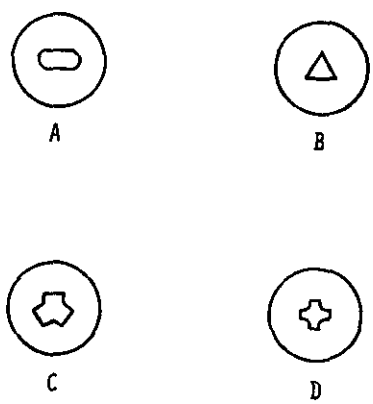

075-02-1

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	10	1471	80	1730	48	2022	18
0102	10	1477	60	1732	48	2024	18
0103	10	1502	80	1736	32	2030	22
0104	10	1504	82	1742	32	2032	22
0105	10	1505	90	1744	32	2034	22
0107	12	1508	80	1748	86	2036	22
0108	12	1509	80	1750	86	2038	22
0703	10	1520	68	1754	86	2040	22
0800	10	1529	98	1798	98	2042	22
1003	10	1545	90	1800	98	2044	22
1004	10	1546	90	1804	98	2046	22
1005	10	1563	22	1805	98	2048	22
1006	10	1570	24	1806	98	2050	22
1008	10	1582	16	1810	46	2052	22
1009	18	1608	54	1812	48	2054	24
1371	56	1610	54	1816	46	2058	24
1372	58	1612	54	1818	46	2060	24
1373	66	1616	54	1858	34	2062	24
1374	90	1618	54	1860	34	2064	24
1375	88	1622	40	1864	34	2066	24
1376	56	1632	42	1866	34	2068	24
1377	58	1638	40	1894	56	2070	24
1380	64	1640	40	1895	56	2074	32
1381	58	1644	72	1896	56	2078	36
1383	68	1650	68	1897	56	2080	36
1384	56	1652	70	1900	56	2082	38
1386	56	1654	70	1902	56	2084	38
1387	56	1658	74	1903	56	2086	38
1407	66	1660	74	1994	42	2088	38
1410	98	1664	72	2000	16	2090	48
1411	88	1666	72	2002	16	2092	48
1412	98	1670	44	2008	16	2094	50
1413	98	1672	44	2010	16	2096	50
1414	90	1674	44	2011	16	2097	56
1416	90	1678	46	2012	18	2098	58
1418	98	1684	42	2013	16	2099	44
1419	88	1686	42	2014	18	2100	70
1420	88	1688	42	2016	18	2102	70
1421	90	1718	48	2018	18	2104	78
1433	88	1720	48	2020	18	2106	78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2108	78	2286	34	2454	52	2652	72
2110	78	2288	34	2456	52	2654	72
2112	78	2290	36	2458	54	2656	72
2114	78	2292	36	2460	54	2694	74
2115	78	2294	36	2462	54	2696	74
2116	78	2296	36	2464	54	2698	74
2118	78	2298	36	2522	56	2700	74
2120	16	2364	36	2526	56	2702	74
2121	78	2366	36	2528	56	2772	76
2122	16	2368	38	2530	56	2774	76
2123	78	2370	38	2532	58	2776	76
2125	78	2372	38	2534	58	2844	80
2126	16	2373	40	2536	58	2846	80
2127	80	2374	38	2550	62	2850	82
2128	16	2375	40	2552	62	2852	82
2129	80	2376	38	2554	62	2854	82
2130	16	2377	42	2556	62	2856	82
2131	80	2378	40	2558	62	2858	82
2200	26	2379	42	2560	62	2860	82
2202	26	2380	40	2562	64	2862	84
2204	26	2381	42	2564	64	2864	84
2240	30	2382	40	2566	64	2866	84
2242	30	2383	42	2570	64	2868	84
2244	30	2384	40	2572	64	2870	84
2246	30	2385	42	2574	64	2872	84
2248	30	2388	44	2576	64	2874	84
2250	30	2390	44	2578	64	2876	84
2252	30	2392	44	2580	64	2878	84
2254	30	2394	44	2590	66	2880	84
2256	30	2396	44	2592	68	2882	84
2258	32	2398	44	2594	68	2884	86
2260	32	2402	44	2596	68	2886	86
2262	32	2404	44	2636	68	2888	86
2264	32	2406	46	2638	70	2890	86
2270	34	2420	46	2640	70	2916	90
2272	34	2422	46	2642	70	2918	90
2274	34	2424	46	2644	70	2920	90
2276	34	2428	48	2646	70	2922	90
2278	34	2430	48	2648	72	2924	90
2284	34	2452	50	2650	72	2926	90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2928	90	4717	52	5054	14	7021	28
2930	90	4754	60	5060	14	7022	28
2932	90	4755	60	5061	14	7023	28
2934	90	4756	60	5062	14	7024	28
2936	90	4760	58	5063	14	7301	14
2938	90	4761	58	5068	14	7302	14
2940	90	4762	58	5069	14	7572	18
2942	90	4765	76	5070	14	7577	18
2944	94	4766	76	5071	14	7580	20
2946	94	4770	76	5209	98	7629	100
2948	94	4772	76	6267	52	7630	100
2950	94	4773	76	6359	66		
2952	94	4788	62	6369	10		
2954	94	4790	62	6372	100		
2956	94	4793	62	6790	26		
2958	94	4795	60	6791	26		
2960	94	4798	60	6792	26		
2962	94	4799	60	6793	26		
2964	94	4803	62	6794	26		
2966	94	4805	60	6795	26		
2968	96	4813	62	6796	26		
2970	96	4815	60	6798	28		
2972	96	4850	52	6799	28		
2974	96	4854	52	6801	28		
2976	96	4855	52	6803	28		
2978	96	4856	50	6870	100		
2980	96	4861	50	6873	10		
2982	96	4867	52	6874	12		
2984	96	4869	52	6941	12		
2986	96	4870	52	6942	12		
2988	96	4874	50	6991	102		
3102	86	4875	50	6992	102		
3104	86	4878	74	6993	102		
3136	32	4897	52	6994	102		
4681	90	4942	98	6995	102		
4682	90	4943	98	7001	100		
4684	82	4944	98	7002	100		
4685	82	4950	20	7003	100		
4686	82	5000	52	7004	100		
4715	94	5052	14	7005	100		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	102
Additional Requirements	100
Air Leakage (Seal)	30
Altitude	26
Altitude Rating	14
Aperture Cards Required	12
Applicable Documents	102
Base Document	10
Cable Pull-Out	32
Cable Seal Flexing	34
City, State, Zip	10
Classification	16
Color	24
Company Name/Command	10
Configuration	18
Contact Insertion and Removal Force	36
Contact Resistance	40
Contact Retention	42
Contract Number/Office Symbol	10
Control, Source	10
Control, Specification	12
Cord	22
Crush	46
Current Overload	48
Date	10
Design	18
Design and Construction	22
Design, Connector	22
Dielectric Withstanding Voltage at Sea Level	50
Durability	54
Enclosure	24
Finishes	20
Fluid Immersion	56
Format	10
Fungus	58
Government Design Activity FSCM	10
Humidity	60

Source: https://assist.dla.mil Downloaded: 2026-04-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Illustrations	20
Insulation Resistance	64
Materials	20
Mating and Unmating Forces	68
Mating Connector	26
Metals	20
Mounting Hardware	100
Nomenclature	102
Notes	102
Outlets	22
Ozone Exposure	72
Packaging	102
Part Marking	100
Part Number	12
Part Number Cross-Reference	102
Phone Number	10
Polarization	22
Quality Assurance Provisions	102
Ratings	16
Requester FSCM	10
Requester's Name	10
Revision of AEDPS Document (Number)	12
Salt Spray	74
Scope	12
Shock, Mechanical/Drop	78
Shock, Specified Pulse	80
Source Table	12
Special Requirements	22
Storage Conditions	98
Street/Building	10
Superseded Document	102
Switch	24
System Application	10
Tabulated Characteristics	20
Temperature	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Temperature Cycling	82
Temperature Rating	14
Temperature Rise	86
Terminals	22
Terminal Strength	88
Termination	24
Units of Measure	12, 18
Vibration	90
Water Pressure	98
Weight	28
Workmanship	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-135(MI), dated 15 Jan 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-135(MI), dated 15 Jan 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DoD STD 35-135

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.