DOD-STD-35-136(MI)
22 SEPTEMBER 1978
SUPERSEDING
SECTIONS 9 THROUGH 12
MIL-STD-35-3C(MI)
21 APRIL 1975

MILITARY STANDARD

RESISTORS, VARIABLE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Resistors, Variable
Automated Engineering
Document Preparation System

DOD-STD-35-136(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-136(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for variable resistors.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	9
	5.5	Tabulation	10
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.6.1	Interrelationship of Codes	13
	5.6.2	Automatic MSE Data	13
	5.6.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Test matrix	10
	III.	Tabulation candidates	11

APPENDICES

Appendix	A.	Illustrations	169
	B.	Characteristic Code Index	211
		Index	219

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for variable resistors.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-199, Selection and Use of Resistors, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
RESISTOR, VARIABLE, COMPOSITION	002005	MIL-R-94	RV
RESISTOR, VARIABLE, NON-WIREWOUND	002009	MIL-R-39023 MIL-R-23285	RQ RVC
RESISTOR, VARIABLE, NON-WIREWOUND, LEAD SCREW ACTUATED	002008	MIL-R-39035 MIL-R-22097	RJR (ER) RJ
RESISTOR, VARIABLE, WIREWOUND	002001	MIL-R-39002 MIL-R-12934 MIL-R-8903 MIL-R-22 MIL-R-19	RK RR RRL RP RA
RESISTOR, VARIABLE, WIREWOUND, LEAD SCREW ACTUATED	002012	MIL-R-39015 MIL-R-27208	RTR (ER) RT

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-R-94	Resistors, Variable, Composition, General Specification For
MIL-R-12934	Resistors, Variable, Wire-Wound, Precision General Specification For
MIL-R-39002	Resistors, Variable, Wire-Wound Semi-Precision, General Specification For
MIL-R-39015	Resistors, Variable, Wire-Wound (Lead Screw Actuated) Established Reliability General Specification For
MIL-R-39023	Resistors, Variable, Non-Wire-Wound, Precision General Specification For
MIL-R-39035	Resistors, Variable, Nonwire-Wound (Adjustment Type), Established Reliability, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Electronic Parts Marking

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to variable resistors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for variable resistors, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to variable resistors.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to variable resistors.

4.3.2 Illustrations. Illustrations applicable to variable resistors are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE / TEST	1928 Absolute Minimum Resistance	2044 Continuity	1998 Electrical Travel	1936 End Resistance	2034 End Voltage	1876 Function/Taper Conformity	1882 High Temperature Exposure	1898 Low Temperature Exposure	1890 Low Temperature Operation	1992 Mechanical Backlash	1902 Mechanical Features	2006 Mechanical Travel	1914 Peak Noise	1958 Shaft Integrity	1974 Taps	1990 Torque
MIL-R-94							X		X	X							X
MIL-R-12934		X				X		X	X	X	X	X	X	X		X	X
MIL-R-39002		X	X	X	X		X	X		X			X	X			X
MIL-R-39015		X	X	X	X									X	X		X
MIL-R-39023						X	X	X	X	X	X	X	X			X	X
MIL-R-39035				X	X			X		X					X		X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for variable resistors characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1571	POWER RATING (WATTS)	2110	MAX VOLT RATING (VOLTS AC)	2114	MAX VOLT RATING (VOLTS DC)
2113	MAX VOLT RATING (VOLTS)	2116	MAX CURR RATING (AMPERES)	2118	MAX CURR RATING (MILLIA)
1717	MAX SWITCH CURRENT (AMPERES)	L900	DC/TOTAL RESISTANCE (OHMS)	4199	RESISTANCE TOLERANCE + OR - (PERCENT)
1603	FUNCTION/ TAPER				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
STYLE	
(DESIGNATION)	1750
RESISTANCE/TEMPERATURE CHARACTERISTIC	
(DESIGNATION)	1752
SHAFT	
(DESIGNATION)	1754
MOISTURE RESISTANCE/TEMPERATURE CHARACTERISTIC	
(DESIGNATION)	1756
LIFE CHARACTERISTIC	
(DESIGNATION)	1758
FUNCTION CONFORMITY TOLERANCE CHARACTERISTIC	
(DESIGNATION)	1760
OUTPUT SMOOTHNESS CHARACTERISTIC	
(DESIGNATION)	1762

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1750	STYLE. STYLE 1750 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1752	RESISTANCE/TEMPERATURE CHARACTERISTIC. RESISTANCE/TEMPERATURE CHARACTERISTIC 1752 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1754	SHAFT. SHAFT DESIGNATION 1754 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1756	MOISTURE RESISTANCE/TEMPERATURE CHARACTERISTIC. MOISTURE RESISTANCE/TEMPERATURE CHARACTERISTIC 1756 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1758	LIFE CHARACTERISTIC. LIFE CHARACTERISTIC 1758 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1760	FUNCTION CONFORMITY TOLERANCE CHARACTERISTIC. FUNCTION CONFORMITY TOLERANCE CHARACTERISTIC 1760 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1762	OUTPUT SMOOTHNESS CHARACTERISTIC. OUTPUT SMOOTHNESS CHARACTERISTIC 1762 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION (CONT)	
RESISTANCE	
3 DIGIT NUMBER (OHMS)	1764
RESISTANCE CHARACTERISTIC	
(DESIGNATION)	1765
TERMINALS	
(DESIGNATION)	1766
CLASS	
(DESIGNATION)	1768
SWITCH	
(DESIGNATION)	1772
BUSHING	
(DESIGNATION)	1774

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1764	RESISTANCE. THE NOMINAL TOTAL RESISTANCE VALUE IN OHMS EXPRESSED AS A THREE DIGIT NUMBER WITH THE FIRST TWO DIGITS REPRESENTING SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFYING THE NUMBER OF ZEROS TO FOLLOW SHALL BE 1764.
1765	RESISTANCE CHARACTERISTIC. RESISTANCE CHARACTERISTIC 1765 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1766	TERMINALS. TERMINAL LETTER 1766 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1768	CLASS. CLASS 1768 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1772	SWITCH. SWITCH LETTER 1772 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1774	BUSHING. BUSHING 1774 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS	
POWER RATING	
(WATTS)	1571
RATING TEMPERATURE (DEGREES CELSIUS)	1572
DERATE TO ZERO POWER TEMPERATURE (DEGREES CELSIUS)	1573
GANGED DERATING (PERCENT)	2072
VOLTAGE RATING	
(VOLTS DC OR RMS)	2113
DC VOLTAGE RATING	
(VOLTS DC)	2114
AC VOLTAGE RATING	
(VOLTS AC)	2110
FREQUENCY (HERTZ)	2112
CURRENT RATING (SELECT ONE)	
(AMPERES)	2116
(MILLIAMPERES)	2118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ELECTRICAL RATINGS.
1571	POWER RATING. THE POWER RATING SHALL BE 1571 WATT(S).
1572	THE AMBIENT TEMPERATURE SHALL BE 1572 DEGREES CELSIUS.
1573	POWER IS DERATED LINEARLY TO ZERO AT 1573 DEGREES CELSIUS.
2072	EACH RESISTOR SHALL BE DERATED 2072 PERCENT IN A MULTISECTION (CUP) CONFIGURATION.
2113	VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 2113 VOLT(S) DC OR RMS.
2114	DC VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 2114 VOLT(S) DC.
2110	AC VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 2110 VOLT(S) AC.
2112	THE FREQUENCY SHALL BE 2112 HERTZ.
2116	CURRENT RATING. THE MAXIMUM CONTINUOUS CURRENT SHALL BE 2116 AMPERE(S).
2118	CURRENT RATING. THE MAXIMUM CONTINUOUS CURRENT SHALL BE 2118 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RATINGS (CONT)	
SWITCH VOLTAGE RATING	
(VOLTS DC OR RMS)	2046
SWITCH DC VOLTAGE RATING	
(VOLTS DC)	2092
SWITCH AC VOLTAGE RATING	
(VOLTS AC)	2088
FREQUENCY (HERTZ)	2090
SWITCH CURRENT RATING	
(AMPERES)	1717
LOAD TYPE ____	1776
RESOLUTION (SELECT ONE)	
THEORETICAL (PERCENT)	1778
ANGULAR (DEGREES)	1780
VOLTAGE (PERCENT)	1782

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2046	SWITCH VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 2046 VOLT(S) DC OR RMS.
2092	SWITCH DC VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 2092 VOLT(S) DC.
2088	SWITCH AC VOLTAGE RATING. THE MAXIMUM WORKING VOLTAGE SHALL BE 2088 VOLT(S) AC.
2090	THE FREQUENCY SHALL BE 2090 HERTZ.
1717	SWITCH CURRENT RATING. THE MAXIMUM CURRENT SHALL BE 1717 AMPERE(S).
1776	THE LOAD TYPE SHALL BE 1776.
1778	RESOLUTION. THE THEORETICAL RESOLUTION SHALL BE 1778 PERCENT.
1780	RESOLUTION. THE ANGULAR RESOLUTION SHALL BE 1780 DEGREE(S).
1782	RESOLUTION. THE VOLTAGE RESOLUTION SHALL BE 1782 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. INCHES.	7572

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT)	
UNITS (CONT)	
SI. MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
ENCLOSURE	
OPEN.	2120
ENCAPSULATED.	2122
MOLDED.	2124
METAL ENCASED.	2126
HERMETICALLY SEALED.	2128
WATERTIGHT.	2130
PANEL SEAL WATERTIGHT.	2132
NON-TURN DEVICE LOCATING PIN (SELECT ONE)	
REQUIRED.	1784
WHEN VIEWED FROM SHAFT END WITH TERMINALS POINTING DOWN, LOCATED CLOCKWISE FROM BOTTOM (DEGREES)	1786
LOCATED ON ILLUSTRATION 002-15-1 AT AXIS (NUMBER)	2136
NOT REQUIRED.	2134

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
2120	THE ENCLOSURE SHALL BE OPEN.
2122	THE ENCLOSURE SHALL BE ENCAPSULATED.
2124	THE ENCLOSURE SHALL BE MOLDED.
2126	THE ENCLOSURE SHALL BE METAL ENCASED.
2128	THE ENCLOSURE SHALL BE HERMETICALLY SEALED.
2130	THE ENCLOSURE SHALL BE WATERTIGHT.
2132	THE ENCLOSURE SHALL HAVE A WATERTIGHT PANEL SEAL.
1784	THE RESISTOR SHALL HAVE A NON-TURN DEVICE.
1786	THE RESISTOR SHALL HAVE A NON-TURN DEVICE LOCATED 1786 DEGREES CLOCKWISE FROM THE BOTTOM WHEN VIEWED FROM THE SHAFT END WITH THE TERMINALS POINTING DOWN.
2136	THE RESISTOR SHALL HAVE A NON-TURN DEVICE LOCATED AT AXIS 2136 ON ILLUSTRATION 002-15-1.
2134	A NON-TURN DEVICE IS NOT REQUIRED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINALS	
SOLDERABLE.	1788
WELDABLE.	1790
SOLDERABLE/WELDABLE.	1792
ILLUSTRATION 002-18-1 (LETTER)	2148
ACCOMMODATE WIRES	
(NUMBER)	1794
*SIZE (AWG)	1796
BUSHING	
FLAT REQUIRED.	1800
WHEN VIEWED FROM SHAFT END WITH TERMINALS POINTING DOWN, FLAT POSITION LOCATED CLOCKWISE FROM BOTTOM (DEGREES)	1802
FLAT POSITION LOCATED ON ILLUSTRATION 002-15-1 TOWARD AXIS (NUMBER)	2138
SHAFT LOCKING TYPE (SELECT ONE)	
SLOTTED.	1804
BEVELED.	1806

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

CHAR CODE	STANDARD PARAGRAPH
1788	TERMINALS SHALL BE SOLDERABLE.
1790	TERMINALS SHALL BE WELDABLE.
1792	TERMINALS SHALL BE SOLDERABLE/WELDABLE.
2148	TERMINALS SHALL BE IN ACCORDANCE WITH STYLE LETTER 2148 ON ILLUSTRATION 002-18-1.
1794 1796	TERMINALS SHALL ACCOMMODATE 1794 WIRE(S) OF SIZE 1796 AWG.
1800	THE BUSHING SHALL HAVE A FLAT.
1802	THE BUSHING SHALL HAVE A FLAT LOCATED 1802 DEGREES CLOCKWISE FROM THE BOTTOM WHEN VIEWED FROM THE SHAFT END WITH THE TERMINALS POINTING DOWN.
2138	THE BUSHING SHALL HAVE A FLAT LOCATED TOWARD AXIS 2138 ON ILLUSTRATION 002-15-1.
1804	THE BUSHING SHALL HAVE A SLOTTED SHAFT LOCK.
1806	THE BUSHING SHALL HAVE A BEVELED SHAFT LOCK.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SHAFT	
FORM (SELECT ONE)	
SINGLE.	1810
CONCENTRIC.	1834
SHAPE (SELECT ONE)	
ROUND.	1812
FLATTED.	1815
POSITION (SELECT ONE)	
SAME AS CONTACT.	1816
OPPOSITE CONTACT.	1818
WHEN VIEWED FROM SHAFT END WITH SHAFT COUNTERCLOCKWISE AND TERMINALS POINTING DOWN, LOCATED CLOCKWISE FROM BOTTOM (DEGREES)	1820

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1810	THE SHAFT SHALL BE SINGLE.
1834	THE SHAFT SHALL BE CONCENTRIC.
1812	THE SHAFT SHALL BE ROUND.
1815	THE SHAFT SHALL BE FLATTED.
1816	THE SHAFT FLAT SHALL BE ON THE SAME SIDE AS THE MOVABLE CONTACT.
1818	THE SHAFT FLAT SHALL BE ON THE SIDE OPPOSITE OF THE MOVABLE CONTACT.
1820	THE SHAFT FLAT SHALL BE LOCATED 1820 DEGREES CLOCKWISE FROM THE BOTTOM WHEN VIEWED FROM THE SHAFT END WITH THE SHAFT FULLY COUNTERCLOCKWISE AND THE TERMINALS POINTING DOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
POSITION (CONT)	
CONCENTRIC POSITIONS	
INNER SHAFT FLAT POSITION WITH SHAFT COUNTERCLOCKWISE ____	2142
OUTER SHAFT FLAT POSITION WITH SHAFT COUNTERCLOCKWISE ____	2140
SCREWDRIVER SLOT.	1822
POSITION (SELECT ONE)	
WHEN VIEWED FROM SHAFT END WITH SHAFT COUNTERCLOCKWISE AND TERMINALS POINTING DOWN, LOCATED CLOCKWISE FROM BOTTOM (DEGREES)	1824
RELATION TO MOVABLE CONTACT (SELECT ONE)	
IN LINE WITH.	1826
OPPOSITE.	1828
OTHER ____	1836
INSULATED.	1830
COMMON TO ____	1832

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2142	THE INNER SHAFT FLAT WITH THE SHAFT FULLY COUNTERCLOCKWISE SHALL BE 2142.
2140	THE OUTER SHAFT FLAT WITH THE SHAFT FULLY COUNTERCLOCKWISE SHALL BE 2140.
1822	THE SHAFT SHALL HAVE A SCREWDRIVER SLOT.
1824	THE SLOT SHALL BE LOCATED 1824 DEGREES CLOCKWISE FROM THE BOTTOM WHEN VIEWED FROM THE SHAFT END WITH THE SHAFT FULLY COUNTERCLOCKWISE AND THE TERMINALS POINTING DOWN.
1826	THE SLOT SHALL BE IN LINE WITH THE MOVABLE CONTACT.
1828	THE SLOT SHALL BE OPPOSITE THE MOVABLE CONTACT.
1836	THE SHAFT SHALL BE 1836.
1830	THE SHAFT SHALL BE INSULATED.
1832	THE SHAFT SHALL BE ELECTRICALLY COMMON TO 1832.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SECTIONS	
(NUMBER)	1838
OUTER SHAFT OPERATES SECTIONS (NUMBERS)	2144
INNER SHAFT OPERATES SECTIONS (NUMBERS)	2146
TAPS	
ADJUSTABLE (NUMBER)	1840
FIXED (NUMBER)	1842
STOPS (SELECT ONE)	
REQUIRED (NUMBER)	1844
NOT REQUIRED.	1798
ELECTRICAL OFF POSITION (SELECT ONE)	
CLOCKWISE.	1846
COUNTERCLOCKWISE.	1848
SWITCH	
TYPE (SELECT ONE)	
PUSH-PULL.	2078
ROTARY.	2080
MOMENTARY PUSH.	2082

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1838	THERE SHALL BE 1838 SECTIONS (CUPS).
2144	THE OUTER SHAFT SHALL OPERATE SECTION(S) 2144.
2146	THE INNER SHAFT SHALL OPERATE SECTION(S) 2146.
1840	THERE SHALL BE 1840 ADJUSTABLE TAP(S).
1842	THERE SHALL BE 1842 FIXED TAP(S).
1844	THERE SHALL BE 1844 MECHANICAL STOPS.
1798	MECHANICAL STOPS ARE NOT REQUIRED.
1846	THE ELECTRICAL OFF POSITION SHALL BE FULLY CLOCKWISE.
1848	THE ELECTRICAL OFF POSITION SHALL BE FULLY COUNTERCLOCKWISE.
2078	THE SWITCH TYPE SHALL BE PUSH-PULL.
2080	THE SWITCH TYPE SHALL BE ROTARY.
2082	THE SWITCH TYPE SHALL BE MOMENTARY PUSH.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TYPE (CONT)	
SPST.	1852
SPDT.	1854
DPST.	1856
DPDT.	1858
POLES (NUMBER)	1860
*THROWS (NUMBER)	1862
TURNS ON AT START OF CLOCKWISE ROTATION.	2084
TURNS ON AT START OF COUNTERCLOCKWISE ROTATION.	2086
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
(OUNCES)	7022
(GRAMS)	7021
DESIGN RELIABILITY	
FAILURE RATE (PERCENT PER 1000 HOURS)	7025
CONFIDENCE LEVEL (PERCENT)	7026

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1852	THE SWITCH TYPE SHALL BE SINGLE POLE SINGLE THROW.
1854	THE SWITCH TYPE SHALL BE SINGLE POLE DOUBLE THROW.
1856	THE SWITCH TYPE SHALL BE DOUBLE POLE SINGLE THROW.
1858	THE SWITCH TYPE SHALL BE DOUBLE POLE DOUBLE THROW.
1860 1862	THE SWITCH TYPE SHALL BE 1860 POLE 1862 THROW.
2084	THE SWITCH SHALL TURN ON AT THE START OF CLOCKWISE ROTATION.
2086	THE SWITCH SHALL TURN ON AT THE START OF COUNTERCLOCKWISE ROTATION.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
	DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:
7025	THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.
7026	THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DESIGN RELIABILITY (CONT)	
RATING TEMPERATURE (DEGREES CELSIUS)	7029
ELECTRICAL STRESS (SELECT ONE)	
VOLTAGE (PERCENT OF RATED)	7030
POWER (PERCENT OF RATED)	7028
ABSOLUTE MINIMUM RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2290
AS FOLLOWS:	1924
MAXIMUM RESISTANCE	
GREATER OF (OHMS)	1926
*(PERCENT OF VALUE)	2294
WIPER CLOCKWISE (OHMS)	1584
WIPER COUNTERCLOCKWISE (OHMS)	1586
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2284

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7029	THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELSIUS.
7030	THE DESIGN RELIABILITY SHALL BE AT 7030 PERCENT OF THE RATED VOLTAGE.
7028	THE DESIGN RELIABILITY SHALL BE AT 7028 PERCENT OF THE RATED POWER.
2290	ABSOLUTE MINIMUM RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2290.
1924	ABSOLUTE MINIMUM RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1926 2294	THE RESISTANCE SHALL BE NOT GREATER THAN THE GREATER OF 1926 OHM(S) OR 2294 PERCENT OF THE TOTAL RESISTANCE.
1584	THE RESISTANCE AT THE CLOCKWISE END SHALL BE NOT GREATER THAN 1584 OHM(S).
1586	THE RESISTANCE AT THE COUNTERCLOCKWISE END SHALL BE NOT GREATER THAN 1586 OHM(S).
2284	ABSOLUTE MINIMUM RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2284.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ABSOLUTE MINIMUM RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1928
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	7345
MAXIMUM (MILLISECONDS)	1864
MAXIMUM (MICROSECONDS)	1866
MAXIMUM RESISTANCE CHANGE (PERCENT)	1868
MAXIMUM SETTING CHANGE (PERCENT)	2164
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1928	ABSOLUTE MINIMUM RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1928.
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1864	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1864 MILLISECOND(S).
1866	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1866 MICROSECOND(S).
1868	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1868 PERCENT PLUS 0.01 OHM).
2164	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2164 PERCENT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 212.	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S.)	4893

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-202, METHOD 212. (CONT)	
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
CONTACT RESISTANCE VARIATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2242
AS FOLLOWS:	1906
MAXIMUM VARIATION (SELECT ONE)	
(PERCENT)	2244
(OHMS)	2246
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2236

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
2242	CONTACT RESISTANCE VARIATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
1906	CONTACT RESISTANCE VARIATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2244	THE CONTACT RESISTANCE VARIATION SHALL BE NOT GREATER THAN 2244 PERCENT.
2246	THE CONTACT RESISTANCE VARIATION SHALL BE NOT GREATER THAN 2246 OHM(S).
2236	CONTACT RESISTANCE VARIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2236.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE VARIATION (CONT)	
TEST METHODS (CONT)	
PER MIL-R-39035.	2238
CYCLES (NUMBER)	1908
CONTINUITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2038
UNIDIRECTIONAL CHANGE.	2040
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2042
PER DOCUMENT (DOC DES)	2044

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2238	CONTACT RESISTANCE VARIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-39035.
1908	THE NUMBER OF TEST CYCLES SHALL BE 1908.
2038	CONTINUITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2038.
2040	CONTINUITY. THE CHANGE IN VOLTAGE OR RESISTANCE SHALL BE SMOOTH AND UNIDIRECTIONAL THROUGHOUT THE EFFECTIVE ELECTRICAL TRAVEL.
2042	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2042.
2044	CONTINUITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2044.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DC/TOTAL RESISTANCE	
REQUIREMENTS	
DC RESISTANCE TABLE	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2296
PER MIL-STD-202, METHOD 303.	1563
TEST VOLTAGE (VOLTS DC)	1564

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DC/TOTAL RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE DC RESISTANCE TABLE.

DC RESISTANCE TABLE

SECTION (CUP)	DC/TOTAL RESISTANCE (OHMS)	RESISTANCE TOLERANCE + OR - (PERCENT)	FUNCTION OR TAPER	FUNCTION TOLERANCE + OR - (PERCENT)
4301	1900	4199	1603	1605
4302	4200	4201	4202	4203
4303	4204	4205	4206	4207
4304	4208	4209	4210	4211
4305	4212	4213	4214	4215
4306	4216	4217	4218	4219
4307	4220	4221	4222	4223
4308	4224	4225	4226	4227
4309	4228	4229	4230	4231
4310	4232	4233	4234	4235

2296 DC/TOTAL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2296.

1563 DC/TOTAL RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 303 OF MIL-STD-202.

1564 THE TEST VOLTAGE SHALL BE 1564 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
MAXIMUM RESISTANCE CHANGE (PERCENT)	1870
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1870	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1870 PERCENT PLUS 0.01 OHM).
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
MAXIMUM RESISTANCE CHANGE (PERCENT)	1872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1872	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1872 PERCENT PLUS 0.01 OHM).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4850 SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
ELECTRICAL TRAVEL (ACTUAL EFFECTIVE/THEORETICAL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2510
AS FOLLOWS:	1994

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
2510	ELECTRICAL TRAVEL (ACTUAL EFFECTIVE/THEORETICAL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2510.
1994	ELECTRICAL TRAVEL (ACTUAL EFFECTIVE/THEORETICAL). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL TRAVEL (ACTUAL EFFECTIVE/THEORETICAL) (CONT)	
AS FOLLOWS: (CONT)	
TRAVEL	
MINIMUM (DEGREES)	1612
MAXIMUM (DEGREES)	1996
TURNS	
MINIMUM (NUMBER)	2514
MAXIMUM (NUMBER)	2516
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2504
PER DOCUMENT (DOC DES)	1998
END RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2306
AS FOLLOWS:	1932

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1612	THE ELECTRICAL TRAVEL SHALL BE NOT LESS THAN 1612 DEGREE(S).
1996	THE ELECTRICAL TRAVEL SHALL BE NOT GREATER THAN 1996 DEGREE(S).
2514	THE ELECTRICAL TRAVEL SHALL BE NOT LESS THAN 2514 TURN(S).
2516	THE ELECTRICAL TRAVEL SHALL BE NOT GREATER THAN 2516 TURN(S).
2504	ELECTRICAL TRAVEL (ACTUAL EFFECTIVE/THEORETICAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2504.
1998	ELECTRICAL TRAVEL (ACTUAL EFFECTIVE/THEORETICAL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1998.
2306	END RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2306.
1932	END RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
END RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM RESISTANCE (SELECT ONE)	
GREATER OF (OHMS)	1934
*(PERCENT OF VALUE)	2308
(OHMS)	2312
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
PER DOCUMENT (DOC DES)	1936
END VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2556
AS FOLLOWS:	1930
MAXIMUM END VOLTAGE (SELECT ONE)	
(VOLTS)	2032
(PERCENT)	2558

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1934 2308	THE END RESISTANCE SHALL BE NOT GREATER THAN THE GREATER OF 1934 OHM(S) OR 2308 PERCENT OF THE TOTAL RESISTANCE.
2312	THE END RESISTANCE SHALL BE NOT GREATER THAN 2312 OHM(S).
2300	END RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
1936	END RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1936.
2556	END VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2556.
1930	END VOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2032	THE END VOLTAGE SHALL BE NOT GREATER THAN 2032 VOLT(S).
2558	THE END VOLTAGE SHALL BE NOT GREATER THAN 2558 PERCENT OF THE APPLIED VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
END VOLTAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2548
PER DOCUMENT (DOC DES)	2034
FUNCTION/TAPER CONFORMITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1874
SPECIFY IN DC RESISTANCE TABLE.	2058
MAXIMUM DEGRADATION AFTER ENVIRONMENTAL TESTS (PERCENT)	2070
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2170
PER DOCUMENT (DOC DES)	1876
MEASUREMENT INTERVAL (PERCENT OF TRAVEL)	2176
TEST VOLTAGE (VOLTS DC)	1878

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2548	END VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2548.
2034	END VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2034.
1874	FUNCTION/TAPER CONFORMITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1874.
2058	FUNCTION/TAPER CONFORMITY. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN THE DC RESISTANCE TABLE.
2070	THE DEGRADATION AFTER ENVIRONMENTAL TESTS SHALL BE NOT GREATER THAN 2070 PERCENT.
2170	FUNCTION/TAPER CONFORMITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2170.
1876	FUNCTION/TAPER CONFORMITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1876.
2176	CONFORMITY MEASUREMENTS SHALL BE PERFORMED AT INTERVALS OF NOT GREATER THAN 2176 PERCENT OF THE THEORETICAL ELECTRICAL TRAVEL.
1878	THE TEST VOLTAGE SHALL BE 1878 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HIGH TEMPERATURE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1662

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
1662	HIGH TEMPERATURE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1662.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HIGH TEMPERATURE EXPOSURE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1880
NO EVIDENCE OF PHYSICAL DAMAGE.	2180
MAXIMUM RESISTANCE CHANGE (PERCENT)	1663
REMAIN WITHIN SPECIFIED TOLERANCE.	2182
MAXIMUM SETTING CHANGE (PERCENT)	2183
MAXIMUM OUTPUT RATIO CHANGE (PERCENT)	2186
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1654
PER DOCUMENT (DOC DES)	1882
TEST TEMPERATURE (DEGREES CELSIUS)	1655
DURATION (HOURS)	1658
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1880	HIGH TEMPERATURE EXPOSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2180	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1663	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1663 PERCENT PLUS 0.01 OHM).
2182	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2183	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2183 PERCENT.
2186	THE OUTPUT VOLTAGE RATIO CHANGE SHALL BE NOT GREATER THAN 2186 PERCENT.
1654	HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1654.
1882	HIGH TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1882.
1655	THE TEST TEMPERATURE SHALL BE 1655 DEGREES CELSIUS.
1658	THE TEST DURATION SHALL BE 1658 HOUR(S).
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
MAXIMUM RESISTANCE CHANGE (PERCENT)	1884
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
1884	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1884 PERCENT PLUS 0.01 OHM).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL NOT BE MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
MAXIMUM RESISTANCE CHANGE (PERCENT)	1886
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1886	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1886 PERCENT PLUS 0.01 OHM).
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
LOW TEMPERATURE EXPOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1650
AS FOLLOWS:	1894
NO EVIDENCE OF PHYSICAL DAMAGE.	2196
MAXIMUM RESISTANCE CHANGE (PERCENT)	1651
MAXIMUM SETTING CHANGE (PERCENT)	1896
REMAIN WITHIN SPECIFIED TOLERANCE.	2198
MAXIMUM OUTPUT RATIO CHANGE (PERCENT)	2200

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1650	LOW TEMPERATURE EXPOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1650.
1894	LOW TEMPERATURE EXPOSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2196	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1651	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1651 PERCENT PLUS 0.01 OHM).
1896	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 1896 PERCENT.
2198	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2200	THE OUTPUT VOLTAGE RATIO CHANGE SHALL BE NOT GREATER THAN 2200 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE EXPOSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1644
PER DOCUMENT (DOC DES)	1898
TEST TEMPERATURE (DEGREES CELSIUS)	1645
DURATION (HOURS)	1648
LOW TEMPERATURE OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1640
AS FOLLOWS:	1888
NO EVIDENCE OF PHYSICAL DAMAGE.	2190
MAXIMUM RESISTANCE CHANGE (PERCENT)	1641
REMAIN WITHIN SPECIFIED TOLERANCE.	2192
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1631

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1644	LOW TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1644.
1898	LOW TEMPERATURE EXPOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1898.
1645	THE TEST TEMPERATURE SHALL BE 1645 DEGREES CELSIUS.
1648	THE TEST DURATION SHALL BE 1648 HOUR(S).
1640	LOW TEMPERATURE OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1640.
1888	LOW TEMPERATURE OPERATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2190	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1641	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1641 PERCENT PLUS 0.01 OHM).
2192	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1631	LOW TEMPERATURE OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1631.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOW TEMPERATURE OPERATION (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1890
TEST TEMPERATURE (DEGREES CELSIUS)	1632
DURATION AT LOW TEMPERATURE (HOURS)	1892
TEST VOLTAGE (PERCENT OF RATED)	2188
DURATION OF VOLTAGE (HOURS)	1635
MECHANICAL BACKLASH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
MAXIMUM BACKLASH (DEGREES)	1610
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2494
PER DOCUMENT (DOC DES)	1992

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1890	LOW TEMPERATURE OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1890.
1632	THE TEST TEMPERATURE SHALL BE 1632 DEGREES CELSIUS.
1892	THE TEST DURATION AT LOW TEMPERATURE SHALL BE 1892 HOUR(S).
2188	THE TEST VOLTAGE SHALL BE 2188 PERCENT OF THE RATED VOLTAGE.
1635	THE DURATION OF APPLICATION OF THE TEST VOLTAGE SHALL BE 1635 HOUR(S).
2500	MECHANICAL BACKLASH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.
1610	MECHANICAL BACKLASH. THE BACKLASH SHALL BE NOT GREATER THAN 1610 DEGREE(S).
2494	MECHANICAL BACKLASH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2494.
1992	MECHANICAL BACKLASH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL FEATURES	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2222
AS FOLLOWS:	1901
MAXIMUM LATERAL RUNOUT (SELECT ONE)	
(INCHES)	1712
(MILLIMETERS)	2224
MAXIMUM SHAFT RUNOUT (SELECT ONE)	
(INCHES)	1714
(MILLIMETERS)	2226
MAXIMUM PILOT DIAMETER RUNOUT (SELECT ONE)	
(INCHES)	1713
(MILLIMETERS)	2228

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2222	MECHANICAL FEATURES. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.
1901	MECHANICAL FEATURES. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1712	THE LATERAL RUNOUT SHALL BE NOT GREATER THAN 1712 INCH(S).
2224	THE LATERAL RUNOUT SHALL BE NOT GREATER THAN 2224 MILLIMETER(S).
1714	THE SHAFT RUNOUT SHALL BE NOT GREATER THAN 1714 INCH(S).
2226	THE SHAFT RUNOUT SHALL BE NOT GREATER THAN 2226 MILLIMETER(S).
1713	THE PILOT DIAMETER RUNOUT SHALL BE NOT GREATER THAN 1713 INCH(S).
2228	THE PILOT DIAMETER RUNOUT SHALL BE NOT GREATER THAN 2228 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL FEATURES (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM SHAFT RADIAL PLAY (SELECT ONE)	
(INCHES)	1711
(MILLIMETERS)	2230
MAXIMUM SHAFT END PLAY (SELECT ONE)	
(INCHES)	1696
(MILLIMETERS)	2232
MINIMUM SWITCH ACTUATING FORCE (SELECT ONE)	
(OUNCES)	2094
(NEWTONS)	2096
(OUNCE-INCHES)	1722
(NEWTON METERS)	2098

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1711	THE SHAFT RADIAL PLAY SHALL BE NOT GREATER THAN 1711 INCH(S).
2230	THE SHAFT RADIAL PLAY SHALL BE NOT GREATER THAN 2230 MILLIMETER(S).
1696	THE SHAFT END PLAY SHALL BE NOT GREATER THAN 1696 INCH(S).
2232	THE SHAFT END PLAY SHALL BE NOT GREATER THAN 2232 MILLIMETER(S).
2094	THE SWITCH ACTUATING FORCE SHALL BE NOT LESS THAN 2094 OUNCE(S).
2096	THE SWITCH ACTUATING FORCE SHALL BE NOT LESS THAN 2096 NEWTON(S).
1722	THE SWITCH ACTUATING FORCE SHALL BE NOT LESS THAN 1722 OUNCE-INCH(S).
2098	THE SWITCH ACTUATING FORCE SHALL BE NOT LESS THAN 2098 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL FEATURES (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM SWITCH ACTUATING FORCE (SELECT ONE)	
(OUNCES)	2100
(NEWTONS)	2102
(OUNCE-INCHES)	1721
(NEWTON METERS)	2104
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2204
PER DOCUMENT (DOC DES)	1902
MECHANICAL TRAVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2526
AS FOLLOWS:	2000

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2100	THE SWITCH ACTUATING FORCE SHALL BE NOT GREATER THAN 2100 OUNCE(S).
2102	THE SWITCH ACTUATING FORCE SHALL BE NOT GREATER THAN 2102 NEWTON(S).
1721	THE SWITCH ACTUATING FORCE SHALL BE NOT GREATER THAN 1721 OUNCE-INCH(S).
2104	THE SWITCH ACTUATING FORCE SHALL BE NOT GREATER THAN 2104 NEWTON METER(S).
2204	MECHANICAL FEATURES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2204.
1902	MECHANICAL FEATURES. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1902.
2526	MECHANICAL TRAVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2526.
2000	MECHANICAL TRAVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MECHANICAL TRAVEL (CONT)	
AS FOLLOWS: (CONT)	
TRAVEL	
MINIMUM (DEGREES)	2528
MAXIMUM (DEGREES)	2002
TURNS	
MINIMUM (NUMBER)	2534
MAXIMUM (NUMBER)	2536
SWITCH TRAVEL	
MINIMUM (DEGREES)	2004
MAXIMUM (DEGREES)	1719
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2520
PER DOCUMENT (DOC DES)	2006

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2528	THE MECHANICAL TRAVEL SHALL BE NOT LESS THAN 2528 DEGREES.
2002	THE MECHANICAL TRAVEL SHALL BE NOT GREATER THAN 2002 DEGREES.
2534	THE MECHANICAL TRAVEL SHALL BE NOT LESS THAN 2534 TURN(S).
2536	THE MECHANICAL TRAVEL SHALL BE NOT GREATER THAN 2536 TURN(S).
2004	THE SWITCH TRAVEL SHALL BE NOT LESS THAN 2004 DEGREE(S).
1719	THE SWITCH TRAVEL SHALL BE NOT GREATER THAN 1719 DEGREE(S).
2520	MECHANICAL TRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2520.
2006	MECHANICAL TRAVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2006.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINIMUM VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2568
MAXIMUM VOLTAGE (SELECT ONE)	
(VOLTS)	2036
(PERCENT)	2570
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2562
PER MIL-R-39023.	2564
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2568	MINIMUM VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2568.
2036	MINIMUM VOLTAGE. THE MINIMUM VOLTAGE SHALL BE NOT GREATER THAN 2036 VOLT(S).
2570	MINIMUM VOLTAGE. THE MINIMUM VOLTAGE SHALL BE NOT GREATER THAN 2570 PERCENT OF THE APPLIED VOLTAGE.
2562	MINIMUM VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2562.
2564	MINIMUM VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-39023.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM RESISTANCE CHANGE (PERCENT)	1904
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1904	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1904 PERCENT PLUS 0.01 OHM).
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMDIITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
OUTPUT SMOOTHNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2278
MAXIMUM SMOOTHNESS (PERCENT)	1626

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2278	OUTPUT SMOOTHNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2278.
1626	OUTPUT SMOOTHNESS. THE PEAK-TO-PEAK VOLTAGE SHALL BE NOT GREATER THAN 1626 PERCENT OF THE INPUT VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT SMOOTHNESS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2268
PER MIL-R-39023.	2270
LOAD (OHMS)	2272
TRAVEL INCREMENT (PERCENT)	2274
PEAK NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2256
AS FOLLOWS:	1910
MAXIMUM PEAK NOISE (SELECT ONE)	
(OHMS)	1624
(MILLIVOLTS)	1912
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
PER DOCUMENT (DOC DES)	1914

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2268	OUTPUT SMOOTHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2268.
2270	OUTPUT SMOOTHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-39023.
2272	THE LOAD RESISTANCE SHALL BE 2272 OHM(S).
2274	THE TRAVEL INCREMENT SHALL BE 2274 PERCENT OF THE TOTAL TRAVEL.
2256	PEAK NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2256.
1910	PEAK NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1624	THE PEAK NOISE SHALL BE NOT GREATER THAN 1624 OHM(S).
1912	THE PEAK NOISE SHALL BE NOT GREATER THAN 1912 MILLIVOLT(S).
2250	PEAK NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
1914	PEAK NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1914.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PEAK NOISE (CONT)	
PER DOCUMENT (CONT)	
CYCLES (NUMBER)	1916
ROTATION RATE (SECONDS PER CYCLE)	1918
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1916	THE NUMBER OF TEST CYCLES SHALL BE 1916.
1918	THE ROTATION RATE SHALL BE 1918 SECOND(S) PER CYCLE.
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 209.	4843
SOURCE OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY) ____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PENETRAMETER WIRE SIZE (CONT)	
(MILLIMETERS)	5297
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937
MAXIMUM RESISTANCE CHANGE (PERCENT)	1814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6937	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1814	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1814 PERCENT PLUS 0.01 OHM).
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6697	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.
6698	TEST CONDITION LETTER 6698 SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
MEASUREMENT INTERVALS (HOURS)	6922
MOUNT PER DOCUMENT (DOC DES)	6924
RESISTANCE-TEMPERATURE CHARACTERISTIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1978
AS FOLLOWS:	1980
MAXIMUM CHANGE	
PLUS (PPM/DEGREE CELSIUS)	1600
MINUS (PPM/DEGREE CELSIUS)	1601
LOW TEMPERATURE REFERENCED TO 25 DEGREES CELSIUS MEASUREMENT (PERCENT)	2422

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
6924	MOUNTING SHALL BE IN ACCORDANCE WITH 6924.
1978	RESISTANCE-TEMPERATURE CHARACTERISTIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1978.
1980	RESISTANCE-TEMPERATURE CHARACTERISTIC. THE RESISTANCE-TEMPERATURE CHARACTERISTIC SHALL BE AS FOLLOWS:
1600	THE PLUS CHANGE SHALL BE NOT GREATER THAN 1600 PPM/DEGREE CELSIUS.
1601	THE MINUS CHANGE SHALL BE NOT GREATER THAN 1601 PPM/DEGREE CELSIUS.
2422	THE CHANGE IN RESISTANCE AT THE LOWEST TEMPERATURE SPECIFIED REFERENCED TO THE PRECEDING RESISTANCE MEASUREMENT AT 25 DEGREES CELSIUS SHALL BE NOT GREATER THEN 2422 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE-TEMPERATURE CHARACTERISTIC (CONT)	
MAXIMUM CHANGE (CONT)	
HIGH TEMPERATURE REFERENCED TO 25 DEGREES CELSIUS MEASUREMENT (PERCENT)	2424
ANY TEMPERATURE REFERENCED TO 25 DEGREES CELSIUS MEASUREMENT (PERCENT)	2426
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2414
PER MIL-STD-202, METHOD 304.	1982
MEASUREMENT TEMPERATURES TABLE	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2424	THE CHANGE IN RESISTANCE AT THE HIGHEST TEMPERATURE SPECIFIED REFERENCED TO THE PRECEDING RESISTANCE MEASUREMENT AT 25 DEGREES CELSIUS SHALL BE NOT GREATER THAN 2424 PERCENT.
2426	THE CHANGE IN RESISTANCE AT ANY SPECIFIED TEMPERATURE REFERENCED TO THE PRECEDING RESISTANCE MEASUREMENT AT 25 DEGREES CELSIUS SHALL BE NOT GREATER THAN 2426 PERCENT.
2414	RESISTANCE-TEMPERATURE CHARACTERISTIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2414.
1982	RESISTANCE-TEMPERATURE CHARACTERISTIC. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 304 OF MIL-STD-202. MEASUREMENTS SHALL BE MADE AT THE TEMPERATURES SHOWN IN THE MEASUREMENT TEMPERATURES TABLE.

MEASUREMENT TEMPERATURES TABLE

TEMPERATURE (DEGREES CELSIUS)
25 REFERENCE
2021
2022
2023
2024
2025
2026
2027
2028
2029

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
MAXIMUM RESISTANCE CHANGE (PERCENT)	1938
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1938	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1938 PERCENT PLUS 0.01 OHM).
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHING (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTATIONAL LIFE (SWITCH LIFE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1741
AS FOLLOWS:	1940
MAXIMUM RESISTANCE CHANGE (PERCENT)	1742
REMAIN WITHIN SPECIFIED TOLERANCE.	2324
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1733
PER MIL-STD-202, METHOD 206.	1734
*TEST CONDITION (LETTER)	1735
*CYCLE RATE (CYCLES PER MINUTE)	1736
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	2314
(VOLTS DC)	2316
TEST TEMPERATURE (DEGREES CELSIUS)	1738
SWITCH CURRENT (AMPERES)	1942

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1741	ROTATIONAL LIFE (SWITCH LIFE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1741.
1940	ROTATIONAL LIFE (SWITCH LIFE). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1742	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1742 PERCENT PLUS 0.01 OHM).
2324	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1733	ROTATIONAL LIFE (SWITCH LIFE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1733.
1734	ROTATIONAL LIFE (SWITCH LIFE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 206 OF MIL-STD-202.
1735	THE TEST CONDITION LETTER SHALL BE 1735.
1736	THE CYCLE RATE SHALL BE 1736 CYCLES PER MINUTE.
2314	THE TEST VOLTAGE SHALL BE 2314 VOLT(S) AC.
2316	THE TEST VOLTAGE SHALL BE 2316 VOLT(S) DC.
1738	THE TEST TEMPERATURE SHALL BE 1738 DEGREES CELSIUS.
1942	THE SWITCH CURRENT SHALL BE 1942 AMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTATIONAL LIFE (SWITCH LIFE) (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	1944
TEST VOLTAGE	
(VOLTS AC)	1946
(VOLTS DC)	2338
DURATION (HOURS)	2340
ROTATION (REVOLUTIONS PER MINUTE)	2342
REVOLUTIONS (NUMBER)	2346
CYCLES (NUMBER)	1948
CYCLE RATE (CYCLES PER MINUTE)	1950
OSCILLATING RATE (HERTZ)	2352
EXCURSION (DEGREES)	2356
SWITCH CURRENT (AMPERES)	1952
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1944	ROTATIONAL LIFE (SWITCH LIFE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1944.
1946	THE TEST VOLTAGE SHALL BE 1946 VOLT(S) AC.
2338	THE TEST VOLTAGE SHALL BE 2338 VOLT(S) DC.
2340	THE TEST DURATION SHALL BE 2340 HOUR(S).
2342	THE ROTATION RATE SHALL BE 2342 REVOLUTIONS PER MINUTE.
2346	THE NUMBER OF REVOLUTIONS SHALL BE 2346.
1948	THE NUMBER OF CYCLES SHALL BE 1948.
1950	THE CYCLE RATE SHALL BE 1950 CYCLES PER MINUTE.
2352	THE OSCILLATING RATE SHALL BE 2352 HERTZ.
2356	THE EXCURSION SHALL BE 2356 DEGREE(S).
1952	THE SWITCH CURRENT SHALL BE 1952 AMPERE(S).
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
MAXIMUM RESISTANCE CHANGE (PERCENT)	1954
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
1954	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1954 PERCENT PLUS 0.01 OHM).
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF DUST PENETRATION.	4959
REMAIN WITHIN SPECIFIED TOLERANCE.	4954
MAXIMUM RESISTANCE CHANGE (PERCENT)	2370
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4954	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2370	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (2370 PERCENT PLUS 0.01 OHM).
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST CONDITION LETTER (CONT)	
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SHAFT INTEGRITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2394
AS FOLLOWS:	1956

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2394	SHAFT INTEGRITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2394.
1956	SHAFT INTEGRITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHAFT INTEGRITY (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	2396
MAXIMUM RESISTANCE CHANGE (PERCENT)	2398
REMAIN WITHIN SPECIFIED TOLERANCE.	2400
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2380
PER DOCUMENT (DOC DES)	1958
AXIAL FORCE (SELECT ONE)	
(POUNDS)	2384
(NEWTONS)	2386
PERPENDICULAR FORCE (SELECT ONE)	
(POUNDS)	2388
(NEWTONS)	2390
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2396	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2398	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (2398 PERCENT PLUS 0.01 OHM).
2400	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2380	SHAFT INTEGRITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2380.
1958	SHAFT INTEGRITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1958.
2384	THE AXIAL FORCE SHALL BE 2384 POUND(S).
2386	THE AXIAL FORCE SHALL BE 2386 NEWTON(S).
2388	THE PERPENDICULAR FORCE SHALL BE 2388 POUND(S).
2390	THE PERPENDICULAR FORCE SHALL BE 2390 NEWTON(S).
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1451
MAXIMUM (MILLISECONDS)	1960
MAXIMUM (MICROSECONDS)	1962
MAXIMUM RESISTANCE CHANGE (PERCENT)	1964
MAXIMUM SETTING CHANGE (PERCENT)	2050
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1960	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1960 MILLISECOND(S).
1962	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1962 MICROSECOND(S).
1964	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1964 PERCENT PLUS 0.01 OHM).
2050	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2050 PERCENT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1471
MAXIMUM (MILLISECONDS)	1966
MAXIMUM (MICROSECONDS)	1968
MAXIMUM RESISTANCE CHANGE (PERCENT)	1970
MAXIMUM SETTING CHANGE (PERCENT)	2402
REMAIN WITHIN SPECIFIED TOLERANCE.	4703

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1966	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1966 MILLISECOND(S).
1968	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1968 MICROSECOND(S).
1970	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1970 PERCENT PLUS 0.01 OHM).
2402	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2402 PERCENT.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
MAXIMUM RESISTANCE CHANGE (PERCENT)	1972

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTABLE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1972	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1972 PERCENT PLUS 0.01 OHM).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TAPS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2412
PER TAP TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2406
PER DOCUMENT (DOC DES)	1974
CURRENT (MILLIAMPERES)	1976

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2412 TAPS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2412.

TAPS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE TAP TABLE.

TAP TABLE

SECTION (CUP)	TAP TERMINAL NUMBER	LOCATION (DEGREES CW)	LOCATION (OHMS FROM CW)	LOCATION (OHMS FROM CCW)	LOCATION TOLERANCE + OR - (PERCENT)	MAXIMUM WIDTH (DEGREES)
4001	4002	4003	4101	4111	4004	4005
4006	4007	4008	4102	4112	4009	4010
4011	4012	4013	4103	4113	4014	4015
4016	4017	4018	4104	4114	4019	4020
4021	4022	4023	4105	4115	4024	4025
4026	4027	4028	4106	4116	4029	4030
4031	4032	4033	4107	4117	4034	4035
4036	4037	4038	4108	4118	4039	4040
4041	4042	4043	4109	4119	4044	4045
4046	4047	4048	4110	4120	4049	4050

2406 TAPS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2406.

1974 TAPS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1974.

1976 THE CURRENT SHALL BE 1976 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
MAXIMUM RESISTANCE CHANGE (PERCENT)	1984
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1984	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1984 PERCENT PLUS 0.01 OHM).
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
MAXIMUM RESISTANCE CHANGE (PERCENT)	1986
MAXIMUM SETTING CHANGE (PERCENT)	2440

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK. (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK. (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1986	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (1986 PERCENT PLUS 0.01 OHM).
2440	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2440 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2468
AS FOLLOWS:	1988
MAXIMUM STARTING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	1689
(NEWTON METERS)	2470
MAXIMUM RUNNING TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2474
(NEWTON METERS)	2476

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4713	THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2468	TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2468.
1988	TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1689	THE STARTING TORQUE SHALL BE NOT GREATER THAN 1689 OUNCE-INCH(S).
2470	THE STARTING TORQUE SHALL BE NOT GREATER THAN 2470 NEWTON METER(S).
2474	THE RUNNING TORQUE SHALL BE NOT GREATER THAN 2474 OUNCE-INCH(S).
2476	THE RUNNING TORQUE SHALL BE NOT GREATER THAN 2476 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
AS FOLLOWS: (CONT)	
NO DAMAGE FROM STOP TORQUE TEST.	2480
MAXIMUM INCREASE IN TRAVEL IN STOP TORQUE TEST (DEGREES)	1695
NO DAMAGE FROM LOCKING TORQUE TEST.	2484
SHAFT SHALL NOT ROTATE IN LOCKING TORQUE TEST.	2486
REMAIN WITHIN SPECIFIED TOLERANCE.	2490
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2444
PER DOCUMENT (DOC DES)	1990
ROTATION RATE (REVOLUTIONS PER MINUTE)	2052
STOP TORQUE (SELECT ONE)	
(OUNCE-INCHES)	1694
(NEWTON METERS)	2452

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2480	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE AS A RESULT OF THE STOP TORQUE TEST.
1695	THE INCREASE IN TRAVEL WHEN THE STOP TORQUE IS APPLIED SHALL BE NOT GREATER THAN 1695 DEGREE(S).
2484	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE AS A RESULT OF THE LOCKING TORQUE TEST.
2486	THE SHAFT SHALL NOT ROTATE WHEN LOCKING TORQUE IS APPLIED.
2490	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2444	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2444.
1990	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1990.
2052	THE ROTATION RATE SHALL BE 2052 REVOLUTION(S) PER MINUTE.
1694	THE APPLIED TORQUE TO THE MECHANICAL STOPS SHALL BE 1694 OUNCE-INCH(S).
2452	THE APPLIED TORQUE TO THE MECHANICAL STOPS SHALL BE 2452 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
PER DOCUMENT (CONT)	
SHAFT LOCKING DEVICE TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2458
(NEWTON METERS)	2460
SHAFT LOCKING DEVICE TEST TORQUE (SELECT ONE)	
(OUNCE-INCHES)	2054
(NEWTON METERS)	2056
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1473
MAXIMUM (MILLISECONDS)	2008
MAXIMUM (MICROSECONDS)	2010

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2458	THE APPLIED TORQUE TO SECURE THE SHAFT LOCKING DEVICE SHALL BE 2458 OUNCE-INCH(S).
2460	THE APPLIED TORQUE TO SECURE THE SHAFT LOCKING DEVICE SHALL BE 2460 NEWTON METER(S).
2054	THE APPLIED TORQUE TO TEST THE SHAFT LOCKING DEVICE SHALL BE 2054 OUNCE-INCH(S).
2056	THE APPLIED TORQUE TO TEST THE SHAFT LOCKING DEVICE SHALL BE 2056 NEWTON METER(S).
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2008	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2008 MILLISECOND(S).
2010	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2010 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
MAXIMUM RESISTANCE CHANGE (PERCENT)	2012
MAXIMUM SETTING CHANGE (PERCENT)	2540
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2012	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (2012 PERCENT PLUS 0.01 OHM).
2540	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2540 PERCENT.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1490
MAXIMUM (MILLISECONDS)	2014
MAXIMUM (MICROSECONDS)	2016
MAXIMUM RESISTANCE CHANGE (PERCENT)	2018
MAXIMUM SETTING CHANGE (PERCENT)	2542
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2014	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2014 MILLISECOND(S).
2016	THE DISCONTINUITY SHALL BE NOT GREATER THAN 2016 MICROSECOND(S).
2018	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (2018 PERCENT PLUS 0.01 OHM).
2542	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2542 PERCENT.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 201. (CONT)	
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
MAXIMUM RESISTANCE CHANGE (PERCENT)	2020
MAXIMUM SETTING CHANGE (PERCENT)	2030
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
2020	THE CHANGE IN RESISTANCE SHALL BE NOT GREATER THAN PLUS OR MINUS (2020 PERCENT PLUS 0.01 OHM).
2030	THE CHANGE IN SETTING SHALL BE NOT GREATER THAN 2030 PERCENT.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 2128 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A256)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

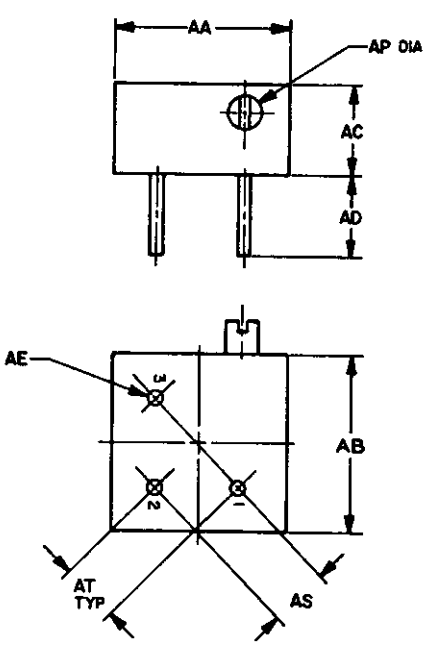


002-01-1

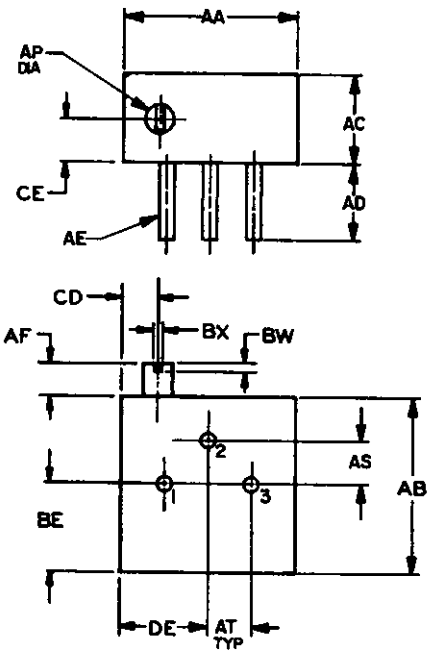


002-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

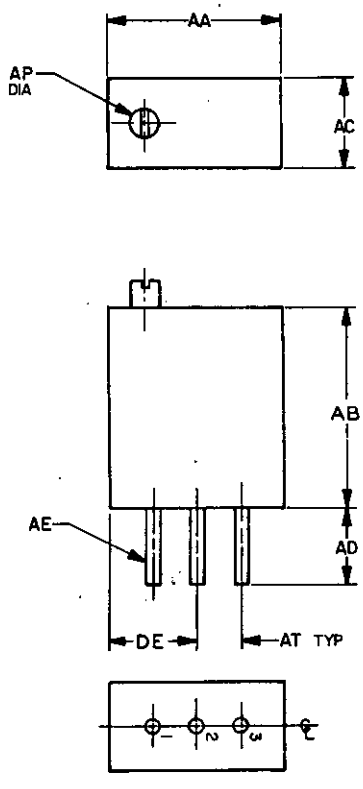


002-01-3

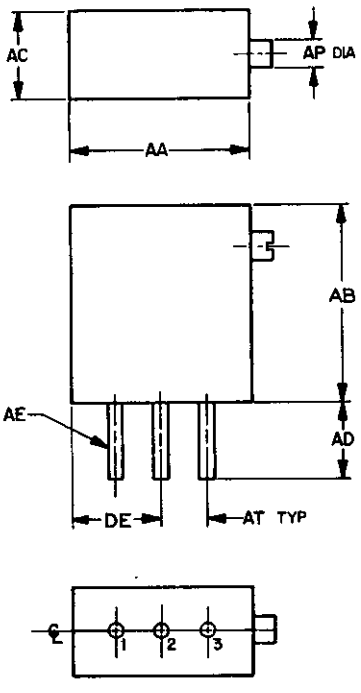


002-01-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

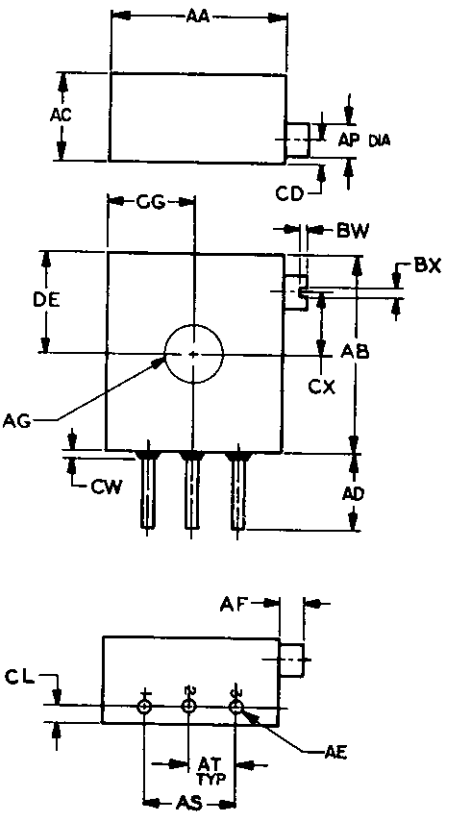


002-01-5

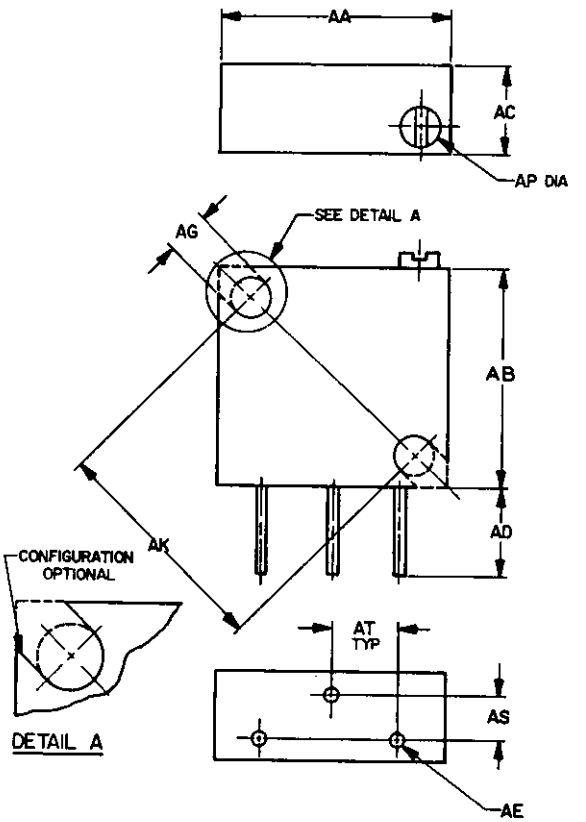



002-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

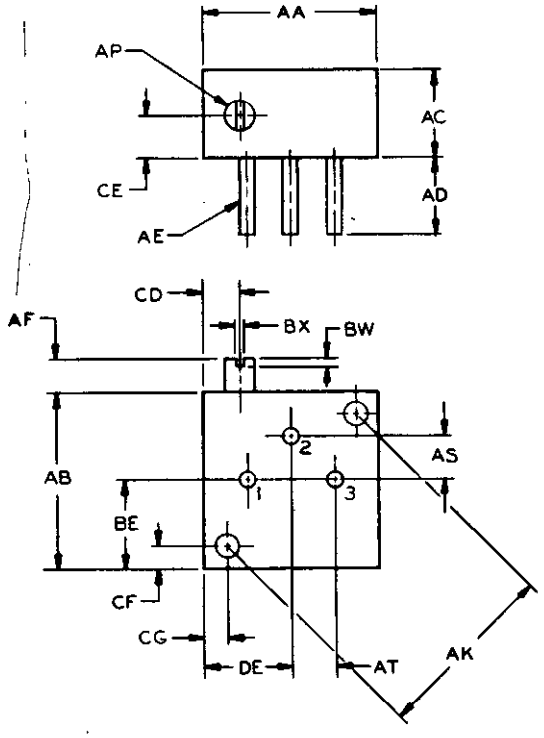


002-01-7

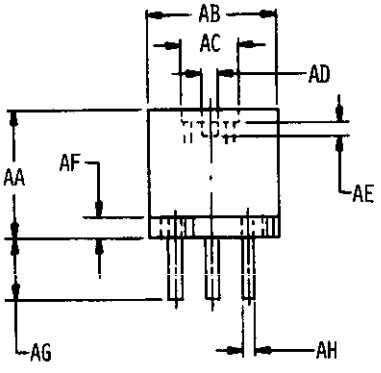

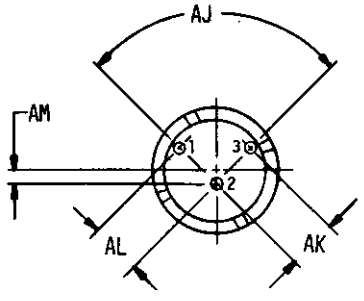


002-01-8

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

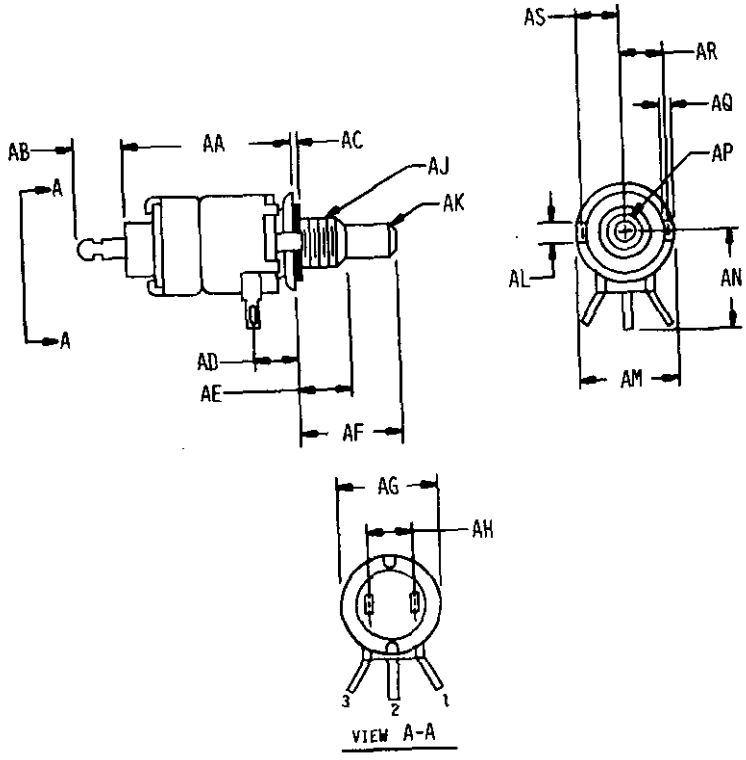


002-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

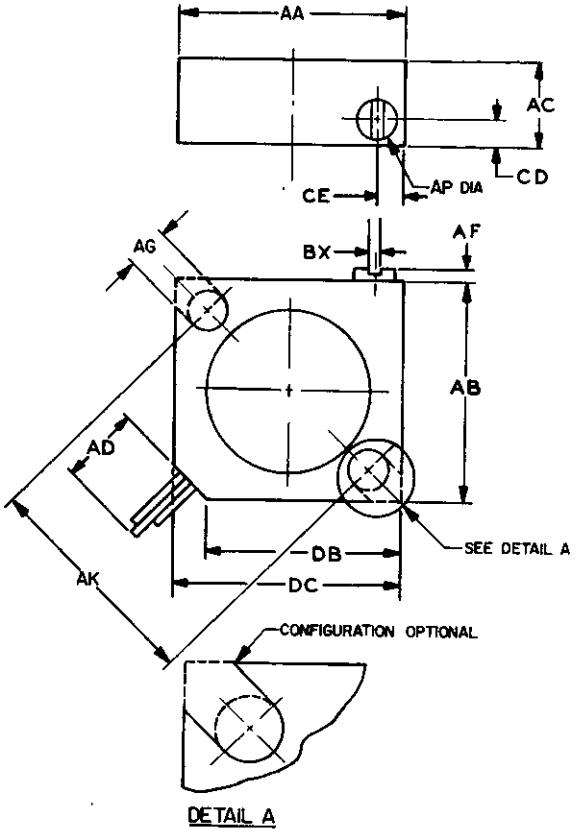


002-02-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

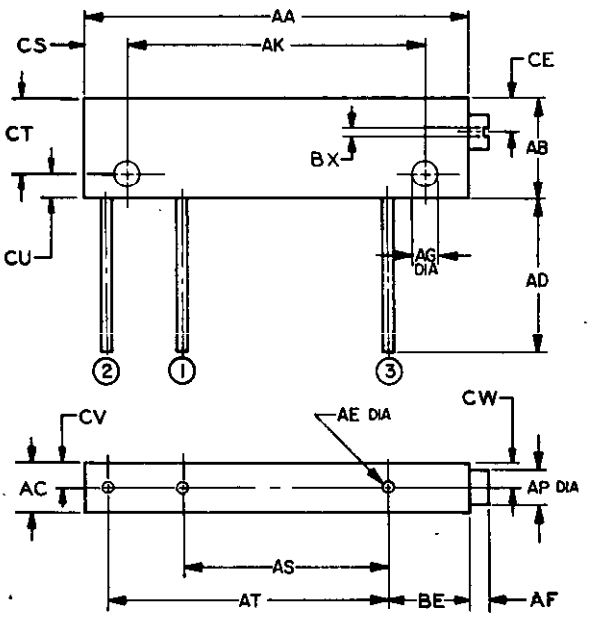


002-03-1

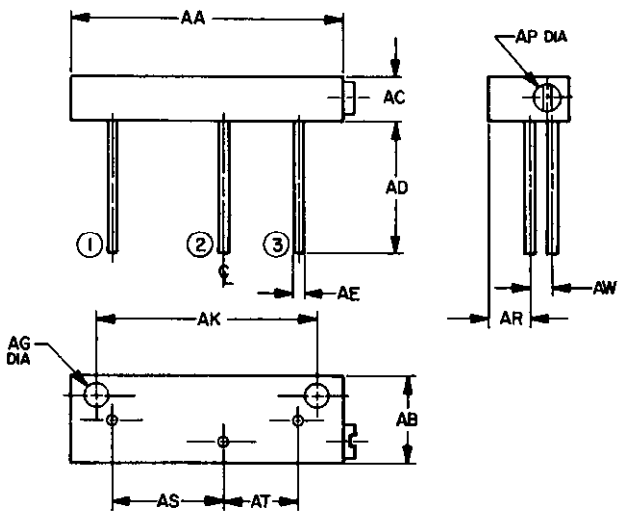


002-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

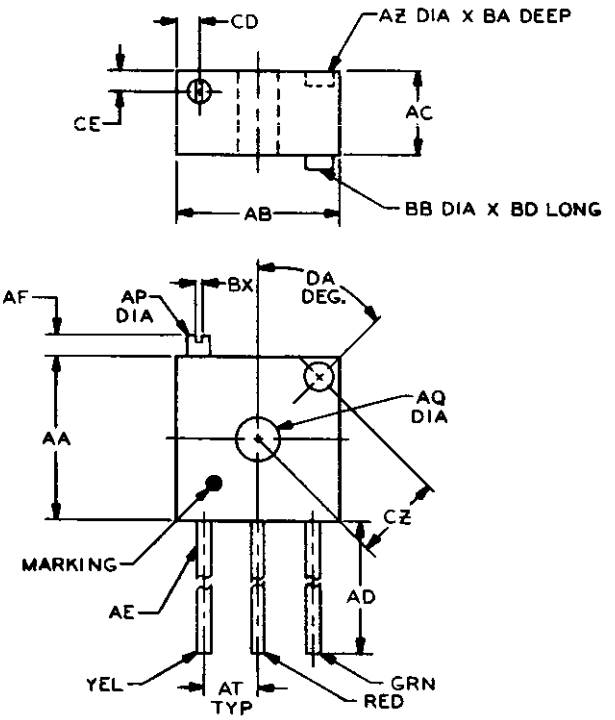


002-03-4

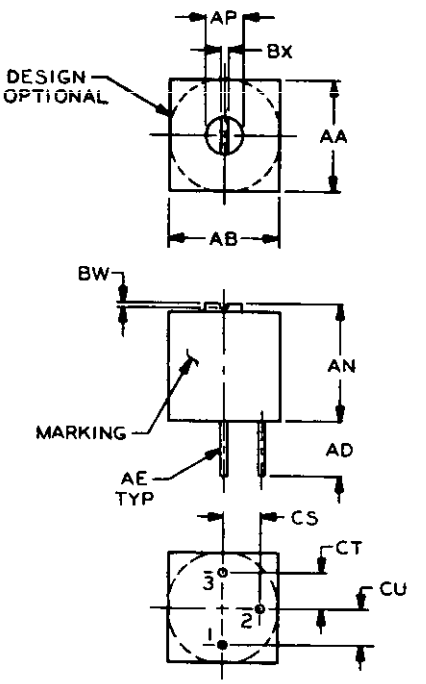


002-03-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

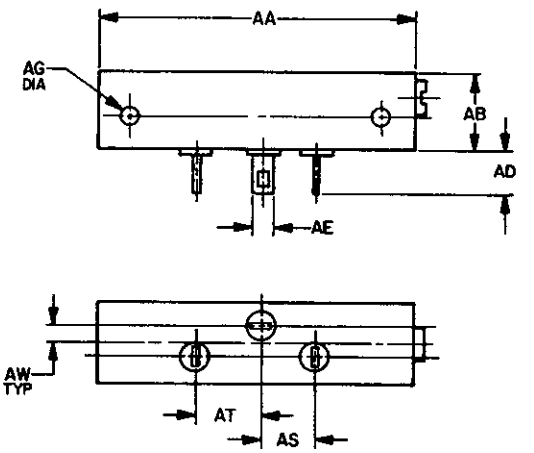


002-04-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

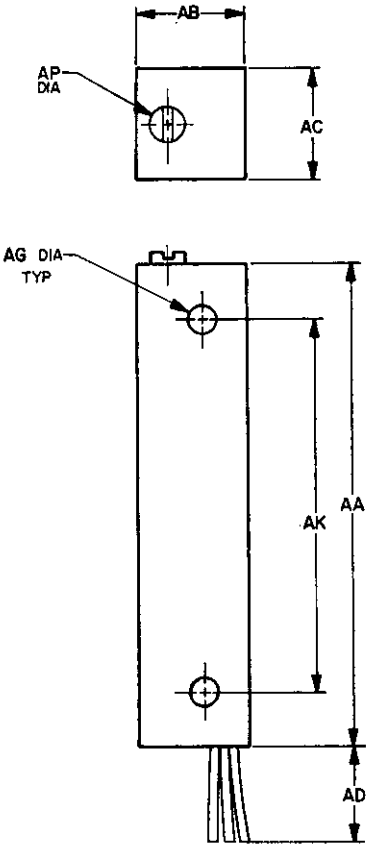


002-05-1

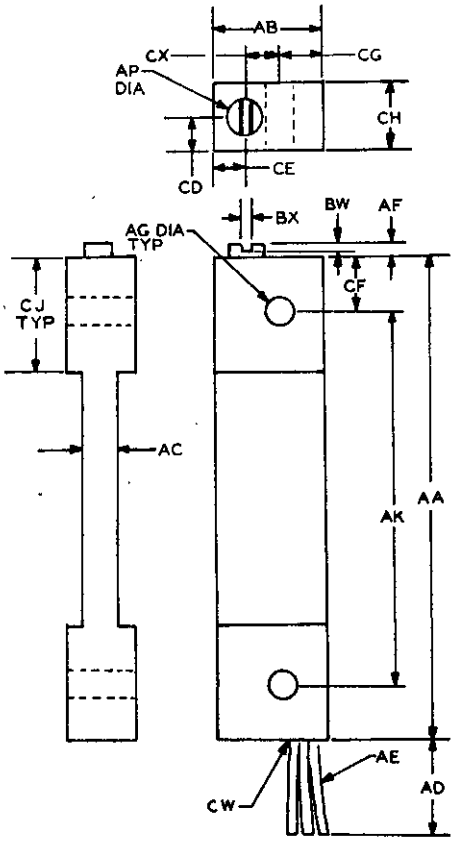


002-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

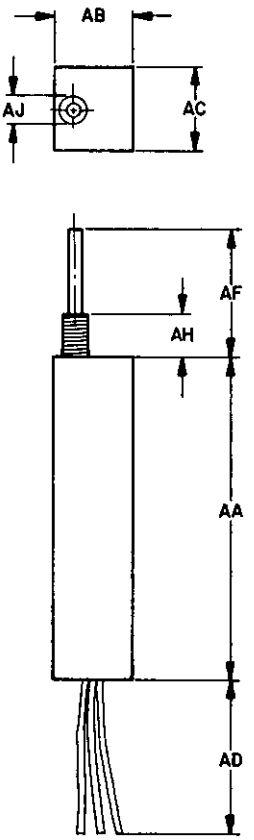


002-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

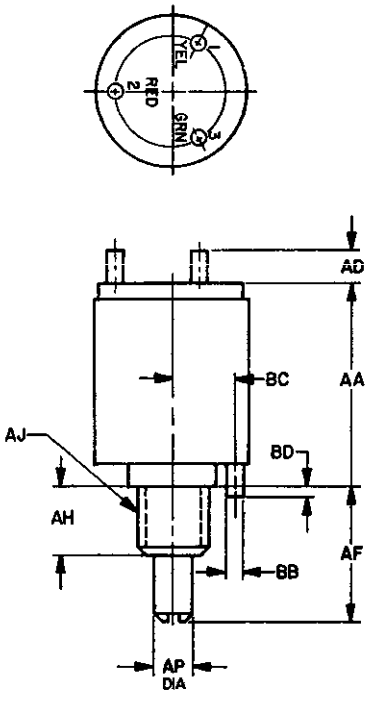


002-07-1

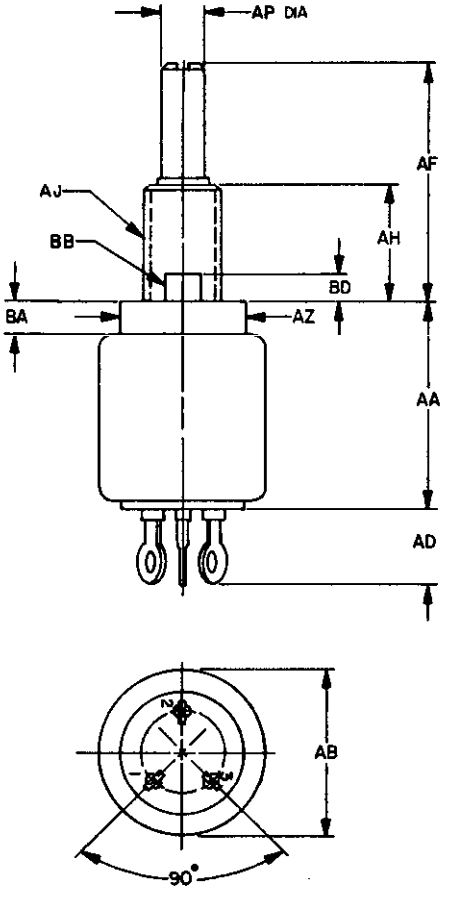


002-07-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

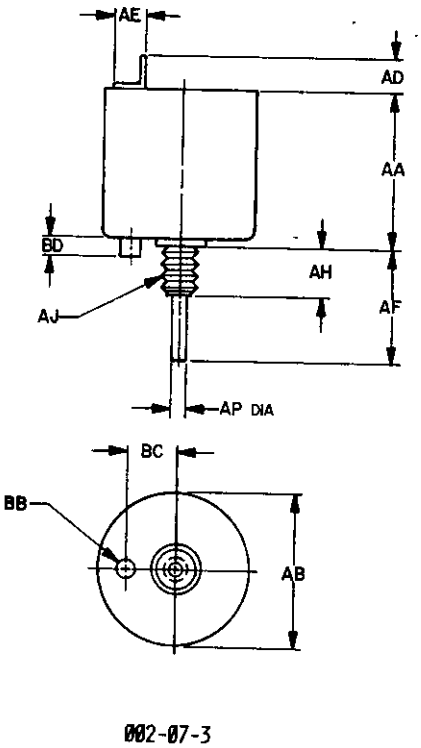


002-07-3

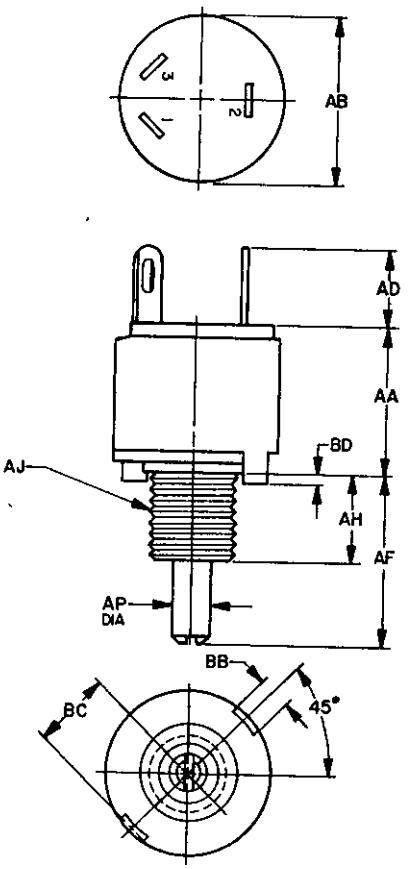


002-07-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

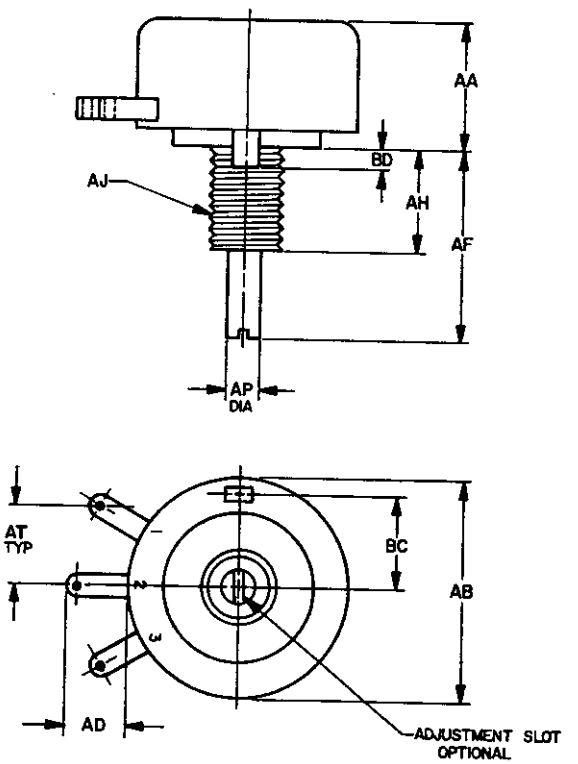


002-07-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

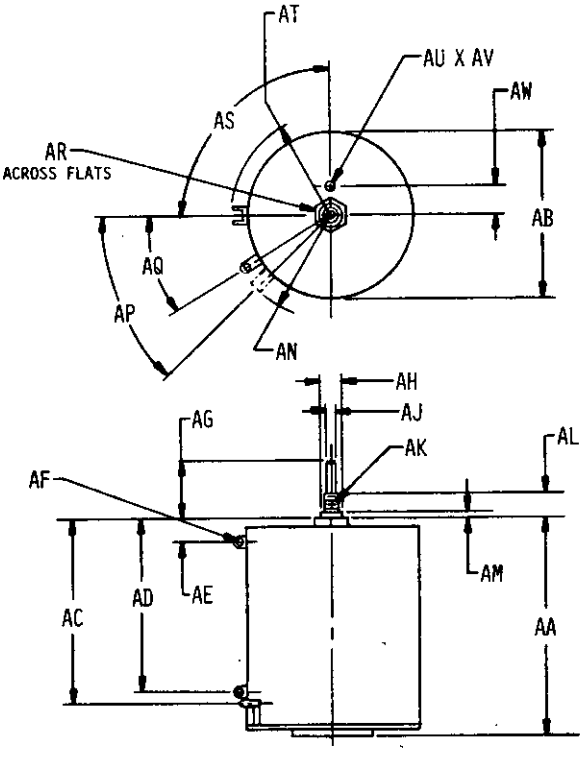


002-07-7

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

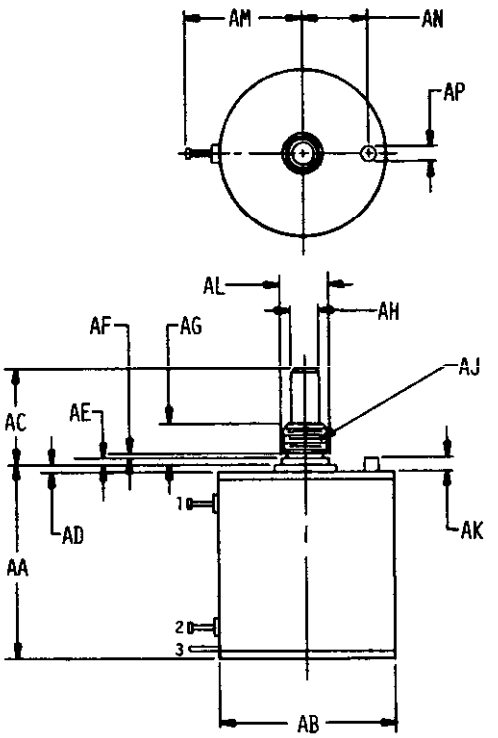


002-07-8

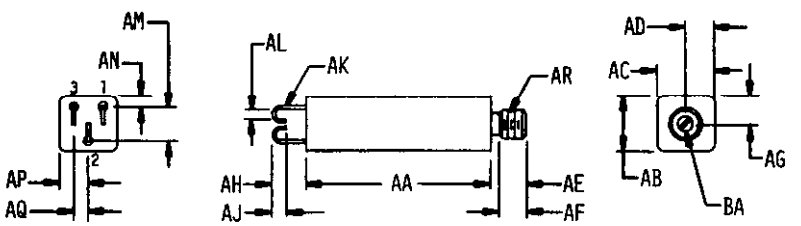


002-07-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

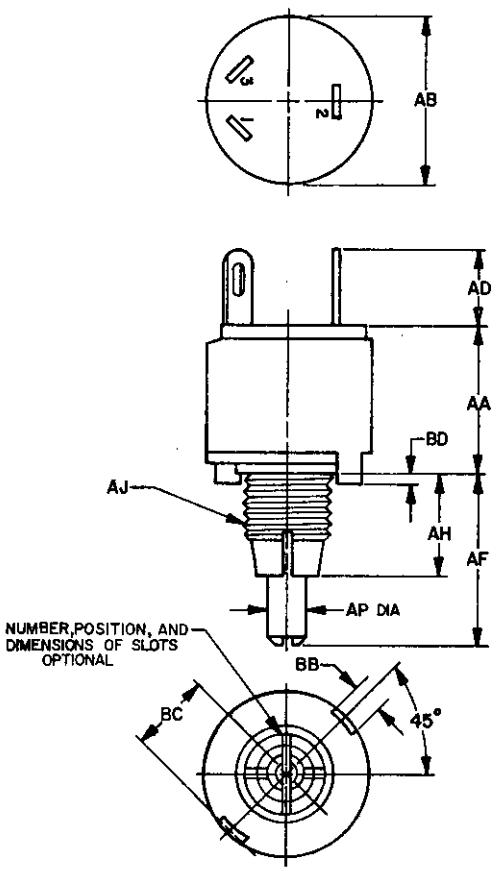


002-08-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

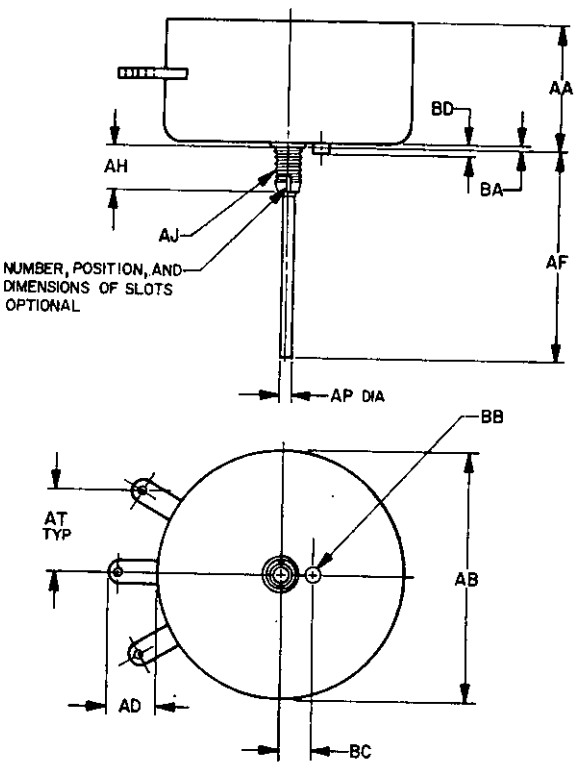


002-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

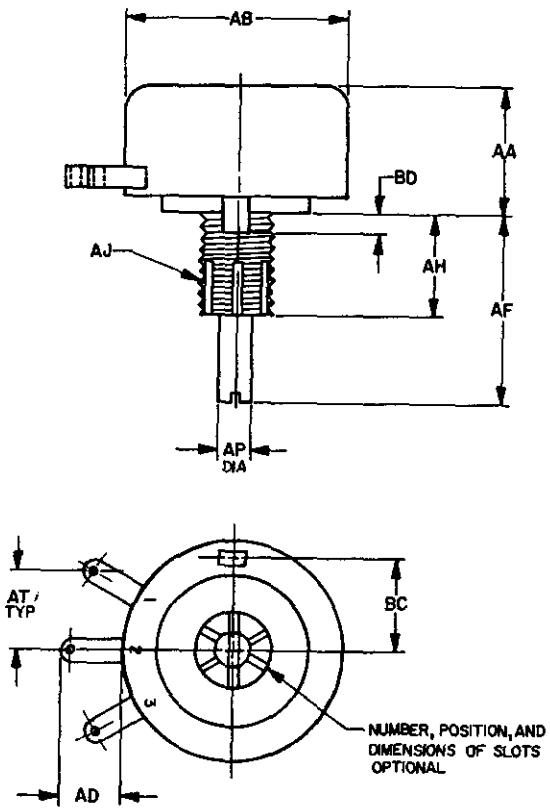


002-08-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

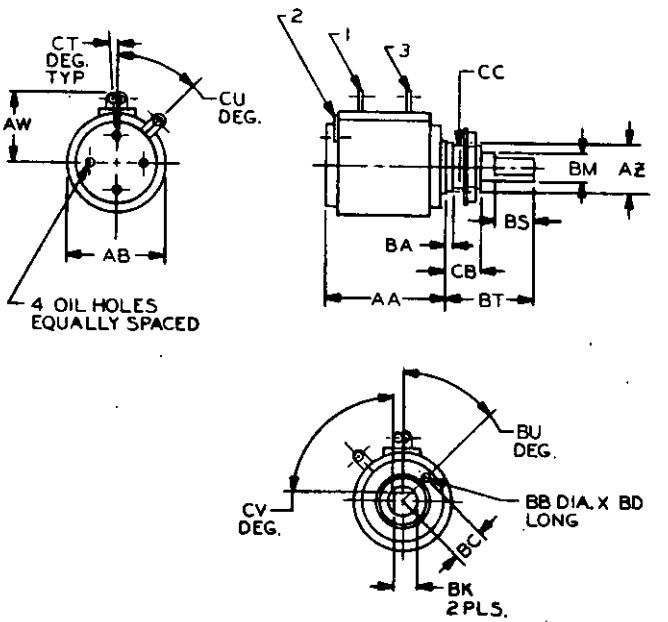


002-08-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

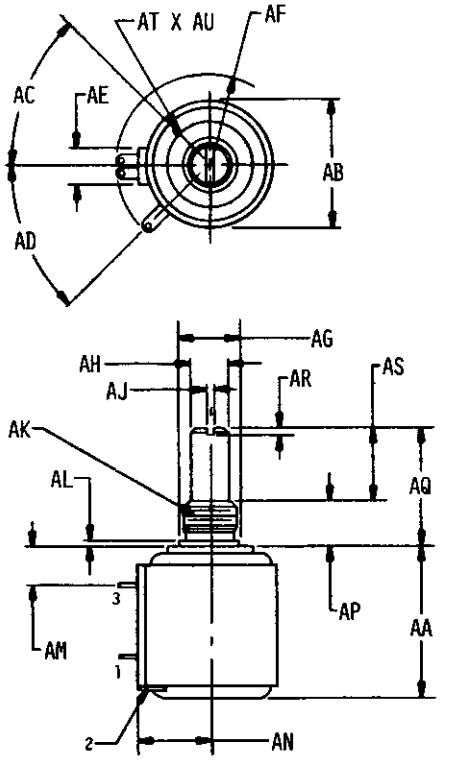


002-08-5

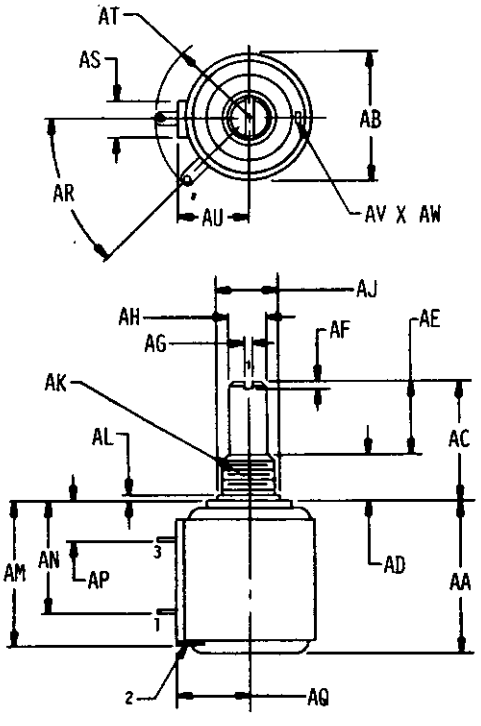


002-08-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

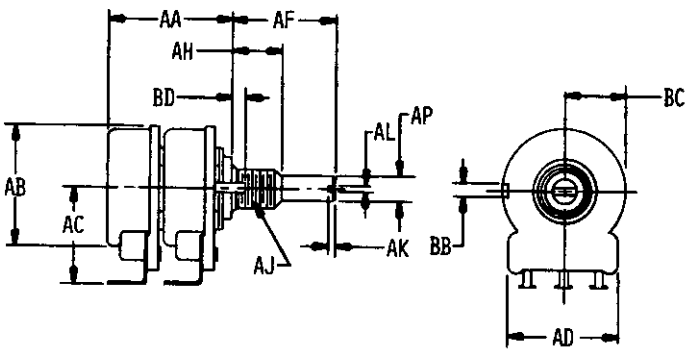


002-08-7

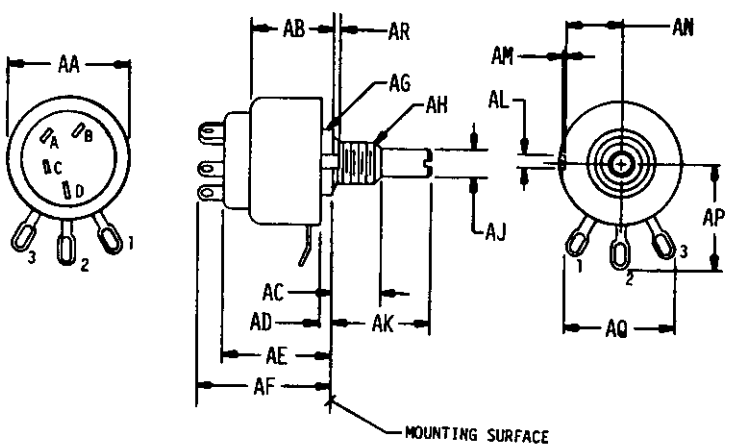


002-08-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

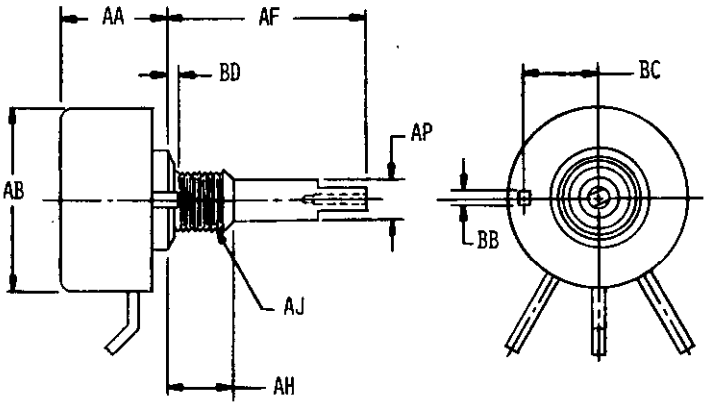


002-08-9

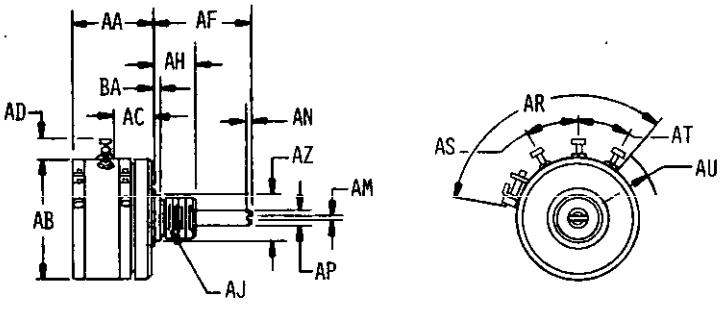


002-08-10

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

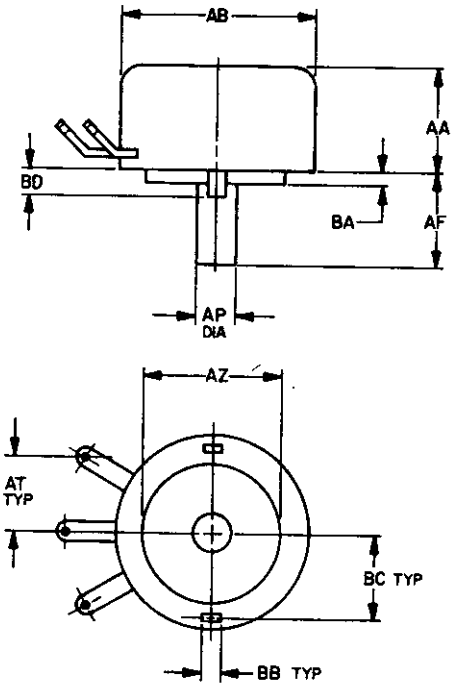


002-09-1

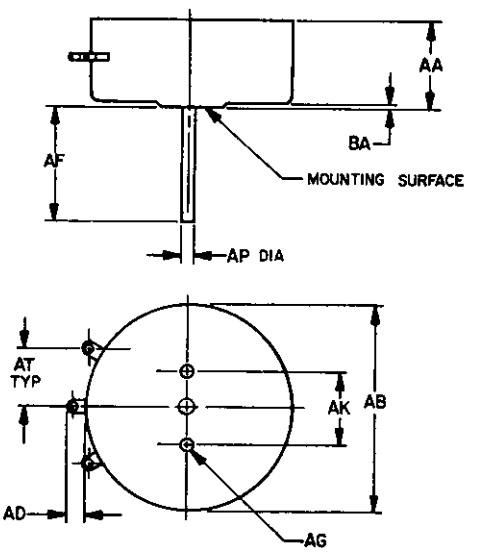


002-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

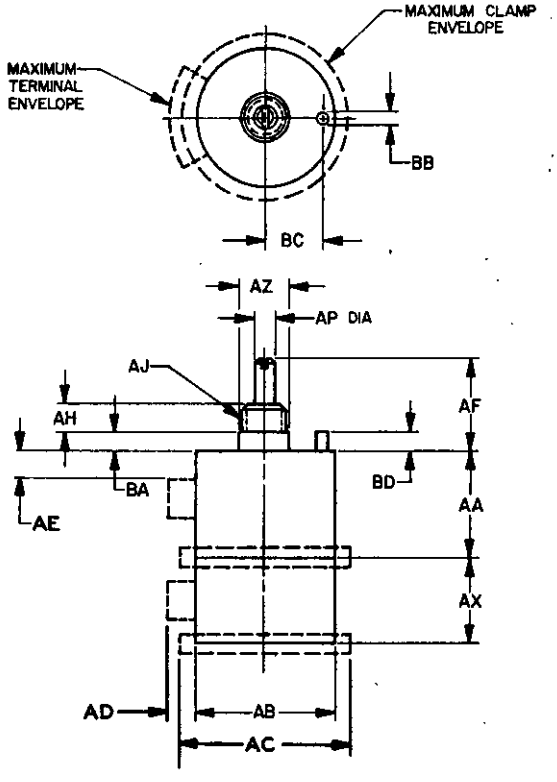


002-10-1

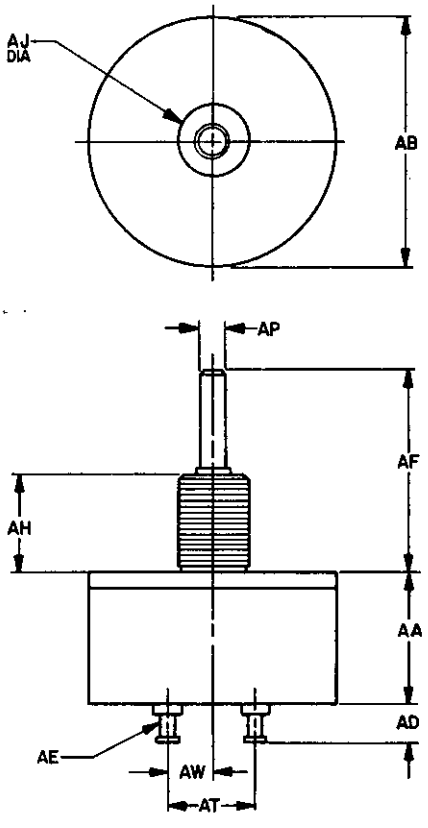


002-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

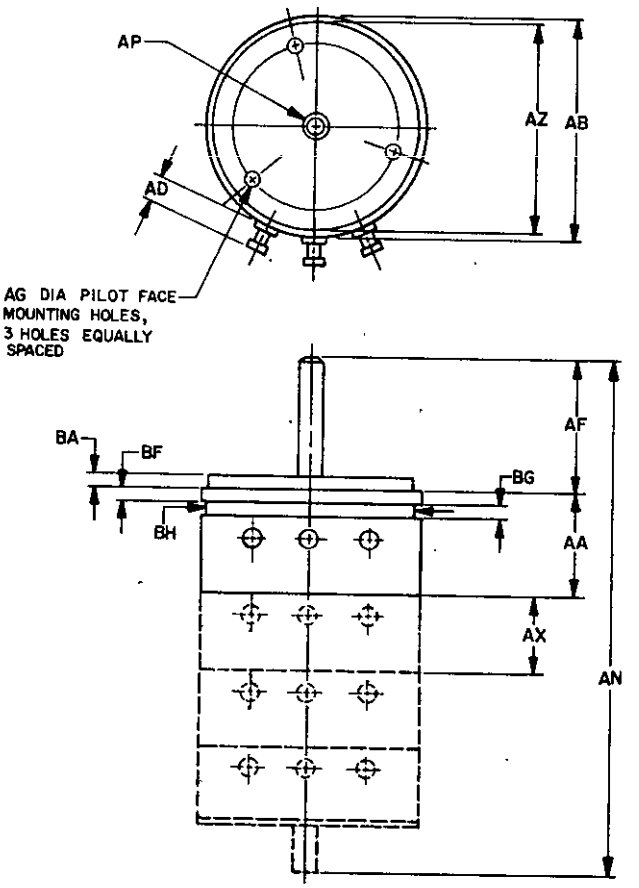


002-11-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

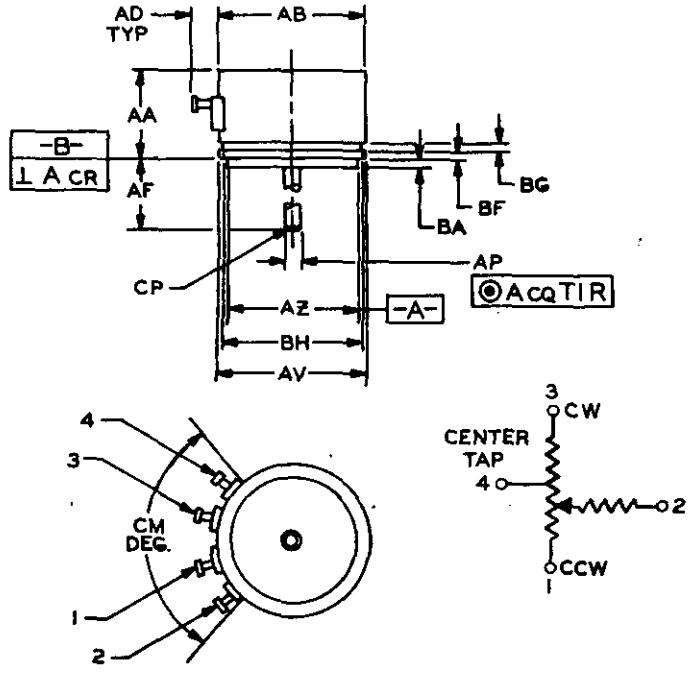


002-11-2

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

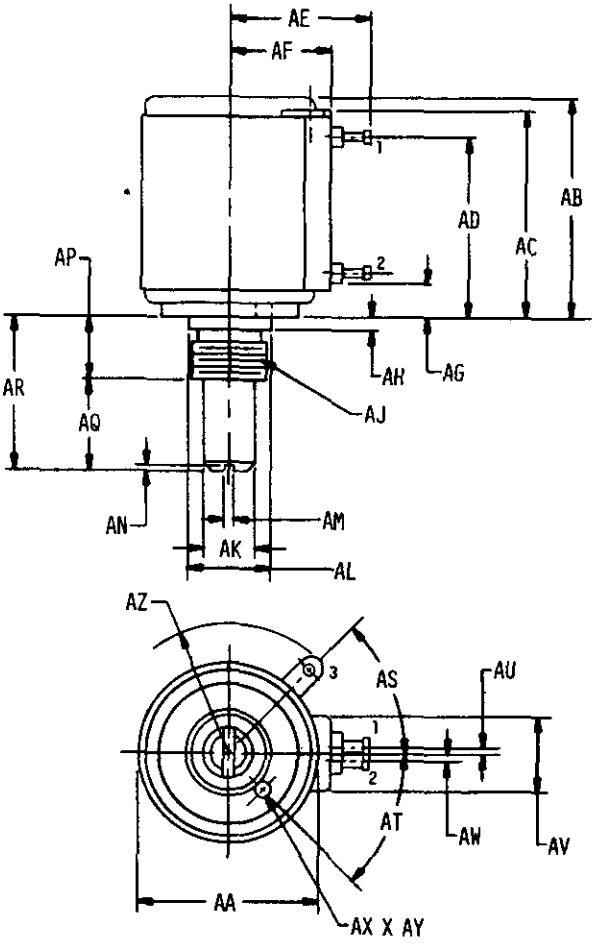


002-11-3

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

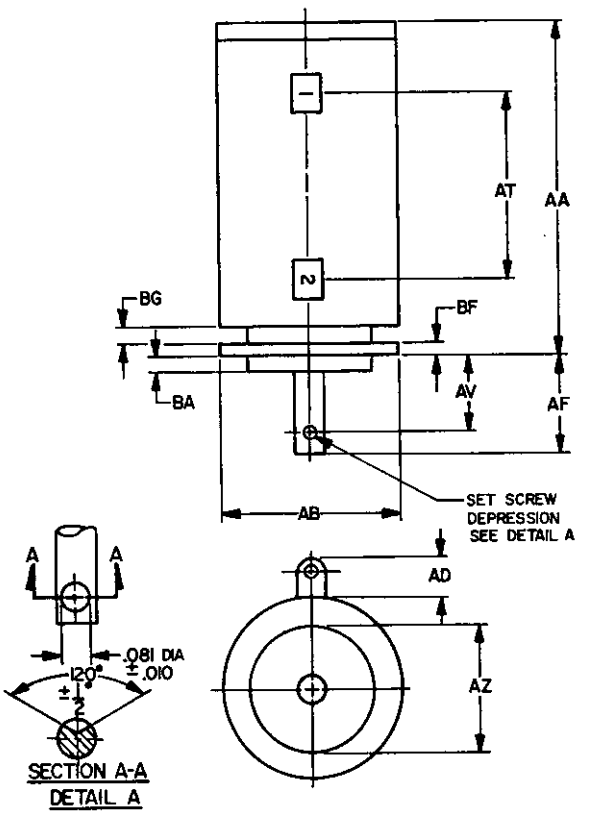


002-12-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

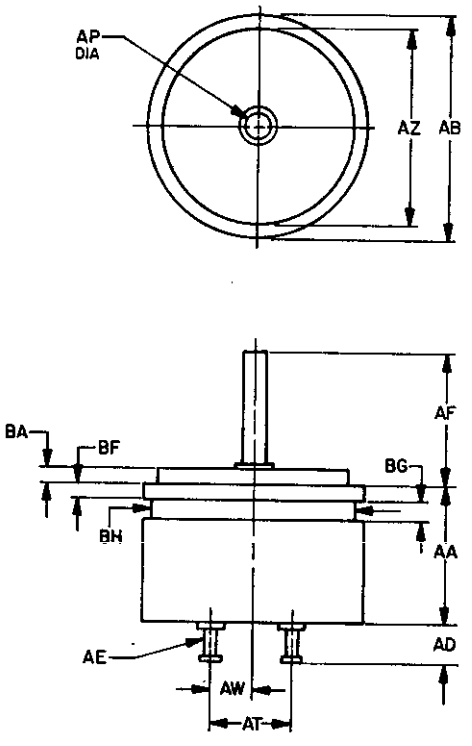


002-12-3

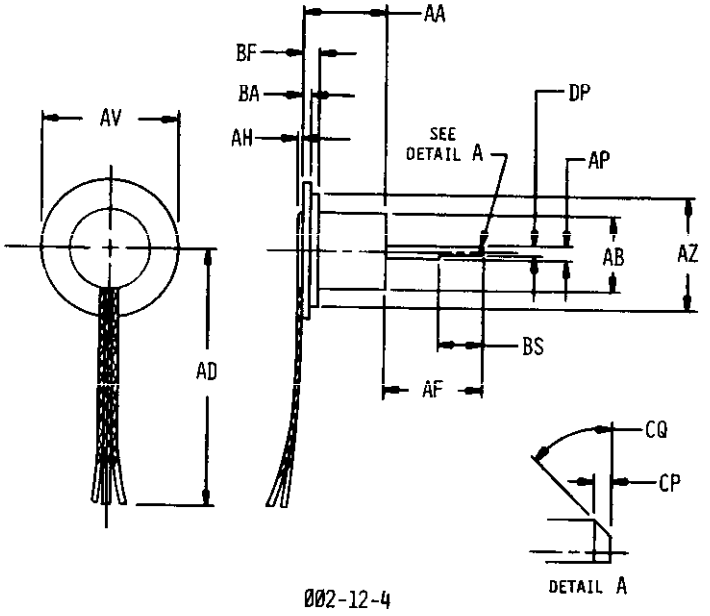


002-12-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

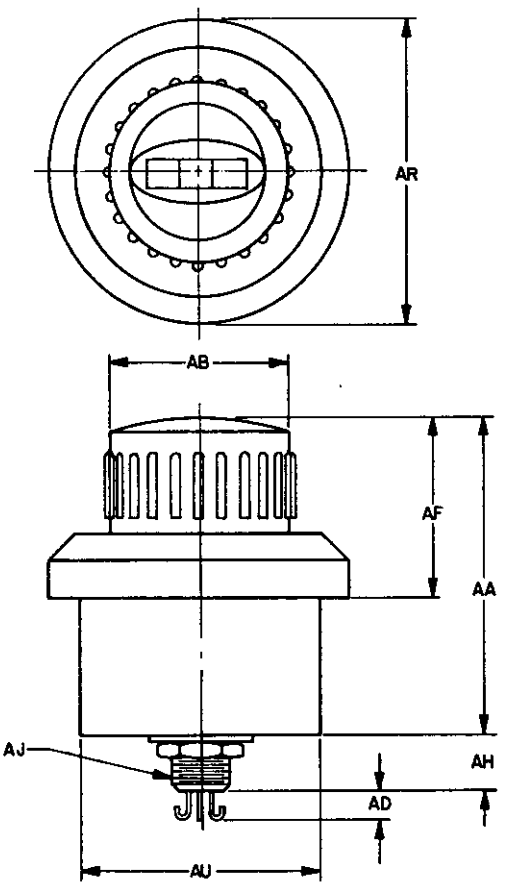


002-13-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

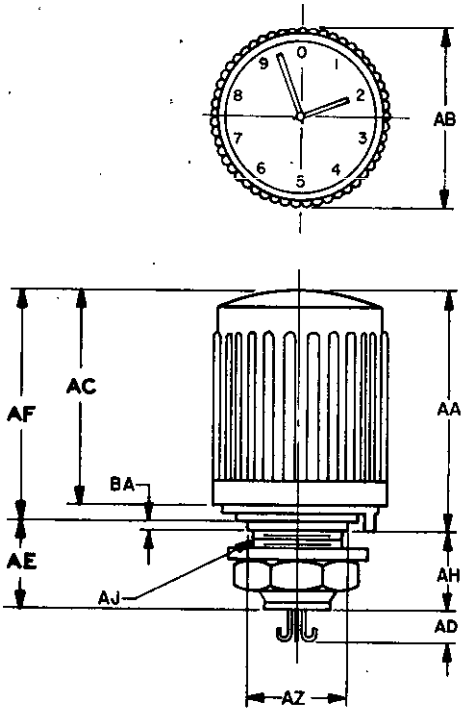


002-14-1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

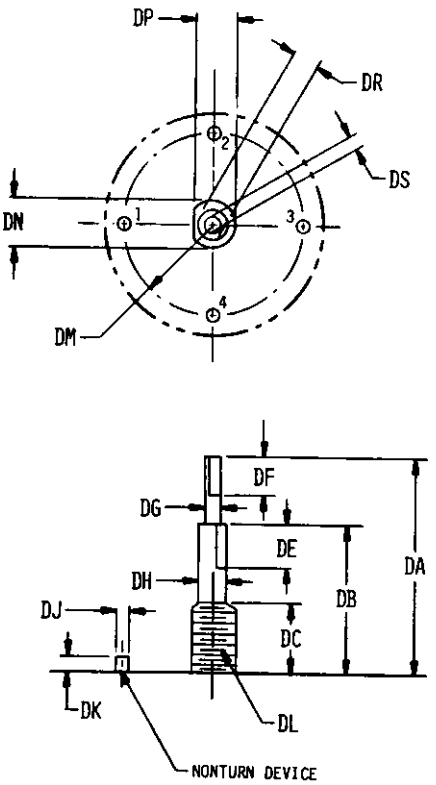


002-15-1

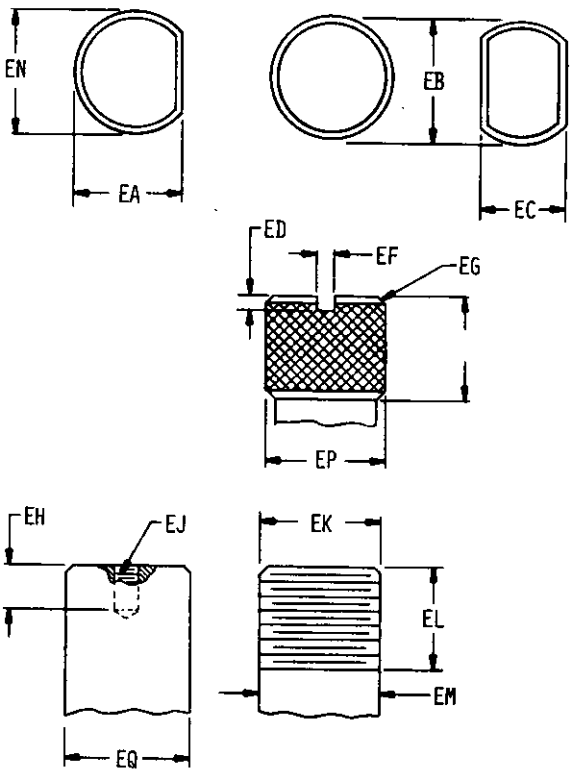


002-15-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




002-16-1




002-16-2




002-16-3




002-16-4




002-16-5




002-16-6



002-17-1




002-17-2



002-17-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

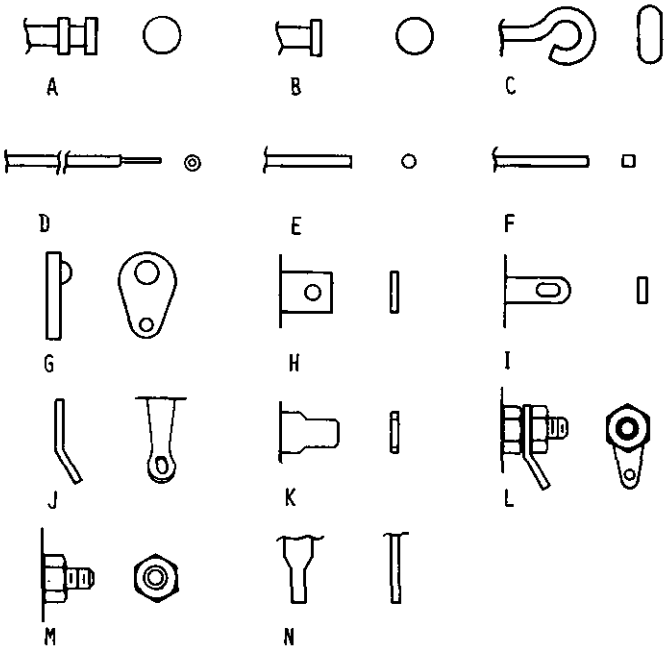

002-18-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1410	144	1473	152	1586	42
0102	14	1411	144	1475	156	1600	110
0103	14	1412	144	1476	156	1601	110
0104	14	1413	146	1478	136	1603	53
0105	14	1414	146	1480	156	1605	53
0107	16	1416	146	1482	134	1610	84
0108	16	1418	144	1486	134	1612	64
0700	14	1419	144	1488	136	1624	100
0800	14	1420	146	1490	156	1626	98
1003	14	1421	146	1494	132	1631	82
1004	14	1426	160	1495	134	1632	84
1005	14	1427	160	1497	78	1635	84
1006	14	1428	160	1498	78	1640	82
1008	14	1429	96	1500	138	1641	82
1009	26	1430	162	1502	138	1644	82
1371	76	1431	160	1504	138	1645	82
1372	80	1432	96	1508	136	1648	82
1373	78	1433	144	1509	136	1650	80
1374	160	1435	158	1511	78	1651	80
1375	144	1436	160	1520	80	1654	72
1376	78	1438	160	1522	78	1655	72
1377	78	1439	162	1523	78	1658	72
1378	78	1446	154	1524	78	1662	70
1380	72	1447	154	1533	154	1663	72
1381	80	1448	154	1534	154	1689	148
1383	80	1449	98	1535	158	1694	150
1384	76	1451	134	1536	158	1695	150
1386	76	1452	162	1537	158	1696	88
1387	76	1453	162	1538	160	1711	88
1388	76	1455	152	1539	124	1712	86
1391	96	1456	152	1545	160	1713	86
1394	96	1459	162	1546	160	1714	86
1395	98	1462	162	1557	46	1717	24
1396	94	1464	134	1558	46	1719	92
1397	96	1466	156	1563	52	1721	90
1398	94	1467	156	1564	52	1722	88
1400	94	1468	136	1571	22	1732	36
1404	96	1469	154	1572	22	1733	118
1406	96	1470	158	1573	22	1734	118
1407	76	1471	136	1584	42	1735	118

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1736	118	1822	36	1904	96	1988	148
1738	118	1824	36	1906	48	1990	150
1741	118	1826	36	1908	50	1992	84
1742	118	1828	36	1910	100	1994	62
1750	18	1830	36	1912	100	1996	64
1752	18	1834	34	1914	100	1998	64
1754	18	1836	36	1916	102	2000	90
1756	18	1838	38	1918	102	2004	92
1758	18	1840	38	1924	42	2006	92
1760	18	1842	38	1926	42	2008	152
1762	18	1844	38	1928	44	2010	152
1764	20	1846	38	1930	66	2012	154
1765	20	1848	38	1932	64	2014	156
1766	20	1852	40	1934	66	2016	156
1768	20	1854	40	1936	66	2018	156
1772	20	1856	40	1938	114	2020	160
1774	20	1858	40	1940	118	2021	113
1776	24	1860	40	1942	118	2022	113
1778	24	1862	40	1944	120	2023	113
1780	24	1864	44	1946	120	2024	113
1782	24	1866	44	1948	120	2025	113
1784	30	1868	44	1950	120	2026	113
1786	30	1870	54	1952	120	2027	113
1788	32	1872	58	1954	122	2028	113
1790	32	1874	68	1956	130	2029	113
1792	32	1876	68	1958	132	2030	160
1794	32	1878	68	1960	134	2032	66
1796	32	1880	72	1962	134	2034	68
1798	38	1882	72	1964	134	2036	94
1800	32	1884	72	1966	136	2038	50
1802	32	1886	76	1968	136	2040	50
1804	32	1888	82	1970	136	2042	50
1806	32	1890	84	1972	138	2044	50
1810	34	1892	84	1974	142	2046	24
1812	34	1894	80	1976	142	2050	134
1814	106	1896	80	1978	110	2052	150
1815	34	1898	82	1980	110	2054	152
1816	34	1900	53	1982	112	2056	152
1818	34	1901	86	1984	144	2058	68
1820	34	1902	90	1986	146	2070	68

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2072	22	2182	72	2338	120	2514	64
2078	38	2183	72	2340	120	2516	64
2080	38	2186	72	2342	120	2520	92
2082	38	2188	84	2346	120	2526	90
2084	40	2190	82	2352	120	2528	92
2086	40	2192	82	2356	120	2534	92
2088	24	2196	80	2370	124	2536	92
2090	24	2198	80	2380	132	2540	154
2092	24	2200	80	2384	132	2542	156
2094	88	2202	92	2386	132	2548	68
2096	88	2204	90	2388	132	2556	66
2098	88	2222	86	2390	132	2558	66
2100	90	2224	86	2394	130	2562	94
2102	90	2226	86	2396	132	2564	94
2104	90	2228	86	2398	132	2568	94
2110	22	2230	88	2400	132	2570	94
2112	22	2232	88	2402	136	4001	143
2113	22	2236	48	2406	142	4002	143
2114	22	2238	50	2412	142	4003	143
2116	22	2242	48	2414	112	4004	143
2118	22	2244	48	2422	110	4005	143
2120	30	2246	48	2424	112	4006	143
2122	30	2250	100	2426	112	4007	143
2124	30	2256	100	2440	146	4008	143
2126	30	2268	100	2444	150	4009	143
2128	30	2270	100	2452	150	4010	143
2130	30	2272	100	2458	152	4011	143
2132	30	2274	100	2460	152	4012	143
2134	30	2278	98	2468	148	4013	143
2136	30	2284	42	2470	148	4014	143
2138	32	2290	42	2474	148	4015	143
2140	36	2294	42	2476	148	4016	143
2142	36	2296	52	2480	150	4017	143
2144	38	2300	66	2484	150	4018	143
2146	38	2306	64	2486	150	4019	143
2148	32	2308	66	2490	150	4020	143
2164	44	2312	66	2494	84	4021	143
2170	68	2314	118	2500	84	4022	143
2176	68	2316	118	2504	64	4023	143
2180	72	2324	118	2510	62	4024	143

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4025	143	4116	143	4234	53	4713	148
4026	143	4117	143	4235	53	4714	148
4027	143	4118	143	4301	53	4715	148
4028	143	4119	143	4302	53	4717	62
4029	143	4120	143	4303	53	4718	114
4030	143	4199	53	4304	53	4719	148
4031	143	4200	53	4305	53	4722	146
4032	143	4201	53	4306	53	4723	146
4033	143	4202	53	4307	53	4726	146
4034	143	4203	53	4308	53	4729	158
4035	143	4204	53	4309	53	4730	158
4036	143	4205	53	4310	53	4731	158
4037	143	4206	53	4662	140	4732	126
4038	143	4207	53	4663	140	4734	126
4039	143	4208	53	4664	140	4735	130
4040	143	4209	53	4665	140	4736	128
4041	143	4210	53	4666	140	4737	126
4042	143	4211	53	4667	140	4738	126
4043	143	4212	53	4669	114	4739	126
4044	143	4213	53	4671	114	4740	128
4046	143	4214	53	4672	138	4741	128
4047	143	4215	53	4674	138	4742	128
4048	143	4216	53	4675	138	4743	130
4049	143	4217	53	4677	138	4745	126
4050	143	4218	53	4683	140	4746	126
4101	143	4219	53	4684	138	4748	126
4102	143	4220	53	4685	138	4749	128
4103	143	4221	53	4686	138	4750	128
4104	143	4222	53	4689	114	4751	130
4105	143	4223	53	4691	114	4752	130
4106	143	4224	53	4692	114	4754	70
4107	143	4225	53	4694	114	4755	70
4108	143	4226	53	4695	114	4756	70
4109	143	4227	53	4698	114	4760	70
4110	143	4228	53	4700	114	4761	70
4111	143	4229	53	4701	114	4762	70
4112	143	4230	53	4703	136	4765	122
4113	143	4231	53	4707	154	4766	122
4114	143	4232	53	4708	154	4770	122
4115	143	4233	53	4709	154	4771	122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4772	122	4868	46	5060	26	6310	58
4773	122	4869	62	5061	26	6311	56
4782	122	4870	62	5062	26	6312	56
4809	72	4872	124	5063	26	6320	126
4810	72	4874	58	5068	26	6321	126
4811	72	4875	58	5069	26	6322	126
4812	72	4878	120	5070	26	6323	128
4814	72	4884	54	5071	26	6324	128
4819	72	4885	56	5297	106	6325	128
4820	72	4886	54	6205	140	6326	128
4822	72	4891	56	6210	48	6328	128
4825	72	4892	46	6226	46	6329	130
4829	116	4893	46	6233	46	6330	130
4830	116	4894	54	6239	46	6331	130
4831	116	4897	62	6250	44	6332	130
4834	116	4900	58	6251	46	6333	130
4835	116	4901	54	6263	48	6359	76
4836	116	4902	58	6264	48	6369	14
4838	116	4906	54	6265	48	6370	126
4839	116	4908	54	6267	62	6371	102
4842	60	4950	28	6272	44	6372	164
4843	104	4952	124	6273	44	6399	
4844	60	4954	124	6277	44	THRU	
4845	60	4956	124	6279	116	6408	124
4846	60	4959	124	6280	56	6696	106
4848	60	4960	124	6282	102	6697	108
4849	56	4975	162	6283	104	6698	108
4850	60	4976	162	6284	104	6699	108
4854	60	4977	162	6285	104	6700	108
4855	60	4978	158	6286	104	6701	108
4856	58	4979	158	6287	104	6706	108
4857	102	4980	98	6288	104	6707	108
4858	102	4981	98	6289	104	6710	108
4859	56	4983	98	6291	102	6713	108
4861	60	4984	98	6292	56	6870	164
4862	60	4985	98	6293	56	6873	14
4863	46	4986	98	6294	56	6874	16
4864	46	4989	114	6296	144	6921	108
4865	46	4991	98	6300	54	6922	110
4867	62	5000	62	6308	58	6923	108

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAG NO
6924	110						
6929	106						
6930	106						
6937	106						
6939	108						
6941	16						
6942	16						
6991	166						
6992	166						
6993	166						
6994	166						
6995	166						
7001	164						
7002	164						
7003	164						
7004	164						
7005	164						
7021	40						
7022	40						
7025	40						
7026	40						
7028	42						
7029	42						
7030	42						
7345	44						
7572	26						
7577	28						
7580	28						
7629	164						
7638	164						

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

INDEX

	Page
Absolute Minimum Resistance	42
AC Voltage Rating	22
Acceleration	44
Additional Part Marking	166
Additional Requirements	164
Altitude Rating	26
Aperture Cards Required	16
Applicable Documents	166
Base Document	14
Bushing	20
City, State, Zip	14
Class	20
Classification	18
Company Name/Command	14
Configuration	26
Contact Resistance Variation	48
Continuity	50
Contract Number/Office Symbol	14
Control	14
Current Rating	22
Date	14
DC/Total Resistance	52
DC Voltage Rating	22
Definition of Hermetic Sealing	166
Design and Construction	30
Design Reliability	40
Dielectric Withstanding Voltage at Reduced Barometric Pressure	54
Dielectric Withstanding Voltage at Sea Level	58
Electrical Ratings	22
Electrical Travel (Actual Effective/Theoretical)	62
End Resistance	64
End Voltage	66
Finishes	28
Format	14
Function Conformity Tolerance Characteristic	18
Function/Taper Conformity	68
Fungus	70
Government Design Activity FSCM	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
High Temperature Exposure	70
Illustrations	28
Immersion	72
Insulation Resistance	74
Life Characteristic	18
Low Temperature Exposure	80
Low Temperature Operation	82
Materials	28
Mechanical Backlash	84
Mechanical Features	86
Mechanical Travel	90
Metals	28
Minimum Voltage	94
Moisture Resistance	94
Moisture Resistance/Temperature Characteristic	18
Mounting Hardware	164
Nomenclature	166
Notes	166
Output Smoothness	98
Output Smoothness Characteristic	18
Packaging	166
Part Marking	164
Part Number	16
Part Number Cross-Reference	166
Peak Noise	100
Phone Number	14
Power Rating	22
Quality Assurance Provisions	166
Radiographic	102
Reliability Screening	106
Requester FSCM	14
Requester's Name	14
Resistance	20
Resistance Characteristic	20
Resistance/Temperature Characteristic (Rating)	18
Resistance-Temperature Characteristic	110

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Resistance to Soldering Heat	114
Resistance to Solvents	116
Resolution	24
Revision of AEDPS Document (Number)	16
Rotational Life (Switch Life)	118
Salt Spray	120
Sand and Dust	122
Scope	16
Seal	126
Shaft	18
Shaft Integrity	130
Shock, High Impact	132
Shock, Specified Pulse	136
Solderability	138
Source Table	16
Street/Building	14
Style	18
Superseded Document	166
Switch	20
Switch AC Voltage Rating	24
Switch Current Rating	24
Switch DC Voltage Rating	24
Switch Voltage Rating	24
System Application	14
Tabulated Characteristics	28
Taps	142
Temperature Rating	26
Terminals	20
Terminal Strength	144
Thermal Shock	146
Torque	148
Units of Measure	16
Vibration, High Frequency	152
Vibration, Low Frequency	156
Vibration, Random	158
Voltage Rating	22
Workmanship	164

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-136(MI), dated 22 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-136(MI), dated 22 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-STD-35-136	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.