DOD-STD-35-137(MI)
15 December 1978

SUPERSEDING
SECTION 2
MIL-STD-35-6A(MI)
15 JANUARY 1975

MILITARY STANDARD

SWITCHES, ILLUMINATED

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Illuminated
Automated Engineering
Document Preparation System

DOD-STD-35-137(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-137(MI) is to provide instructions for the preparation of Specification Requirement Sheets (SRS) in order to produce Military Specification Exceptions for illuminated switches.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	9
	5.5	Tabulation	10
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	15
	5.6.1	Interrelationship of Codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title Index	2
	II.	Test matrix	10
	III.	Tabulation candidates	11

APPENDICES

Appendix	A.	Illustrations	203
	B.	Characteristic Code Index	241
		Index	253

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ATTENTION CUSTOMER

DOD-STD-35-137 (MI), dated 15 December 1978 contains two Specification Requirement Sheets (SRS) that are foldouts and cannot be supplied as part of this digital file at this time. If you require them please fax this information sheet with your complete mailing address and we will mail them to you. Our fax number is (215) 697-1462.

Mailing Address: _____

_____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for illuminated switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132, Selection and Use of Switches and Associated Hardware be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, ILLUMINATED	013050	MIL-S-22710	ROTARY
		MIL-S-22885	GENERAL SPECIFICATION
		MIL-S-24317	MULTISTATION

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-901	Shock Tests (High Impact) Shipboard Machinery, Equipment and Systems, Requirements For
MIL-S-22710	Switches, Rotary (Printed Circuit), (Thumbwheel, Inline, and Pushbutton) General Specifications For
MIL-S-22885	Switch, Pushbutton, Illuminated, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-167-1	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited)
MIL-STD-202	Test Methods for Electronic and Electrical Parts
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement Of
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1285	Marking of Electrical and Electronic Parts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring acitivty or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide
ASTMD1868	Standard Method for Detection and Measurement of Corona Pulses in Evaluation of Insulation

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Illuminated.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Switches, Illuminated, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Switches, Illuminated.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Switches, Illuminated.

4.3.2 Illustrations. Illustrations applicable to Switches, Illuminated are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	1738	1792	1886	1858	1914	3612	2982	3586	2346	2302	2392	2412	3472	2438	2452
	TEST	Circuit Configuration	Coincidence Of Operating And Release Points (Simultaneity)	Corona, Reduce Barometric Pressure	Corona, Sea Level	Endurance, Electrical	Endurance, Mechanical	Lamp Retention	Luminance	Operating Force	Overload	Short Circuit	Stops Strength	Strength Of Actuating Measn	Strength of Mounting Means	Temperature Rise
MIL-S-22710		X		X	X			X	X	X			X		X	
MIL-S-22885		X	X			X		X	X		X	X		X	X	X
MIL-S-24317		X	X			X	X	X			X		X	X		

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for illuminated switches characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2502	MAKE AND BREAK RESISTIVE DC LOAD VOLTS	2526	MAKE AND BREAK INDUCTIVE DC LOAD VOLTS	2574	MAKE AND BREAK LAMP DC LOAD VOLTS
2503	MAKE AND BREAK RESISTIVE DC LOAD AMPERES	2527	MAKE AND BREAK INDUCTIVE DC LOAD AMPERES	2575	MAKE AND BREAK LAMP DC LOAD AMPERES
2504	MAKE AND BREAK RESISTIVE AC LOAD VOLTS	2528	MAKE AND BREAK INDUCTIVE AC LOAD VOLTS	2576	MAKE AND BREAK LAMP AC LOAD VOLTS
2505	MAKE AND BREAK RESISTIVE AC LOAD FREQUENCY HERTZ	2529	MAKE AND BREAK INDUCTIVE AC LOAD FREQUENCY HERTZ	2577	MAKE AND BREAK LAMP AC LOAD FREQUENCY HERTZ
2506	MAKE AND BREAK RESISTIVE AC LOAD AMPERES	2530	MAKE AND BREAK INDUCTIVE AC LOAD AMPERES	2578	MAKE AND BREAK LAMP AC LOAD AMPERES
2550	MAKE AND BREAK MOTOR LOAD DC VOLTS	2601	MAKE AND BREAK DRY CKT DC VOLTS	2551	MAKE AND BREAK MOTOR LOAD DC AMPERES
2602	MAKE AND BREAK DRY CKT DC AMPERES	2552	MAKE AND BREAK MOTOR LOAD AC VOLTS	2603	MAKE AND BREAK DRY CKT AC VOLTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2553	MAKE AND BREAK MOTOR LOAD AC VOLTAGE FREQUENCY HERTZ	2604	MAKE AND BREAK DRY CKT AC VOLTAGE FREQUENCY HERTZ	2554	MAKE AND BREAK MOTOR LOAD AC AMPERES
2605	MAKE AND BREAK DRY CKT AC AMPERES	2749	CURRENT CARRYING MOTOR LOAD DC VOLTS	2801	CURRENT CARRYING DRY CKT DC VOLTS
2750	CURRENT CARRYING MOTOR LOAD DC AMPERES	2802	CURRENT CARRYING DRY CKT DC AMPERES	2751	CURRENT CARRYING MOTOR LOAD AC VOLTS
2803	CURRENT CARRYING DRY CKT AC VOLTS	2752	CURRENT CARRYING MOTOR LOAD AC VOLTAGE FREQUENCY HERTZ	2804	CURRENT CARRYING DRY CKT AC VOLTAGE FREQUENCY HERTZ
2753	CURRENT CARRYING MOTOR LOAD AC AMPERES	2805	CURRENT CARRYING DRY CKT AC AMPERES	2701	CURRENT CARRYING RESISTIVE DC LOAD VOLTS
2725	CURRENT CARRYING INDUCTIVE DC LOAD VOLTS	2773	CURRENT CARRYING LAMP DC LOAD VOLTS	2702	CURRENT CARRYING RESISTIVE DC LOAD AMPERES
2726	CURRENT CARRYING INDUCTIVE DC LOAD	2774	CURRENT CARRYING LAMP DC LOAD	2703	CURRENT CARRYING RESISTIVE AC LOAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2727	CURRENT CARRYING INDUCTIVE AC LOAD VOLTS	2775	CURRENT CARRYING LAMP AC LOAD VOLTS	2704	CURRENT CARRYING RESISTIVE AC LOAD FREQUENCY HERTZ
2728	CURRENT CARRYING INDUCTIVE AC LOAD FREQUENCY HERTZ	2776	CURRENT CARRYING LAMP AC LOAD FREQUENCY HERTZ	2705	CURRENT CARRYING RESISTIVE AC LOAD AMPERES
2729	CURRENT CARRYING INDUCTIVE AC LOAD AMPERES	2777	CURRENT CARRYING LAMP AC LOAD AMPERES	3841	LEGEND LOCATION POSITION SYMBOL ILLUS 013-10-1
3842	LEGEND LINE	3843	LEGEND	1650	SWITCHING ACTION
1656	CONTACT ARRANGE-MENT POLE	1657	CONTACT ARRANGE-MENT THROW	1562	SWITCH CIRCUIT ILLUS
1563	LAMP CIRCUIT ILLUS	2706	RESISTIVE LOAD PRESSURE MILLI-METERS OF MERCURY	2730	INDUCTIVE LOAD PRESSURE MILLI-METERS OF MERCURY
2754	MOTOR LOAD PRESSURE MILLI-METERS OF MERCURY	2778	LAMP LOAD PRESSURE MILLI-METERS OF MERCURY		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS	
CURRENT CARRYING CAPACITY	
NOTE: SEE RATED LOAD TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD (CURRENT CARRYING CAPACITY). THE RATED LOAD (CURRENT CARRYING CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (CURRENT CARRYING CAPACITY).

RATED LOAD TABLE (CURRENT CARRYING CAPACITY)

	DC		AC			PRESSURE
LOAD TYPE	VOLTS	AMPERES	VOLTS RMS	FREQ. HERTZ	AMPERES	MILLIMETERS OF MERCURY
RESISTIVE	2701	2702	2703	2704	2705	2706
RESISTIVE	2707	2708	2709	2710	2711	2712
RESISTIVE	2713	2714	2715	2716	2717	2718
RESISTIVE	2719	2720	2721	2722	2723	2724
INDUCTIVE	2725	2726	2727	2728	2729	2730
INDUCTIVE	2731	2732	2733	2734	2735	2736
INDUCTIVE	2737	2738	2739	2740	2741	2742
INDUCTIVE	2743	2744	2745	2746	2747	2748
MOTOR	2749	2750	2751	2752	2753	2754
MOTOR	2755	2756	2757	2758	2759	2760
MOTOR	2761	2762	2763	2764	2765	2766
MOTOR	2767	2768	2769	2770	2771	2772
LAMP	2773	2774	2775	2776	2777	2778
LAMP	2779	2780	2781	2782	2783	2784
LAMP	2785	2786	2787	2788	2789	2790
LAMP	2791	2792	2793	2794	2795	2796

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS (CONT)	
CURRENT CARRYING CAPACITY (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD TABLE (CURRENT CARRYING CAPACITY) (CONT)

LOAD TYPE	DC		AC			PRESSURE
	VOLTS	AMPERES	VOLTS RMS	FREQ. HERTZ	AMPERES	MILLIMETERS OF MERCURY
LOW-LEVEL (DRY CKT)	2801	2802	2803	2804	2805	2806
LOW-LEVEL (DRY CKT)	2807	2808	2809	2810	2811	2812
LOW-LEVEL (DRY CKT)	2813	2814	2815	2816	2817	2818
LOW-LEVEL (DRY CKT)	2819	2820	2821	2822	2823	2824
2825	2826	2827	2828	2829	2830	2831
2832	2833	2834	2835	2836	2837	2838
2839	2840	2841	2842	2843	2844	2845
2846	2847	2848	2849	2850	2851	2852

NOTE A: 2853.
NOTE B: 2854.
NOTE C: 2855.
NOTE D: 2856.
NOTE E: 2857.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS (CONT)	
MAKE AND BREAK CAPACITY	
NOTE: SEE RATED LOAD TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE *STANDARD PARAGRAPH*

RATED LOAD (MAKE AND BREAK CAPACITY). THE RATED LOAD (MAKE AND BREAK CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (MAKE AND BREAK CAPACITY).

RATED LOAD TABLE (MAKE AND BREAK CAPACITY)

	DC		AC			PRESSURE
LOAD TYPE	VOLTS	AMPERES	VOLTS RMS	FREQ. HERTZ	AMPERES	MILLIMETERS OF MERCURY
RESISTIVE	2502	2503	2504	2505	2506	2501
RESISTIVE	2508	2509	2510	2511	2512	2507
RESISTIVE	2514	2515	2516	2517	2518	2513
RESISTIVE	2520	2521	2522	2523	2524	2519
INDUCTIVE	2526	2527	2528	2529	2530	2525
INDUCTIVE	2532	2533	2534	2535	2536	2531
INDUCTIVE	2538	2539	2540	2541	2542	2537
INDUCTIVE	2544	2545	2546	2547	2548	2543
MOTOR	2550	2551	2552	2553	2554	2549
MOTOR	2556	2557	2558	2559	2560	2555
MOTOR	2562	2563	2564	2565	2566	2561
MOTOR	2568	2569	2570	2571	2572	2567
LAMP	2574	2575	2576	2577	2578	2573
LAMP	2580	2581	2582	2583	2584	2579
LAMP	2586	2587	2588	2589	2590	2585
LAMP	2592	2593	2594	2595	2596	2591
LOW-LEVEL (DRY CKT)	2601	2602	2603	2604	2605	2606
LOW-LEVEL (DRY CKT)	2607	2608	2609	2610	2611	2612
LOW-LEVEL (DRY CKT)	2613	2614	2615	2616	2617	2618
LOW-LEVEL (DRY CKT)	2619	2620	2621	2622	2623	2624
2625	2626	2627	2628	2629	2630	2631
2632	2633	2634	2635	2636	2637	2638
2639	2640	2641	2642	2643	2644	2645
2646	2647	2648	2649	2650	2651	2652

NOTE A: 2653.
NOTE B: 2654.
NOTE C: 2655.
NOTE D: 2656.
NOTE E: 2657.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TYPE DESIGNATION	
STYLE (DESIGNATION)	1620
CONSTRUCTION (DESIGNATION)	1622
TEMPERATURE-LIFE CHARACTERISTIC (DESIGNATION)	1624
VIBRATION GRADE (DESIGNATION)	1626
SHOCK TYPE (DESIGNATION)	1628
ALTITUDE (DESIGNATION)	1630
OPERATION (DESIGNATION)	1632
COLOR (DESIGNATION)	1634
LUMINANCE (DESGINATION)	1636
LENS TRANSMITTANCE (DESIGNATION)	1638
OTHER ____	1640

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TYPE DESIGNATION.
1620	THE ITEM(S) STYLE SHALL BE 1620 IN ACCORDANCE WITH THE BASE DOCUMENT.
1622	THE ITEM(S) CONSTRUCTION SYMBOL SHALL BE 1622 IN ACCORDANCE WITH THE BASE DOCUMENT.
1624	THE ITEM(S) TEMPERATURE-LIFE CHARACTERISTIC SHALL BE 1624 IN ACCORDANCE WITH THE BASE DOCUMENT.
1626	THE ITEM(S) VIBRATION GRADE SHALL BE 1626 IN ACCORDANCE WITH THE BASE DOCUMENT.
1628	THE ITEM(S) SHOCK TYPE SHALL BE 1628 IN ACCORDANCE WITH THE BASE DOCUMENT.
1630	THE ITEM(S) ALTITUDE SYMBOL SHALL BE 1630 IN ACCORDANCE WITH THE BASE DOCUMENT.
1632	THE ITEM(S) OPERATION SHALL BE 1632 IN ACCORDANCE WITH THE BASE DOCUMENT.
1634	THE ITEM(S) COLOR SHALL BE 1634 IN ACCORDANCE WITH THE BASE DOCUMENT.
1636	THE ITEM(S) LUMINANCE SHALL BE 1636 IN ACCORDANCE WITH THE BASE DOCUMENT.
1638	THE ITEM(S) LENS TRANSMITTANCE SHALL BE 1638 IN ACCORDANCE WITH THE BASE DOCUMENT.
1640	THE ITEM(S) TYPE DESIGNATION SHALL BE 1640.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
UNSEALED.	1564
DRIPPROOF.	1568
WATERTIGHT.	1570
EXPLOSION PROOF.	1572
DUSTPROOF.	1574
OTHER ____	1566
SWITCH CIRCUIT DIAGRAM	
(ILLUSTRATION)	1562
LAMP CIRCUIT DIAGRAM	
(ILLUSTRATION)	1563
PANEL MOUNTING THICKNESS	
MINIMUM (SELECT ONE)	
(INCHES)	1584
(MILLIMETERS)	1576
MAXIMUM (SELECT ONE)	
(INCHES)	1585
(MILLIMETERS)	1578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
1564	ENCLOSURE. THE ENCLOSURE SHALL BE UNSEALED.
1568	ENCLOSURE. THE ENCLOSURE SHALL BE DRIPPROOF.
1570	ENCLOSURE. THE ENCLOSURE SHALL BE WATERTIGHT.
1572	ENCLOSURE. THE ENCLOSURE SHALL BE EXPLOSION PROOF.
1574	ENCLOSURE. THE ENCLOUSRE SHALL BE DUSTPROOF.
1566	ENCLOSURE. THE ENCLOSURE SHALL BE 1566.
1562	SWITCH CIRCUIT DIAGRAM. THE SWITCH CIRCUIT DIAGRAM SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1562.
1563	LAMP CIRCUIT DIAGRAM. THE LAMP CIRCUIT DIAGRAM SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1563.
	PANEL MOUNTING THICKNESS.
1584	THE PANEL THICKNESS FOR MOUNTING THE SWITCH SHALL BE NOT LESS THAN 1584 INCH(S).
1576	THE PANEL THICKNESS FOR MOUNTING THE SWITCH SHALL BE NOT LESS THAN 1576 MILLIMETER(S).
1585	THE PANEL THICKNESS FOR MOUNTING THE SWITCH SHALL BE NOT GREATER THAN 1585 INCH(S).
1578	THE PANEL THICKNESS FOR MOUNTING THE SWITCH SHALL BE NOT GREATER THAN 1578 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDED (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
LAMPS	
LAMP CIRCUITRY SHALL BE INDEPENDENT FROM SWITCH CIRCUITRY AND INSULATED FROM SWITCH HOUSING.	1580
LAMP REPLACEMENT	
FROM FRONT OF PANEL.	1582
NO SPECIAL TOOLS REQUIRED.	1586
OTHER ____	1588
(TYPE)	1598
(PART NUMBER)	1590
LENS	
LEGEND INSCRIPTION (SELECT ONE)	
ENGRAVED.	1581
ENGRAVED (REVERSE).	1616
HEAT STAMPED.	1617
HEAT STAMPED (REVERSE).	1618
OTHER ____	1592
LEGEND MARKINGS PER MIL-M-18012.	1614

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	LAMPS.
1580	THE LAMP CIRCUITRY SHALL BE INDEPENDENT FROM SWITCH CIRCUITRY AND INSULATED FROM THE SWITCH HOUSING.
1582	LAMP REPLACEMENT SHALL BE FROM THE FRONT OF THE PANEL.
1586	NO SPECIAL TOOLS SHALL BE REQUIRED FOR LAMP REPLACEMENT.
1588	LAMP REPLACEMENT SHALL BE 1588.
1598	THE LAMP TYPE SHALL BE 1598.
1590	THE LAMP PART NUMBER SHALL BE 1590.
	LENS.
1581	THE LENS LEGEND INSCRIPTION SHALL BE ENGRAVED.
1616	THE LENS LEGEND INSCRIPTION SHALL BE ENGRAVED (REVERSE).
1617	THE LENS LEGEND INSCRIPTION SHALL BE HEAT STAMPED.
1618	THE LENS LEGEND INSCRIPTION SHALL BE HEAT STAMPED (REVERSE).
1592	THE LENS LEGEND INSCRIPTION SHALL BE 1592.
1614	THE LENS LEGEND MARKINGS SHALL BE IN ACCORDANCE WITH MIL-M-18012.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
LENS (CONT)	
LEGENDS	
NOTE: SEE LENS LEGENDS TABLE	
LENS REMOVABLE FROM FRONT OF PANEL.	1594
COLOR	
UNLIT (COLOR)	1608
LIT (COLOR)	1596
SWITCHING ACTION (SELECT ONE)	
ALTERNATE.	1642
MOMENTARY.	1644
MAGNETIC HELD MOMENTARY.	1646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

LEGEND CHARACTERS. LEGEND CHARACTERS, SIZE, STYLE, COLOR, OR THE LOCATION OF THE LEGEND CHARACTERS ON THE PUSH BUTTON(S) SHALL BE AS SPECIFIED IN THE FOLLOWING LENS LEGEND CHARACTERS TABLE.

LENS LEGEND CHARACTERS TABLE

LOCATION (ILL 013-10-1) SYMBOL POSITION	LINE	CHARACTER LEGEND	SIZE	STYLE	COLOR
3841	3842	3843	3844	3845	3846
3847	3848	3849	3850	3851	3852
3853	3854	3855	3856	3857	3858
3859	3860	3861	3862	3863	3864
3865	3866	3867	3868	3869	3870
3871	3872	3873	3874	3875	3876
3877	3878	3879	3880	3881	3882
3883	3884	3885	3886	3887	3888

1594 THE LENS SHALL BE REMOVABLE FROM THE FRONT OF THE PANEL.

1608 THE LENS COLOR, WHEN UNLIT, SHALL BE 1608.

1596 THE LENS COLOR, WHEN LIT, SHALL BE 1596.

1642 SWITCHING ACTION. THE SWITCHING ACTION SHALL BE ALTERNATE.

1644 SWITCHING ACTION. THE SWITCHING ACTION SHALL BE MOMENTARY.

1646 SWITCHING ACTION. THE SWITCHING ACTION SHALL BE MAGNETIC HELD MOMENTARY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SWITCHING ACTION (CONT)	
MECHANICAL LATCHDOWN.	1648
OTHER ____	1650
CONTACT ARRANGEMENT	
(CIRCUIT)	1651
(FORM)	1652
OTHER ARRANGEMENTS (SELECT ONE)	
SPST.	1653
SPDT.	1654
DPDT.	1655
(POLE) *(THROW)	1656 1657
CAP FILTERS	
(COLOR)	1600
STOPS (SELECT ONE)	
REQUIRED (LOCATION)	1571
NOT REQUIRED.	3900
ADJUSTABLE.	3902
INDEXING ANGLE	
(DEGREES)	3904

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1648	SWITCHING ACTION. THE SWITCHING ACTION SHALL BE MECHANICAL LATCHDOWN.
1650	SWITCHING ACTION. THE SWITCHING ACTION SHALL BE 1650.
	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE AS FOLLOWS:
1651	1651 CIRCUIT.
1652	FORM 1652.
1653	SINGLE POLE SINGLE THROW.
1654	SINGLE POLE DOUBLE THROW.
1655	DOUBLE POLE DOUBLE THROW.
1656 1657	1656 POLE, 1657 THROW.
1600	CAP FILTERS. THE CAP FILTER COLOR SHALL BE 1600.
	STOPS.
1571	STOPS ARE REQUIRED 1571.
3900	STOPS ARE NOT REQUIRED.
3902	PROVISIONS FOR ADJUSTABLE STOPS ARE REQUIRED.
3904	INDEXING ANGLE. THE INDEXING ANGLE (ANGLE BETWEEN POSITIONS) SHALL BE 3904 DEGREE(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CIRCUIT BOARD TERMINATION (SELECT ONE)	
CARD EDGE CONNECTORS.	3906
DIRECT WIRE.	3908
PROBE TERMINALS (PC PINS).	3910
OTHER ____	3912
NONTURN DEVICE	
REQUIRED.	3914
TERMINATION	
SOLDER TAB	
WIRE ACCOMMODATION	
NUMBER OF WIRES (QUANTITY)	1606
WIRE SIZE (SELECT ONE)	
(AWG)	1607
(MILLIMETERS, DIAMETER)	1601
ANGLE TERMINALS BENT TO REAR (DEGREES)	1602
ANGLE TERMINALS BENT TO FRONT (DEGREES)	1609
QUICK DISCONNECT SIZE	
SIZE ____	1611

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CIRCUIT BOARD TERMINATION.
3906	THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE CARDEDGE CONNECTORS.
3908	THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE DIRECT WIRE.
3910	THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE PROBE TERMINALS (PC PINS).
3912	THE SWITCH CIRCUIT BOARD TERMINATION SHALL BE 3912.
	NONTURN DEVICE.
3914	A NONTURN DEVICE IS REQUIRED.
	TERMINATION.
	SOLDER TAB.
1606	SOLDER TAB TERMINALS SHALL ACCOMMODATE 1606 WIRE(S).
1607	THE ACCOMMODATED WIRE SIZE SHALL BE 1607 AWG.
1601	THE ACCOMMODATED WIRE SIZE SHALL BE 1601 MILLIMETER(S), DIAMETER.
1602	ANGLE TERMINALS SHALL BE BENT TO THE REAR 1602 DEGREE(S).
1609	ANGLE TERMINALS SHALL BE BENT TO THE FRONT 1609 DEGREE(S).
1611	QUICK DISCONNECT SIZE. THE QUICK DISCONNECT SIZE SHALL BE 1611.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATION (CONT)	
CONNECTOR	
(PART NUMBER)	1613
PER DOCUMENT (DOC DES)	1615
WIRE LEAD	
WIRE SIZE (SELECT ONE)	
(AWG)	1619
(MILLIMETERS, DIAMETER)	1625
DOCUMENTATION (DOC DES)	1627
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONNECTOR.
1613	THE CONNECTOR PART NUMBER SHALL BE 1613.
1615	THE CONNECTOR SHALL BE IN ACCORDANCE WITH 1615.
	WIRE LEAD.
1619	THE WIRE LEAD WIRE SIZE SHALL BE 1619 AWG.
1625	THE WIRE LEAD WIRE SIZE SHALL BE 1625 MILLIMETER(S), DIAMETER.
1627	THE WIRE LEAD WIRE SHALL BE IN ACCORDANCE WITH 1627.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRUTH TABLE	

NOTE: SEE TRUTH TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TRUTH TABLE

READOUT

SYMBOL 3000

	3001	3002	3003	3004	3005	3006	3007	3008	3009	3010	3011
3012	3013	3014	3015	3016	3017	3018	3019	3020	3021	3022	3023
3024	3025	3026	3027	3028	3029	3030	3031	3032	3033	3034	3035
3036	3037	3038	3039	3040	3041	3042	3043	3044	3045	3046	3047
3048	3049	3050	3051	3052	3053	3054	3055	3056	3057	3058	3059
3060	3061	3062	3063	3064	3065	3066	3067	3068	3069	3070	3071
3072	3073	3074	3075	3076	3077	3078	3079	3080	3081	3082	3083
3084	3085	3086	3087	3088	3089	3090	3091	3092	3093	3094	3095
3096	3097	3098	3099	3100	3101	3102	3103	3104	3105	3106	3107
3108	3109	3110	3111	3112	3113	3114	3115	3116	3117	3118	3119
3120	3121	3122	3123	3124	3125	3126	3127	3128	3129	3130	3131
3132	3133	3134	3135	3136	3137	3138	3139	3140	3141	3142	3143
3144	3145	3146	3147	3148	3149	3150	3151	3152	3153	3154	3155
3156	3157	3158	3159	3160	3161	3162	3163	3164	3165	3166	3167
3168	3169	3170	3171	3172	3173	3174	3175	3176	3177	3178	3179
3180	3181	3182	3183	3184	3185	3186	3187	3188	3189	3190	3191
3192	3193	3194	3195	3196	3197	3198	3199	3200	3201	3202	3203

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRUTH TABLE (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

READOUT

SYMBOL

	3204	3205	3206	3207	3208	3209	3210	3211	3212	3213	3214
--------	3215	3216	3217	3218	3219	3220	3221	3222	3223	3224	3225
	3226	3227	3228	3229	3230	3231	3232	3233	3234	3235	3236
	3237	3238	3239	3240	3241	3242	3243	3244	3245	3246	3247
	3248	3249	3250	3251	3252	3253	3254	3255	3256	3257	3258
	3259	3260	3261	3262	3263	3264	3265	3266	3267	3268	3269
	3270	3271	3272	3273	3274	3275	3276	3277	3278	3279	3280
	3281	3282	3283	3284	3285	3286	3287	3288	3289	3290	3291
	3292	3293	3294	3295	3296	3297	3298	3299	3300	3301	3302
	3303	3304	3305	3306	3307	3308	3309	3310	3311	3312	3313
	3314	3315	3316	3317	3318	3319	3320	3321	3322	3323	3324
	3325	3326	3327	3328	3329	3330	3331	3332	3333	3334	3335
	3336	3337	3338	3339	3340	3341	3342	3343	3344	3345	3346
	3347	3348	3349	3350	3351	3352	3353	3354	3355	3356	3357
	3358	3359	3360	3361	3362	3363	3364	3365	3366	3367	3368
	3369	3370	3371	3372	3373	3374	3375	3376	3377	3378	3379
	3380	3381	3382	3383	3384	3385	3386	3387	3388	3389	3390

(A) NOTE: 3391.
(B) NOTE: 3392.
(C) NOTE: 3393.
(D) NOTE: 3394.
(E) NOTE: 3395.
(F) NOTE: 3396.
(G) NOTE: 3397.
(H) NOTE: 3398.
(I) NOTE: 3399.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 212.	6251

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1547	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6151	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-202, METHOD 212. (CONT)	
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A.	6226
*LEVEL (SELECT ONE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S.	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER C.	6239
*LEVEL (G'S)	4893

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANADARD PARAGRAPH
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 100 G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE* INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-202, METHOD 212. (CONT)	
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDITION (LETTER)	1549
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1668
AS FOLLOWS:	1662
MAXIMUM CAPACITANCE ACROSS OPEN CONTRACTS (PICOFARADS)	1666
MAXIMUM CAPACITANCE FROM OPEN CONTACTS TO GROUND (PICOFARADS)	1672

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
1668	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1668.
1662	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1666	THE CAPACITANCE ACROSS THE OPEN CONTACTS SHALL BE NOT GREATER THAN 1666 PICOFARAD(S).
1672	THE CAPACITANCE FROM THE OPEN CONTACT(S) TO GROUND SHALL BE NOT GREATER THAN 1672 PICOFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS (PICOFARADS)	1678
MAXIMUM CAPACITANCE (PICOFARADS)	1670
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
PER MIL-STD-202, METHOD 305.	1682
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1663
(KILOHERTZ)	1684
(MEGAHERTZ)	1688
MAGNITUDE OF POLARIZING VOLTAGE (VOLTS, DC)	1664
PLUS VOLTAGE TOLERANCE (VOLTS, DC)	1690
MINUS VOLTAGE TOLERANCE (VOLTS, DC)	1692
MEASUREMENT ACCURACY (SELECT ONE)	
(PERCENT)	1665
(PICOFARADS)	1694

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1678	THE CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS SHALL BE NOT GREATER THAN 1678 PICOFARAD(S).
1670	CAPACITANCE SHALL BE NOT GREATER THAN 1670 PICOFARAD(S).
1660	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1682	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 305.
1663	THE TEST FREQUENCY SHALL BE 1663 HERTZ.
1684	THE TEST FREQUENCY SHALL BE 1684 KILOHERTZ.
1688	THE TEST FREQUENCY SHALL BE 1688 MEGAHERTZ.
1664	THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 1664 VOLTS, DC.
1690	THE PLUS VOLTAGE TOLERANCE SHALL BE 1690 VOLTS, DC.
1692	THE MINUS VOLTAGE TOLERANCE SHALL BE 1692 VOLTS, DC.
1665	THE ACCURACY OF THE MEASUREMENT SHALL BE 1665 PERCENT.
1694	THE ACCURACY OF THE MEASUREMENT SHALL BE 1694 PICOFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
PER MIL-STD-202, METHOD 305. (CONT)	
POINTS OF MEASUREMENT	
BETWEEN OPEN CONTACTS.	1696
BETWEEN ADJACENT CLOSED CONTACTS.	1698
BETWEEN TWO ADJACENT TERMINALS (CONTACTS) ON ONE SWITCH SECTION.	1700
BETWEEN ONE OPEN CONTACT AND ITS COMMON TERMINAL.	1702
BETWEEN COMMON TERMINALS ON ADJACENT SWITCH SECTIONS.	1706
OTHER ____	1708
CHROMATICITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT ____	2160
AS FOLLOWS:	2162
SOURCE ILLUMINATE KELVIN VALUE (DEGREES CELSIUS)	2164

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE POINTS OF MEASUREMENT SHALL BE AS FOLLOWS:
1696	BETWEEN OPEN CONTACTS.
1698	BETWEEN ADJACENT CLOSED CONTACTS.
1700	BETWEEN TWO ADJACENT TERMINALS (CONTACTS) ON ONE SWITCH SECTION.
1702	BETWEEN ONE OPEN CONTACT AND ITS COMMON TERMINAL.
1706	BETWEEN COMMON TERMINALS ON ADJACENT SWITCH SECTIONS.
1708	1708.
2160	CHROMATICITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2160.
2162	CHROMATICITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2164	THE SOURCE ILLUMINATE FOR THE CHROMATICITY TABLE SHALL BE 2164 DEGREES KELVIN.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHROMATICITY (CONT)	
AS FOLLOWS: (CONT)	
NOTE: SEE CHROMATICITY TABLE.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE CHROMATICITIES OF THE COLOR LENSES EXPRESSED AS "X" AND "Y" COORDINATES ON THE CEI CHROMATICITY DIAGRAM SHALL BE WITHIN AREAS BOUNDED BY THE COORDINATES LISTED FOR EACH COLOR, USING A SOURCE ILLUMINATE OF KELVIN VALUE AS SPECIFIED.

CHROMATICITY TABLE

POSITION CODE (ILLUSTRATION 013-10-1)	COLOR	COLOR COORDINATES PER CEI CHROMATICITY DIAGRAM X	Y
2030	2031	2032	2033
	2035	2036	2037
	2039	2040	2041
	2043	2044	2045
2046	2047	2048	2049
	2051	2052	2053
	2055	2056	2057
	2059	2060	2061
2062	2063	2064	2065
	2067	2068	2069
	2072	2072	2073
	2075	2076	2077
2078	2079	2080	2081
	2083	2084	2085
	2087	2088	2089
	2091	2092	2093
2094	2095	2096	2097
	2099	2100	2101
	2103	2104	2105
	2107	2108	2109
2110	2111	2112	2113
	2115	2116	2117
	2119	2120	2121
	2123	2124	2125
2126	2127	2128	2129

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHROMATICITY (CONT)	
NOTE: SEE CHROMATICITY TABLE. (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2170
PER MIL-S-22885.	2172
METHOD (DESIGNATION)	2174
APPARATUS ____	2176
CIRCUIT CONFIGURATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1730
AS FOLLOWS:	1732
THE SWITCH CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.	1734
THE LAMP CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.	1735

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

CHROMATICITY TABLE (CONT)

POSITION CODE (ILLUSTRATION 013-10-1)	COLOR	COLOR COORDINATES PER CEI CHROMATICITY DIAGRAM X	Y
	2131	2132	2133
	2135	2136	2137
	2139	2140	2141
2142	2143	2144	2145
	2147	2148	2149
	2151	2152	2153
	2155	2156	2157

2170 CHROMATICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2170.

2172 CHROMATICITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-22885.

2174 METHOD 2174 SHALL APPLY.

2176 THE APPARATUS USED FOR TESTING SHALL BE 2176.

1730 CIRCUIT CONFIGURATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.

1732 CIRCUIT CONFIGURATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1734 THE SWITCH CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.

1735 THE LAMP CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT CONFIGURATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1736
PER DOCUMENT (DOC DES)	1738
AS FOLLOWS:	1740
SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.	1742
THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.	1744
LOAD ____	1746
COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
AS FOLLOWS:	1784
ALL CONTACTS TRANSFER WITHIN (MILLISECONDS)	1786
ALL CLOSED CONTACTS SHALL OPEN BEFORE ANY CONTACTS IN THE NEXT POSITION CLOSE.	1788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1736	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.
1738	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1738.
1740	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED AS FOLLOWS:
1742	SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.
1744	THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.
1746	THE LOAD SHALL BE 1746.
1782	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
1784	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1786	ALL CONTACTS SHALL TRANSFER WITHIN 1786 MILLISECOND(S).
1788	ALL CLOSED CONTACTS SHALL OPEN BEFORE ANY CONTACTS IN THE NEXT POSITION CLOSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1790
PER DOCUMENT (DOC DES)	1792
ACTUATION RATE (SELECT ONE)	
(INCHES PER SECOND)	1794
(MILLIMETERS PER SECOND)	1796
(DEGREES PER SECOND)	1798
CONTACT BOUNCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1750
AS FOLLOWS:	1752
MAXIMUM CONTACT BOUNCE DURATION (SELECT ONE)	
(MICROSECONDS)	1754
(MILLISECONDS)	1756
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1790 COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1790.

1792 COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1792.

1794 THE ACTUATION RATE SHALL BE 1794 *INCH(S) PER SECOND*.

1796 THE ACTUATION RATE SHALL BE 1796 MILLIMETERS PER SECOND.

1798 THE ACTUATION RATE SHALL BE 1798 DEGREES PER SECOND.

1750 CONTACT BOUNCE. *THE REQUIREMENT(S)* SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1750.

1752 CONTACT BOUNCE. *THE REQUIREMENT(S)* SHALL BE AS FOLLOWS:

1754 THE CONTACT BOUNCE DURATION SHALL BE NOT GREATER THAN 1754 MICROSECOND(S).

1756 THE CONTACT BOUNCE DURATION SHALL BE NOT GREATER THAN 1756 MILLISECOND(S).

1760 CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT BOUNCE (CONT)	
TEST METHODS (CONT)	
PER MIL-S-22885.	1762
OPERATION VELOCITY (INCHES PER SECOND)	1764
SWITCH OPERATIONS (QUANTITY)	1766
CONTACT RESISTANCE, LAMP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3500
AS FOLLOWS:	3502
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	3504
(MILLIOHMS)	3506
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	3508
(MILLIVOLTS)	3510
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3520
PER MIL-STD-202, METHOD 307.	3522

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1762	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-22885.
1764	THE OPERATION VELOCITY SHALL BE 1764 INCH(S) PER SECOND.
1766	THERE SHALL BE 1766 SWITCH OPERATION(S).
3500	CONTACT RESISTANCE, LAMP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3500.
3502	CONTACT RESISTANCE, LAMP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3504	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3504 OHM(S).
3506	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3506 MILLIOHM(S).
3508	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 3508 VOLT(S).
3510	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 3510 MILLIVOLT(S).
3520	CONTACT RESISTANCE, LAMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3520.
3522	CONTACT RESISTANCE, LAMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 307 OF MIL-STD-202.

Source: https://assist.dla.mil --- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE, LAMP (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
TEST CURRENT (SELECT ONE)	
MAXIMUM RATED CURRENT.	3524
(AMPERES)	3526
(MILLIAMPERES)	3528
MAXIMUM OPEN CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	3530
(MILLIVOLTS, DC)	3532
(VOLTS, AC)	3534
(MILLIVOLTS, AC)	3536
NUMBER OF ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	3538
NUMBER OF TEST ACTIVATIONS (QUANTITY)	3540
NUMBER OF MEASUREMENTS PER ACTIVATION (QUANTITY)	3542
MAXIMUM MEASUREMENT ERROR (PERCENT)	3544
METHOD OF CONNECTION ____	3546

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3524 THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.

3526 THE TEST CURRENT SHALL BE 3526 AMPERE(S).

3528 THE TEST CURRENT SHALL BE 3528 MILLIAMPERE(S).

3530 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 3530 VOLT(S), DC.

3532 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 3532 MILLIVOLT(S), DC.

3534 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 3534 VOLT(S), AC.

3536 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 3536 MILLIVOLT(S), AC.

3538 THERE SHALL BE 3538 ACTIVATION(S) PRIOR TO MEASUREMENT.

3540 THERE SHALL BE 3540 TEST ACTIVATION(S).

3542 THERE SHALL BE 3542 MEASUREMENT(S) PER ACTIVATION.

3544 THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 3544 PERCENT.

3546 THE METHOD OF CONNECTION SHALL BE 3546.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE, SWITCH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1804
(MILLIOHMS)	1704
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1806
(MILLIVOLTS)	1808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
PER MIL-STD-202, METHOD 307.	1812
TEST CURRENT (SELECT ONE)	
MAXIMUM RATED CURRENT.	1814
(AMPERES)	1816
(MILLIAMPERES)	1818

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1800	CONTACT RESISTANCE, SWTICH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	CONTACT RESISTANCE, SWITCH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1804	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1804 OHM(S).
1704	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1704 MILLIOHM(S).
1806	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1806 VOLT(S).
1808	THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1808 MILLIVOLT(S).
1810	CONTACT RESISTANCE, SWITCH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
1812	CONTACT RESISTANCE, SWITCH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 307 OF MIL-STD-202.
1814	THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.
1816	THE TEST CURRENT SHALL BE 1816 AMPERE(S).
1818	THE TEST CURRENT SHALL BE 1818 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE, SWITCH (CONT)	
PER MIL-STD-202, METHOD 307. (CONT)	
MAXIMUM OPEN CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	1820
(MILLIVOLTS, DC)	1822
(VOLTS, AC)	1824
(MILLIVOLTS, AC)	1826
NUMBER OF ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	1828
NUMBER OF TEST ACTIVATIONS (QUANTITY)	1830
NUMBER OF MEASUREMENTS PER ACTIVATION (QUANTITY)	1832
MAXIMUM MEASUREMENT ERROR (PERCENT)	1834
METHOD OF CONNECTION ____	1836
CORONA AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
AS FOLLOWS:	1880

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1820 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1820 VOLT(S), DC.

1822 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1822 MILLIVOLT(S), DC.

1824 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1824 VOLT(S), AC.

1826 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1826 MILLIVOLT(S), AC.

1828 THERE SHALL BE 1828 ACTIVATION(S) PRIOR TO MEASUREMENT.

1830 THERE SHALL BE 1830 TEST ACTIVATION(S).

1832 THERE SHALL BE 1832 MEASUREMENT(S) PER ACTIVATION.

1834 THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 1834 PERCENT.

1836 THE METHOD OF CONNECTION SHALL BE 1836.

1840 CORONA AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.

1880 CORONA AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT REDUCED BAROMETRIC PRESSURE (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF CORONA.	1882
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	1884
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	1881
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	1883
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	1885
*TEST VOLTAGE (VOLTS)	1887
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1856
PER DOCUMENT (DOC DES)	1886
ALTITUDE PER METHOD 105, MIL-STD-202, TEST CONDITION (LETTER)	1860
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1888
FREQUENCY (HERTZ)	1890
(VOLTS, DC)	1892

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1882	THERE SHALL BE NO EVIDENCE OF CORONA.
1884	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 1884 VOLT(S).
1881	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 1881 VOLT(S).
1883	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1883 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.
1885 1887	THE APPARENT CORONA CHAGGE SHALL BE NOT GREATER THAN 1885 PICOCOULOMB(S) AT 1887 VOLT(S).
1856	CORONA AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1856.
1886	CORONA AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1886.
1860	ALTITUDE SHALL BE IN ACCORDANCE WITH METHOD 105 OF MIL-STD-202, TEST CONDITION 1860.
1888	THE TEST VOLTAGE SHALL BE 1888 VOLT(S), AC.
1890	THE AC VOLTAGE FREQUENCY SHALL BE 1890 HERTZ.
1892	THE TEST VOLTAGE SHALL BE 1892 VOLT(S), DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1686
AS FOLLOWS:	1842
NO EVIDENCE OF CORONA.	1844
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	1846
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	1848
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	1850
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	1852
*TEST VOLTAGE (VOLTS)	1854
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1683
PER DOCUMENT (DOC DES)	1858
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1862
FREQUENCY (HERTZ)	1864
(VOLTS, DC)	1866

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1686	CORONA AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1686.
1842	CORONA AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1844	THERE SHALL BE NO EVIDENCE OF CORONA.
1846	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 1846 VOLT(S).
1848	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 1848 VOLT(S).
1850	THE APPARENT CORONA CHARGE SHALL BENOT GREATER THAN 1850 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.
1852 1854	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1852 PICOCOULOMB(S) AT 1854 VOLT(S).
1683	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1683.
1858	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1858.
1862	THE TEST VOLTAGE SHALL BE 1862 VOLT(S), AC.
1864	THE AC VOLTAGE FREQUENCY SHALL BE 1864 HERTZ.
1866	THE TEST VOLTAGE SHALL BE 1866 VOLT(S), DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA, AT SEA LEVEL (CONT)	
TEST METHODS (CONT)	
PER ASTMD1868.	1868
MINIMUM EQUIPMENT SENSITIVITY (PICOCOULOMBS)	1870
TEST VOLTAGE (SELECT ONE)	
(AC)	1874
(PERCENT OF RATED)	1876
(DC)	1872
TEST VOLTAGE FREQUENCY (HERTZ)	1877
SUPERIMPOSED TEST VOLTAGE (VOLTS RMS)	1878
*VOLTAGE (VOLTS, DC)	1879
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1868	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
1870	THE EQUIPMENT SHALL HAVE A SENSITIVITY CAPABLE OF DETECTING A PULSE LEVEL OF 1870 PICOCOULOMB(S) OR LARGER.
1874	THE TEST VOLTAGE SHALL BE 1874 VOLT(S), AC.
1876	THE TEST VOLTAGE SHALL BE 1876 PERCENT OF RATED VOLTAGE.
1872	THE TEST VOLTAGE SHALL BE 1872 VOLT(S), DC.
1877	THE FREQUENCY OF THE AC VOLTAGE SHALL BE 1877 HERTZ.
1878 1879	THE TEST VOLTAGE SHALL BE 1878 VOLT(S) RMS SUPERIMPOSED ON A DC VOLTAGE OF 1879 VOLT(S).
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINT OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLT(S), DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLT(S), AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
POINT OF VOLTAGE APPLICATION: (CONT)	
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

4847 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLT(S), DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLT(S), AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
3810	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE (CONT)	
REQUIREMENTS (CONT)	
PER MIL-STD-461 LIMITS.	3812
NO ELECTRICAL OR MECHANICAL MALFUNCTION.	3814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3820
PER MIL-STD-461, APPENDIX METHOD (DESIGNATION)	3822
PER MIL-STD-462.	3824
*TEST METHOD(S)	
CE (NUMBER)	3826
RE (NUMBER)	3828
CS (NUMBER)	3830
RS (NUMBER)	3832
CRE (NUMBER)	3834
ENDURANCE, ELECTRICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3812	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS PER MIL-STD-461.
3814	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
3820	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3820.
3822	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MIL-STD-451 APPENDIX. METHOD 3822 SHALL APPLY.
3824	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING METHOD(S) SHALL APPLY:
3826	METHOD CE 3826.
3828	METHOD RE 3828.
3830	METHOD CS 3830.
3832	METHOD RS 3832.
3834	METHOD CRE 3834.
1900	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1902
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(MILLIOHMS)	1906
(OHMS)	1904
NO EVIDENCE OF MALFUNCTION.	1910
REMAIN WITHIN SPECIFIED TOLERANCES.	1908
MAXIMUM TERMPERATURE RISE (DEGREES CELSIUS)	1905
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
PER DOCUMENT (DOC DES)	1914
OPERATIONAL CYCLES (QUANTITY)	1916
APPLIED VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1918
(VOLTS, DC)	1920
LOAD (PERCENT OF RATED LOAD)	1922
LOAD (TYPE)	1924

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1902	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1906	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1906 MILLIOHM(S).
1904	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1904 OHM(S).
1910	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
1908	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1905	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 1905 DEGREES CELSIUS.
1912	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1914.
1916	THERE SHALL BE 1916 OPERATING CYCLES.
1918	THE APPLIED VOLTAGE SHALL BE 1918 VOLT(S), AC.
1920	THE APPLIED VOLTAGE SHALL BE 1920 VOLT(S), DC.
1922	THE LOAD SHALL BE 1922 PERCENT OF THE RATED LOAD.
1924	THE LOAD TYPE SHALL BE 1924.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
PER DOCUMENT (DOC DES) (CONT)	
TEST CYCLE RATE (CYCLES PER MINUTE)	1926
ENDURANCE, MECHANICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3600
AS FOLLOWS:	3602
REMAIN WITHIN SPECIFIED TOLERANCES.	3604
NO EVIDENCE OF MALFUNCTION.	3606
NO EVIDENCE OF DAMAGE.	3608
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3610
PER DOCUMENT (DOC DES)	3612
OPERATING CYCLES (QUANTITY)	3614
TEST CYCLE RATE (CYCLES PER MINUTE)	3616
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1680

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1926	THE TEST CYCLE RATE SHALL BE 1926 CYCLES PER MINUTE.
3600	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3600.
3602	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3604	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
3606	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
3608	THERE SHALL BE NO EVIDENCE OF DAMAGE.
3610	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3610.
3612	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3612.
3614	THERE SHALL BE 3614 OPERATING CYCLES.
3616	THE TEST CYCLE RATE SHALL BE 3616 CYCLES PER MINUTE.
1680	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1680.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1928
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.	1930
NO EXPLOSION WITHIN SWITCH OR CHAMBER.	1932
NO EXPLOSION IN CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN SWITCH.	1934
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1674
PER MIL-STD-202, METHOD 109.	1936
LOAD (PERCENT OF RATED LOAD)	1938
LOAD (TYPE)	1940
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1676
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1942
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1944
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1946

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1928	EXPLOSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1930	SWITCHES SHALL BE ELECTRICALLY AND MECHANICALLY OPERATIVE OPERATIVE AFTER TEST.
1932	THERE SHALL BE NO EXPLOSION WITHIN THE SWITCH OR CHAMBER.
1934	THERE SHALL BE NO EXPLOSION IN THE CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN THE SWITCH.
1674	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.
1936	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 109.
1938	THE LOAD SHALL BE 1938 PERCENT OF THE RATED LOAD.
1940	THE LOAD TYPE SHALL BE 1940.
1676	THE CHAMBER TEMPERATURE SHALL BE 1676 DEGREES CELSIUS.
1942	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1942 DEGREES CELSIUS.
1944	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1944 DEGREES CELSIUS.
1946	THE TEST VOLTAGE SHALL BE 1946 VOLT(S) AC.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
(VOLTS, AC) (CONT)	
FREQUENCY (HERTZ)	1948
(VOLTS, DC)	1950
FIELD OF VIEW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT ____	2950
VISIBILITY OF ANY SIGNAL, LEGEND, SYMBOLOGY, OR ALPHA NUMERICS SHALL NOT BE RESTRICTED BY THE PERIPHERY OF THE ENCLOSURE.	2952
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2954
PER MIL-S-22885.	2956
VIEWING DISTANCE (SELECT ONE)	
(FEET)	2957
(METERS)	2958
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1948	THE AC VOLTAGE FREQUENCY SHALL BE 1948 HERTZ.
1950	THE TEST VOLTAGE SHALL BE 1950 VOLT(S) DC.
2950	FIELD OF VIEW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2950.
2952	FIELD OF VIEW. VISIBILITY OF ANY SIGNAL, LEGEND, SYMBOLOGY, OR ALPHA NUMERICS SHALL NOT BE RESTRICTED BY THE PERIPHERY OF THE ENCLOSURE.
2954	FIELD OF VIEW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2954.
2956	FIELD OF VIEW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-22885.
2957	THE VIEWING DISTANCE SHALL BE 2957 FEET.
2958	THE VIEWING DISTANCE SHALL BE 2958 METER(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 METOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESITNG SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLT(S), DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-202, METHOD 103. (CONT)	
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
PER MIL-STD-202, METHOD 104. (CONT)	
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED DOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
SPECIAL PREPARATION OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
INTERMEDIATE CURRENT SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
AS FOLLOWS:	1954
REMAIN WITHIN SPECIFIED TOLERANCES.	1956
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1958
(MILLIOHMS)	1960
(PERCENT OF LOAD RESISTANCE)	1961
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1962

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
1952	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1956	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
1958	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1958 OHM(S).
1960	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1960 MILLIOHM(S).
1961	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1961 PERCENT OF LOAD.
1962	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1962 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
MAXIMUM CONTACT VOLTAGE DROP (CONT)	
(MILLIVOLTS)	1964
NO ELECTRICAL FAILURE.	1965
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1966
PER MIL-STD-202, METHOD 312.	1968
MINIMUM VOLTAGE ACROSS OPEN CONTACT (SELECT ONE)	
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	1970
(VOLTS, AC)	1972
(VOLTS, DC)	1974
NUMBER OF OPERATIONS (QUANTITY)	1976
CYCLING RATE (CYCLES PER MINUTE)	1978
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	1980
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	1982

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1964	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1964 MILLIVOLT(S).
1965	THERE SHALL BE NO ELECTRICAL FAILURE.
1966	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1966.
1968	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 312 OF MIL-STD-202.
1970	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1970 PERCENT OF THE APPLIED LOAD VOLTAGE.
1972	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1972 VOLT(S), AC.
1974	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1974 VOLT(S), DC.
1976	THERE SHALL BE 1976 OPERATIONS.
1978	THE CYCLING RATE SHALL BE 1978 CYCLES PER MINUTE.
1980	THE PLUS CYCLING RATE TOLERANCE SHALL BE 1980 CYCLE(S) PER MINUTE.
1982	THE MINUS CYCLING RATE TOLERANCE SHALL BE 1982 CYCLE(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
PER MIL-STD-202, METHOD 312. (CONT)	
CYCLE "ON" AND "OFF" DURATION	
"ON" (PERCENT OF CYCLE)	1984
"OFF" (PERCENT OF CYCLE)	1986
MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.	1988
FINAL HALF OF CYCLES ARE TO BE TESTED AT ROOM TEMPERATURE.	1990
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	1992
LAMP RETENTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2970
AS FOLLOWS:	2972
LAMPS SHALL BE HELD CAPTIVE WITHIN THE REMOVABLE PORTION OF THE LENS ASSEMBLY.	2974
THE TEST PLUG SHALL REMAIN CAPTIVE TO THE LENS.	2976
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2980

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE CYCLE 'ON' AND 'OFF' DURATION(S) SHALL BE AS FOLLOWS:
1984	'ON' 1984 PERCENT OF THE CYCLE.
1986	'OFF' 1986 PERCENT OF THE CYCLE.
1988	MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.
1990	THE FINAL HALF OF THE CYCLES SHALL BE TESTED AT ROOM TEMPERATURE.
1992	THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 1992 DEGREES CELSIUS.
2970	LAMP RETENTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2970.
2972	LAMP RETENTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2974	LAMPS SHALL BE HELD CAPTIVE WITHIN THE REMOVABLE PORTION OF THE LENS ASSEMBLY.
2976	THE TEST PLUG SHALL REMAIN CAPTIVE TO THE LENS.
2980	LAMP RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2980.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LAMP RETENTION (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2982
TEST PLUG INSERTION/WITHDRAWAL CYCLES (QUANTITY)	2984
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2180
AS FOLLOWS:	2182
"MISSES" ALLOWED (QUANTITY)	2184
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2186
(MILLIOHMS)	2188
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2190
(MILLIVOLTS)	2192
REMAIN WITHIN SPECIFIED TOLERANCES.	2194

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2982 LAMP RETENTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2982.

2984 THERE SHALL BE 2984 TEST PLUG INSERTION/WITHDRAWAL CYCLES.

2180 LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2180.

2182 LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2184 THERE SHALL BE 2184 'MISS(S)' ALLOWED.

2186 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2186 OHM(S).

2188 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2188 MILLIOHM(S).

2190 THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2190 VOLT(S).

2192 THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2192 MILLIVOLT(S).

2194 THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200
PER MIL-STD-202, METHOD 311.	2202
*ALTITUDE PER METHOD 105, MIL-STD-202, CONDITION (LETTER)	2204
MAXIMUM LOAD CURRENT (SELECT ONE)	
(MILLIAMPERES)	2208
(AMPERES)	2206
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2210
(MILLIVOLTS, DC)	2212
(VOLTS, AC)	2214
(MILLIVOLTS, AC)	2216
CONTACTS SHALL BE MONITORED FOR STICKING.	2218
TEST CYCLES (QUANTITY)	2220
TEST CYCLE RATE (CYCLES PER MINUTE)	2222

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2200	LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.
2202	LIFE, LOW LEVEL SWTICHING AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2204	ALTITUDE SHALL BE IN ACCORDANCE WITH METHOD 105 OF MIL-STD-202, TEST CONDITION 2204.
2208	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2208 MILLIAMPERE(S).
2206	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2206 AMPERE(S).
2210	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2210 VOLT(S), DC.
2212	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2212 MILLIVOLT(S), DC.
2214	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2214 VOLT(S), AC.
2216	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2216 MILLIVOLT(S), AC.
2218	CONTACTS SHALL BE MONITORED FOR STICKING.
2220	THERE SHALL BE 2220 TEST CYCLES.
2222	THE TEST CYCLE RATE SHALL BE 2222 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST CYCLE RATE (CYCLES PER MINUTE) (CONT)	
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2224
MINUS RATE TOLERANCE (CYCLES PER MINUTE)	2226
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2230
AS FOLLOWS:	2232
"MISSES" ALLOWED (QUANTITY)	2234
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2236
(MILLIOHMS)	2238
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2240
(MILLIVOLTS)	2242
REMAIN WITHIN SPECIFIED TOLERANCES.	2244

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2224	THE PLUS TYCLE RATE TOLERANCE SHALL BE 2224 CYCLES PER MINUTE.
2226	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2226 CYCLES PER MINUTE.
2230	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230.
2232	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2234	THERE SHALL BE 2234 'MISS(S)' ALLOWED.
2236	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2236 OHM(S).
2238	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2238 MILLIOHM(S).
2240	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2240 VOLT(S).
2242	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2242 MILLIVOLT(S).
2244	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
PER MIL-STD-202, METHOD 311.	2252
MAXIMUM LOAD CURRENT (SELECT ONE)	
(AMPERES)	2254
(MILLIAMPERES)	2256
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2258
(MILLIVOLTS, DC)	2260
(VOLTS, AC)	2262
(MILLIVOLTS, AC)	2264
CONTACTS SHALL BE MONITORED FOR STICKING.	2266
TEST CYCLES (QUANTITY)	2268
TEST CYCLE RATE (CYCLES PER MINUTE)	2270
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2272
MINUS RATE TOLERANCE (CYCLES PER MINUTE)	2274

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2250	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2254	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2254 AMPERE(S).
2256	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2256 MILLIAMPERE(S).
2258	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2258 VOLT(S), DC.
2260	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2260 MILLIVOLT(S), DC.
2262	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2262 VOLT(S), AC.
2264	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2264 MILLIVOLT(S), AC.
2266	CONTACTS SHALL BE MONITORED FOR STICKING.
2268	THERE SHALL BE 2268 TEST CYCLES.
2270	THE TEST CYCLE RATE SHALL BE 2270 CYCLES PER MINUTE.
2272	THE PLUS CYCLE RATE TOLERANCE SHALL BE 2272 CYCLES PER MINUTE.
2274	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2274 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LUMINANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3570
AS FOLLOWS:	3572
MINIMUM LUMINANCE (SELECT ONE)	
(FOOTLAMBERTS)	3574
(CANDELAS PER SQUARE METER)	3576
MAXIMUM EMITTED STRAY LIGHT (SELECT ONE)	
(FOOTLAMBERTS)	3578
(CANDELAS PER SQUARE METER)	3580
MAXIMUM DEVIATION OF INDIVIDUAL READING OUTSIDE SPECIFIED LIMITS (PERCENT)	3582
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3584
PER DOCUMENT (DOC DES)	3586
NUMBER OF READINGS (QUANTITY)	3588
LOCATION OF READINGS _____	3590
TEST EQUIPMENT ____	3592

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3570 LUMINANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3570.

3572 LUMINANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3574 LUMINANCE SHALL BE NOT LESS THAN 3574 FOOTLAMBERT(S).

3576 LUMINANCE SHALL BE NOT LESS THAN 3576 CANDELAS PER SQUARE METER.

3578 EMITTED STRAY LIGHT SHALL BE NOT GREATER THAN 3578 FOOTLAMBERT(S).

3580 EMITTED STRAY LIGHT SHALL BE NOT GREATER THAN 3580 CANDELAS PER SQUARE METER.

3582 THE DEVIATION OF INDIVIDUAL READINGS OUTSIDE SPECIFIED LIMITS SHALL BE NOT GREATER THAN 3582 PERCENT.

3584 LUMINANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3584.

3586 LUMINANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3586.

3588 THERE SHALL BE 3588 READINGS.

3590 THE LOCATION OF THE READINGS SHALL BE 3590.

3592 THE TEST EQUIPMENT SHALL BE 3592.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LUMINANCE (CONT)	
PER DOCUMENT (CONT)	
PERFORM STRAY LIGHT TEST PER MIL-S-22895.	3594
NUMBER OF READINGS (QUANTITY)	3596
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3594	THE STRAY LIGHT TEST SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-22885.
3596	THERE SHALL BE 3596 READINGS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANCIAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PE4 DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
OPERATING FORCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOUCMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLT(S), DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLT(S), DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLT(S), AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2320	OPERATING FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING FORCE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2322
MAXIMUM ROTATION TORQUE (SELECT ONE)	
(POUND-INCHES)	2324
(NEWTON METERS)	2326
OPERATING FORCE	
MINIMUM (SELECT ONE)	
(NEWTONS)	2328
(OUNCES)	2332
(POUNDS)	2334
MAXIMUM (SELECT ONE)	
(NEWTONS)	2336
(POUNDS)	2342
(OUNCES)	2340
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344
PER DOCUMENT (DOC DES)	2346

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2322	OPERATING FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2324	ROTATIONAL TORQUE SHALL BE NOT GREATER THAN 2324 POUND-INCHES.
2326	ROTATIONAL TORQUE SHALL BE NOT GREATER THAN 2326 NEWTON METER(S).
2328	OPERATING FORCE SHALL BE NOT LESS THAN 2328 NEWTON(S).
2332	OPERATING FORCE SHALL BE NOT LESS THAN 2332 OUNCE(S).
2334	OPERATING FORCE SHALL BE NOT LESS THAN 2334 POUND(S).
2336	OPERATING FORCE SHALL BE NOT GREATER THAN 2336 NEWTON(S).
2342	OPERATING FORCE SHALL BE NOT GREATER THAN 2342 POUND(S).
2340	OPERATING FORCE SHALL BE NOT GREATER THAN 2340 OUNCE(S).
2344	OPERATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.
2346	OPERATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2346.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING FORCE (CONT)	
PER DOCUMENT (CONT)	
LOW TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2348
LOW TEMPERATURE TEST DURATION (HOURS)	2350
ROOM TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2352
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2280
AS FOLLOWS:	2282
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2284
(MILLIOHMS)	2286
MAXIMUM VOLTAGE DROP ACROSS CLOSED CONTACTS (SELECT ONE)	
(VOLTS)	2288
(MILLIVOLTS)	2290
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	2292

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2348 THE LOW TEMPERATURE TEST TEMPERATURE SHALL BE 2348 DEGREES CELSIUS.

2350 THE LOW TEMPERATURE TEST DURATION SHALL BE 2350 HOUR(S).

2352 THE ROOM TEMPERATURE TEST TEMPERATURE SHALL BE 2352 DEGREES CELSIUS.

2280 OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.

2282 OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2284 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2284 OHM(S).

2286 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2286 MILLIOHM(S).

2288 THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER 2288 VOLT(S).

2290 THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2290 MILLIVOLT(S).

2292 THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2292 PERCENT OF THE APPLIED LOAD VOLTAGE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM VOLTAGE ACROSS OPEN CONTACTS	
(PERCENT OF APPLIED LOAD VOLTAGE)	2294
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	2296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
PER DOCUMENT (DOC DES)	2302
NUMBER OF OPERATIONS (QUANTITY)	2304
OVERLOAD CURRENT (SELECT ONE)	
(AMPERES)	2306
(PERCENT OF RATED LOAD)	2308
CYCLING RATE (CYCLES PER MINUTE)	2310
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2312
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2314

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2294	THE VOLTAGE ACROSS THE OPEN CAONTACTS SHALL BE NOT LESS THAN 2294 PERCENT OF THE APPLIED LOAD VOLTAGE.
2296	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.
2300	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2302	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2302.
2304	THERE SHALL BE 2304 OPERATIONS.
2306	THE OVERLOAD CURRENT SHALL BE 2306 AMPERE(S).
2308	THE OVERLOAD CURRENT SHALL BE 2308 PERCENT OF THE RATED LOAD.
2310	THE CYCLING RATE SHALL BE 2310 CYCLES PER MINUTE.
2312	THE PLUS CYCLING RATE TOLERANCE SHALL BE 2312 CYCLES PER MINUTE.
2314	THE MINUS CYCLING RATE TOLERANCE SHALL BE 2314 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
PER DOCUMENT (CONT)	
DUTY CYCLE	
ON (PERCENT)	2316
OFF (PERCENT)	2318
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2930
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currenversion before use.

CHAR
CODE STANDARD PARAGRAPH

THE DUTY CYCLE SHALL BE AS FOLLOWS:

2316 'ON' 2316 PERCENT OF CYCLE.

2318 'OFF' 2318 PERCENT OF CYCLE.

4700 RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.

4701 RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4718 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

2930 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2930 MILLIOHM(S).

4689 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.

4698 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

4691 TEST CONDITION LETTER 4691 SHALL APPLY.

4694 4694 TERMINATION(S) PER UNIT SHALL BE TESTED.

4692 DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
DEPTH OF IMMERSION IN SOLDER (CONT)	
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215. DEGRADATION OF PERFORMANCE.	4839
SOLVENTS TO BE ADDED (NAME)	4838

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATIONS IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
PER MIL-STD-202, METHOD 215. (CONT)	
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSH (SELECT ONE)	
MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
MOUNTING (CONT)	
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
OPERATION CYCLES (QUANTITY)	2932
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
NO EVIDENCE OF MECHANICAL OR ELECTRICAL DAMAGE.	2358
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2932	THERE SHALL BE 2932 OPERATION CYCLES.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
2358	THERE SHALL BE NO EVIDENCE OF MECHANICAL OR ELECTRICAL DAMAGE.
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
PER MIL-STD-202, METHOD 110. (CONT)	
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
OPERATION CYCLES (QUANTITY)	2934
OPERATION CYCLE LATE (CYCLES PER MINUTE)	2936
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
MAXIMUM LEAKAGE CURRENT (MILLIAMPERES)	2360
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
2934	THERE SHALL BE 2934 OPERATION CYCLES.
2936	THE OPERATION CYCLE RATE SHALL BE 2936 CYCLES PER MINUTE.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
2360	LEAKAGE CURRENT SHALL BE NOT GREATER THAN 2360 MILLIAMPERE(S).
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER A. (CONT)	
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4739	*TEMPERATURE OF THE BUBBLE TEST BATH* LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
PER MIL-S-22710.	2362
MOUNTING METHOD (SELECT ONE)	
I.	2364
II.	2366

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
2362	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-22710.
2364	METHOD I SHALL APPLY.
2366	METHOD II SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2022640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2368
(MILLISECONDS)	2370
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550
NO CHANGE IN SHAFT POSITION.	2372
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2368	DISCONTINUITY SHALL BE NOT GREATER THAN 2368 MICROSECOND(S).
2370	DISCONTINUITY SHALL BE NOT GREATER THAN 2370 MILLISECOND(S).
1550	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2372	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
MOUNTING FIXTURE (CONT)	
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
PER MIL-S-901.	4132
EQUIPMENT GRADE (LETTER)	4133
EQUIPMENT CLASSIFICATION (SELECT ONE)	
DECK MOUNTED.	4135
SHELL MOUNTED.	4136
HULL MOUNTED.	4134
SUBSIDIARY COMPONENT.	4138
SUBASSEMBLIES.	4139
PRINCIPAL UNIT.	4137
TEST CLASSIFICATION	
LIGHTWEIGHT.	4143

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
4132	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-901.
4133	THE EQUIPMENT GRADE SHALL BE 4133.
4135	THE EQUIPMENT CLASSIFICATION SHALL BE DECK MOUNTED.
4136	THE EQUIPMENT CLASSIFICATION SHALL BE SHELL MOUNTED.
4134	THE EQUIPMENT CLASSIFICATION SHALL BE HULL MOUNTED.
4138	THE EQUIPMENT CLASSIFICATION SHALL BE SUBSIDIARY COMPONENT.
4139	THE EQUIPMENT CLASSIFICATION SHALL BE SUBASSEMBLIES.
4137	THE EQUIPMENT CLASSIFICATION SHALL BE PRINCIPAL UNIT.
4143	THE TEST CLASSIFICATION SHALL BE LIGHTWEIGHT.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-S-901. (CONT)	
TEST TYPE (LETTER)	4146
METHOD OF MOUNTING (FIXTURE)	4147
EQUIPMENT CLASS (NUMERAL)	4142
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2374
(MILLISECONDS)	2376
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
NO CHANGE IN SHAFT POSITION	2382
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4146	THE TEST TYPE SHALL BE 4146.
4147	THE METHOD OF MOUNTING SHALL BE IN ACCORDANCE WITH FIXTURE 4147.
4142	THE EQUIPMENT CLASS SHALL BE 4142.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2374	DISCONTINUITY SHALL BE NOT GREATER THAN 2374 MICROSECOND(S).
2376	DISCONTINUITY SHALL BE NOT GREATER THAN 2376 MILLISECOND(S).
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2382	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING MEANS.	4685
MOUNT PER DOUCMENT (DOC DES)	4684
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2384
AS FOLLOWS:	2386
THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.	2388

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
2384	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2384.
2386	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2388	THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT CIRCUIT (CONT)	
AS FOLLOWS: (CONT)	
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST.	2390
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2391
PER DOCUMENT (DOC DES)	2392
MAXIMUM APPLIED TEST CURRENT (AMPERES)	2393
OPEN CIRCUIT TEST VOLTAGE (VOLTS)	2394
FREQUENCY (HERTZ)	2395
LOAD (TYPE)	2396
TEST CYCLES (QUANTITY)	2397
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2390	THE SWITCH SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TESTING.
2391	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2391.
2392	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2392.
2393	THE APPLIED TEST CURRENT SHALL BE NOT GREATER THAN 2393 AMPERES.
2394	THE OPEN CIRCUIT TEST VOLTAGE SHALL BE 2394 VOLT(S).
2395	THE FREQUENCY SHALL BE 2395 HERTZ.
2396	THE LOAD TYPE SHALL BE 2396.
2397	THE NUMBER OF TEST CYCLES SHALL BE 2397.
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205
STOPS STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
AS FOLLOWS:	2402
NO EVIDENCE OF PHYSICAL DAMAGE.	2404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.
2400	STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2402	STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2404	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STOPS STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
NO SLIPPAGE OF MOVING PARTS.	2406
NO EVIDENCE OF MALFUNCTION.	2408
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2410
PER DOCUMENT (DOC DES)	2412
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2414
(NEWTON METERS)	2416
DURATION OF TEST TORQUE (SELECT ONE)	
(SECONDS)	2418
(MINUTES)	2420
TEST FORCE (SELECT ONE)	
(POUNDS)	2422
(NEWTONS)	2424
STRAY LIGHTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2680

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2406	THERE SHALL BE NO SLIPPAGE OF MOVING PARTS.
2408	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
2410	STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.
2412	STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2412.
2414	THE TEST TORQUE SHALL BE 2414 POUND-INCH(S).
2416	THE TEST TORQUE SHALL BE 2416 NEWTON METER(S).
2418	THE DURATION OF THE TEST TORQUE SHALL BE 2418 SECOND(S).
2420	THE DURATION OF THE TEST TORQUE SHALL BE 2420 MINUTE(S).
2422	THE TEST FORCE SHALL BE 2422 POUND(S).
2424	THE TEST FORCE SHALL BE 2424 NEWTON(S).
2680	STRAY LIGHTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2680.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRAY LIGHTS (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2682
MAXIMUM EMITTED STRAY LIGHT (SELECT ONE)	
(FOOTLAMBERTS)	2684
(CANDELA PER SQUARE METER)	2686
ALL LAMP FILAMENTS SHIELDED FROM DIRECT VIEW.	2688
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2690
PER MIL-S-22885.	2692
MINIMUM NUMBER OF READINGS (QUANTITY)	2694
STRENGTH OF ACTUATING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT ____	3450
AS FOLLOWS:	3452
NO EVIDENCE OF DAMAGE.	3454
REMAIN WITHIN SPECIFIED TOLERANCES.	3456

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2682	STRAY LIGHTS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2684	EMITTED STRAY LIGHT SHALL BE NOT GREATER THAN 2684 FOOTLAMBERT(S).
2686	EMITTED STRAY LIGHT SHALL BE NOT GREATER THAN 2686 CANDELAS PER SQUARE METER.
2688	ALL LAMP FILAMENTS SHALL BE SHIELDED FROM THE DIRECT VIEW.
2690	STRAY LIGHTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2690.
2692	STRAY LIGHTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-22885.
2694	THERE SHALL BE NOT LESS THAN 2694 READINGS.
3450	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3450.
3452	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3454	THERE SHALL BE NO EVIDENCE OF DAMAGE.
3456	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF ACTUATING MEANS (CONT)	
AS FOLLOWS: (CONT)	
NO ELECTRICAL DISCONTINUITY.	3458
MAXIMUM LENS ROTATION AFTER INSTALLATION (DEGREES)	3460
MINIMUM LENS ROTATION AFTER INSTALLATION (DEGREES)	3462
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3470
PER DOCUMENT (DOC DES)	3472
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	3474
(NEWTON METERS)	3476
TORQUE DURATION (SELECT ONE)	
(SECONDS)	3478
(MINUTES)	3480
TEST LOAD (SELECT ONE)	
(POUNDS)	3482
(KILOGRAMS)	3484

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3458	THERE SHALL BE NO ELECTRICAL DISCONTINUITY.
3460	LENS ROTATION AFTER INSTALLATION SHALL BE NOT GREATER THAN 3460 DEGREE(S).
3462	LENS ROTATION AFTER INSTALLATION SHALL BE NOT LESS THAN 3462 DEGREE(S).
3470	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3470.
3472	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3472.
3474	THE TEST TORQUE SHALL BE 3474 POUND-INCH(S).
3476	THE TEST TORQUE SHALL BE 3476 NEWTON METER(S).
3478	THE TORQUE DURATION SHALL BE 3478 SECOND(S).
3480	THE TORQUE DURATION SHALL BE 3480 MINUTE(S).
3482	THE TEST LOAD SHALL BE 3482 POUND(S).
3484	THE TEST LOAD SHALL BE 3484 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF ACTUATING MEANS (CONT)	
PER DOCUMENT (CONT)	
LOAD DURATION (SELECT ONE)	
(SECONDS)	3486
(MINUTES)	3488
STRENGTH OF MOUNTING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2426
AS FOLLOWS:	2428
NO EVIDENCE OF DAMAGE.	2430
NO LOOSENING AND TWISTING OF BUSHING RELATIVE TO SWITCH FRONT PLATE ASSEMBLY.	2432
DAMAGE TO NONTURN DEVICE NOT CONSIDERED A FAILURE.	2434
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2436
PER DOCUMENT (DOC DES)	2438
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2440

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3486	THE LOAD DURATION SHALL BE 3486 SECOND(S).
3488	THE LOAD DURATION SHALL BE 3488 MINUTE(S).
2426	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2428	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2430	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2432	THERE SHALL BE NO LOOSENING AND TWISTING OF THE BUSHING RELATIVE TO THE SWITCH FRONT PLATE ASSEMBLY.
2434	DAMAGE TO THE NONTURN DEVICE SHALL NOT BE CONSIDERED A FAILURE.
2436	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2436.
2438	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2438.
2440	THE TEST TORQUE SHALL BE 2440 POUND-INCH(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF MOUNTING MEANS (CONT)	
TEST TORQUE (CONT)	
(NEWTON METERS)	2442
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER DOCUMENT (DOC DES)	3700
PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2442	THE TEST TORQUE SHALL BE 2442 NEWTON METER(S).
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
3700	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3700.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER DOCUMENT (DOC DES)	3702
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2444

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
3702	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3702.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
2444	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2444.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
REQUIREMENTS (CONT)	
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2446
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2450
PER DOCUMENT (DOC DES)	2452
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED CURRENT)	2454
(AMPERES)	2456
TEST CURRENT APPLICATION DURATION (SELECT ONE)	
(MINUTES)	2458
(HOURS)	2460
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2462
(VOLTS, AC)	2464
NUMBER OF READINGS (QUANTITY)	2466
READING INTERVAL (MINUTES)	2468

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2446	TEMPERATURE RISE. THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2446 DEGREES CELSIUS.
2450	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.
2452	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2452.
2454	THE TEST CURRENT SHALL BE 2454 PERCENT OF THE RATED CURRENT.
2456	THE TEST CURRENT SHALL BE 2456 AMPERE(S).
2458	THE TEST CURRENT APPLICATION DURATION SHALL BE 2458 MINUTE(S).
2460	THE TEST CURRENT APPLICATION DURATION SHALL BE 2460 HOUR(S).
2462	THE TEST VOLTAGE SHALL BE 2462 VOLT(S), DC.
2464	THE TEST VOLTAGE SHALL BE 2464 VOLT(S), AC.
2466	THERE SHALL BE 2466 READINGS.
2468	THE READING INTERVAL SHALL BE 2468 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1418	TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
NUMBER OF TERMINALS TESTED (QUANTITY)	3490
THERMAL EMF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT ____	2474
MAXIMUM THERMAL EMF (MICROVOLTS PER DEGREE CELSIUS)	2475
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2478
PER DOCUMENT (DOC DES)	2480
TEST TEMPERATURE (DEGREES CELSIUS)	2482

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METERS.
3490	THERE SHALL BE 3490 TERMINAL(S) TESTED.
2474	THERMAL EMF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2474.
2475	THERMAL EMF. THE THERMAL EMF SHALL BE NOT GREATER THAN 2475 MICROVOLTS PER DEGREE CELSIUS.
2478	THERMAL EMF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2478.
2480	THERMAL EMF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2480.
2482	THE TEST TEMPERATURE SHALL BE 2482 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
NO ELECTRICAL DAMAGE.	2492
NO LOOSENING OF FASTENING DEVICES.	3496
NO DISCOLORATION OR DEFORMATION OF LENS.	3498
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
TEST TEMPERATURE (DEGREES CELSIUS)	3492
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2492	THERE SHALL BE NO ELECTRICAL DAMAGE.
3496	THERE SHALL BE NO LOOSENING OF FASTENING DEVICES.
3498	THERE SHALL BE NO DISCOLORATION OR DEFORMATION OF THE LENS.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
3492	THE TEST TEMPERATURE SHALL BE 3492 DEGREES CELSIUS.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1473
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2493
(MILLISECONDS)	2494
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
NO CHANGE IN SHAFT POSITION.	2497
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1473 THERE SHALL BE NO DISCONTINUITY DURING TEST.

2493 DISCONTINUITY SHALL BE NOT GREATER THAN 2493 MICROSECOND(S).

2494 DISCONTINUITY SHALL BE NOT GREATER THAN 2494 MILLISECOND(S).

1552 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

1469 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

2497 THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.

1446 VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

1447 VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.

1448 TEST CONDITION LETTER 1448 SHALL APPLY.

6200 THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.

4709 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4708 MOUNTING SHALL BE BY THE NORMAL METHOD.

4707 MOUNTING SHALL BE IN ACCORDANCE WTIH 4707.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2900	DISCONTINUITY SHALL BE NOT GREATER THAN 2900 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
MAXIMUM DISCONTINUITY (CONT)	
MILLISECONDS)	2902
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
NO CHANGE IN SHAFT POSITION.	2904
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 210.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2902	DISCONTINUITY SHALL BE NOT GREATER THAN 2902 MILLISECOND(S).
1553	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2904	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTER LINE OF THE MOST SENSITIVE AXIS.

Source: https://assist.dla.mil - Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME .	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
90 DEGREES FROM THE CENTER LINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491
*TEST CONDITION (LETTER)	1492
PERCENT RATED LOAD APPLIED (PERCENT)	6201
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY	1374
MAXIMUM (MILLISECONDS)	1545

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES DROM THE CENTER LINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1491	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.
1492	TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
DISCONTINUITY DURING TEST (CONT)	
MAXIMUM (MICROSECONDS)	1546
NO LAMP IN TEST CIRCUIT SHALL LIGHT	1457
NO CHANGE IN SHAFT POSITION	2906
TEST METHOD (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECOND(S).
1457	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
2906	THERE SHALL BE NO CHANGE IN THE SHAFT POSITION.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THEVIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
PER MIL-STD-167-1.	2908
TYPE(S) OF VIBRATION REQUIRED (ROMAN NUMERAL)	2910

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
2908	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-167-1.
2910.	TESTING SHALL BE PERFORMED PER TYPE 2910 CLASSIFICATION.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A257)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

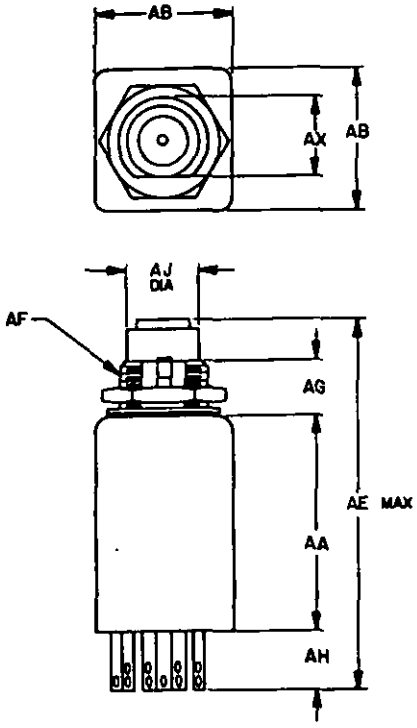


013-01-1

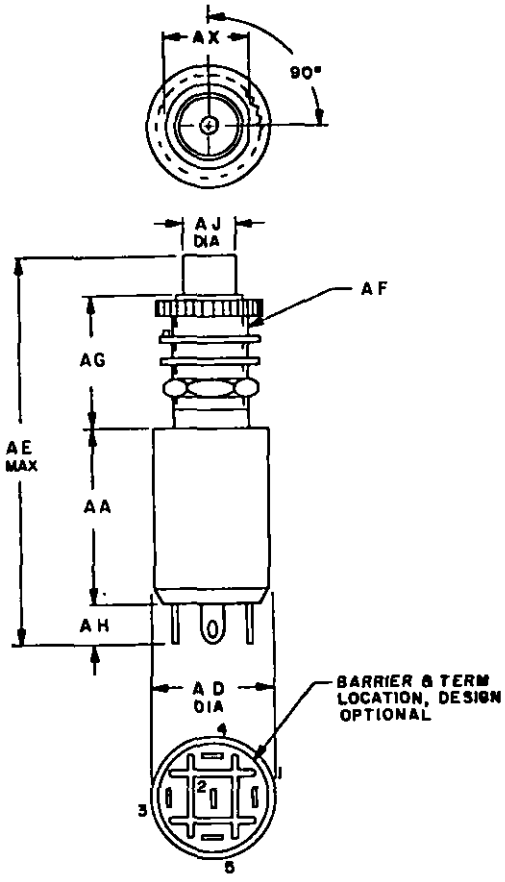


013-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

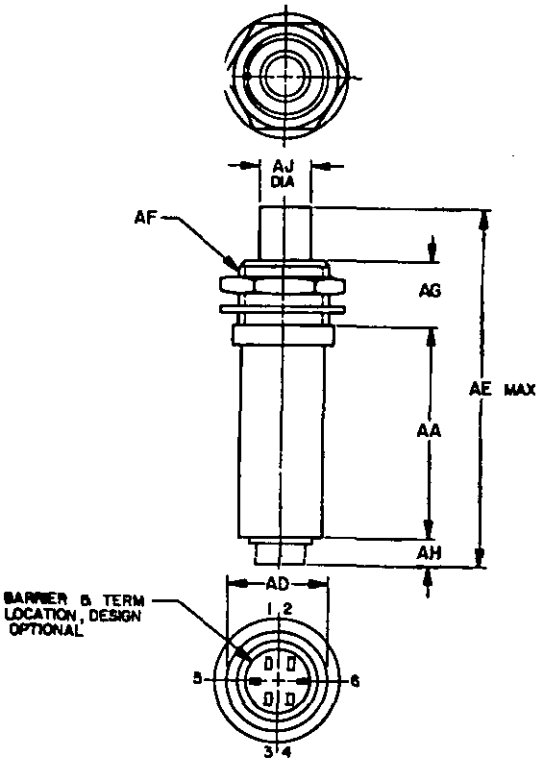


013-01-3

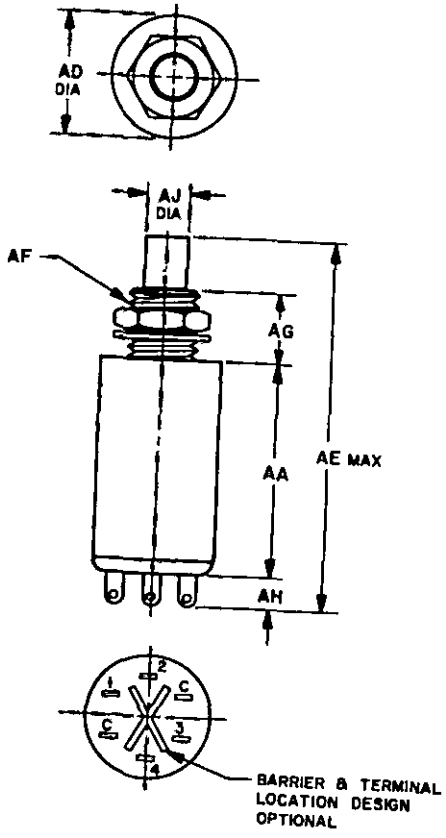


013-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

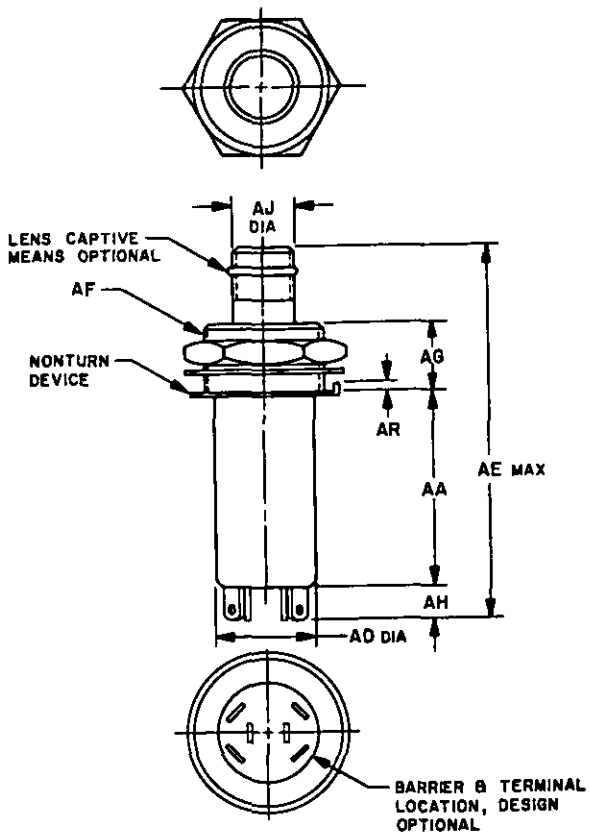


013-01-5

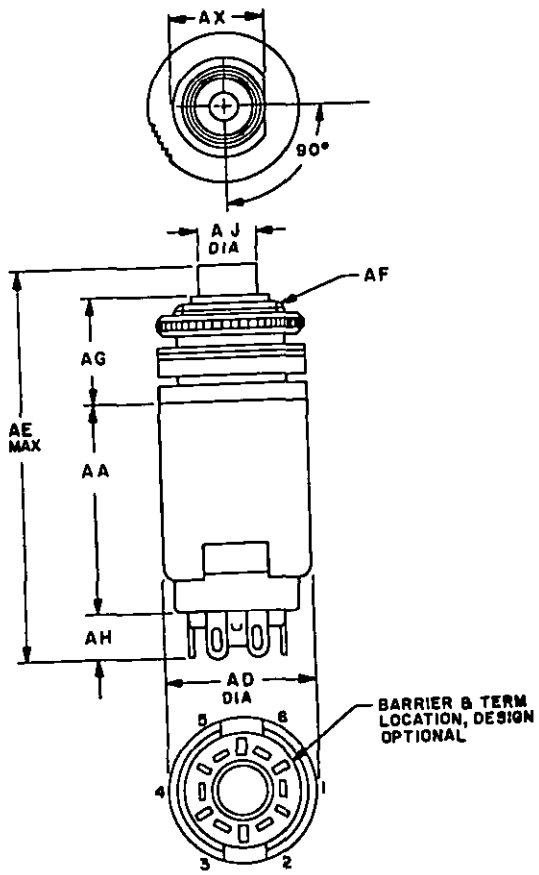


013-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

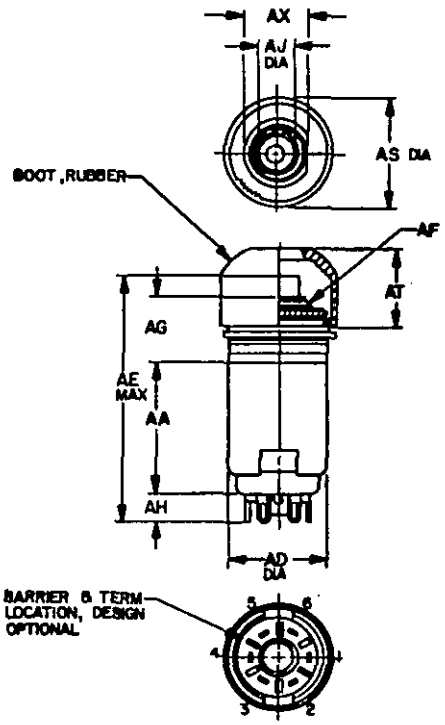


813-81-7

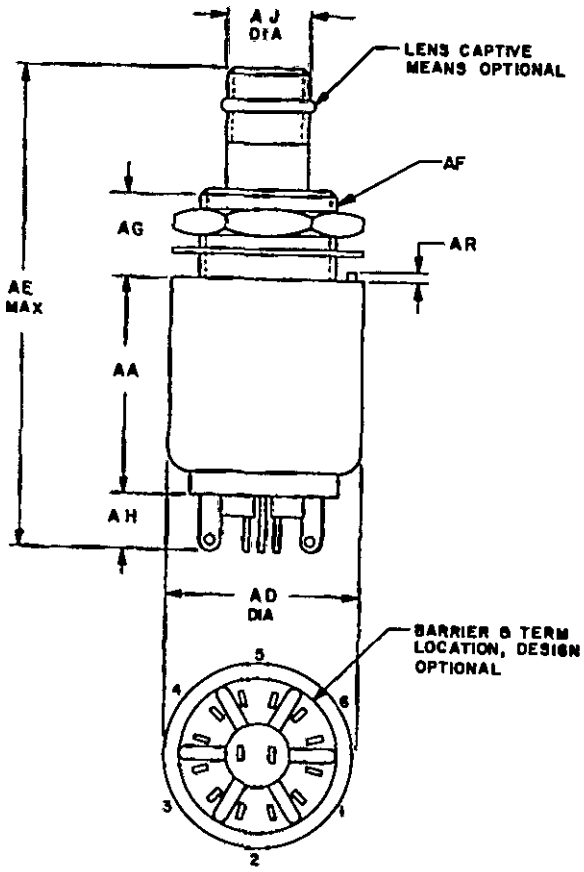


813-81-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

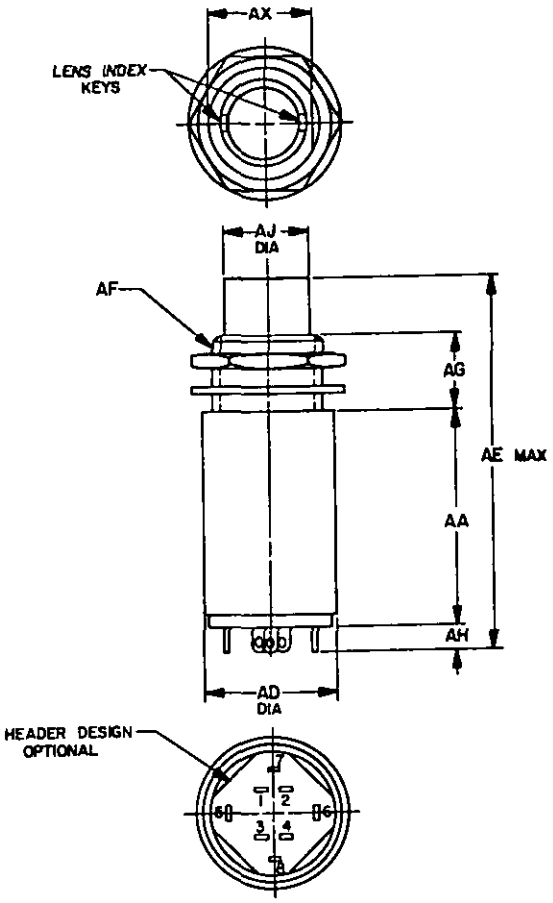


013-01-9

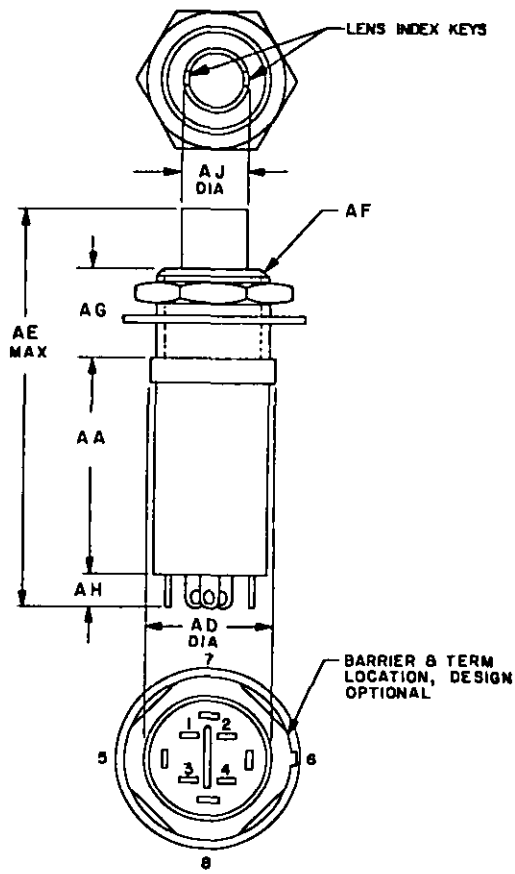


013-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

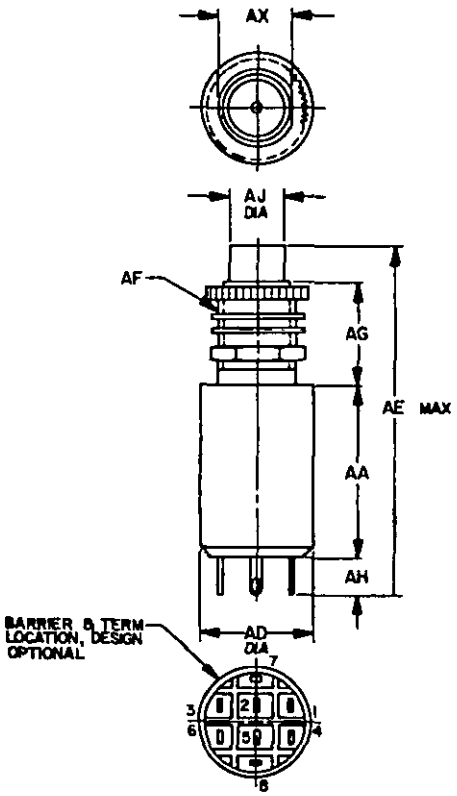


013-01-11

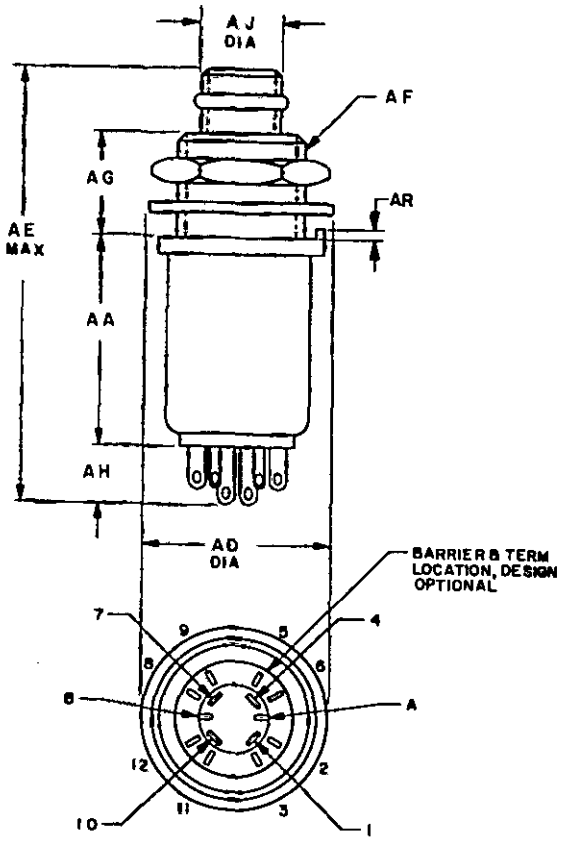


013-01-12

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

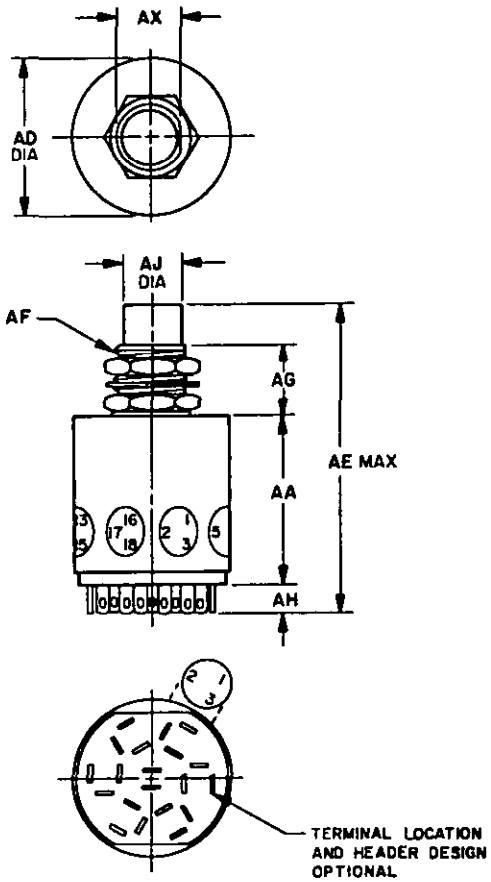


013-01-13

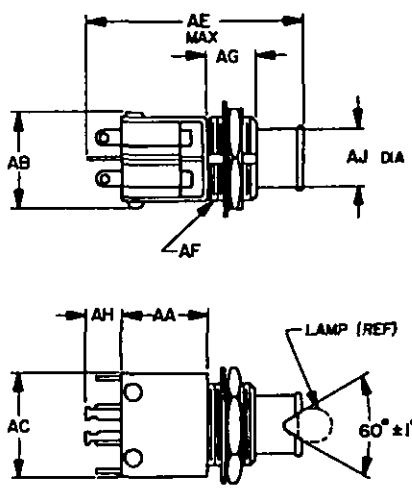


013-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

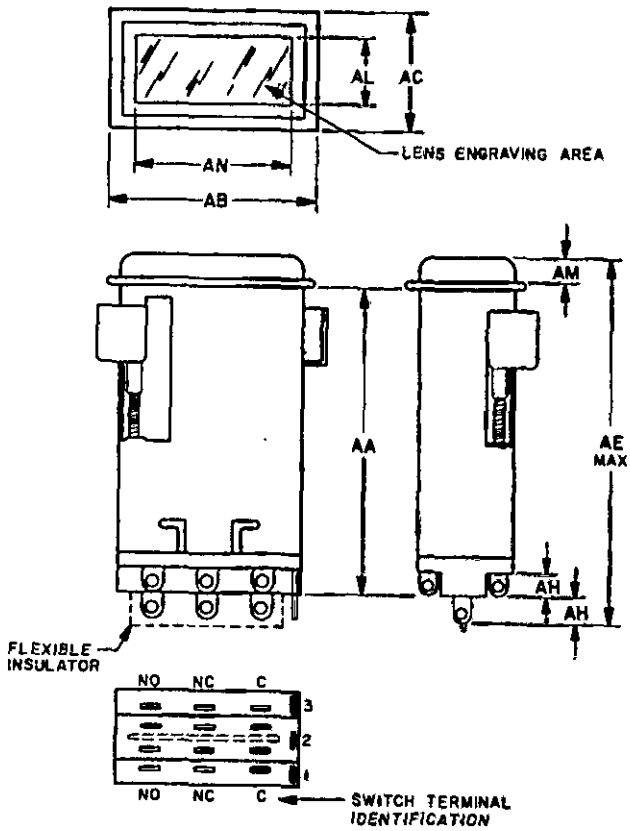


013-01-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

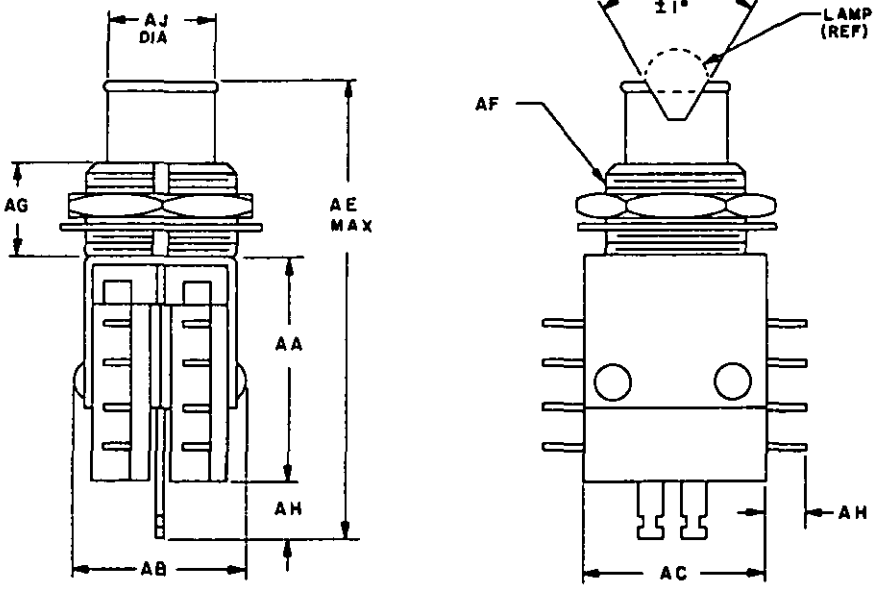


013-01-15

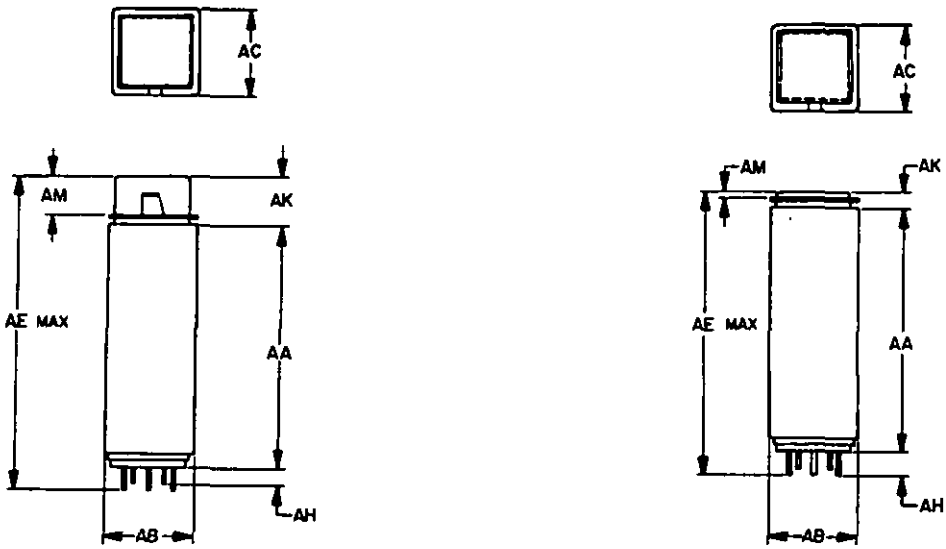


013-01-17

013-01-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

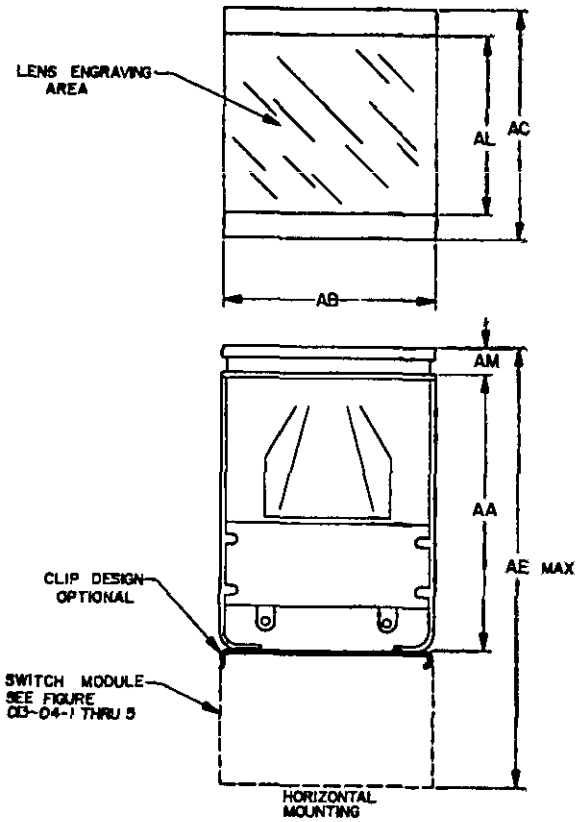


013-02-1

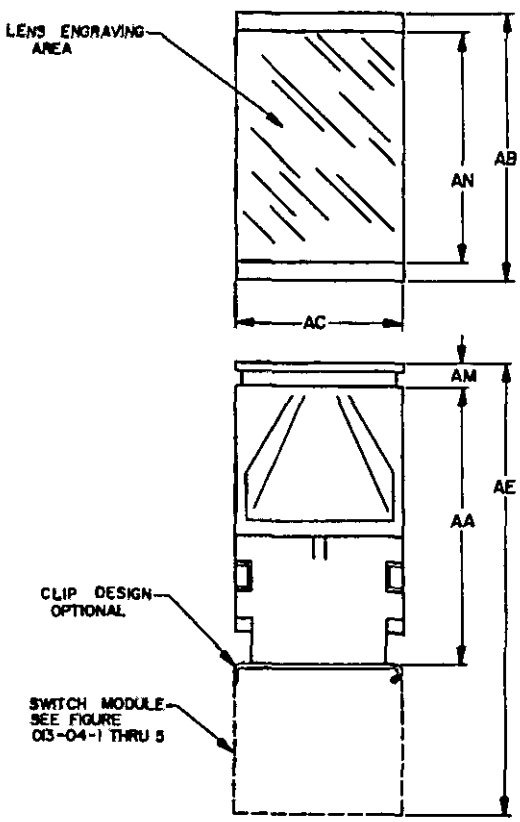


013-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

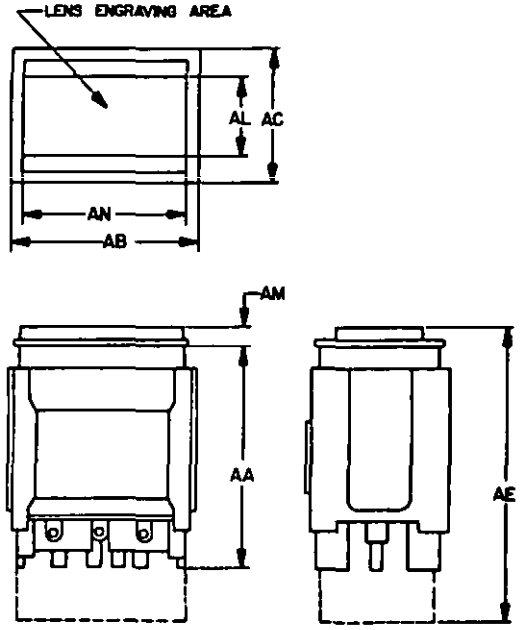


813-02-3

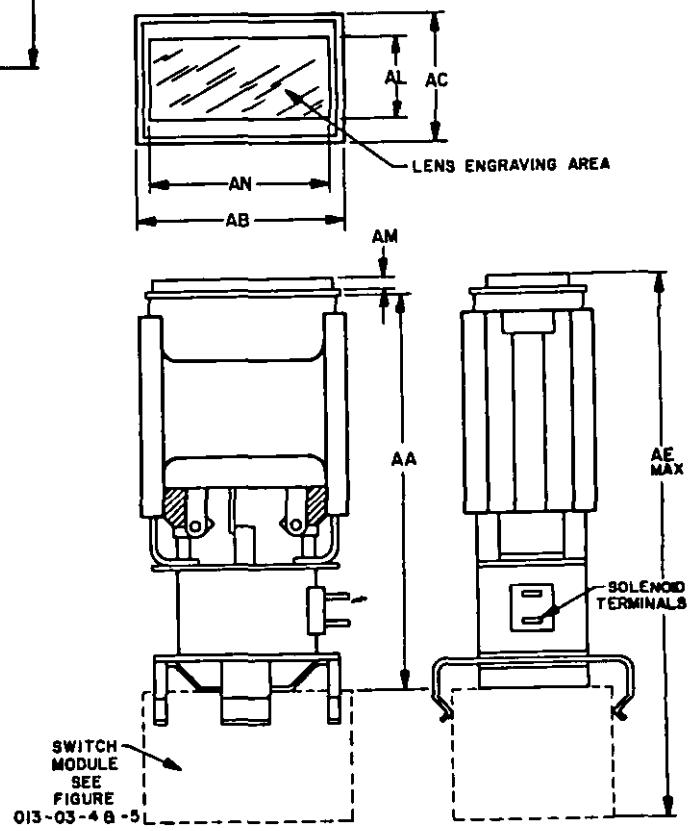


813-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

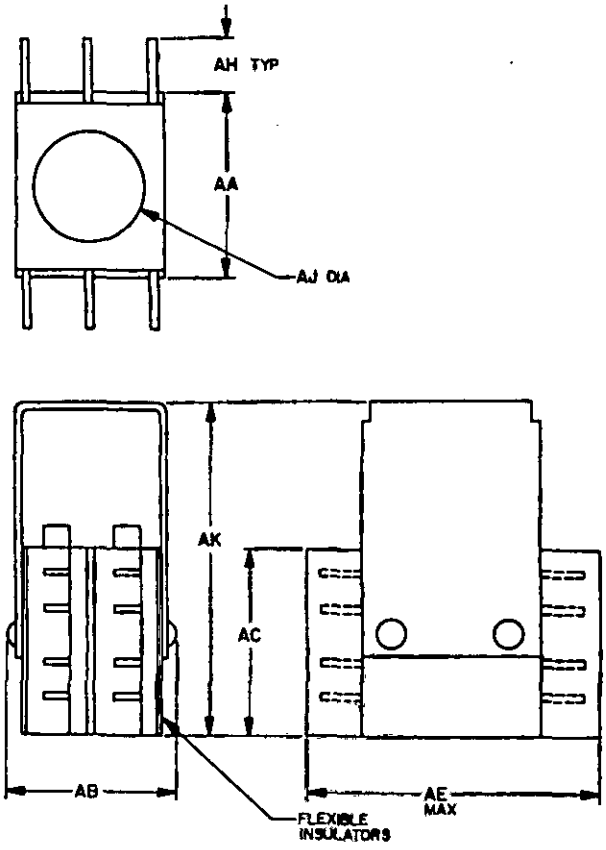


813-84-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

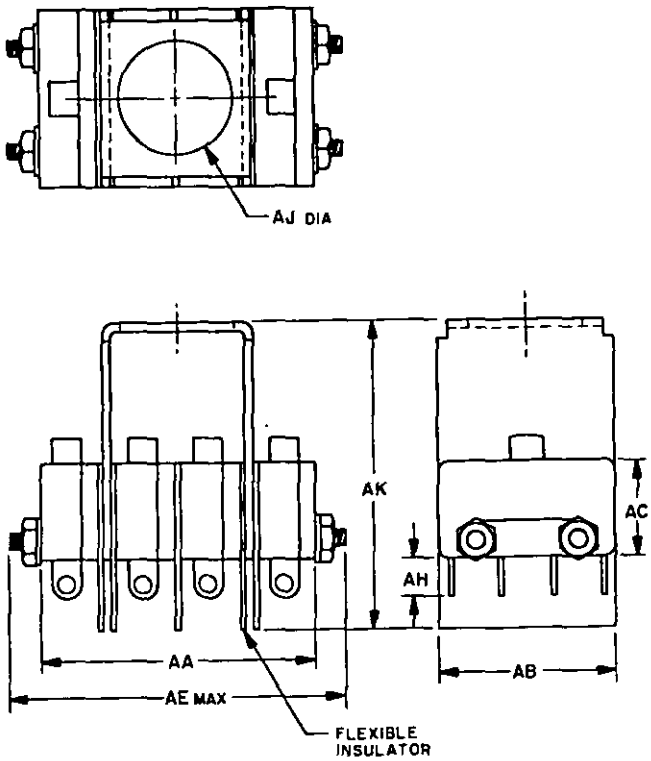


013-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

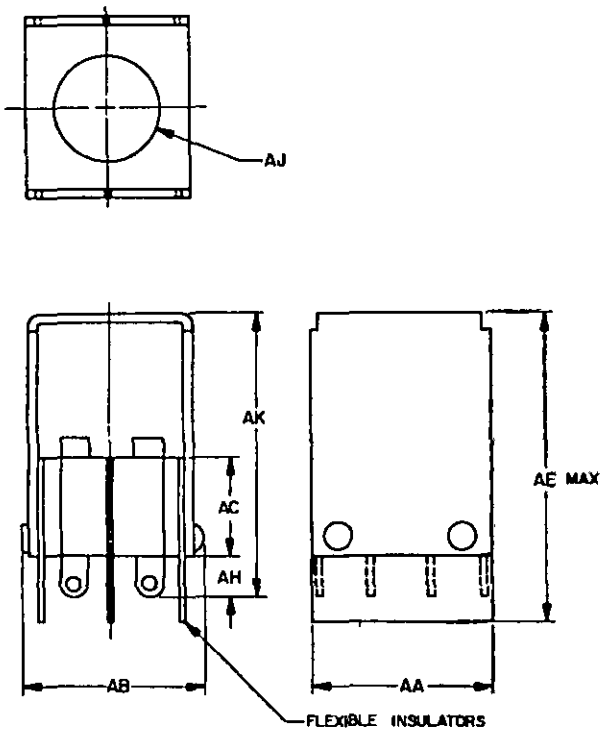


013-04-3

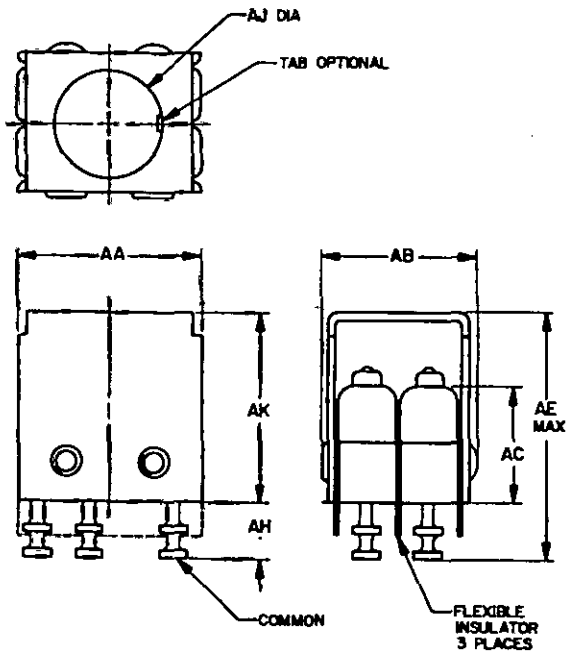


013-04-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

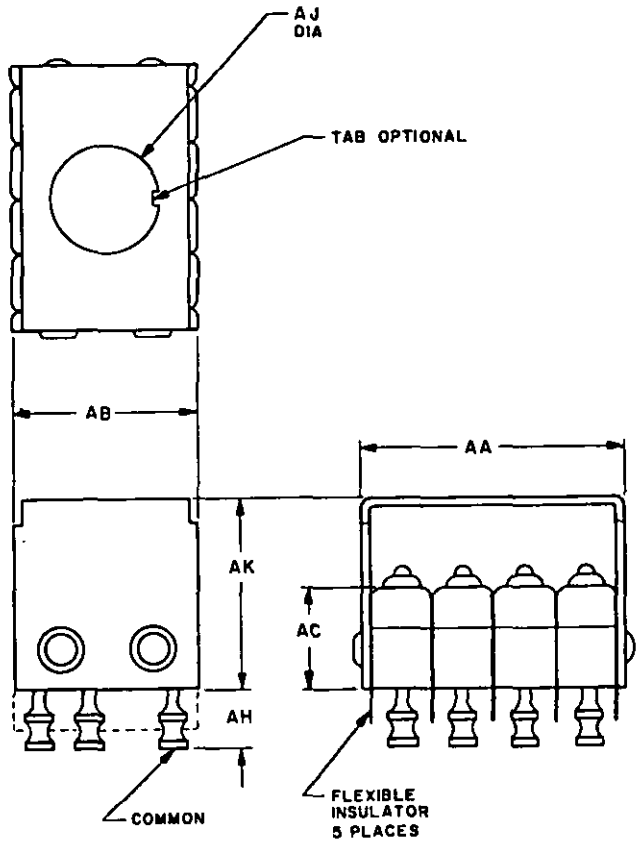


013-04-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

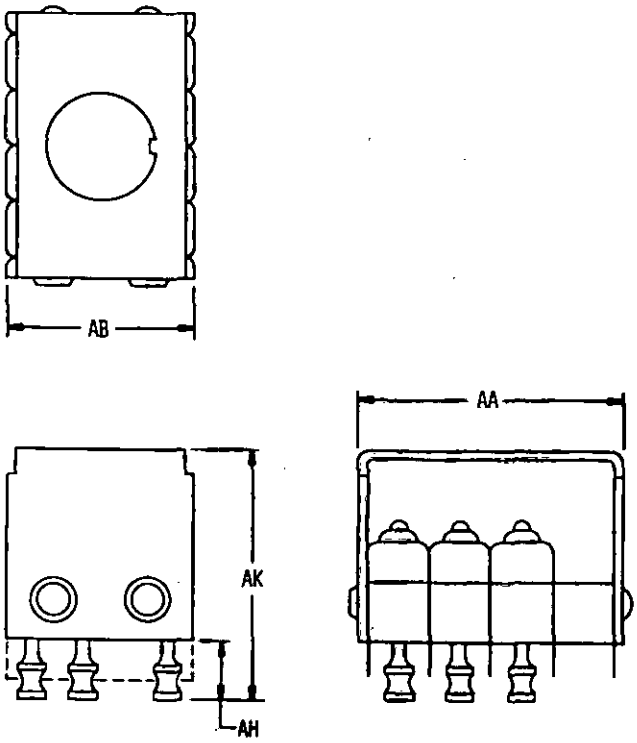


– 013-04-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

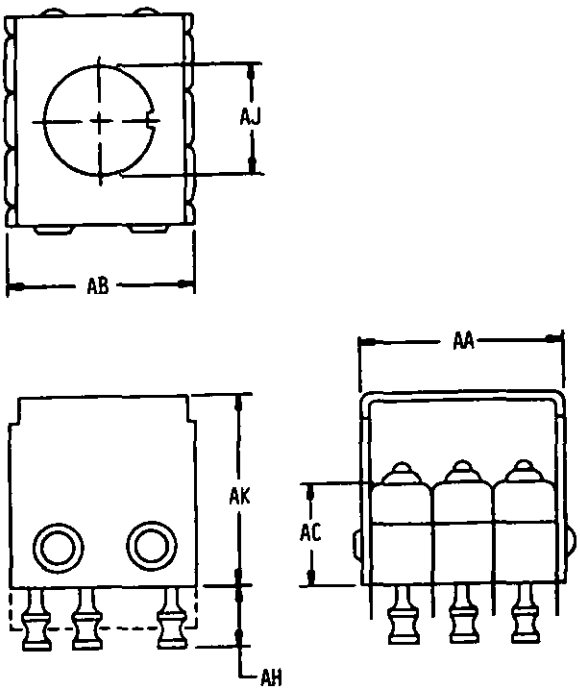


B13-04-7

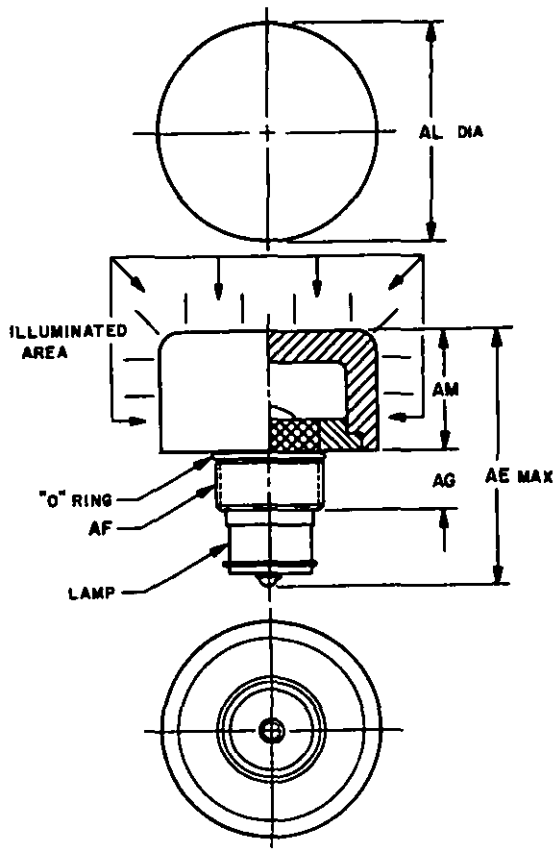


B13-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

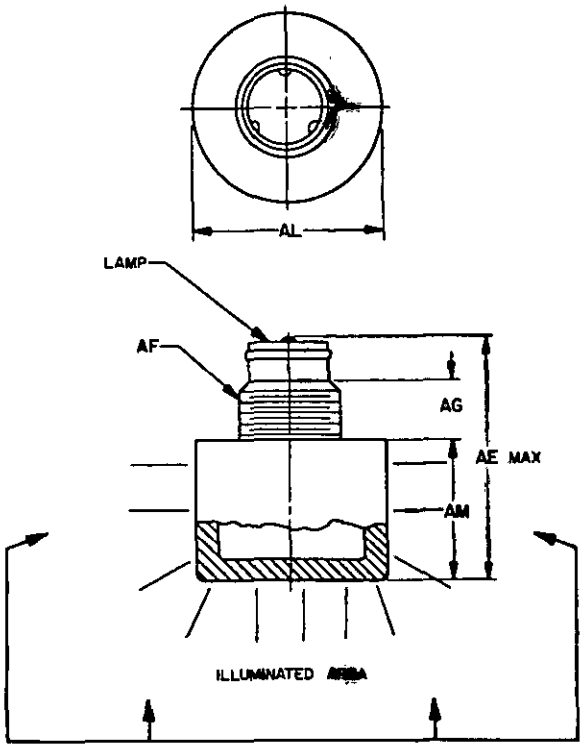


013-05-2

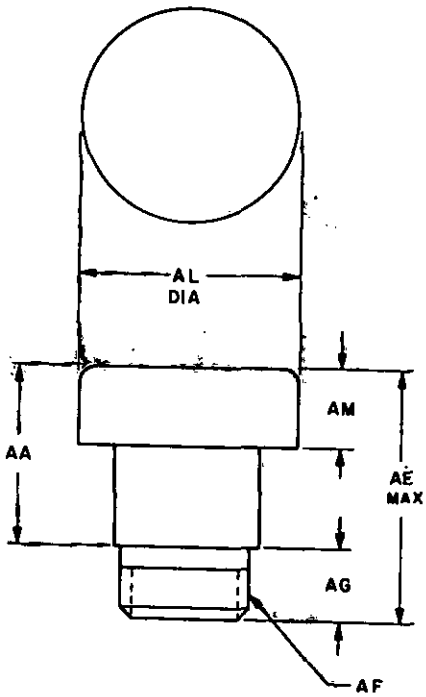


013-05-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

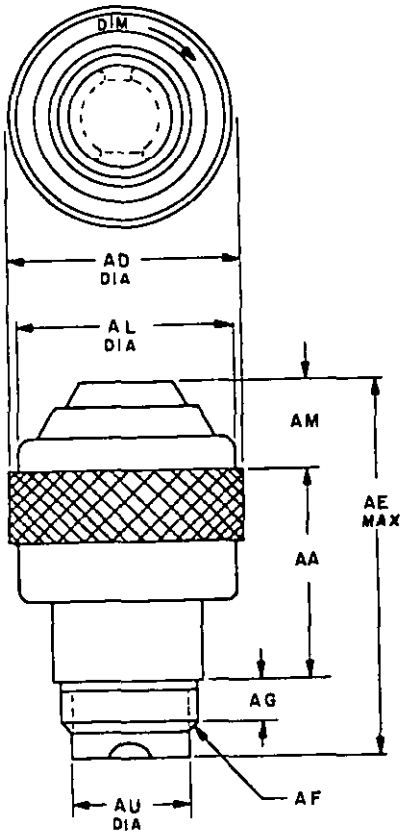


013-05-4

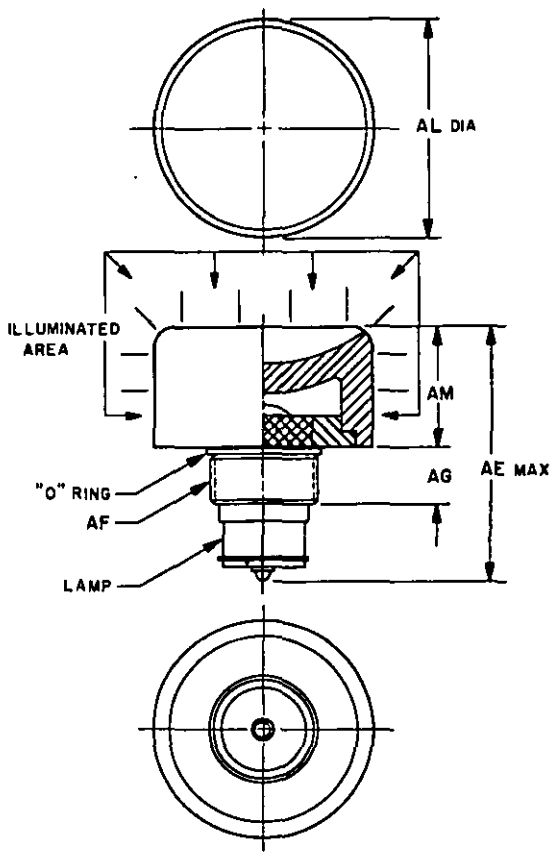


013-05-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

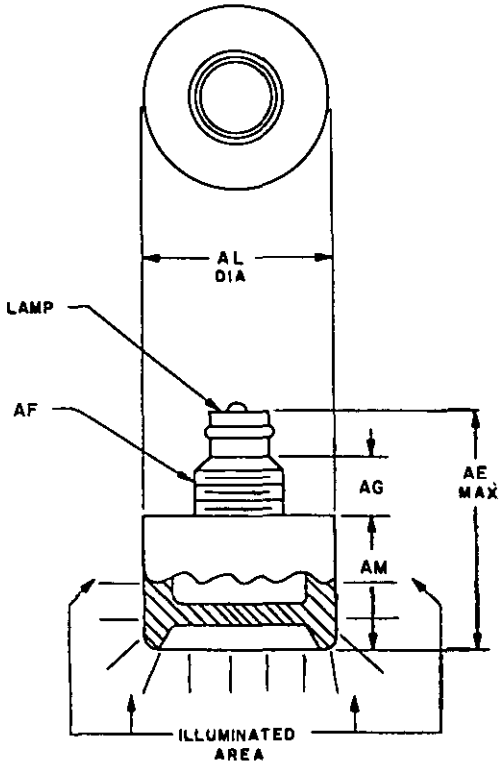


013-05-6

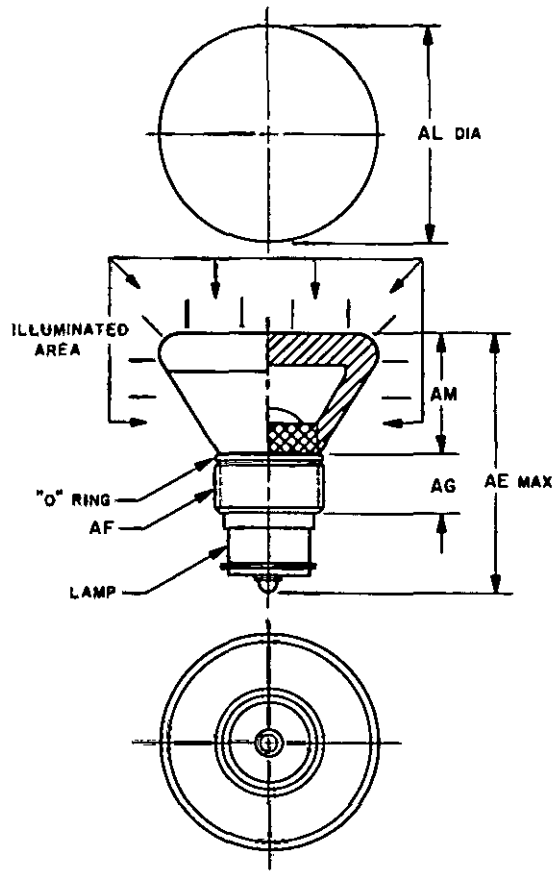


013-05-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

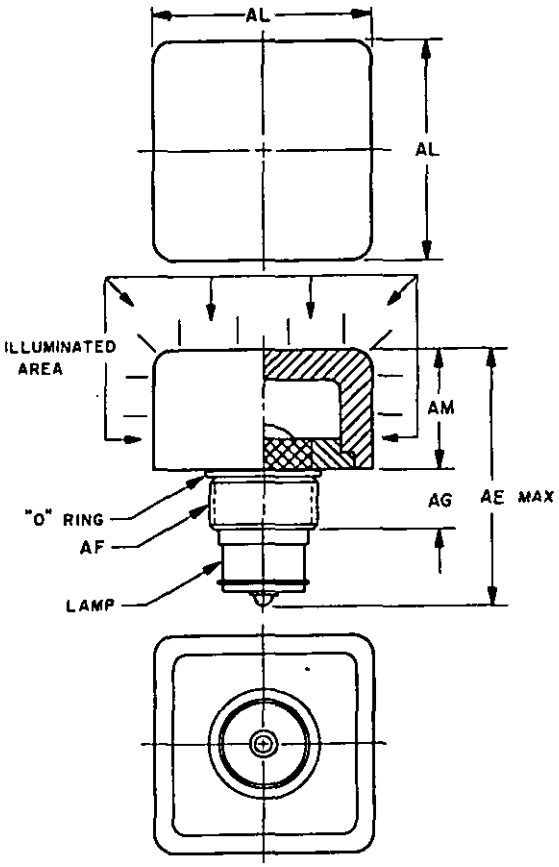


013-05-8

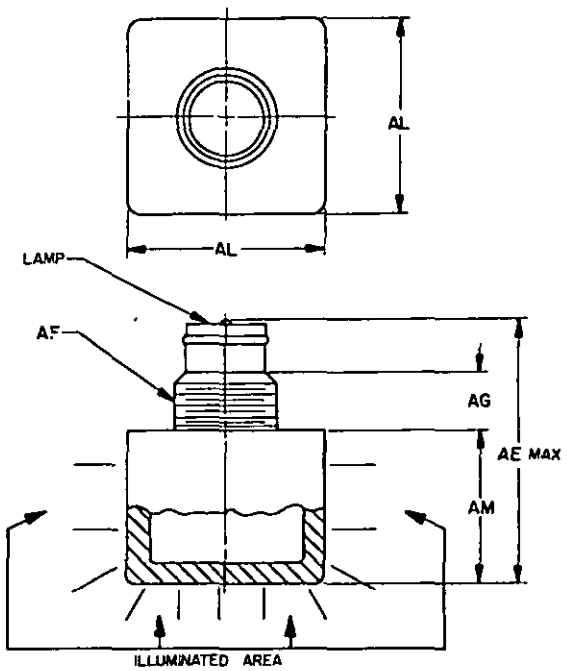


013-05-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

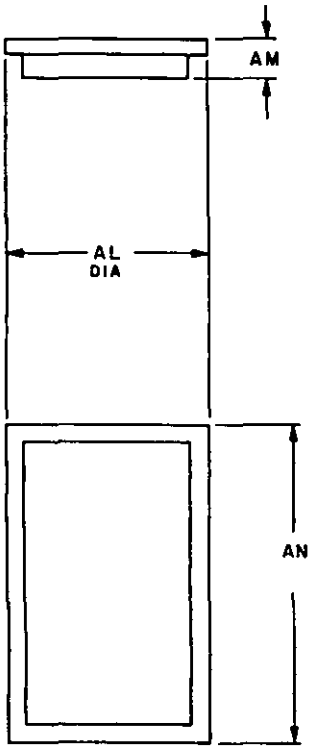

013-06-1

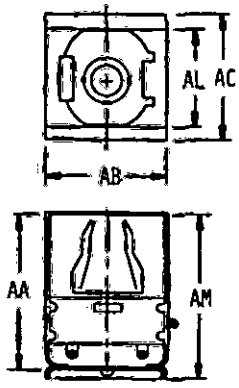


013-05-10

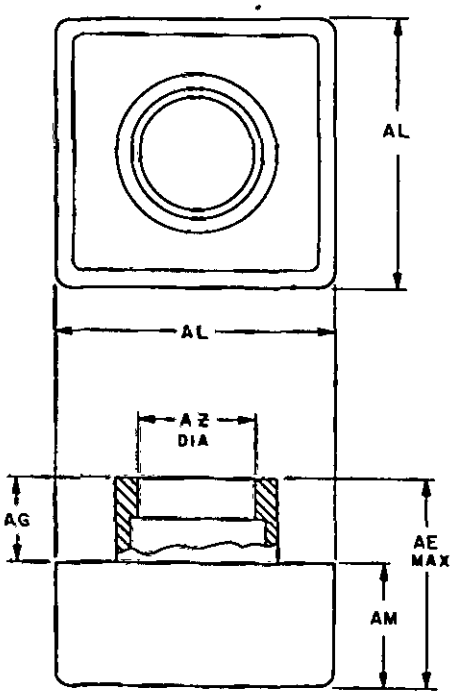


013-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

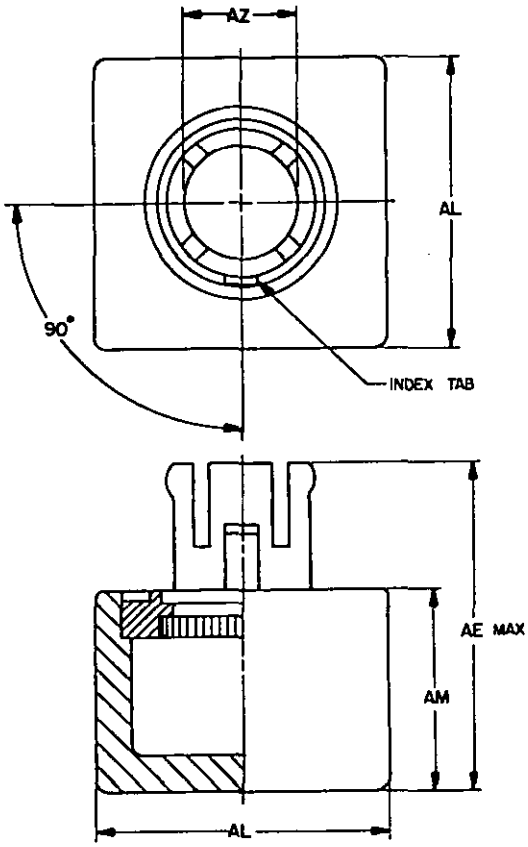


013-07-2

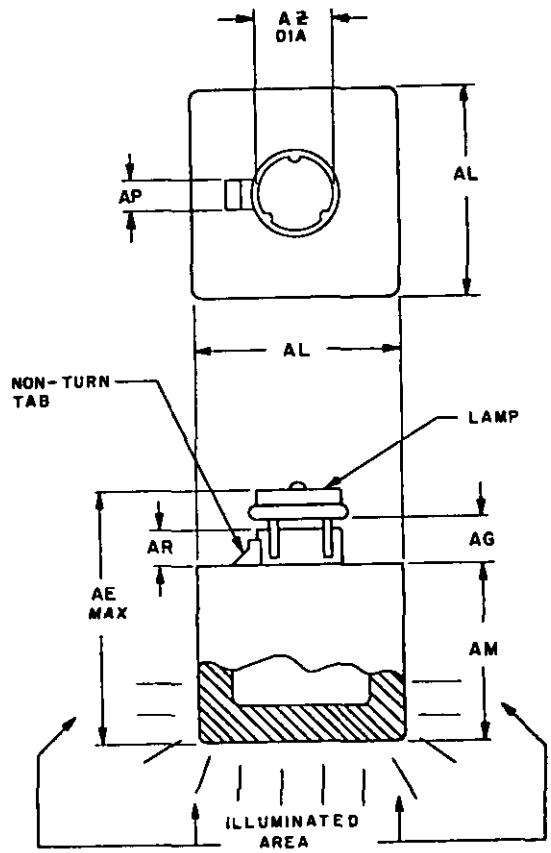


013-07-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

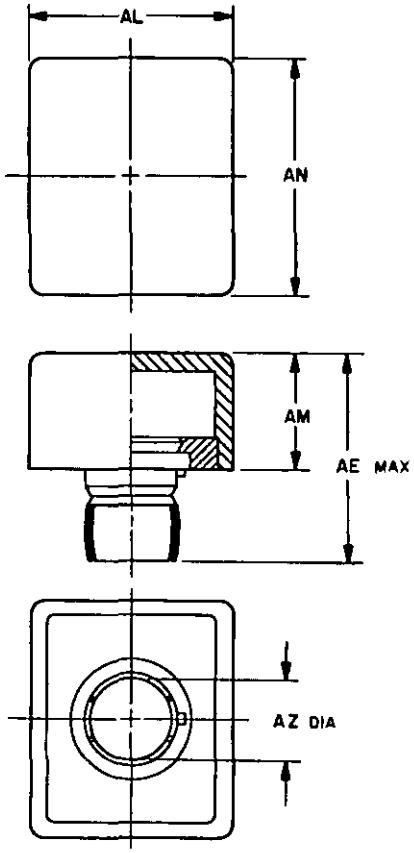


813-07-4

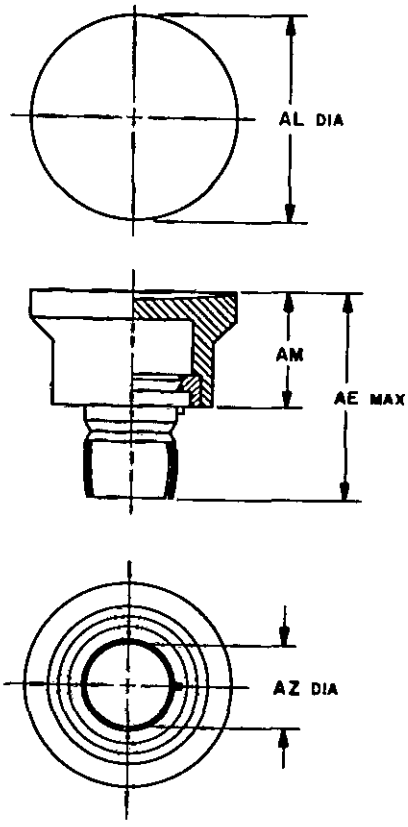



813-07-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

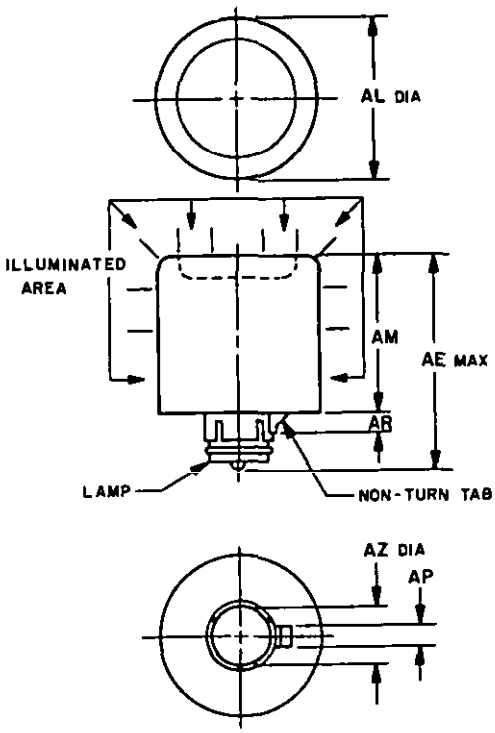


013-07-6

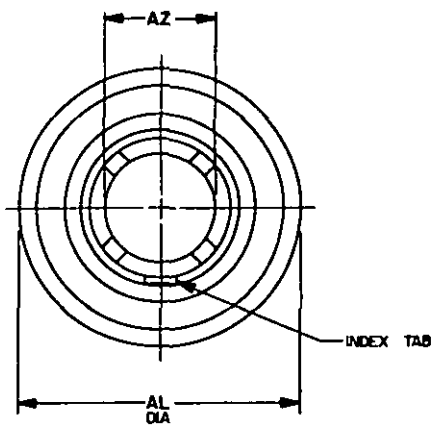


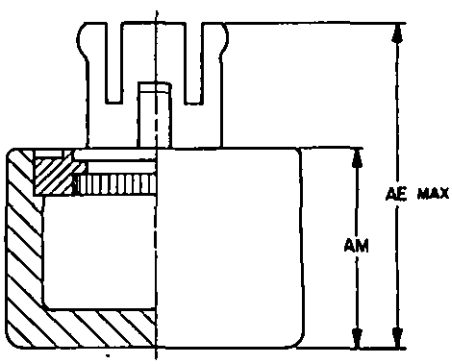


013-07-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

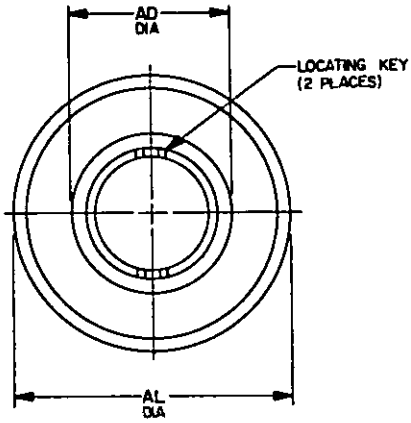


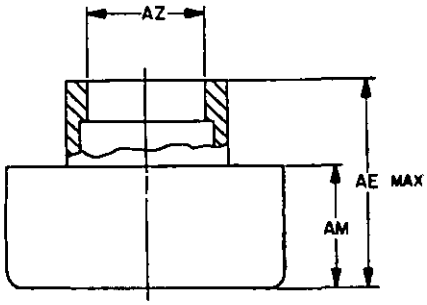

013-07-8

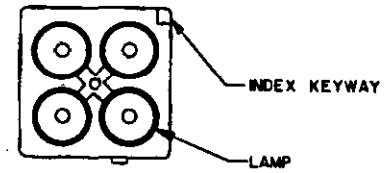







013-08-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

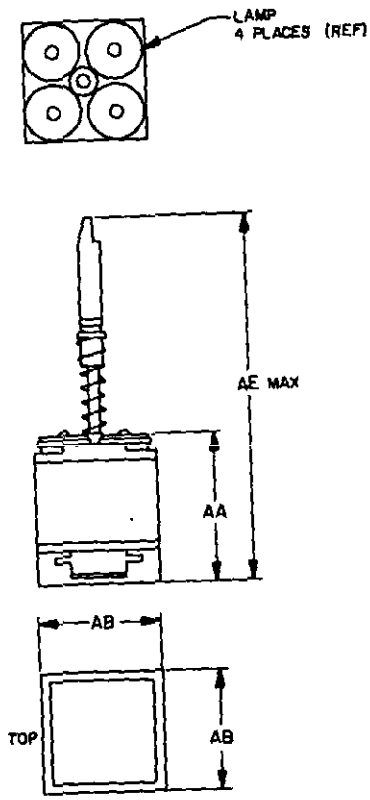


013-08-2

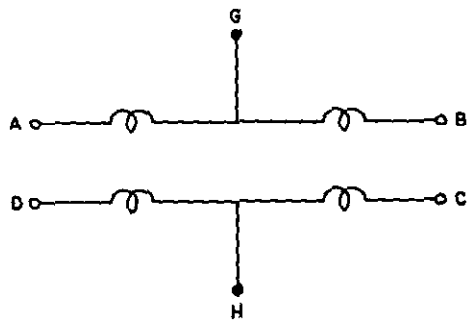


013-09-4

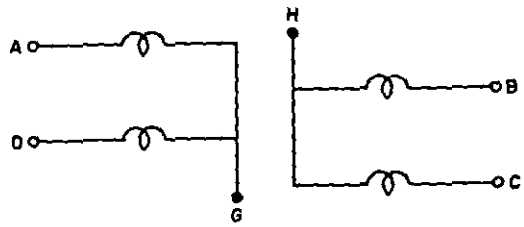

013-09-5

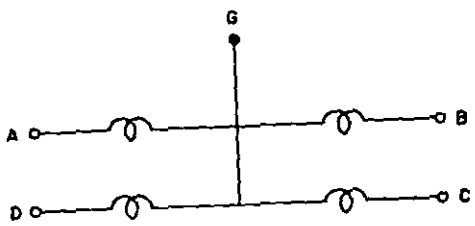


013-09-3

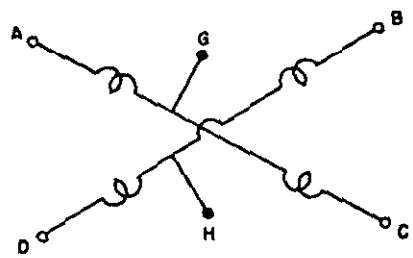

013-09-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

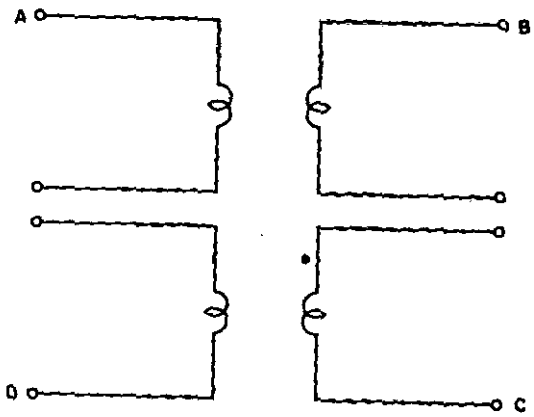


613-09-7


SYMBOL	POSITION	SYMBOL	POSITION
A.	1, 2, 3, 4	B.	1, 2, 3
C.	1, 2	D.	1
E.	1, 2, 3	F.	1, 2
G.	1, 2, 3	H.	1, 2, 3

613-10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

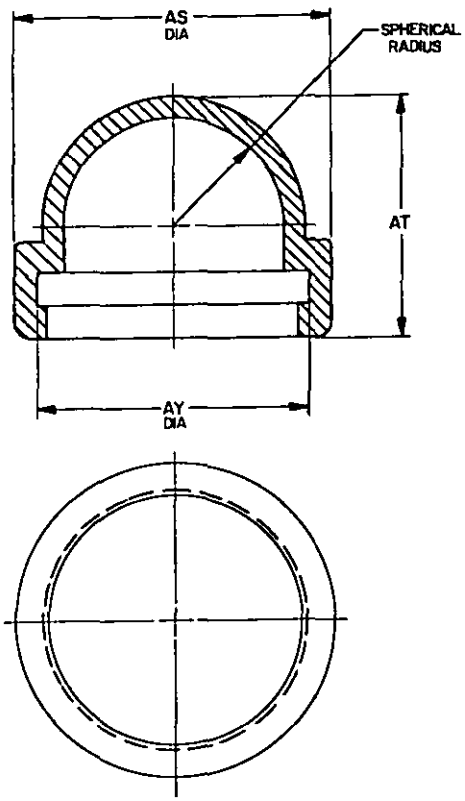


013-11-1

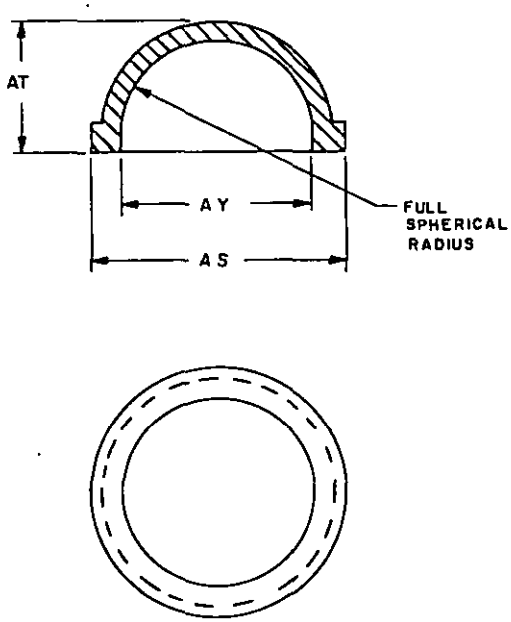


013-11-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

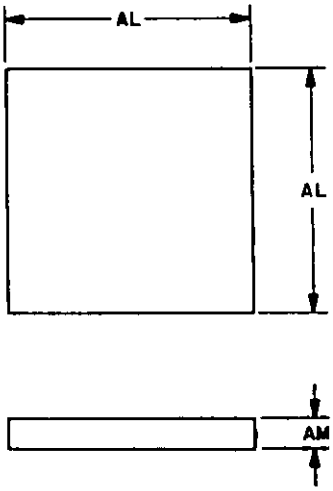


013-11-3

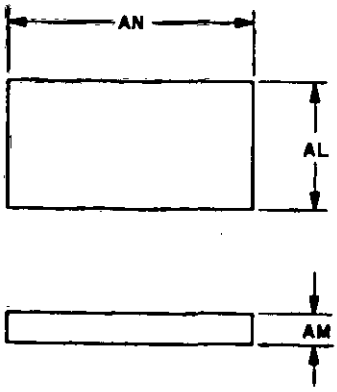

013-11-4

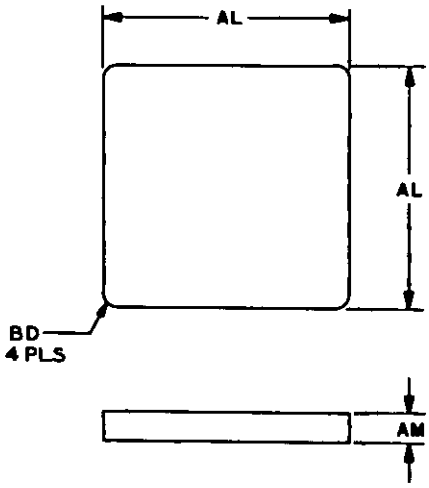


013-11-5

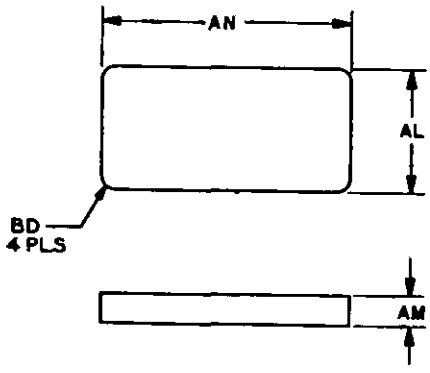


013-11-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

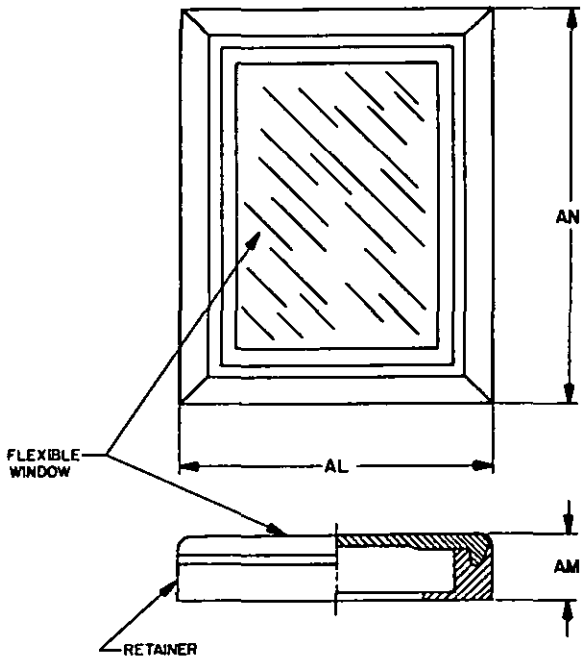


013-12-1

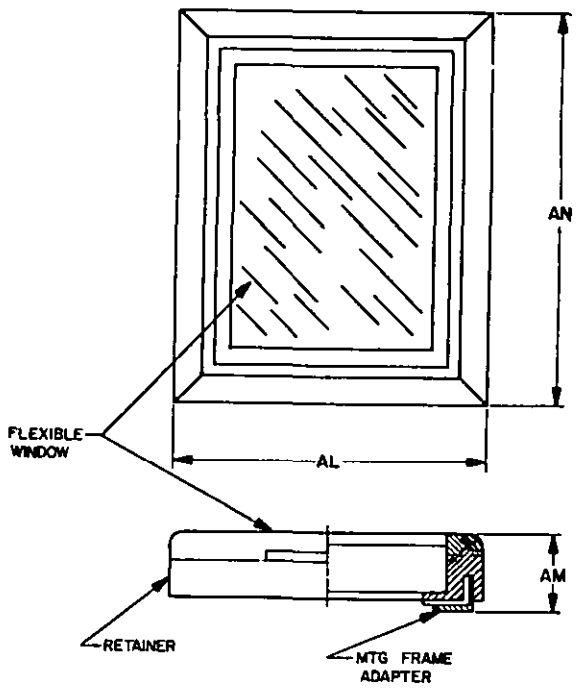


013-12-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

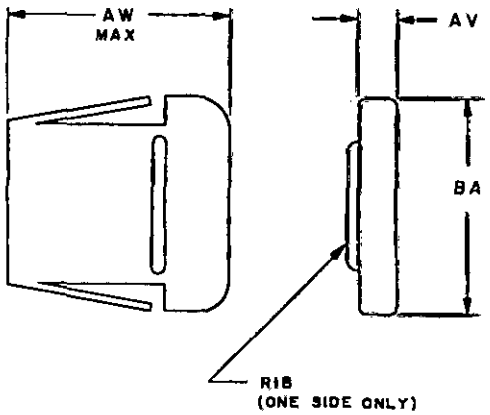

013-13-1

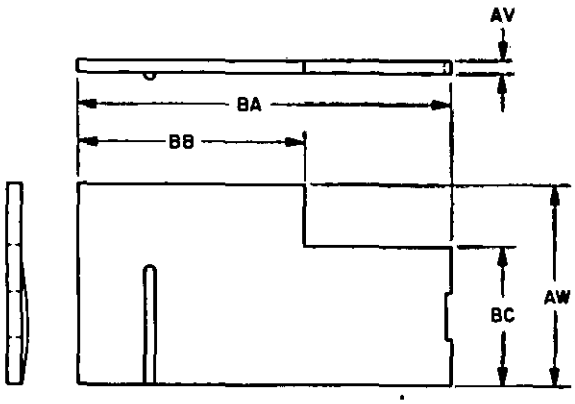

013-14-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




POSITION - NORMALLY OPEN OR NORMALLY CLOSED

013-15-1




POSITION - NORMALLY CLOSED

013-15-2




POSITION - NORMALLY OPEN

013-15-3




POSITION - #1 NORMALLY CLOSED

013-15-4




POSITION - #2 NORMALLY CLOSED

013-15-5




POSITION - NORMALLY OPEN

013-15-6



POSITION - NORMALLY CLOSED


013-15-7



POSITION - #2 & #3 NORMALLY CLOSED


013-15-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




POSITION-1 & 2 NORMALLY CLOSED


013-15-9




013-15-10




013-15-11




013-15-12



013-15-13




013-15-14




013-15-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

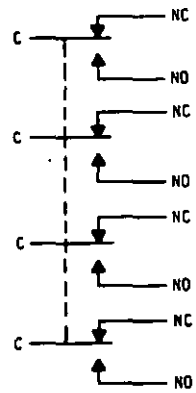

013-15-16

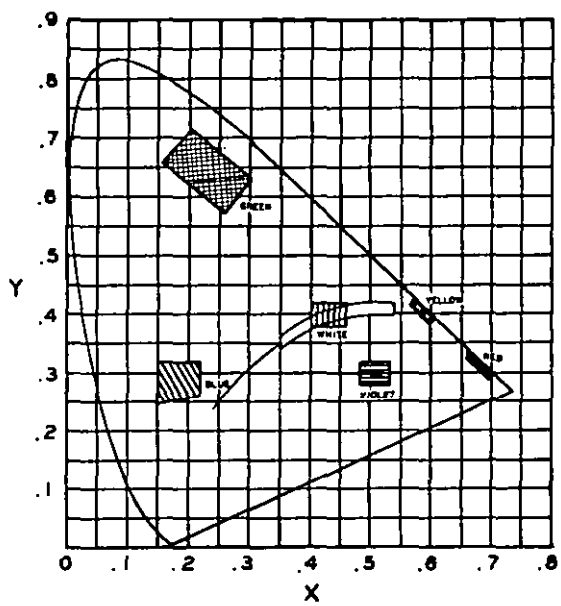

013-16-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1406	130	1467	190	1538	192
0102	16	1407	110	1468	156	1539	146
0103	16	1410	180	1469	186	1545	192
0104	16	1411	180	1470	190	1546	194
0105	16	1412	180	1471	158	1547	54
0107	18	1413	180	1473	186	1548	58
0108	18	1414	182	1475	188	1549	58
0700	16	1416	182	1476	188	1550	154
0800	16	1418	180	1477	196	1551	158
1003	16	1419	180	1478	154	1552	186
1004	16	1420	180	1479	156	1553	190
1005	16	1421	182	1480	188	1557	56
1006	16	1426	194	1482	154	1558	56
1008	16	1427	194	1486	154	1562	36
1009	32	1428	194	1487	156	1563	36
1371	112	1429	130	1488	154	1564	36
1372	114	1430	196	1490	188	1566	36
1373	112	1431	194	1491	192	1568	36
1374	192	1432	130	1492	192	1570	36
1375	180	1433	180	1494	154	1571	42
1376	112	1435	192	1495	154	1572	36
1377	112	1436	192	1497	112	1574	36
1378	112	1438	194	1498	112	1576	36
1380	110	1439	196	1499	160	1578	36
1381	114	1442	188	1500	160	1580	38
1382	196	1444	188	1502	158	1581	38
1383	114	1446	186	1503	160	1582	38
1384	110	1447	186	1504	160	1584	36
1386	110	1448	186	1508	158	1585	36
1387	110	1449	132	1509	158	1586	38
1388	110	1451	154	1511	112	1588	38
1391	132	1452	194	1520	114	1590	38
1394	130	1453	194	1522	112	1592	38
1395	132	1455	184	1523	112	1594	40
1396	130	1456	184	1524	112	1596	40
1397	132	1457	194	1533	188	1598	38
1398	130	1459	194	1534	188	1600	42
1400	130	1462	196	1535	190	1601	44
1402	196	1464	154	1536	190	1602	44
1404	130	1466	190	1537	192	1606	44

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1607	44	1665	60	1764	72	1860	80
1608	40	1666	58	1766	72	1862	82
1609	44	1668	58	1782	68	1864	82
1611	44	1670	60	1784	68	1866	82
1613	46	1672	58	1786	68	1868	84
1614	38	1674	100	1788	68	1870	84
1615	46	1676	100	1790	70	1872	84
1616	38	1678	60	1792	70	1874	84
1617	38	1680	98	1794	70	1876	84
1618	38	1682	60	1796	70	1877	84
1619	46	1683	82	1798	70	1878	84
1620	30	1684	60	1800	76	1879	84
1622	30	1686	82	1802	76	1880	78
1624	30	1688	60	1804	76	1881	80
1625	46	1690	60	1806	76	1882	80
1626	30	1692	60	1808	76	1883	80
1627	46	1694	60	1810	76	1884	80
1628	30	1696	62	1812	76	1885	80
1630	30	1698	62	1814	76	1886	80
1632	30	1700	62	1816	76	1887	80
1634	30	1702	62	1818	76	1888	80
1636	30	1704	76	1820	78	1890	80
1638	30	1706	62	1822	78	1892	80
1640	30	1708	62	1824	78	1900	94
1642	40	1730	66	1826	78	1902	96
1644	40	1732	66	1828	78	1904	96
1646	40	1734	66	1830	78	1905	96
1648	42	1735	66	1832	78	1906	96
1650	42	1736	68	1834	78	1908	96
1651	42	1738	68	1836	78	1910	96
1652	42	1740	68	1840	78	1912	96
1653	42	1742	68	1842	82	1914	96
1654	42	1744	68	1844	82	1916	96
1655	42	1746	68	1846	82	1918	96
1656	42	1750	70	1848	82	1920	96
1657	42	1752	70	1850	82	1922	96
1660	60	1754	70	1852	82	1924	96
1662	58	1756	70	1854	82	1926	98
1663	60	1760	70	1856	80	1928	100
1664	60	1762	72	1858	82	1930	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1932	100	2039	65	2089	65	2139	67
1934	100	2040	65	2091	65	2140	67
1936	100	2041	65	2092	65	2141	67
1938	100	2043	65	2093	65	2142	67
1940	100	2044	65	2094	65	2143	67
1942	100	2045	65	2095	65	2144	67
1944	100	2046	65	2096	65	2145	67
1946	100	2047	65	2097	65	2147	67
1948	102	2048	65	2099	65	2148	67
1950	102	2049	65	2100	65	2149	67
1952	114	2051	65	2101	65	2151	67
1954	114	2052	65	2103	65	2152	67
1956	114	2053	65	2104	65	2153	67
1958	114	2055	65	2105	65	2155	67
1960	114	2056	65	2107	65	2156	67
1961	114	2057	65	2108	65	2157	67
1962	114	2059	65	2109	65	2160	62
1964	116	2060	65	2110	65	2162	62
1965	116	2061	65	2111	65	2164	62
1966	116	2062	65	2112	65	2170	66
1968	116	2063	65	2113	65	2172	66
1970	116	2064	65	2115	65	2174	66
1972	116	2065	65	2116	65	2176	66
1974	116	2067	65	2117	65	2180	120
1976	116	2068	65	2119	65	2182	120
1978	116	2069	65	2120	65	2184	120
1980	116	2072	65	2121	65	2186	120
1982	116	2073	65	2123	65	2188	120
1984	118	2075	65	2124	65	2190	120
1986	118	2076	65	2125	65	2192	120
1988	118	2077	65	2126	65	2194	120
1990	118	2078	65	2127	65	2200	122
1992	118	2079	65	2128	65	2202	122
2030	65	2080	65	2129	65	2204	122
2031	65	2081	65	2131	67	2206	122
2032	65	2083	65	2132	67	2208	122
2033	65	2084	65	2133	67	2210	122
2035	65	2085	65	2135	67	2212	122
2036	65	2087	65	2136	67	2214	122
2037	65	2088	65	2137	67	2216	122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2218	122	2310	138	2396	162	2482	182
2220	122	2312	138	2397	162	2492	184
2222	122	2314	138	2400	164	2493	186
2224	124	2316	140	2402	164	2494	186
2226	124	2318	140	2404	164	2497	186
2230	124	2320	132	2406	166	2501	29
2232	124	2322	134	2408	166	2502	29
2234	124	2324	134	2410	166	2503	29
2236	124	2326	134	2412	166	2504	29
2238	124	2328	134	2414	166	2505	29
2240	124	2332	134	2416	166	2506	29
2242	124	2334	134	2418	166	2507	29
2244	124	2336	134	2420	166	2508	29
2250	126	2340	134	2422	166	2509	29
2252	126	2342	134	2424	166	2510	29
2254	126	2344	134	2426	172	2511	29
2256	126	2346	134	2428	172	2512	29
2258	126	2348	136	2430	172	2513	29
2260	126	2350	136	2432	172	2514	29
2262	126	2352	136	2434	172	2515	29
2264	126	2358	146	2436	172	2516	29
2266	126	2360	148	2438	172	2517	29
2268	126	2362	152	2440	172	2518	29
2270	126	2364	152	2442	174	2519	29
2272	126	2366	152	2444	176	2520	29
2274	126	2368	154	2446	178	2521	29
2280	136	2370	154	2450	178	2522	29
2282	136	2372	154	2452	178	2523	29
2284	136	2374	158	2454	178	2524	29
2286	136	2376	158	2456	178	2525	29
2288	136	2382	158	2458	178	2526	29
2290	136	2384	160	2460	178	2527	29
2292	136	2386	160	2462	178	2528	29
2294	138	2388	160	2464	178	2529	29
2296	138	2390	162	2466	178	2530	29
2300	138	2391	162	2468	178	2531	29
2302	138	2392	162	2474	182	2532	29
2304	138	2393	162	2475	182	2533	29
2306	138	2394	162	2478	182	2534	29
2308	138	2395	162	2480	182	2535	29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2536	29	2576	29	2620	29	2692	168
2537	29	2577	29	2621	29	2701	25
2538	29	2578	29	2622	29	2702	25
2539	29	2579	29	2623	29	2703	25
2540	29	2580	29	2624	29	2704	25
2541	29	2581	29	2626	29	2705	25
2542	29	2582	29	2627	29	2706	25
2543	29	2583	29	2628	29	2707	25
2544	29	2584	29	2629	29	2708	25
2545	29	2585	29	2630	29	2709	25
2546	29	2586	29	2631	29	2710	25
2547	29	2587	29	2633	29	2711	25
2548	29	2588	29	2634	29	2712	25
2549	29	2589	29	2635	29	2713	25
2550	29	2590	29	2636	29	2714	25
2551	29	2591	29	2637	29	2715	25
2552	29	2592	29	2638	29	2716	25
2553	29	2593	29	2640	29	2717	25
2554	29	2594	29	2641	29	2718	25
2555	29	2595	29	2642	29	2719	25
2556	29	2596	29	2643	29	2720	25
2557	29	2601	29	2644	29	2721	25
2558	29	2602	29	2645	29	2722	25
2559	29	2603	29	2647	29	2723	25
2560	29	2604	29	2648	29	2724	25
2561	29	2605	29	2649	29	2725	25
2562	29	2606	29	2650	29	2726	25
2563	29	2607	29	2651	29	2727	25
2564	29	2608	29	2652	29	2728	25
2565	29	2609	29	2653	29	2729	25
2566	29	2610	29	2654	29	2730	25
2567	29	2611	29	2655	29	2731	25
2568	29	2612	29	2656	29	2732	25
2569	29	2613	29	2657	29	2733	25
2570	29	2614	29	2680	166	2734	25
2571	29	2615	29	2682	168	2735	25
2572	29	2616	29	2684	168	2736	25
2573	29	2617	29	2686	168	2737	25
2574	29	2618	29	2688	168	2738	25
2575	29	2619	29	2690	168	2739	25

Source: https://assistdla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2740	25	2780	25	2824	27	2950	102
2741	25	2781	25	2826	27	2952	102
2742	25	2782	25	2827	27	2954	102
2743	25	2783	25	2828	27	2956	102
2744	25	2784	25	2829	27	2957	102
2745	25	2785	25	2830	27	2958	102
2746	25	2786	25	2831	27	2970	118
2747	25	2787	25	2833	27	2972	118
2748	25	2788	25	2834	27	2974	118
2749	25	2789	25	2835	27	2976	118
2750	25	2790	25	2836	27	2980	118
2751	25	2791	25	2837	27	2982	120
2752	25	2792	25	2838	27	2984	120
2753	25	2793	25	2840	27	3000	51
2754	25	2794	25	2841	27	3001	51
2755	25	2795	25	2842	27	3002	51
2756	25	2796	25	2843	27	3004	51
2757	25	2801	27	2844	27	3005	51
2758	25	2802	27	2845	27	3006	51
2759	25	2803	27	2847	27	3007	51
2760	25	2804	27	2848	27	3009	51
2761	25	2805	27	2849	27	3010	51
2762	25	2806	27	2850	27	3011	51
2763	25	2807	27	2851	27	3012	51
2764	25	2808	27	2852	27	3013	51
2765	25	2809	27	2853	27	3014	51
2766	25	2810	27	2854	27	3015	51
2767	25	2811	27	2855	27	3016	51
2768	25	2812	27	2856	27	3017	51
2769	25	2813	27	2857	27	3018	51
2770	25	2814	27	2900	188	3019	51
2771	25	2815	27	2902	190	3020	51
2772	25	2816	27	2904	190	3021	51
2773	25	2817	27	2906	194	3022	51
2774	25	2818	27	2908	196	3023	51
2775	25	2819	27	2910	196	3024	51
2776	25	2820	27	2930	140	3025	51
2777	25	2821	27	2932	146	3026	51
2778	25	2822	27	2934	148	3027	51
2779	25	2823	27	2936	148	3028	51

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3029	51	3069	51	3109	51	3149	51
3030	51	3070	51	3110	51	3150	51
3031	51	3071	51	3111	51	3151	51
3032	51	3072	51	3112	51	3152	51
3033	51	3073	51	3113	51	3153	51
3034	51	3074	51	3114	51	3154	51
3035	51	3075	51	3115	51	3155	51
3036	51	3076	51	3116	51	3156	51
3037	51	3077	51	3117	51	3157	51
3038	51	3078	51	3118	51	3158	51
3039	51	3079	51	3119	51	3159	51
3040	51	3080	51	3120	51	3160	51
3041	51	3081	51	3121	51	3161	51
3042	51	3082	51	3122	51	3162	51
3043	51	3083	51	3123	51	3163	51
3044	51	3084	51	3124	51	3164	51
3045	51	3085	51	3125	51	3165	51
3046	51	3086	51	3126	51	3166	51
3047	51	3087	51	3127	51	3167	51
3048	51	3088	51	3128	51	3168	51
3049	51	3089	51	3129	51	3169	51
3050	51	3090	51	3130	51	3170	51
3051	51	3091	51	3131	51	3171	51
3052	51	3092	51	3132	51	3172	51
3053	51	3093	51	3133	51	3173	51
3054	51	3094	51	3134	51	3174	51
3055	51	3095	51	3135	51	3175	51
3056	51	3096	51	3136	51	3176	51
3057	51	3097	51	3137	51	3177	51
3058	51	3098	51	3138	51	3178	51
3059	51	3099	51	3139	51	3179	51
3060	51	3100	51	3140	51	3180	51
3061	51	3101	51	3141	51	3181	51
3062	51	3102	51	3142	51	3182	51
3063	51	3103	51	3143	51	3183	51
3064	51	3104	51	3144	51	3184	51
3065	51	3105	51	3145	51	3185	51
3066	51	3106	51	3146	51	3186	51
3067	51	3107	51	3147	51	3187	51
3068	51	3108	51	3148	51	3188	51

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3189	51	3229	53	3269	53	3309	53
3190	51	3230	53	3270	53	3310	53
3191	51	3231	53	3271	53	3311	53
3192	51	3232	53	3272	53	3312	53
3193	51	3233	53	3273	53	3313	53
3194	51	3234	53	3274	53	3314	53
3195	51	3235	53	3275	53	3315	53
3196	51	3236	53	3276	53	3316	53
3197	51	3237	53	3277	53	3317	53
3198	51	3238	53	3278	53	3318	53
3199	51	3239	53	3279	53	3319	53
3200	51	3240	53	3280	53	3320	53
3201	51	3241	53	3281	53	3321	53
3202	51	3242	53	3282	53	3322	53
3203	51	3243	53	3283	53	3323	53
3204	53	3244	53	3284	53	3324	53
3205	53	3245	53	3285	53	3325	53
3206	53	3246	53	3286	53	3326	53
3207	53	3247	53	3287	53	3327	53
3208	53	3248	53	3288	53	3328	53
3209	53	3249	53	3289	53	3329	53
3210	53	3250	53	3290	53	3330	53
3211	53	3251	53	3291	53	3331	53
3212	53	3252	53	3292	53	3332	53
3213	53	3253	53	3293	53	3333	53
3214	53	3254	53	3294	53	3334	53
3215	53	3255	53	3295	53	3335	53
3216	53	3256	53	3296	53	3336	53
3217	53	3257	53	3297	53	3337	53
3218	53	3258	53	3298	53	3338	53
3219	53	3259	53	3299	53	3339	53
3220	53	3260	53	3300	53	3340	53
3221	53	3261	53	3301	53	3341	53
3222	53	3262	53	3302	53	3342	53
3223	53	3263	53	3303	53	3343	53
3224	53	3264	53	3304	53	3344	53
3225	53	3265	53	3305	53	3345	53
3226	53	3266	53	3306	53	3346	53
3227	53	3267	53	3307	53	3347	53
3228	53	3268	53	3308	53	3348	53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3349	53	3389	53	3524	74	3820	94
3350	53	3390	53	3526	74	3822	94
3351	53	3391	53	3528	74	3824	94
3352	53	3392	53	3530	74	3826	94
3353	53	3393	53	3532	74	3828	94
3354	53	3394	53	3534	74	3830	94
3355	53	3395	53	3536	74	3832	94
3356	53	3396	53	3538	74	3834	94
3357	53	3397	53	3540	74	3841	41
3358	53	3398	53	3542	74	3842	41
3359	53	3399	53	3544	74	3843	41
3360	53	3450	168	3546	74	3844	41
3361	53	3452	168	3570	128	3845	41
3362	53	3454	168	3572	128	3846	41
3363	53	3456	168	3574	128	3847	41
3364	53	3458	170	3576	128	3848	41
3365	53	3460	170	3578	128	3849	41
3366	53	3462	170	3580	128	3850	41
3367	53	3470	170	3582	128	3851	41
3368	53	3472	170	3584	128	3852	41
3369	53	3474	170	3586	128	3853	41
3370	53	3476	170	3588	128	3854	41
3371	53	3478	170	3590	128	3855	41
3372	53	3480	170	3592	128	3856	41
3373	53	3482	170	3594	130	3857	41
3374	53	3484	170	3596	130	3858	41
3375	53	3486	172	3600	98	3859	41
3376	53	3488	172	3602	98	3860	41
3377	53	3490	182	3604	98	3861	41
3378	53	3492	184	3606	98	3862	41
3379	53	3496	184	3608	98	3863	41
3380	53	3498	184	3610	98	3864	41
3381	53	3500	72	3612	98	3865	41
3382	53	3502	72	3614	98	3866	41
3383	53	3504	72	3616	98	3867	41
3384	53	3506	72	3700	174	3868	41
3385	53	3508	72	3702	176	3869	41
3386	53	3510	72	3810	92	3870	41
3387	53	3520	72	3812	94	3871	41
3388	53	3522	72	3814	94	3872	41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3873	41	4666	164	4736	150	4812	110
3874	41	4667	164	4737	148	4813	106
3875	41	4669	142	4738	148	4814	110
3876	41	4671	142	4739	150	4815	104
3877	41	4672	162	4740	150	4819	108
3878	41	4674	162	4741	150	4820	108
3879	41	4675	162	4742	150	4822	108
3880	41	4677	162	4743	152	4825	108
3881	41	4678	196	4745	148	4829	142
3882	41	4683	164	4746	148	4830	142
3883	41	4684	160	4748	148	4831	144
3884	41	4685	160	4749	150	4834	142
3885	41	4686	160	4750	152	4835	144
3886	41	4689	140	4751	152	4836	142
3887	41	4691	140	4752	152	4838	142
3888	41	4692	140	4754	104	4839	142
3900	42	4694	140	4755	104	4842	90
3902	42	4695	142	4756	104	4844	90
3904	42	4698	140	4760	102	4845	92
3906	44	4700	140	4761	104	4846	92
3908	44	4701	140	4762	104	4847	90
3910	44	4703	158	4765	146	4848	90
3912	44	4707	186	4766	146	4849	86
3914	44	4708	186	4770	144	4850	92
4132	156	4709	186	4771	144	4853	106
4133	156	4713	184	4772	144	4854	90
4134	156	4714	184	4773	144	4855	90
4135	156	4715	184	4782	144	4856	90
4136	156	4717	92	4788	106	4859	88
4137	156	4718	140	4790	106	4861	90
4138	156	4719	184	4791	104	4862	90
4139	156	4722	184	4793	106	4863	56
4142	158	4723	184	4795	106	4864	56
4143	156	4726	184	4798	104	4865	56
4146	158	4729	190	4799	104	4867	92
4147	158	4730	190	4803	106	4868	56
4662	164	4731	190	4805	106	4869	92
4663	164	4732	148	4809	108	4870	92
4664	164	4734	148	4810	108	4872	146
4665	164	4735	152	4811	110	4874	88

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4875	90	5000	92	6250	54	6370	148
4878	144	5046	20	6251	54	6372	198
4884	86	5048	20	6263	58	6870	198
4885	86	5052	20	6264	58	6873	16
4886	86	5054	20	6265	58	6874	18
4890	106	5060	22	6267	92	6941	18
4891	88	5061	22	6272	54	6942	18
4892	56	5062	22	6273	54	6991	200
4893	56	5063	22	6277	54	6992	200
4894	86	5068	20	6279	144	6993	200
4897	92	5069	20	6280	88	6994	200
4900	88	5070	20	6292	88	6995	200
4901	86	5071	20	6293	88	6996	48
4902	88	6200	186	6294	88	6997	48
4904	20	6201	192	6296	180	6998	48
4905	20	6202	198	6299	146	6999	48
4906	84	6203	156	6300	86	7001	198
4908	84	6204	160	6308	88	7002	198
4950	32	6205	164	6310	88	7003	198
4952	146	6206	168	6311	86	7004	198
4956	148	6207	108	6312	86	7005	198
4958	146	6210	58	6315	176	7021	46
4959	146	6217	174	6316	176	7022	46
4960	146	6219	174	6318	176	7023	46
4969	108	6220	174	6319	176	7024	46
4970	108	6221	174	6320	150	7301	20
4971	108	6222	174	6321	150	7302	20
4975	196	6224	174	6322	150	7345	54
4976	196	6225	174	6323	150	7572	32
4977	196	6226	56	6324	150	7573	32
4978	192	6228	174	6325	150	7576	32
4979	190	6229	174	6326	150	7577	32
4980	132	6231	176	6328	152	7629	198
4981	132	6233	56	6329	152	7630	198
4983	132	6234	176	6330	152	7631	22
4984	132	6235	176	6331	152	7632	22
4985	132	6236	176	6332	152	7633	22
4986	132	6237	176	6333	152	7645	22
4989	142	6238	176	6359	110		
4991	132	6239	56	6369	16		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	54
Additional Part Marking	200
Additional Requirements	198
Altitude Rating	22
Aperture Cards Required	18
Applicable Documents	200
Base Document	16
Capacitance	58
Cap Filters	42
Chromaticity	62
Circuitboard Termination	44
Circuit Configuration	66
City, State, Zip	16
Coincidence of Operating and Release Points (Simultaneity)	68
Company Name/Command	16
Configuration	32
Connector	46
Contact Arrangement	42
Contact Bounce	70
Contact Resistance, Lamp	72
Contact Resistance, Switch	76
Contract Number/Office Symbol	16
Control, Source	16
Control, Specification	18
Corona at Reduced Barometric Pressure	78
Corona at Sea Level	82
Date	16
Design and Construction	36
Dielectric Withstanding Voltage at Reduced Barometric Pressure	84
Dielectric Withstanding Voltage at Sea Level	88
Electromagnetic Interference	92
Enclosure	36
Endurance, Electrical	94
Endurance, Mechanical	98
Explosion	98
Field of View	102
Finishes	34
Format	16
Fungus	102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Government Design Activity FSCM	16
Humidity	104
Illustrations	32
Immersion	108
Indexing Angle	42
Insulation Resistance	110
Intermediate Current Switching	114
Lamp Circuit Diagram	36
Lamp Retention	118
Lamps	38
Lens	38
Life, Low Level Swtiching at Reduced Barometric Pressure	120
Life, Low Level Switching at Sea Level	124
Luminance	128
Materials	34
Metals	34
Moisture Resistance	130
Mounting Hardware	198
Nomenclature	200
Nonturn Device	44
Notes	200
Operating Force	132
Overload	136
Packaging	200
Panel Mounting Thickness	36
Part Marking	198
Part Number	18
Part Number Cross-Reference	200
Phone Number	16
Power Rating	22
Quality Assurance Provisions	200
Quick Disconnect Size	44
Rated Loads	24
Requester FSCM	16
Requester's Name	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Resistance to Soldering Heat	140
Resistance to Solvents	142
Revision of AEDPS Document (Number)	18
Salt Spray	144
Sand and Dust	146
Scope	18
Seal	148
Shock, High Impact	154
Shock, Specified Pulse	158
Short Circuit	160
Solderability	162
Solder Tab	44
Source Table	18
Stops	42
Stops Strength	164
Stray Lights	166
Street/Building	16
Strength of Actuating Means	168
Strength of Mounting Means	172
Superseded Document	200
Switch Circuit Diagram	36
Switching Action	40
System Application	16
Tabulated Characteristics	34
Temperature, High	174
Temperature, Low	176
Temperature Rating	20
Temperature Rise	176
Terminal Strength	180
Termination	44
Thermal EMF	182
Thermal Shock (Temperature Cycling)	184
Truth Table	50
Type Designation	30
Units of Measure	18, 32
Vibration, High Frequency	184
Vibration, Low Frequency	188
Vibration, Random	192
Weight	46
Wire Lead	46
Workmanship	198

☆U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/596

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.